MIL-C-3607/15A
2 August 1963
SUPERSEDING
MIL-C-3607/15
30 August 1961

MILITARY SPECIFICATION

# CONNECTOR, RECEPTACLE, ELECTRICAL, SERIES PULSE, TYPE UG-1141/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

## 1. SCOPE

1.1 This specification covers the detail requirements for type UG-1141/U series pulse electrical receptacle connector. The Military part number for type UG-1141/U connector is M3606/15-01.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY
MIL-C-3607 - Connectors, Coaxial, Radiofrequency, Series Pulse, General Specification for.

DRAWINGS

BUREAU OF SHIPS
REB10021 - Gasket.
REB10036 - Washer.
REB10075 - Nut.
REB10481 - Ring.
REB10519 - Lock Ring.
REA10799 - Gasket.
REA10890 - Contact.
REA10891 - Stud.
REB10892 - Body.
REB10893 - Insulator.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Requirements.- Requirements shall be in accordance with MIL-C-3607, and as specified herein.

3.2 Design and Construction. The electrical receptacle connector shall be of the design, construction, and physical dimensions specified on figure 1.

## 4. QUALITY ASSURANCE PROVISIONS


4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-C-3607, and as specified herein.

4.1.1 Group B inspection. Group B inspection shall be in accordance with MIL-C-3607. Mating dimensions shall be as specified on figure 2.

4.2 Leakage. The leakage test is not applicable.

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

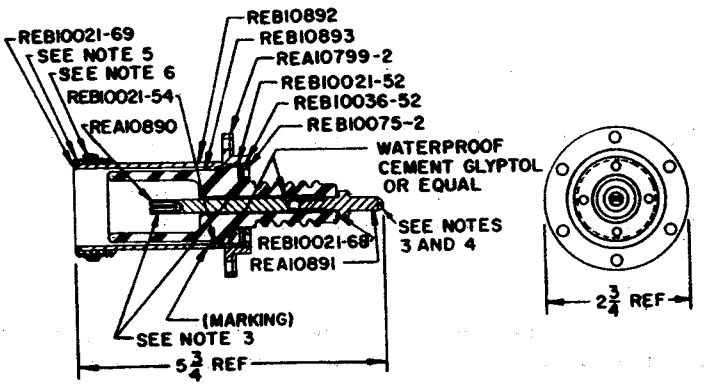


NOTES:

1. All dimensions in inches.
2. Tolerances are ±1/64 on fractions.
3. Contact, REA10890; and screw shall have a silver plating of 0.0002 inch thick. All other metal parts shall be nickel plated.
4. This item is a #5-40 UNC-2A x 3/8 inch long, brass, round-head machine screw.
5. This item is identical to ring, REB10481, except threads are 2-24 UNS-2A.
6. This item is identical to lock ring, REB10519, except threads are 2-24 UNS-2B.
7. The concentricity of the contact, REA10890, with respect to the body, REB10892, shall be not more than 0.016 total dial indicator reading. The concentricity of the insulator, REB10893, shall be not more than 0.020 total indicator reading.

**Figure 1 - Type UG-1141/U electrical receptacle connector (Military Part No. M3607/15-01).**

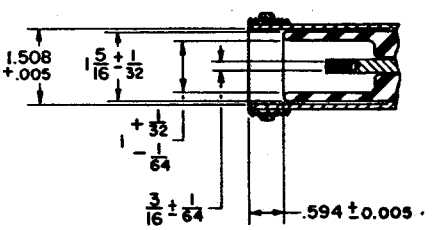


ALL DIMENSIONS IN INCHES

**Figure 2 - Dimensional requirements for group B inspection.**

**4.3 Dielectric withstanding voltage. The test voltage for the dielectric-withstanding-voltage-test shall be 18,000 volts, root mean square.**

## 5. PREPARATION FOR DELIVERY

**5.1 Preparation for delivery shall be in accordance with MIL-C-3607.**



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in MIL-C-3607 are applicable to this specification.

6.2 Intended use. Electrical receptacle connector, type UG-1141/U, is designed for use with radiofrequency pulse cables.

Custodians:
Army - EL
Navy - Ships
Air Force - ASD

Preparing activity:
Navy - Ships
(Project 5935-1017)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.