MIL-C-3607/4B
1 NOVEMBER 1965
SUPERSEDING
MIL-C-3607/4A
2 AUGUST 1963

MILITARY SPECIFICATION

CONNECTOR, RECEPTACLE, ELECTRICAL PRESSURIZED, SERIES PULSE, TYPE UG-38A/U

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the detail requirements for type UG-38A/U, series pulse, pressurized, electrical receptacle connector. The Military part number for type UG-38A/U connector is M3607/4-01.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-C-3607 — Connectors, Coaxial, Radio - frequency, Series Pulse, General Specification for.

DRAWINGS

BUREAU OF SHIPS

REA10470 — Cap.
REA10491 — Conductor.
REA10492 — Contact.
REA10799 — Gasket.
REB10021 — Gasket.
REB10036 — Washer.
REB10075 — Nut.
REB10463 — Flange.
REB10480 — Tube.
REB10481 — Ring.
REB10512 — Insulator.
REB10519 — Lock Ring.


(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with MIL-C-3607, and as specified herein.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.

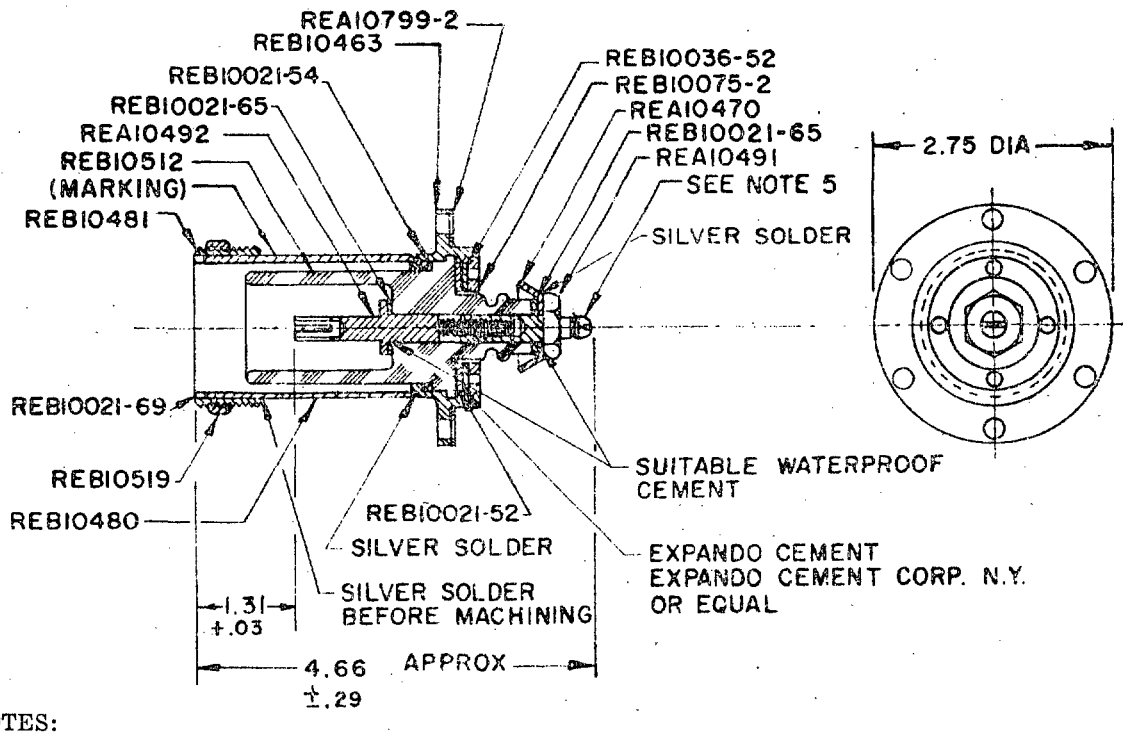

NOTES:

1. All dimensions in inches.
2. Unless otherwise specified, tolerance is .02 on decimals.
3. Body may be made on one piece in lieu of three pieces, silver soldered together.
4. Contact, REA10492, and conductor, REA10491, shall have a silver plating of .0002 inch thick. All other metal parts shall be nickel-plated.
5. This item is a #6–32 UNC–2A x .38 long, brass, round-head machine screw.
6. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. *Type UG–38A/U electrical receptacle connector (Military part No. M3607/4–01).*

INCHES	MM
.02	.51
.03	.76
.05	1.27
.06	1.52
.188	4.78
.190	4.83
.29	7.37
.38	9.65
1.00	25.40
1.31	33.27
1.508	38.34
1.511	38.38
2.75	69.85
4.66	118.36

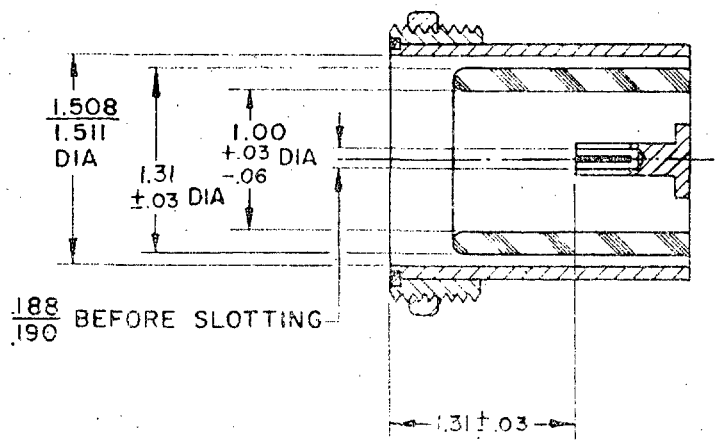


FIGURE 2. *Dimensional requirements for group B inspection.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.

3.2 **Design and construction.** The electrical receptacle connector shall be of the design, construction, and physical dimension specified on figure 1.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Sampling and inspection.** Sampling and inspection shall be in accordance with MIL–C–3607, and as specified herein.

4.1.1 *Group B inspection.* Group B inspection shall be in accordance with MIL–C–3607. Mating dimensions shall be as specified on figure 2.

4.2 **Dielectric withstanding voltage.** The test voltage for the dielectric-withstanding-voltage-test shall be 9,000 volts root mean square.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL–C–3607.

6. NOTES

6.1 **Notes.** In addition to the notes specified herein, the notes specified in MIL–C–3607 are applicable to this specification.

6.2 **Intended use.** Electrical receptacle connector UG–38A/U is designed for use with radiofrequency pulse cables.

6.3 This specification covers the design of type UG–38A/U electrical receptacle connector which was previously covered by Bureau of Ships Drawing REB49208.

Custodians:

Army—EL

Navy—SH

Air Force—11

Review activities:

Army—EL, MI, MU

Navy—SH

Air Force—11

User activities:

Army—MO

Navy—WP, MC

Preparing activity:

Navy—SH

(Project 5935–1328)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.