MIL-C-3607/8B
12 December 1963
SUPERSEDING
MIL-C-3607/8A
2 August 1963

MILITARY SPECIFICATION

CONNECTOR, RECEPTACLE, ELECTRICAL, SERIES PULSE, TYPE UG-181A/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1 1 This specification covers the detail requirements for type UG-181/U series pulse, electrical receptacle connector The military part number for type UG-181A/U connector is M3607/8-01

2 APPLICABLE DOCUMENTS

2 1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein

SPECIFICATION

MILITARY
MIL-C-3607 - Connectors, Coaxial, Radiofrequency, Series Pulse, General Specification for

DRAWINGS

BUREAU OF SHIPS
REA10035 - Spring.
REA10471 - Collar
REA10472 - Bushing.
REA10473 - Clamp Shell
REA10474 - Washer.
REA10475 - Gasket
REA10476 - Ferrule
REB10021 - Gasket.
REB10032 - Nut
REB10036 - Washer
REB10082 - Contact
REB10460 - Body
REB10461 - Body.
REB10479 - Clamp
REB10513 - Insulator

(Copies of specifications, standards, drawings, and publications required by supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)

3 REQUIREMENTS

3 1 Requirements - Requirements shall be in accordance with MIL-C-3607, and as specified herein

3 2 Design and construction - The electrical receptacle connector shall be of the design, construction, and physical dimensions specified on figure 1

4 QUALITY ASSURANCE PROVISIONS

4 1 Sampling and inspection - Sampling and inspection shall be in accordance with MIL-C-3607, and as specified herein

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.

4.2 Leakage. - The leakage test is not applicable

4.3 Dielectric withstanding voltage. - The test voltage for the dielectric-withstanding-voltage-test shall be 9,000 volts, root mean square

5 PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-C-3607

6 NOTES

6.1 Notes - In addition to the notes specified herein, the notes specified in MIL-C-3607 are applicable to this specification


6.2 Intended use - Electrical receptacle connector, type UG-181A/U, is designed for use with radio-frequency pulse cables RG-25/U, -26/U, -64/U, and -88/U

6.3 This specification covers the design of electrical receptacle connector, type UG-181A/U, which was previously covered by Drawing REB49209

Custodians
Army - EL
Navy - Ships
Air Force - ASD

Preparing activity
Navy - Ships
(Project 5935-1155)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.

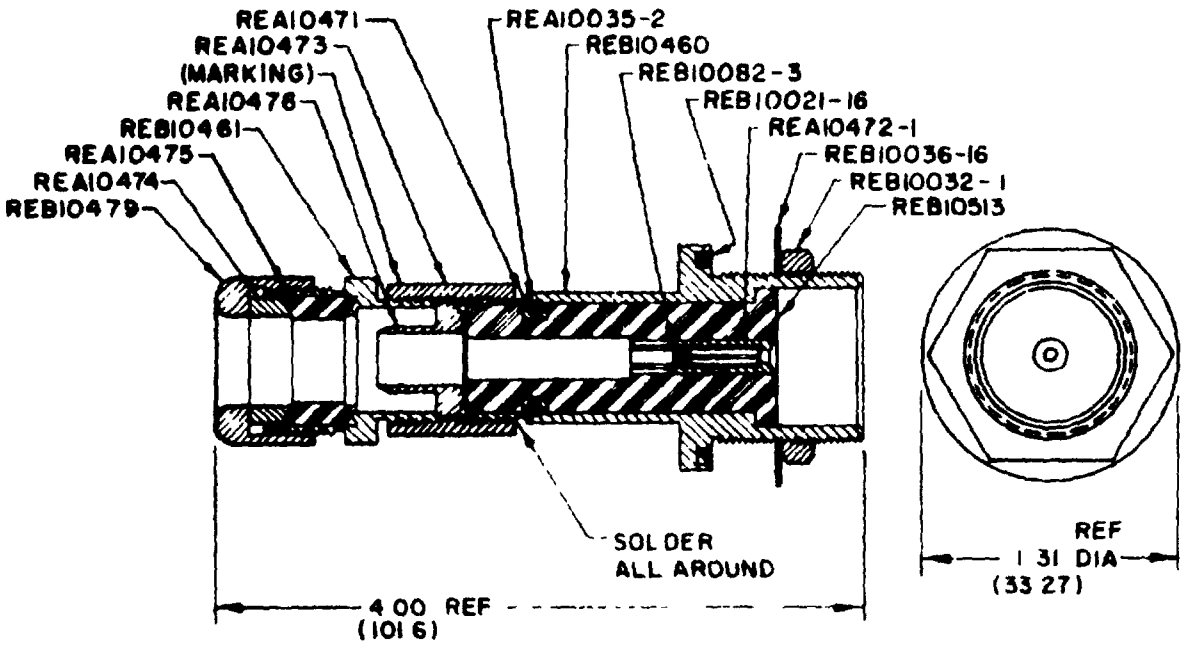

ASSEMBLY

NOTES

1. All dimensions in inches (metric equivalents in parentheses)
2. Collar, REA10471, Spring, REA1035-2, and Bushing REA10472-1 shall not be plated Nut, REA10032-1, Washer, REB10036-16, and Contact, REB10082-3, shall have a silver plating of not less than 0.0002 (0.01) inch thick. All other metal parts shall have a tin plating of 0.0002 (0.01) inch thick.
3. Metric equivalents are for information only and are based upon 1 inch = 25.4 mm.

Figure 1. Type UG-181A/U electrical receptacle connector (Military Part No. M3607/8-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:37Z
Check the source to verify that this is the current version before use.