MIL-H-3611C
1 April 1971
SUPERSEDING
MIL-H-3611B
13 May 1965

MILITARY SPECIFICATION

HOOK, LOG-GRAB (5-INCH BY 8-INCH)

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of steel log-grab hook.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U. S. Military Property.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 4030

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:38Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

A304 - Alloy Steel Bars to End Quench Hardenability Requirements.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Tariff Publishing Officer, Room 202, Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street NW, Washington, D. C. 20036.)

3. REQUIREMENTS

3.1 Description. The hook shall be formed to an angle of approximately 90 degrees with a wide throat opening. The hook shall have an eye and projection on one end, a spur on the heel, and a plain point on the other end (see 6.4).

3.2 First article.

3.2.1 Preproduction model. The supplier shall furnish a hook for examination within the time frame specified to prove, prior to starting production, that his production methods and choice of design detail will produce hooks that comply with the requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

3.3 Dimensions. The hook shall conform to the dimensions shown in table I.

Table I. Hook Dimensions

Dimension	Inches	Tolerance	
		Plus	Minus
Overall length	8	1/4	1/8
Overall depth	5	1/4	1/8
Length of hook	4	1/4	1/8
Width of bit	5/8	1/8	1/8
Width of shank	3/4	1/8	1/8
Depth of shank	1-3/8	1/8	1/8
Eye diameter (min.)	3/4	---	---

3.4 Material. The hook shall be forged of steel conforming to ASTM A304, 4620H or 8620H alloy. The forged hook shall be heat treated to a Rockwell "C" hardness of 30 plus or minus 2.

3.5 Identification marking. The hook shall be identified in accordance with MIL-STD-130.

3.6 Workmanship. The hook shall be forged of one piece and there shall be no cracks, seams, laps, or burnt spots. There shall be no visible evidence of porosity, pipe, or segregation. Splits or nonmetallic inclusions shall not be permitted. The hook shall be formed without sharp changes in section. All burrs shall be removed. Points shall be sharp, and edges shall be smooth and free of nicks. The hook eye shall be radiused around the outer edge to prevent cutting or damage to wire rope.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T18:38Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction hook shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The hooks shall be examined for the following defects:

101. Dimensions not as specified.
102. Workmanship not as specified.
103. Hardness not as specified.
104. Marking not as specified.
105. Material not as specified.

4.6 Inspection of preparation for delivery.

4.6.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.3 Examination. Samples selected in accordance with 4.6.2 shall be examined for the following defects. AQL shall be 4.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

106. Materials or containers not as specified. Each incorrect material or container shall constitute one defect.
107. Strapping not zinc coated for level A.
108. Marking illegible, incomplete, incorrect or missing.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, or C, as specified.

5.1.1 Level A. The hooks shall be packed in close-fitting boxes conforming to PPP-B-621, class 2, style 2, 2-1/2, or 3; or in boxes conforming to PPP-B-601, style A or B. Blocking, bracing, and anchoring shall be in accordance with MIL-STD-1186. The boxes shall be strapped in accordance with the appendix to the applicable box specification. Strapping shall be zinc coated.

5.1.2 Level B. The hooks shall be packed as specified in 5.1.1, except boxes shall be domestic type or class, as applicable, and strapping need not be zinc coated.

5.1.3 Level C. The hooks shall be packed to assure carrier acceptance and safe delivery to destination at lowest rates in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.2 Marking. Shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The log-grab hook is intended to facilitate towing and skidding logs.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of preproduction model (see 3.2.1).
(c) Level of packing required (see 5.1).

6.3 Preproduction model. Any changes or deviations of production hooks from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish hooks conforming to this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:38Z
Check the source to verify that this is the currentversion before use.

6.4 Figure 1 shows a type of hook which has been found acceptable; however, the figure is included for illustration only and is not intended to preclude the furnishing of other log-grab hooks which conform to this specification.

Custodians:

Army - ME
Navy - YD
Air Force - 82

Preparing activity:

Army - ME

Project No. 4030-0128

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:38Z
Check the source to verify that this is the current version before use.

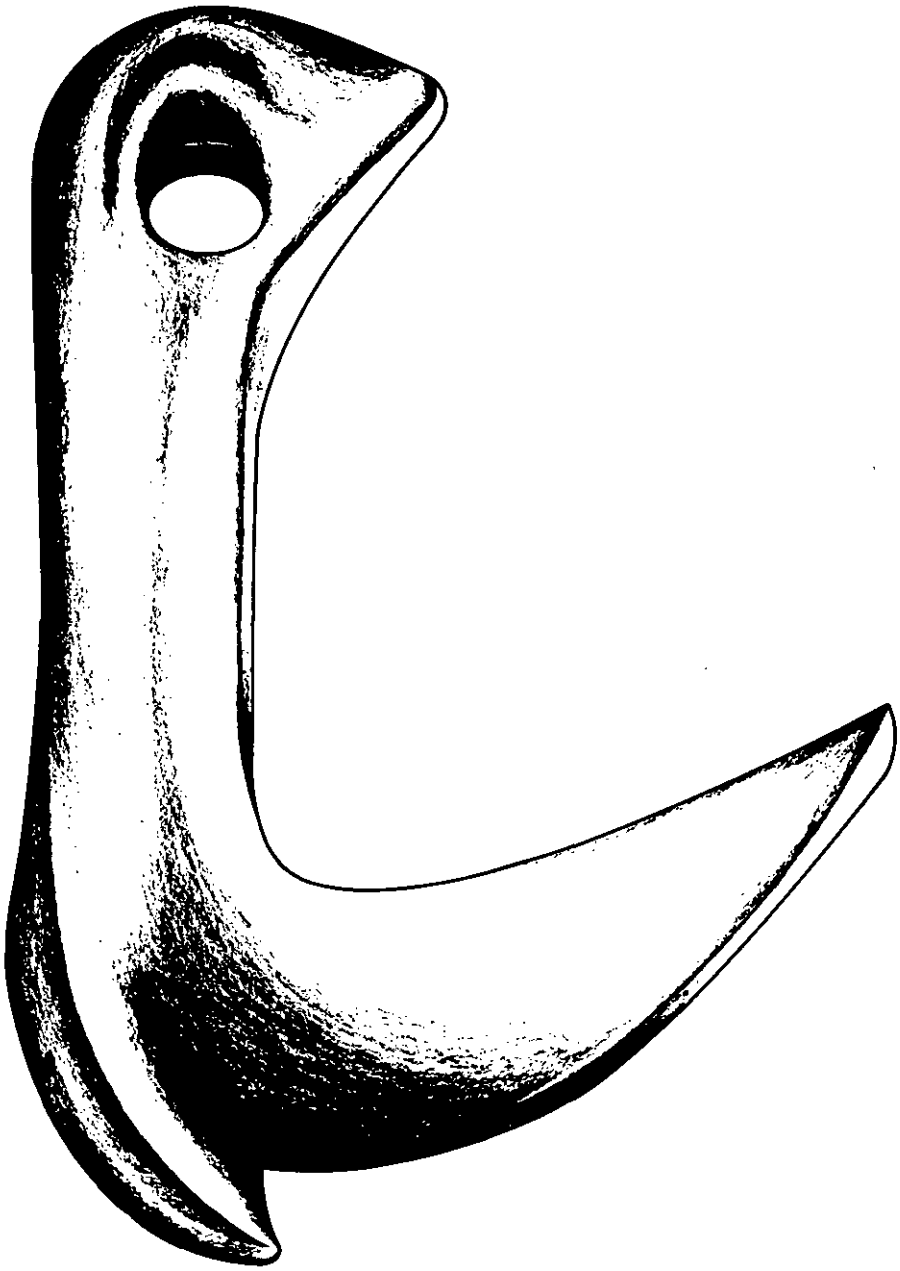


FIGURE 1. HOOK, LOG-GRAB

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:38Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-H-3611C Hook, Log-Grab (5-Inch by 8-Inch)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 20260-16T18:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. A. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZK-KX
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

POSTAGE AND FEES PAID

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZK-KX
FORT BELVOIR, VIRGINIA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-16T18:38Z
Check the source to verify that this is the current version before use.