|METRIC|
DOD-C-55302/164B(CR)
18 July 1985
SUPERSEDING
DOD-C-55302/164A(CR)
30 July 1982

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES PLUG AND/OR RECEPTACLE 160 CONTACT POSITIONS FOR PRINTED WIRING BOARDS 2.54 MM X 1.27 MM OFFSET GRID, METRIC

This specification is approved for use by US Army Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-55302.


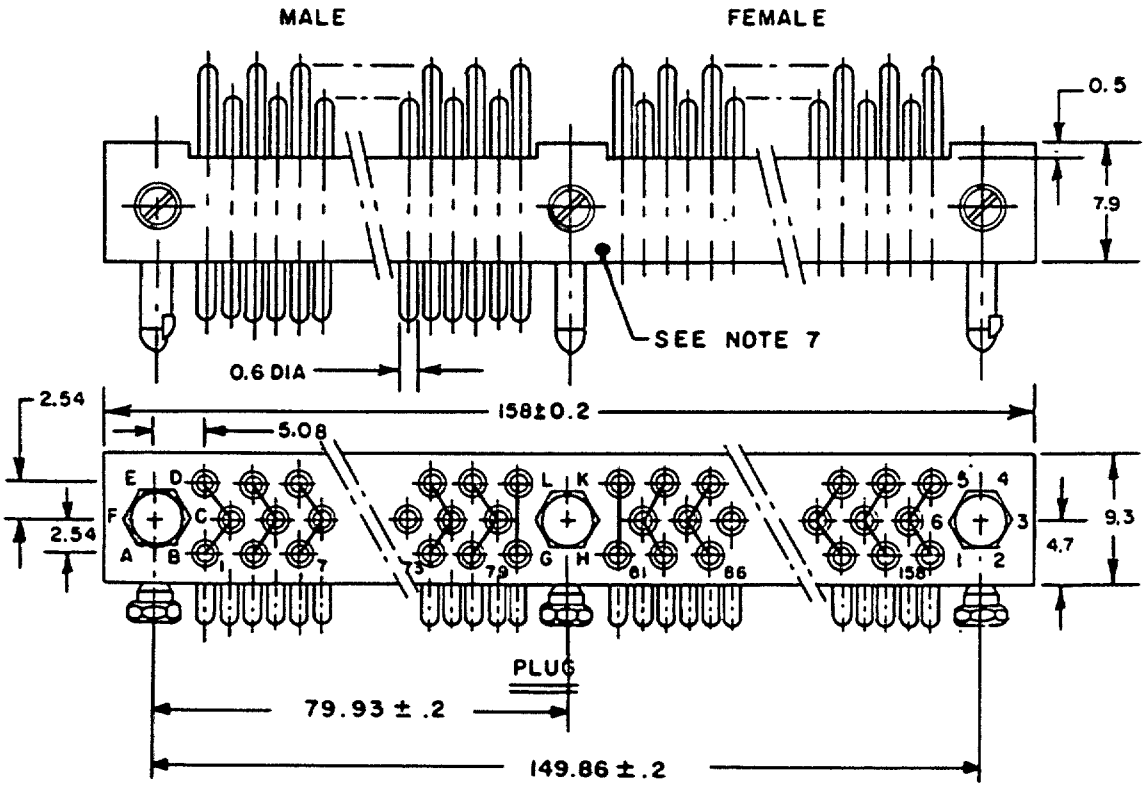


FIGURE 1. Connector plug.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil/online/start/ - 20260210_225222_542
Check the source to verify that this is the current version before use.

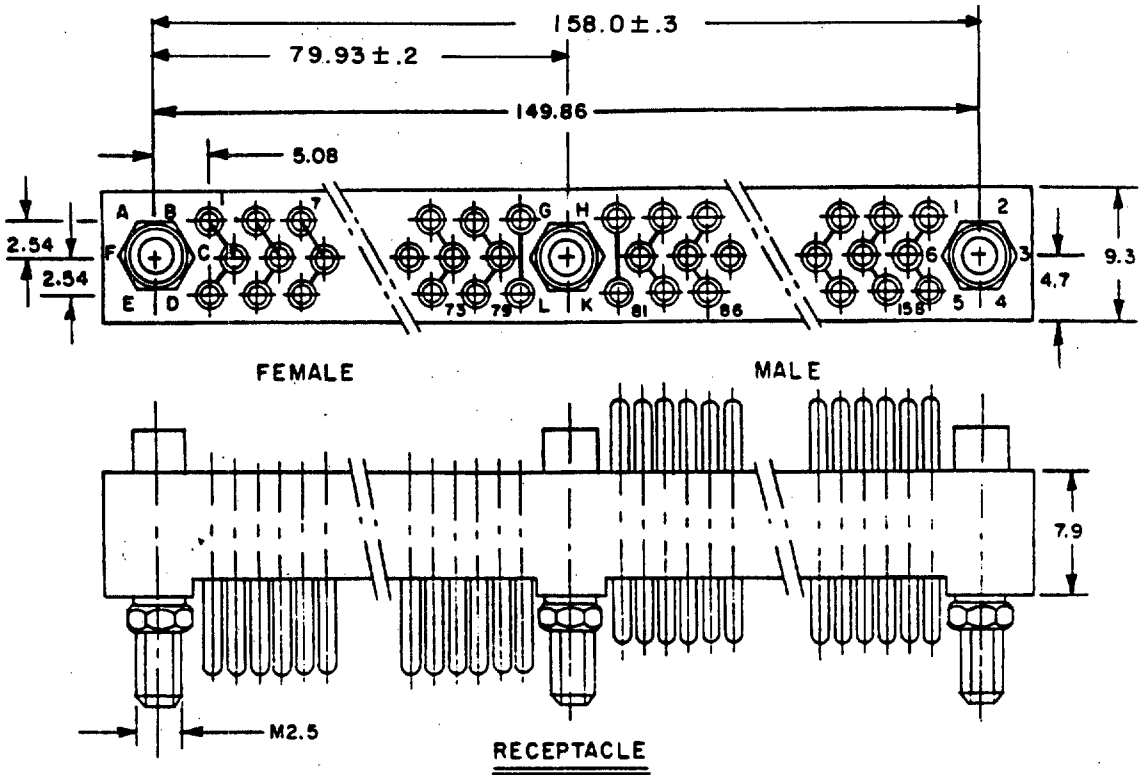

RECEPTACLE

MM	INCHES
0.2	.008
0.3	.012
0.5	.022
0.6	.023
2.5	.098
2.54	.100
4.7	.185
5.08	.200
7.9	.311
9.3	.366
79.93	3.147
149.86	5.900
158.0	6.220

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 1. Connector plug - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

TERMINAL STYLES

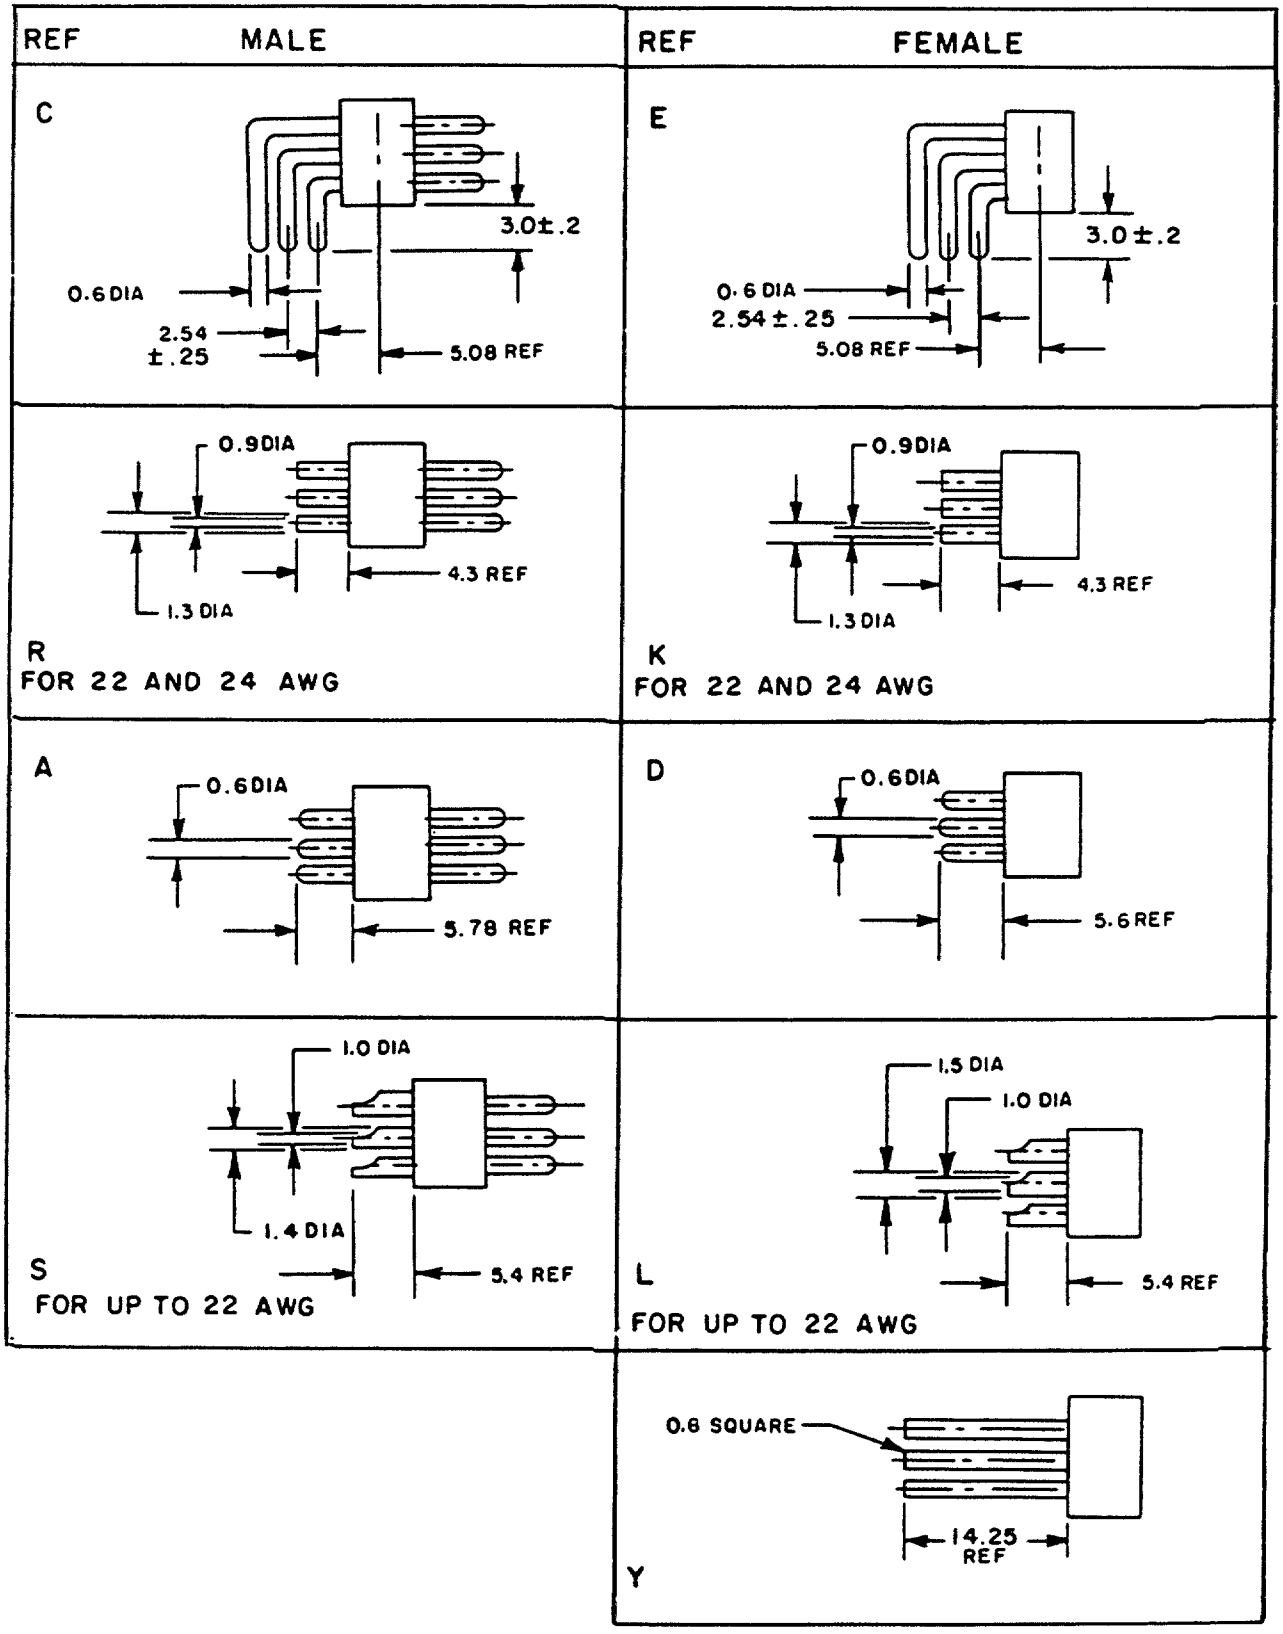
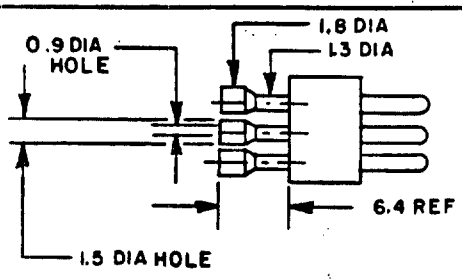
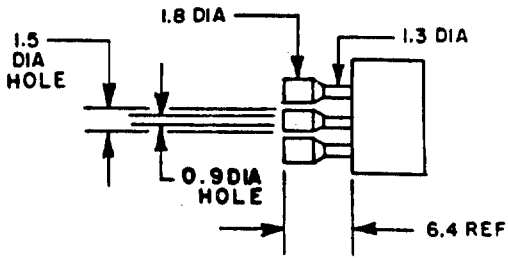


FIGURE 2. Connector termination styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

TERMINAL STYLES

REF MALE	REF FEMALE
 M FOR 22 AND 24 AWG	 H FOR 22 AND 24 AWG

MM	INCHES
0.2	.008
0.25	.010
0.6	.023
0.9	.035
1.0	.039
1.3	.051
1.4	.055
1.5	.059
1.8	.071
2.54	.100
3.0	.118
4.3	.169
5.08	.200
5.4	.212
5.6	.220
5.78	.225
6.4	.252
9.0	.354
14.25	.561

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 2. Connector termination styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

MOUNTING STYLES


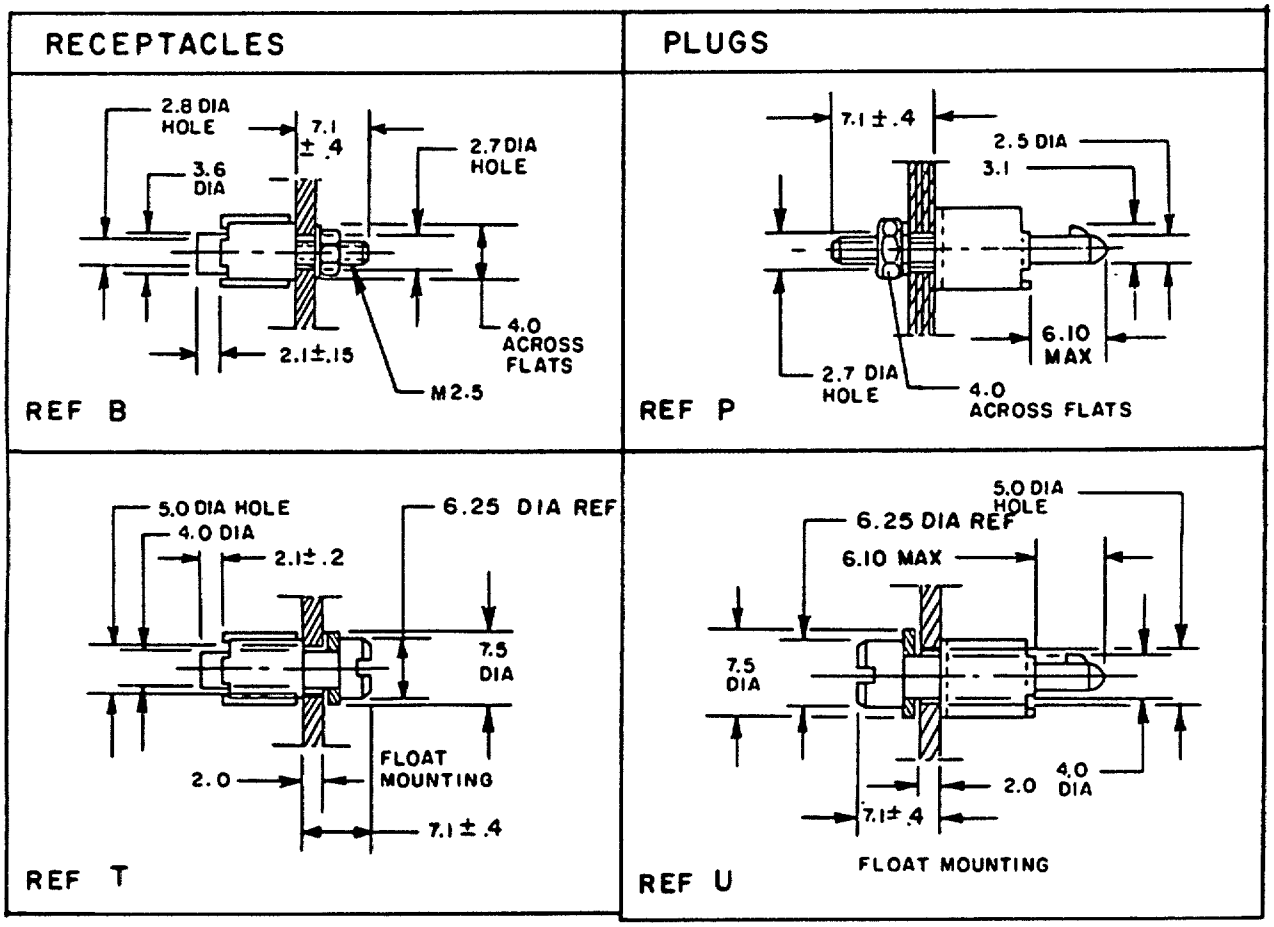


FIGURE 3. Mounting styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

MOUNTING STYLES

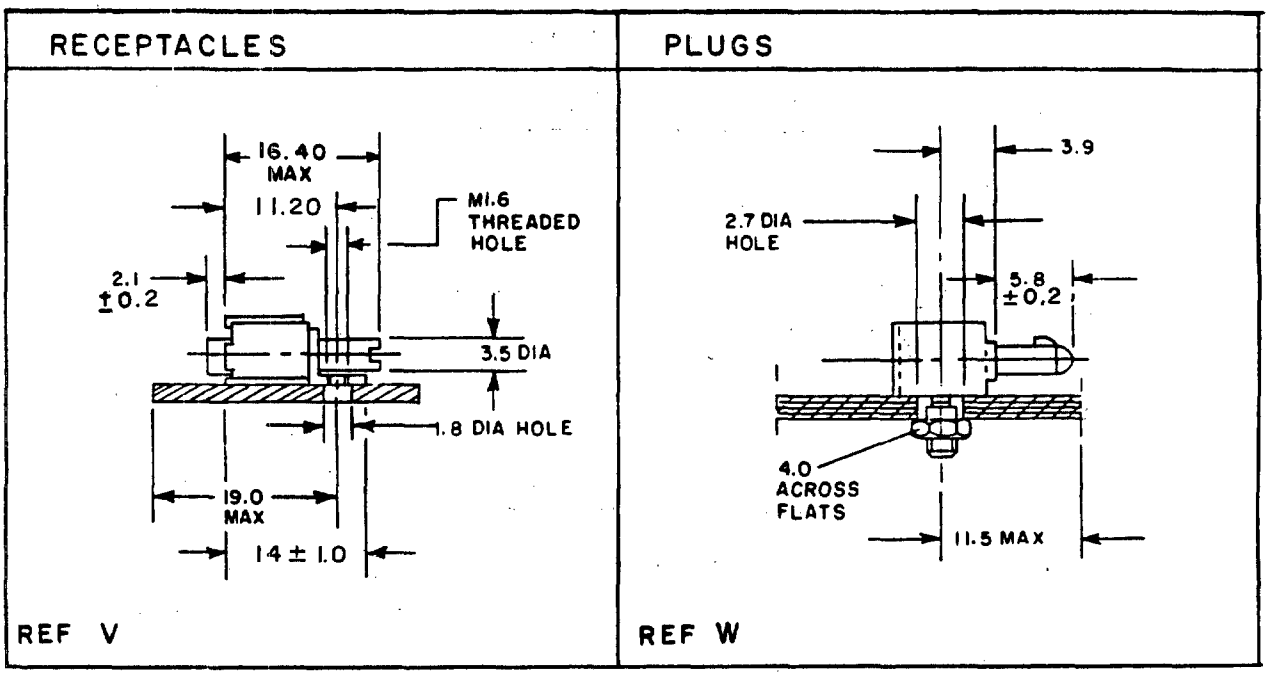

MM	INCHES	MM	INCHES
0.15	.006	3.9	.153
0.2	.008	4.0	.157
0.4	.016	5.0	.197
1.0	.039	5.8	.228
1.6	.063	6.10	.238
1.8	.071	6.25	.246
2.0	.078	6.5	.254
2.1	.082	7.1	.279
2.5	.098	7.5	.295
2.7	.106	11.20	.441
2.8	.110	11.5	.542
3.1	.122	14.0	.551
3.5	.137	16.40	.630
3.6	.141	19.0	.748

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 3. Mounting styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

PLUGS

LOCKING HARDWARE

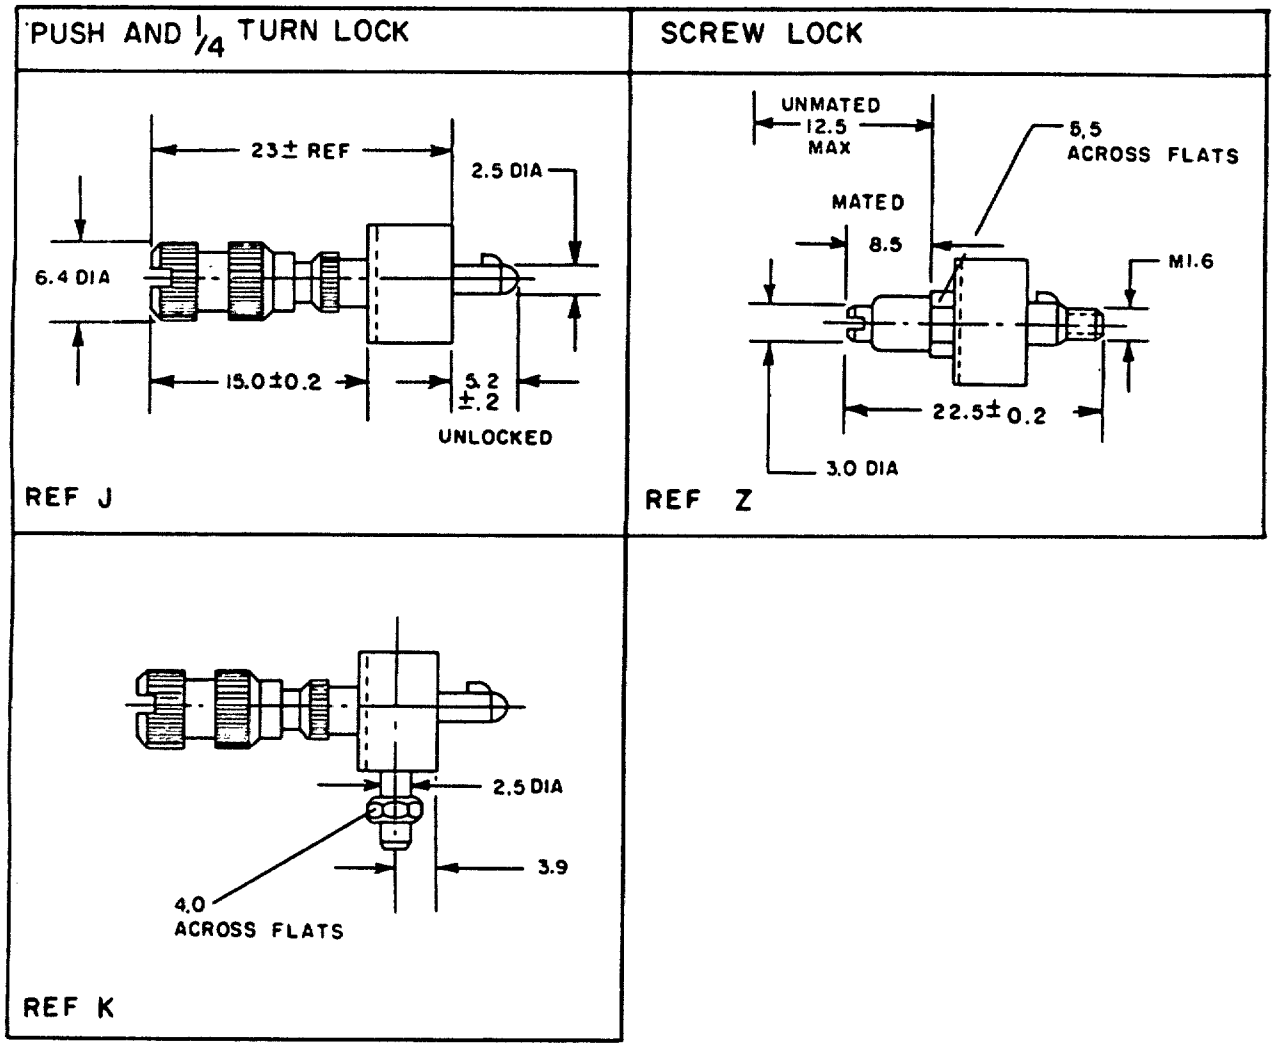


FIGURE 4. Locking hardware.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

RECEPTACLES LOCKING HARDWARE

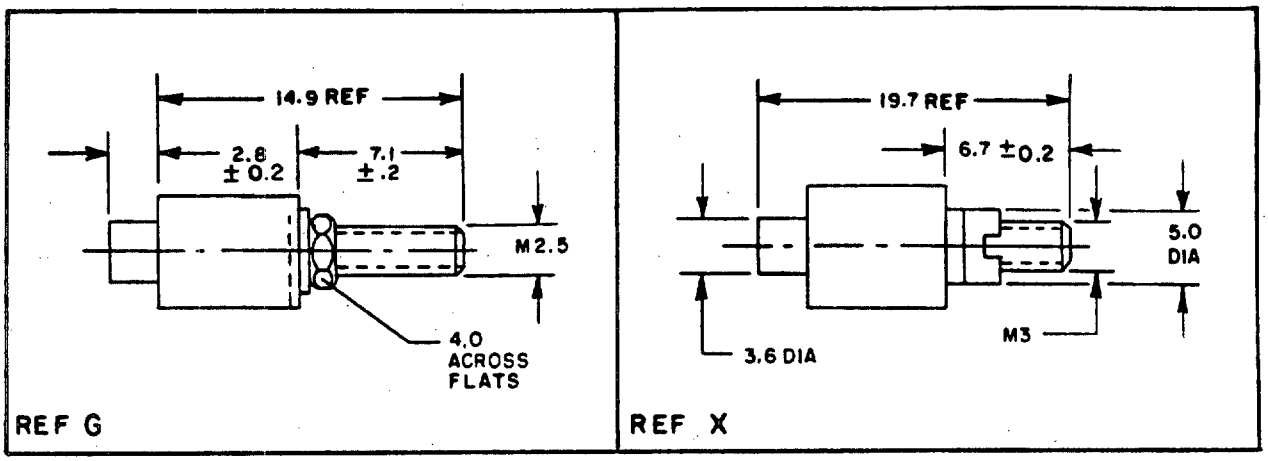


TABLE I. MATING REFERENCES

TYPE	WILL ONLY MATE WITH	LOCKING METHOD
B	P,U,W	NONE
F	J,K	PUSH, 1/4 TURN
G	J,K	PUSH, 1/4 TURN
J	F,G	PUSH, 1/4 TURN
K	F,G	PUSH, 1/4 TURN
P	B,T,V	NONE
T	P,U,W	NONE
U	B,T,V	NONE
V	P,U,W	NONE
W	B,T,V	NONE
X	Z	SCREW
Y	Z	SCREW
Z	X,Y	SCREW

MM	INCHES	MM	INCHES
0.15	.006	5.2	.204
0.2	.008	5.5	.216
1.6	.063	6.4	.252
2.5	.098	6.7	.263
2.8	.110	7.1	.279
3.0	.118	8.5	.334
3.1	.122	12.5	.492
3.6	.141	14.9	.586
3.9	.154	15.0	.590
4.0	.157	19.7	.775
5.0	.197	22.5	.886
		23.0	.905

NOTES:
1. Dimensions are in millimeters.
2. This is a metric design. Inches are to the closest .001.
3. Unless otherwise specified, tolerance is ±.1 (.004 inch).
4. These connectors mate with DOD-C-55302/164 or DOD-C-55302/161.
5. Inch equivalents are given for general information only.
6. See table for mating.
7. Contact identification may be located adjacent to contact cavity on surface indicated.

FIGURE 4. Locking hardware - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figures 1 through 4.

Material:

Insulators: Diallyl phthalate per MIL-M-14.

(B) Guides and hardware: Brass per QQ-B-626, nickel plated per QQ-N-290, or A151 303 stainless steel or equivalent per QQ-S-764, passivated per QQ-P-35.

Contact identification: See figure 1.

(B) Contact engagement and separation forces:

Minimum force .5 ounce with a .0220 ±.0001 ø pin.
Maximum force 1.6 ounces with a .0230 ±.0001 ø pin.

Note: Pin surface roughness to be .25 - 2.5 microns.

Mating and unmating: The maximum force shall not exceed 2 ounces (56 grams) multiplied by the number of positions.

Contact retention minimum: 8 pounds (3.6 kg) minimum.

Current rating: 5 amperes per line.

Durability: 2,000 cycles minimum.


Dielectric withstanding voltage:

Sea level: 1,400 Vac (rms) test, or equivalent dc voltage (2,000 volts).

(B) High altitude: 300 Vac (rms) test.

Keying: Rotation of guides - 6 positions each, 36 possible combinations.

Connector part number:

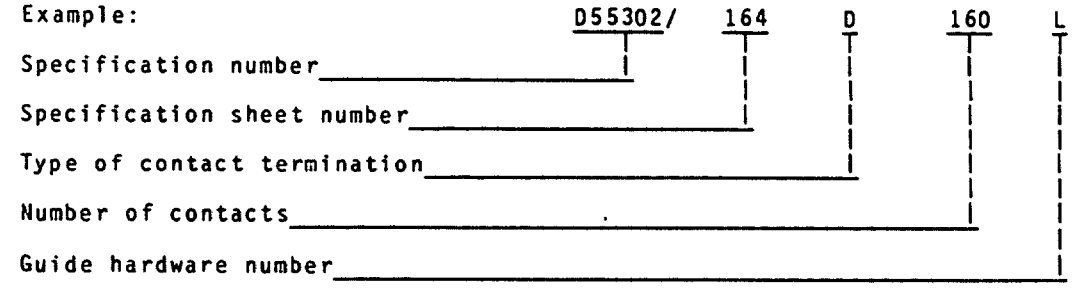

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR

Review activities:
Army - AR, MI
DLA - ES

User activities:
Army - ME, AT, AV

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-A256-6)

Source: https://assist.dla.mil Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.