INCH-POUND

MIL-PRF-81757/14(AS)
1 March 1999

PERFORMANCE SPECIFICATION SHEET

BATTERY, STORAGE, AIRCRAFT, NICKEL-CADMIUM,
24-VOLT, 5.5-AMPERE-HOUR, LOW-MAINTENANCE, VENTED

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-81757.

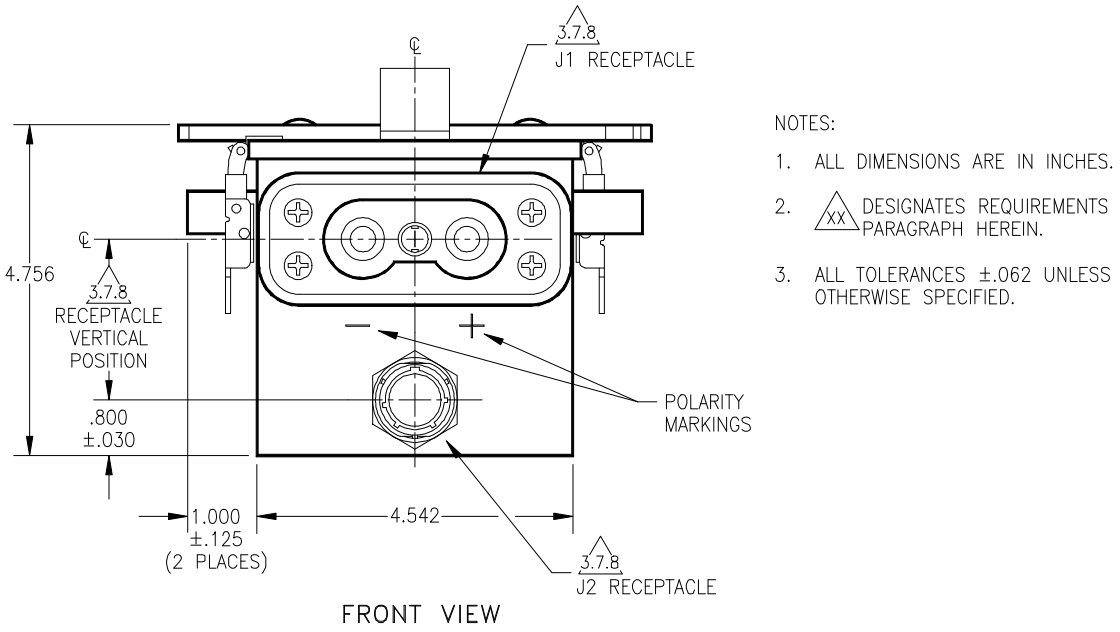


FIGURE 1. PIN M81757/14-1 dimensions.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

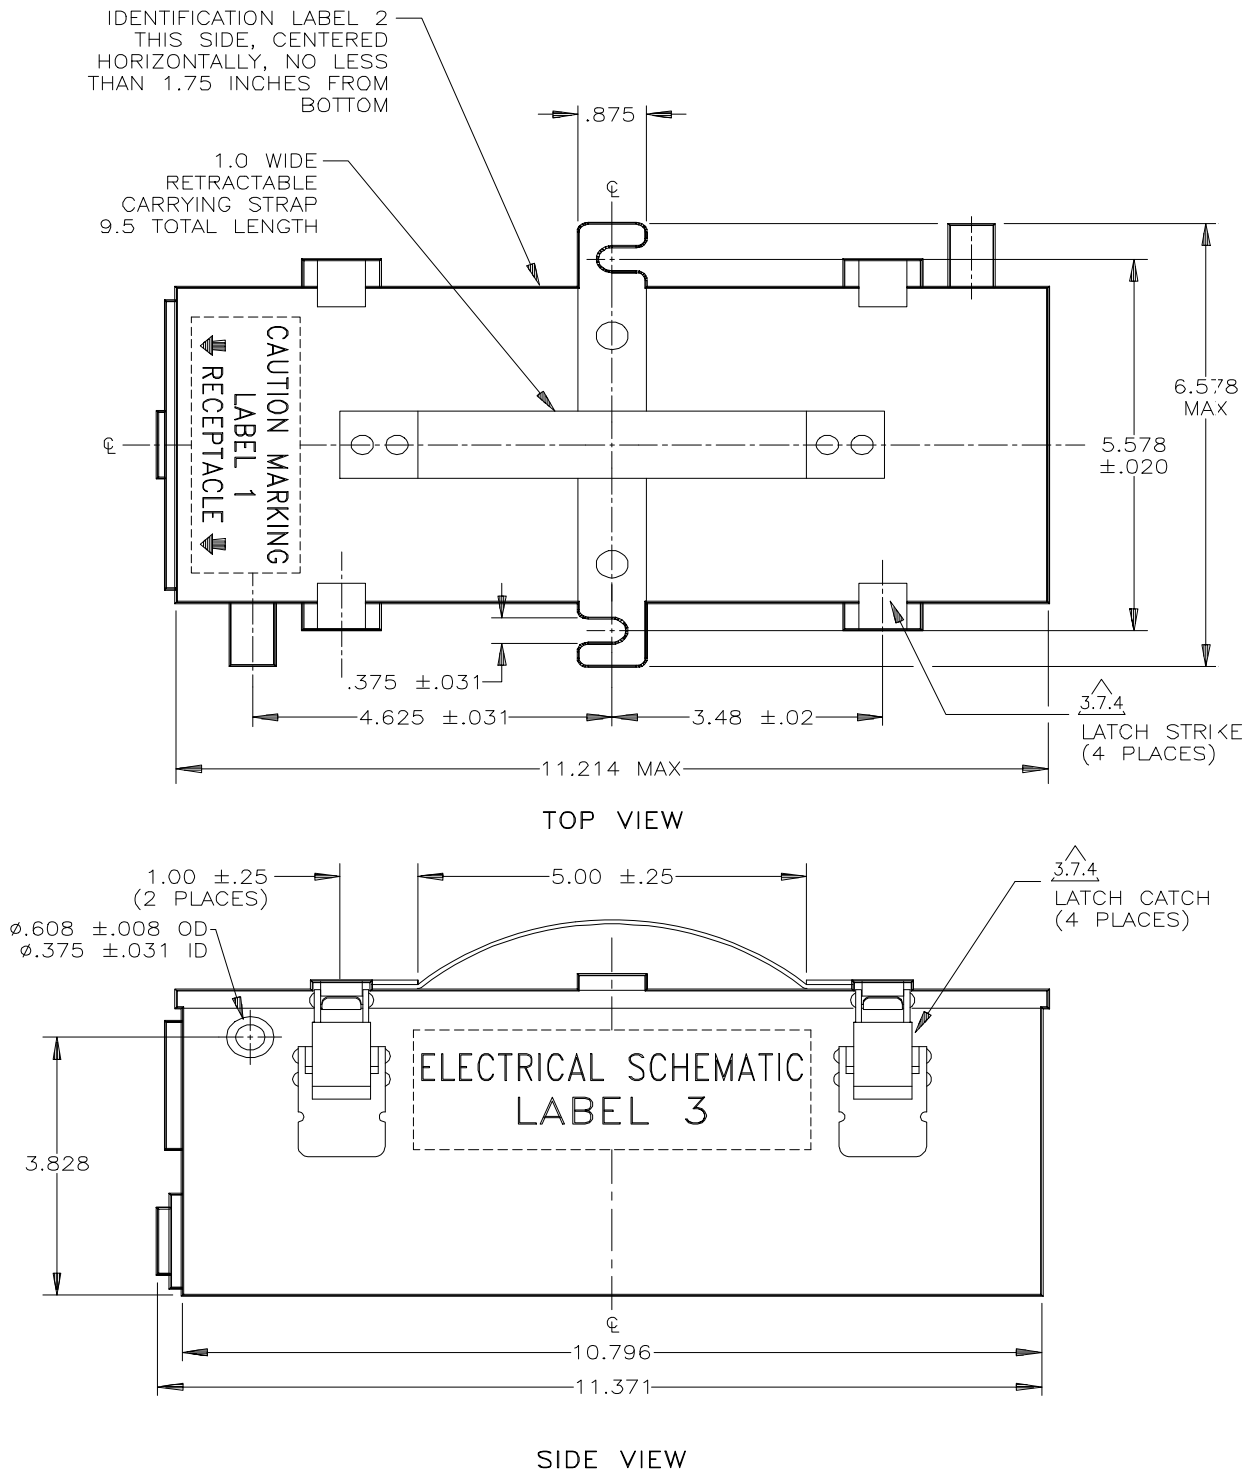


FIGURE 1. PIN M81757/14-1 dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.


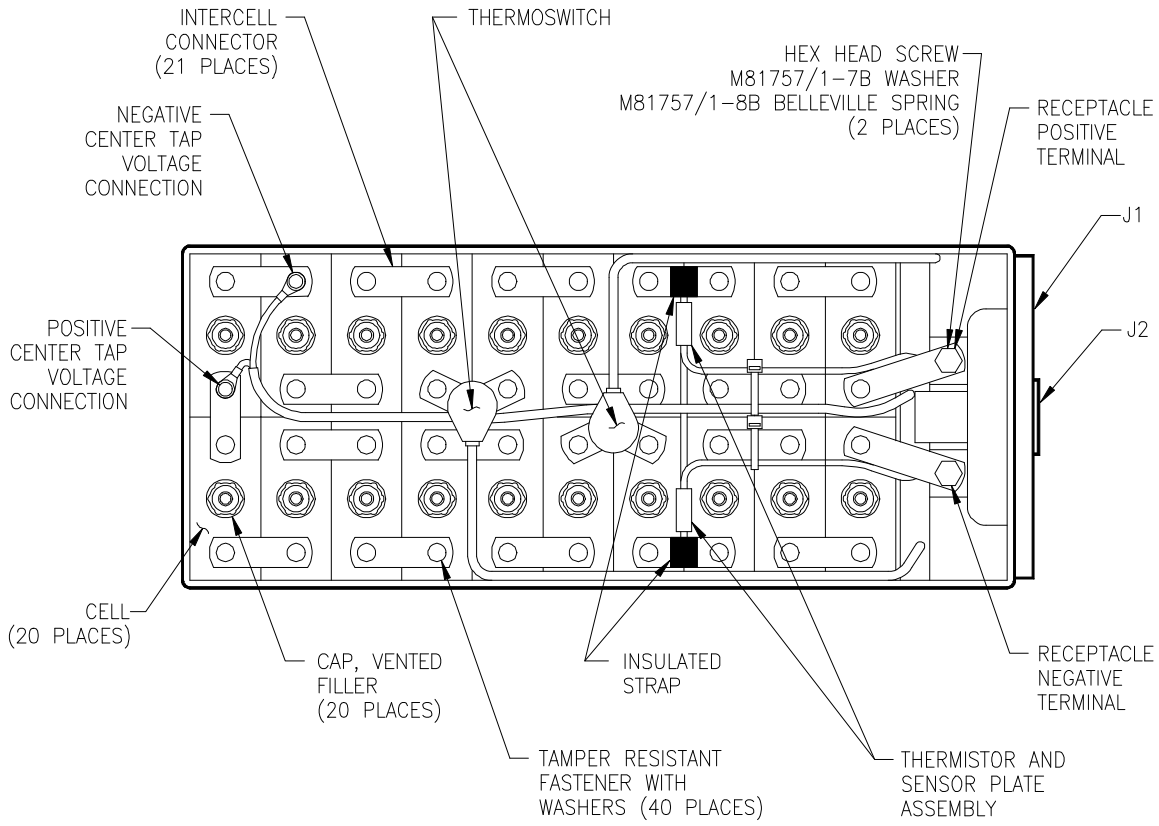


FIGURE 2. Layout of cells and sensors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

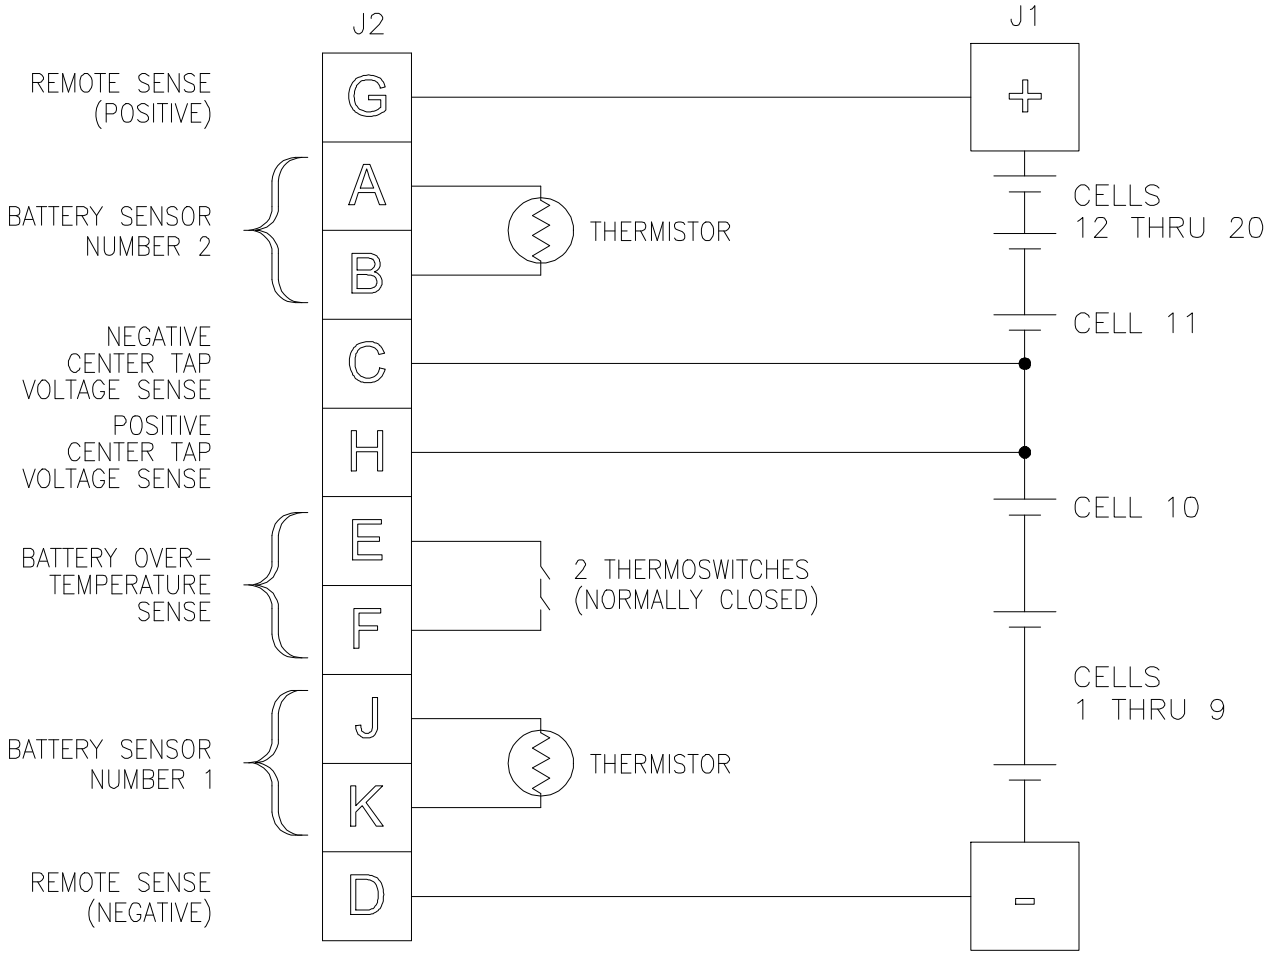

NOTES:

1. CELLS ARE PROGRESSIVELY NUMBERED NEGATIVE TO POSITIVE.

FIGURE 3. Electrical schematic of sensor/connector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

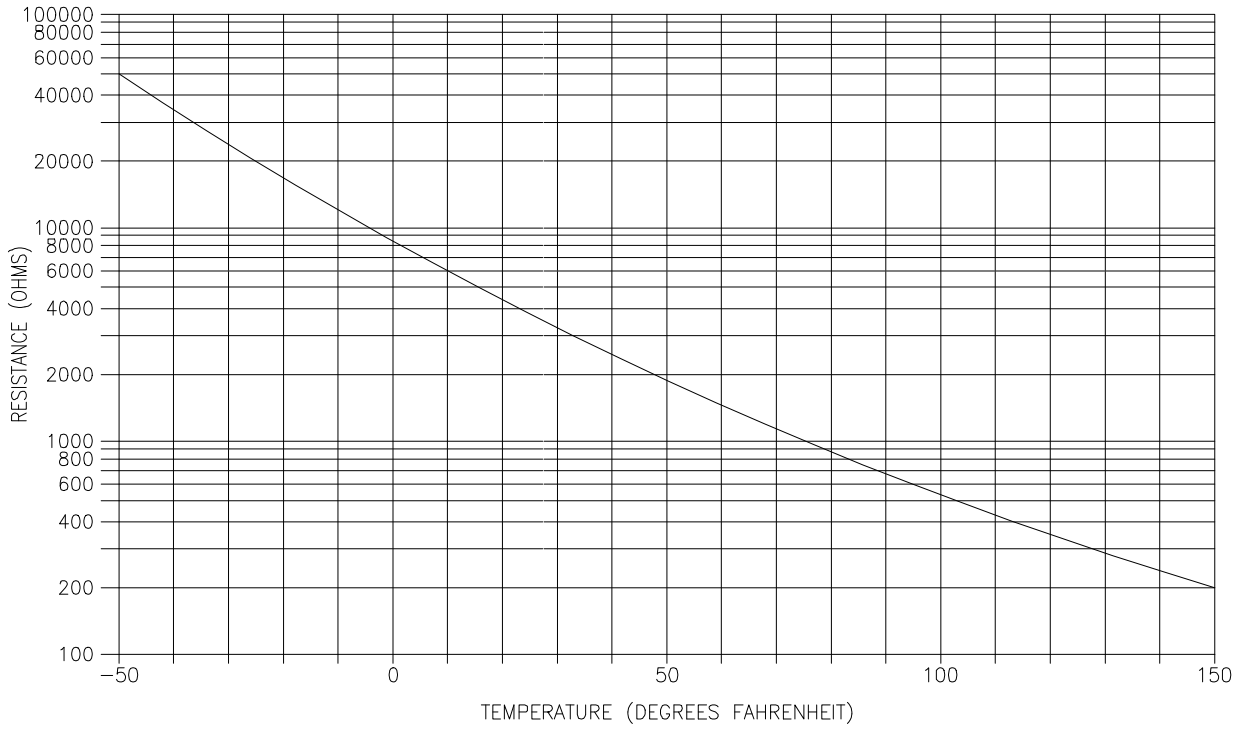


FIGURE 4. Thermistor characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

NOMENCLATURE:	BATTERY, STORAGE, AIRCRAFT NICKEL-CADMIUM, HIGH RATE, LOW-MAINTENANCE, VENTED, LIMITED-REPAIR
MILITARY PIN:	M81757/14-1
NATIONAL STOCK NUMBER:	6140-**-***-****
NOMINAL VOLTAGE:	24 VOLTS
MAXIMUM WEIGHT:	17.5 LB.
INITIAL CAPACITY:	7 AH (5.5 AMPS/75 MINUTES/24 °C /19 V)
MINIMUM CAPACITY:	5.5 AH (5.5 AMPS/1 HR/24 °C /19 V)
CONTRACT AND DELIVERY ORDER NUMBER:	***
MANUFACTURED BY:	***
MANUFACTURER'S CAGE:	***
MANUFACTURER'S SERIAL NUMBER:	***
DATE/LOT CODE:	***
DATE FIRST PLACED IN SERVICE:	

FIGURE 5. Marking for M81757/14-1 batteries.

REQUIREMENTS:

1. Part or identifying number. The part or identifying number (PIN) of the battery shall be M81757/14-1. The M81757/14-1 is a limited repair, low-maintenance, vented battery.

2. Dimensions and weight. The dimensions and the configuration of the battery container shall be as shown on figure 1. The weight of the battery shall be not greater than 17.5 pounds (7.94 kg).

3. Capacity. The initial capacity of the battery shall be not less than 7 ampere-hours (Ah). The minimum capacity of the battery shall be not less than 5.5 Ah. See 3.10.14 as modified herein.

3.10.14 Capacity. Delete the first sentence and insert: "The initial capacity of the battery shall be not less than 7 Ah. The minimum capacity of the battery shall be not less than 5.5Ah.

3.10.14.1 Initial capacity. Delete the text and substitute: "To comply with the initial capacity requirement, each cell shall produce a potential of not less than 0.95 volts not less than 75 minutes into the constant 5.5-ampere discharge after being tested in accordance with 4.5.13 at 24°C ambient temperature."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

3.10.14.2.1 Low-maintenance vented batteries. Delete the text and substitute: "The minimum capacity of the battery shall be not less than 5.5 Ah. The minimum capacity of the battery shall be based on its ability to comply with the 1C-rate capacity requirement. To comply with the 1C-rate capacity requirement, the battery shall produce a potential of not less than 19.0 volts not less than 60 minutes into the constant 5.5-ampere discharge at 24°C ambient temperature."

4. Harness assembly. Each battery shall include a harness assembly which shall be attached as shown on figure 2. The wiring configuration of the battery and harness assembly shall conform to figure 3. All electrical connections made to the receptacle and harness devices shall be potted with a compound that will not support flame, absorb moisture, flow, crack, or shrink during any of the tests of 4.5. The harness assembly and potting compound shall meet the requirements of 3.10.3.

5. Thermoswitches. The harness assembly shall have two temperature sensor/switching devices connected in series to provide a signal for high temperature conditions. If thermoswitches are used, they shall be environmentally (shock, altitude, and vibration), and functionally equivalent to MIL-S-24236 for type I, class 4 switches. The devices shall open when the battery temperature is 71° ± 2.8°C (160° ± 5°F) and close when the battery temperature drops to 62.8° ± 2.8°C (145° ± 5°F).

6. Temperature sensor. The harness assembly shall use two temperature sensor devices with a resistance output conforming to figure 4. If thermistors are used, they shall conform to MIL-PRF-23648 or equivalent.

7. Interface requirements. The cells and other interior components of the battery shall be arranged and positioned as shown on figure 2 herein. The cell terminals shall be vertically and horizontally positioned so that each cell terminal shall mate with its matching electrical connection of the cell scanner fixture and cell equalization fixture. The components and fasteners specified on figure 2 are required due to interfaces with the MS3509-28 receptacle, the cell scanner fixture, and the cell equalization fixture.

8. MIL-PRF-81757 variance. The battery shall comply with MIL-PRF-81757 except as follows.

Modify the following paragraphs, tables, and figure:

3.7.2 Battery container and cover. Delete the first sentence and substitute: "The battery container and cover shall be made of a material that is impervious to salt spray and to an aqueous solution of potassium hydroxide of 1.30 ± 0.04 specific gravity (see 6.10.1) and an alternate electrolyte if used. The cover may be protected with a material (such as paint, epoxy,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

or powder coating) that is impervious to salt spray and to an aqueous solution of potassium hydroxide of 1.30 ± 0.04 specific gravity (see 3.81 and 6.10.1) and an alternate electrolyte if used. Such protective materials shall not be applied to the battery container except as indicated in 3.8.1."

3.7.5 Handles. Delete the title and text and substitute: "Carrying strap. The battery cover shall have a carrying strap located as shown on figure 1. Fasteners or adhesive methods shall not be used to mount the carrying strap. The carrying strap shall be free of any coating and shall meet the requirements of 3.9, 3.10.3, and 3.10.25. The dimensions of the carrying strap shall be as shown on figure 1."

3.7.8 Receptacles. Add the following after the last sentence: "The battery shall contain two receptacles. The J1 receptacle shall conform to MS3509-28. The MS3509-28 main power receptacle shall be vertically positioned so that the top of the terminal block and the cell terminal contact surfaces are in the same plane. The J2 sensor receptacle shall be dimensionally equal to MS3474-L12-10PN, the receptacle shall be located as shown on figure 1, and the key of the receptacle shall be in the 12 o'clock position. Electroless nickel plating or cadmium plating shall not be used on the shell of the J2 sensor receptacle. The shell of the J2 sensor receptacle shall not be made of aluminum or aluminum alloy. Mate the J2 sensor receptacle to the matching connector (see 3.5)."

3.7.11.1 Cell container. Add the following after the last sentence: "To impede cell removal, the cell containers shall be attached to each other to form a monoblock type design. Mechanical means, such as fasteners or straps, shall not be used to attach the cell containers together."

3.7.11.6 Vented filler cap. Add the following after the last sentence: "Each cell shall contain a vented filler cap conforming to PIN M81757/2-3 for the M81757/14-1 battery."

3.8.4.1 Limited-repair batteries. In the first sentence delete "figure 1" and substitute "figure 4 of the applicable specification sheet."

3.8.7 Cell electrolyte level marking (low-maintenance vented batteries only). Delete everything after the first sentence and insert: "Each cell baffle shall contain a electrolyte level indicator between one-eighth and one-fourth inch above the bottom of the baffle."

3.10.10 Handle strength. Delete each mention of "handle(s)" in the title and text and insert "carrying strap."

3.10.22 Constant voltage discharge. Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

3.10.23 Cycling. Delete the text (including all subparagraphs) and substitute the following: "Batteries, when cycled in accordance with 4.5.23 at ambient conditions of 4.4.1, shall provide not less than 85 cycles of charge and discharge. During the life test, inability to meet the 1-hour rate discharge requirement for three consecutive discharges shall constitute a failure."

3.10.25 Physical integrity at high temperature. In the first sentence, delete "handles" and substitute "carrying strap."

4.5.9 Handle strength test. Delete each mention of "handle" in the title and text and insert "carrying strap". In the first sentence, delete "600 newtons (135 pounds)" and substitute "155.6 newtons (35 pounds)".

4.5.14 Humidity and charge retention test. Delete the second sentence and insert: "Constant current charge the battery in accordance with 4.4.3."

4.5.15 Shock test (basic design). Delete the second sentence and insert: "Constant current charge the battery in accordance with 4.4.3."

4.5.16 Vibration test. Delete the text and substitute the following: "Remove the cover from the battery. Constant current charge the battery in accordance with 4.4.3. Secure the cover onto the battery. Subject the battery to the vibration test of MIL-STD-810, method 514.4, procedure I and condition I-3.4.3. Use the test time schedule and curve for 'general' equipment location (figure 514.4-9). Discharge the battery at the 0.1 C-rate during vibration. During the vibration test, monitor the battery voltage. Upon completion of the vibration, constant current charge the battery in accordance with 4.4.3 and then discharge the battery at the 30C-rate for 60 ± 2 seconds. Examine the battery for the requirements of 3.9."

4.5.17 Temperature shock test. Delete the second sentence and insert: "Constant current charge the battery in accordance with 4.4.3."

4.5.18 Altitude test. In step a, delete the second sentence and insert: "Constant current charge the battery in accordance with 4.4.3." In step e, delete the text and insert: "Constant current charge the battery in accordance with 4.4.3."

4.5.20 Twenty-second pulse discharge test. In step a, delete the second sentence and insert: "Constant current charge the battery in accordance with 4.4.3."

4.5.21 Medium rate discharge, operating position test. In step a, delete the second sentence and insert: "Constant current charge the battery in accordance with 4.4.3."

4.5.22 Constant voltage discharge. Delete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

4.5.23 Cycling test. Delete the text and substitute the following: "Subject the battery to 85 cycles of charge and discharge. Each cycle shall consist of a constant current charge in accordance with 4.4.3 followed immediately by a 1-hour rest period on open circuit, followed by a 1.0 C-rate discharge to 19.0 volts."

4.5.24.2 Group C testing. In step a, delete the second and third sentences and insert: "Constant potential charge the battery in accordance with 4.4.2. Do not adjust the electrolyte levels."

4.5.25 Physical integrity at high temperature. In step a, delete the text and insert: "Constant current charge the battery in accordance with 4.4.3." In step c, delete "handles" and substitute "carrying strap".

6.1 Intended use. Add the following after the last sentence: “The M81757/14-1 limited-repair battery is designed so that its cells and all components associated with installing the cells cannot be removed and replaced. The battery should be requisitioned and used only by those DoD Departments and Agencies whose aircraft battery maintenance/repair policies, procedures, and practices disallow the battery’s cells to be removed and replaced.”

TABLE III. Qualification inspection of batteries. For the visual and mechanical test (test number 2), add "requirements 4, 5, 6, and 7" to the requirement paragraph column. For the dimensions and weight test (test number 4), add "requirement 2" to the requirement paragraph column. Delete the title of test number 5 and insert "Carrying strap strength test". For the initial capacity discharge test (test number 9), add "requirement 3" to the requirement paragraph column.

TABLE VIII. Group C inspection. For the visual and mechanical test (test numbers I-2, II-1, and III-1), add "requirements 4, 5, 6, and 7" to the requirement paragraph column. For the dimensions and weight test (test number I-3), add "requirement 2 " to the requirement paragraph column. For the initial capacity discharge tests (test numbers I-6, II-5, and III-4), add "requirement 3" to the requirement paragraph column.

FIGURE 1. Marking for limited-repair batteries. Delete the figure and insert figure 5 contained herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian:
Navy - AS

Preparing activity:
Navy - AS

Agent:
Navy - NW
(Project 6140-N887)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:07Z
Check the source to verify that this is the current version before use.