INCH-POUND

MIL-R-50319B(AR)
27 April 1990
SUPERSEDING
MIL-R-50319A(MU)
15 **April 1971**

MILITARY SPECIFICATION

REGULATOR, VOLTAGE: 10548043 AND 11727763

This specification is approved for use within the U.S. Army Armament. Munitions and **Chemical Command, and is available for use** by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers 25-volt regulators used in Radar Set AN/vPS'-2 and in Radar Test Set AN/TFM-22 (see 6.1].

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the department of defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control. Materiel, Manufacture and Inspection General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 1285

Source: https://assist.dla.mil -- Downloaded: 2015-10-20T20:15Z
Check the source to verify that this is the current version before use.

MIL-I-45607 Inspection Equipment, Acquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are avilable from the **Military Specifications and Standards, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.**)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10548043 ± 25V Regulator
11727763 ± 25V RegUlator

PACKAGING DATA SHEET

PS10548043 packaging of +_25V ReguLator
PS117763 Packaging Of ± 25V REGUlaLor

(Copies of drawings, publications, and other Government documents required by contractors in connection with specific acquisition. functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets OR MS standards) , the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3 REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.1 Materials. **Materials shall be in accordance with** the applicable drawings **and specifications.**

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawings 10548043, or 11727763, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the 25-volt regulator shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances
b. Inorganic protective surface finishings
c. Part identification and marking
D. Workmanship

3.3 Environmental service conditions.

3.3.1 Vibration. The 25-volt regulator shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations , in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibratiom shal.l be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3 . 75 minutes +1o'% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds +10%

3.3.2 Shock. The 25-volt regulator shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 ±10% g's, 11 ± lO% milliseconds, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The 25-volt regulator shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pr6ssure encountered at 10,000 feet above sea level (20.6 inches of. (HG)*

3.3.3.2 Non-operating. The 25--volt regulator shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above se~ level (5.5 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:21Z
Check the source to verify that this is the currentversion before use.

3. 3.4.1 Operating. The 25-volt regulator shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 degrees F and +155 degrees F

3.3.4.2 Non-oPerating (storage) . The 25-volt regulator shall not suffer permanent damage when subjected to the constant temperature extremes of -60 degrees F for a period of 24 hours and +160 degrees F for a period of 4 hours (after temperature stabilization) and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (non-operating) The 25-volt regulator shall meet the requirements of 3.4 and 3.; after exposure to an atmosphere with a relative humidity in excess-of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the 25-volt regulator.

3.5 Performance.

3.5.1 Input and output characteristics. When supplied with the inputs specified in Table I, the 25-volt regulator shall yield the outputs specified in Table I.

3.5.2 Overvoltage protection. The 25-volt regulator shall protect load circuits from voltages greater than 27 volts(V).

TABLE 1. Input and Output Characteristics

REQUIREMENT	CHARACTERISTIC	TERMiNALS
Input power		
+33 VC3C	+33 ±2.0 Vdc	P1-45 & P1-46(+), P1-53 & P1--54(RET).
-33 vdc	-33 ± 2.0 Vdc	P1-41 & P1-42(-), P1-51. & P1-52(RET).
outputs		
+25 udc	+25 VDC +0.100 V across resistive loads between 15 to 27 ohms, **when 2N3749 pass transistor is connected** with **emitter at P1-55 and P1-56, base at P1-47 and P1-48, and collector at P1–45 and P1-46.**	P1-55 & P1-56(+:1# P1-53 & P1-54(RET)

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T20:21Z
Check the source to verify that this is the currentversion before use.

TABLE 1. Input and output characteristics (Continued)

REQUIREMENT	CHARACTERISTIC	TERMINALS
outputs		
-25 Vdc	-25 Vdc +0.100 V **across resistive loads between 15 to 27 ohms, when 2N3749 pass transistor is comected with emitter at P1-41 and p1-42, base at p1-43 and p1-44, and collector at p1-49 and P1-50.**	p1-49 & P1-50(-), **P1-51 & P1-52(RET).**

NOTE : The 25-volt regulator shall regulate the output voltage within the indicated limits for all combinations of specified input voltage and load resistances.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical. provisions herein (see 4.3).

3.7 Workmanship. The workmanship requirements of MIL-F-13926 shall apply except for soldering.

3.8 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task)F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or Purchase order, the contractor is responsible for the performance-of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.1.1 Responsibility **for compliance. All items must meet all** requirements of sections 3 and 5 and all applicable drawings. The inspections set forth in this specification-shall become **a** part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance **comply** with all requirements of the contract. Sampling

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows and apply to each voltage regulator (10548043 or 11727763} as applicable:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following stan~ard **ambient conditions:**

a.	**Temperature**	**+5o deg to +90 deg** F.
b.	**Reiatlve** humldlty	9U% NM Max.
c.	Pressure	28 to 32 inches of Hg .

4.3 First article inspection.

4.3.1 **First article submission. The requirement for** first **article and the responsibility (Government or contractor)** for the first article testifig shall b: as specified in the contract and the applicable drawing. The sample for the first art~cle tests sh~l] consist of three 25-volt regulators manufactured in the same manner, using the same materials, equipment, processes and procedure as in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.3,1.1 Government testing. When the Government is reapons~ble for conducting first article tests, the contractor, prior to submitting the. sample t.o the Government, shall inspect tfie sample to ensure that it conforms to all the requirements of the contract and the applicable drawings. The contractor shall submit a record of the inspection with the sample including certified test report (CTR) or certificate of conformance (COC) for the materials.

4.3.1.2 Contractor testing. 'When the contractor is responsible for conducting first article tests, the sample shall be inspected **by** the contractor for **all** the requirements of the contract, all of the examinations and tests specified in Table II (Functional Test) and Table III (Special Sampling) herein and to all requirements of the applicable drawings. The sample and a ~ecord of this irlspcc.tion, including CTF\#/COC, ~h~ll be S[1]~bfi'~.~tQ5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

for the Government approval. The Government reserves the right to witness the Contractorts inspection.

4.3.2 **Re~ection.** If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample-shall be-rejected.--The Gover~ent reserves the right to terminate its inspection upon any failure of any 25-volt regulator to comply with any of the stated requirements.

4.4 **Quality** conformance inspection.

4.4.1 Inspection lot formatio~. The term "inspection lot" is def~ned as a homogene%~s collection ot units of product trom which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification * shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine-conformance with-requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. Al 1 components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAP's, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final. acceptance inspecton, Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis iri accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to he pexforrwil b~y the supplier after first article approval a:~d prito~ to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

o

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE II Functional tests
(100% Inspection)

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		**None**	**N/A**
Major:			
1010	**Electrical**	**3.4**	**4.7.2**
1020	**Performance**	**3.5**	**4.7.3**
Minor:		None	hi/A

4.5 **Special** sampling. one 25-volt regulator out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table II and shall then meet the tests in Table III. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

TABLE 111. **Special sampling**

CHARACTERISTIC		**REQUIREMENTS**	TEST PROCEDURE
Critical:		None	NIA
Maj or:			
103.	Vibration	3.3.1	4.7.1.1
104.	Shock	3.3.2	4.7.1.2
105.	Altitude	3*3.3	4.7.1.3
106.	Temperature	3.3.4	4.7.1.4
107.	Humidity	3.3.5	4.7.1.5
Minor:		None	N/A

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary,corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.2 Contractor-furnished inspection equipment.

446.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor In accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in 'Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will re.iiably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with paragraph 6.3.

4.6.2.3 Test equipment. **In** conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table IV shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE IV. Test equipment list


ITEM NUMBER	DESCRIPTION
1. Power supply	0 to 40 Vdc, 0 to 40 A current capacity, adjustable current limiting, with short circuit protection. Ripple voltage not greater than 10 mV rms.
2. Power supply	0 to 40 Vdc, 0 to 4 A current capacity, adjustable current limiting, with short circuit protection. "Ripple voltage not greater than 10 mV rms.
3. DC digital voltmeter	Visual display 5 digits. Full scale range 50,000 V or greater. Input resistance 1 megohm or greater. Response time 250 ms or less. Accuracy f 0.01% of reading and ± 0.01% of full scale reading.
4. Test Harness	As specified in Figure 1. See Table V for test harness parts list.

TABLE V. Test harness parts list

DESIGNATION	PART	DESCRIPTION
P1	Connector	Malco 5893232-1, *Elco* 07-5422-0198-01, or equivalent
Q1	Transistor	2N3749
Q2	Transistor	2N3749
R1	Resistor	15 ohms, 50 W
R2	Resistor	15 ohms, 50 W
R3	Potentiometer	0-15 ohms, 15 W
R4	Potentiometer	0-15 ohms, 15 W
SI	Switch	SPST, 3A capacity
S2	Switch	SPST, 3A capacity

NOTE : Wire, test points, mounting hardware, per Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

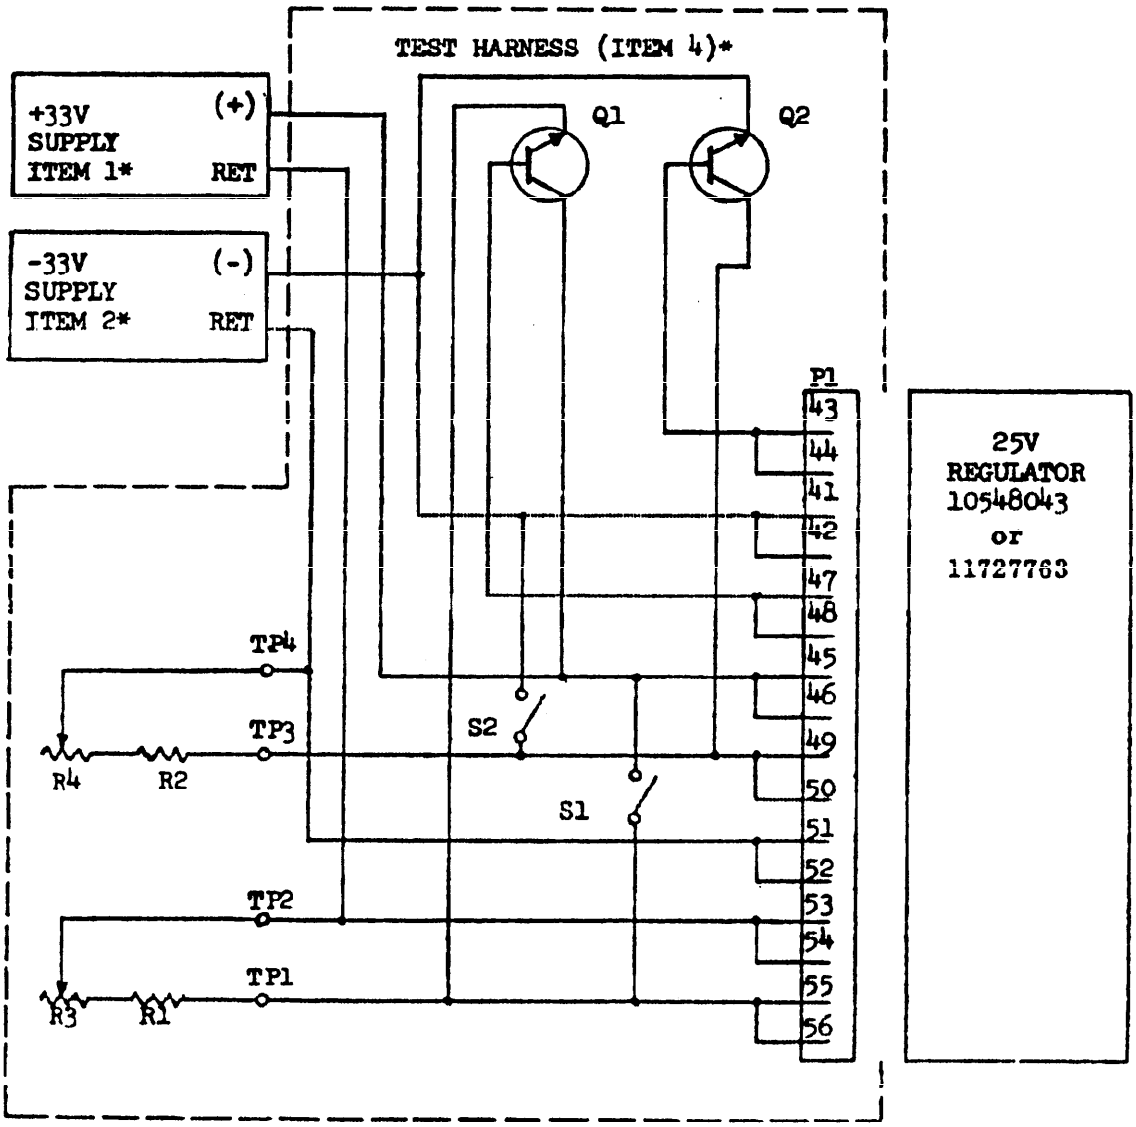

*REFER TO 4.6.2.3

NOTE: See Table V for test harness parts list.

FIGURE 1. Test setup for 25-volt regulator

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514.3, Category 8, Procedure **I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The 25-volt regulator shall be attached to the vibration qenerator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the 25-v61t regulator shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.**

4.7.1.2 Shock . This test shall be performed as specified in Procedure I, Section II of Method 516.3 of MIL-STD-810 except that:

a. The post test functional check (Step s of Procedure 1) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms + 10% duration.

c. The maximum g shall occur at 5.5 milliseconds +~ 10%.

d. The shock measuring system shall have a flat frequencv response within ± 10% from 20-to-2,000 hertz.

After the application of all the shock impulses, the 25-volt regulator shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating) This test shall be performed as specified in procedures II and 111, Method 500.2 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.: High (operating and non-operating~. This test shall be performed as specified in Procedures I and II, Method 501.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 **Low** (operating **and non-operating). This test shall be performed as specified in procedures I and II, Method 502.2 of** MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliauce with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T20:21Z
Check the source to verify that this is the currentversion before use.

4.7.1.5 **Humidity (non-operating) This test shall be Derformed in accordance with ProcedurE iii , Method 507.2 of** MIL-sTD-810 except **that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in** 4.7.2 and 4.7.3 foR compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4.

4.7.3 Performance. The selected 25-volt regulators shall be tested as follows: Adjust power supplies, items 1 and 2, of Table **IV, to** deliver 33 ± 0.0i0 volts direct current (Vdc), with current limiting to occur at 3 amperes (A). Turn off power supplies. Connect test equipment as shown in Figure 1. Open switches S1 and S2. Adjust R3 and R4 so that maximum resistances are in the circuit. Insert 25-volt regulator into connector P1. Turn on power supplies.

4.7.3.1 Input and output characteristics.

Connect voltmeter (Table IV, item 3) from TP1(+) to TP2 (RET). verrify that voltage is as shown in Table I for +25 Vdc output . Gradually turn potentiometer R3 to minimum resistance. Verify that output voltage remains as shown in Table I for +25 Vdc output throughout the range of load resistance. Turn potentiometer
e R3 back to maximum resistance.

b. Readjust power supply (Table Iv, item 1) to deliver 35 ± .010vdc. Repeat a. above.

c. Readjust power supply (Table IV, item 1) to deliver 31 ± 0.010 vdc. Repeat a. above.

d. Connect voltmeter (Table IV, item 3) from TP3(-) to TP4 (RET). Verify that voltage is as shown in Table I for -25 Vdc output . Gradually turn potentiometer R4 to minimum resistance. Verify that output voltage remains as shown in Table I for -25 Vdc output throughout the range of load resistance. Turn potentiometer R4 back to maximum resistance.

e. Readjust power supply (Table IV, item 2) to deliver 35 ±.o1o vdc. Repeat d. above.

f. Readjust power supply (Table IV, item 2) to deliver 31 ± 0 .010 vdc. **Repeat d. above.**

4.7.3.2 Overvoltage protection.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:21Z
Check the source to verify that this is the current version before use.

a. Adjust potentiometers R3 and R4 to minimum resistance.

b. **Close** switch S1. Verify that output current from power supply (Table IV, item 1) rises to approximately **3 A and that power supply voltage and current then drop to approximately zero. Open switch S1 and reset power supply if it does not have automatic recovery.**

c. Close switch s2. Verify that output current from power supply (Table IV, item 2) rises to approximately 3 A and **that power supply voltage and current then drop to approximately zero. Open switch S2 and reset power supply if it does not have automatic recovery.**

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the requirements and acceptance criteria of MIL-STD-2000 to be specified in paragraph 3.8.

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheets PS10548043 and PS11727763. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The 25-volt regulator, part number 10548043, is used in Subassembly Test Set MX-8048/TPM-22, part of Radar Test Set TPM-22 and in Range Computer CP-888VPS-2, part of Radar Set AN/vPS-2. The 25-volt regulator, part number 11727763/ is used in Subassembly Test Set MX-8050/TPM-22, part of Radar Test Set TPM-22. In the test set, the 25-volt regulator simulates the performance of the subassembly of the Radar Set AN/VPS-2. In the Radar Set AN/VPS-2, it provides regulated ± 25 volts to circuits of the range computer.

6.2 Acquisition requirements. procurement documents shall specify the following:

6.2.i procurment requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c. First Article Sample requirements.
d. Packaging requirements, If other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of conformance for each lot or shipment of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN : AMSMC-QAF-I(D), Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC!), may also include drawings prepared by, and identified **as, U.S. Army Armament, Research and** Development Command **(ARRADCOM),** Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC .

6.5 subject term (key word) listing.

Fire Control System
Radar Set AN/vPS–2
Radar Test Set AN/TPM-22
Range Computer CP-888/VPS-2
Subassembly Test Set MX-8048/TPM-22
Subassembly Test Set MX-8050/TPM-22
VADS
Voltage regulator

6*6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A705)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-R-50319B (AR)	27 April 1990

3. DOCUMENT TITLE

REGULATOR, VOLTAGE: 10548043 AND 11727763

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US Army ARDEC Specifications & Standardization Office	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete. — 198 290

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T20:21Z
Check the source to verify that this is the most current version before use.