[METRIC]
A-A-2086D
November 3, 1993
SUPERSEDING
A-A-2086C
December 10, 1991

COMMERCIAL ITEM DESCRIPTION

DESK (OFFICE, TRADITIONAL STYLE)

The General Services Administration has authorized the use of this commercial Item Description in preference to Interim Federal Specifications AA-D-001107, AA-0-00240, and AA-D-00191.

Scope. This Commercial Item Description covers desks which are a part of a traditional line of metal office furniture.

Salient characteristics. These characteristics concisely describe the essential physical and functional/performance features of the commercially available item.

Design. The desks shall be traditional style designed for heavy duty, commercial office use.

Types, classes, and styles.

Type I. General Office.

Class 1. Double pedestal
1500 mm W X 750 mm D X 750 mm H
Center drawer plus four storage drawers and one file drawer.

Class 2. Single pedestal with panel
1150 mm W X 750 mm D X 750 mm H
Style A - Left pedestal
Style B - Right pedestal
Center drawer plus one storage drawer over one file drawer.

Class 3. Single pedestal
1500 mm W X 750 mm D X 750 mm H
Style A - Left pedestal

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Style B - Right pedestal
Center drawer plus one storage drawer over one file drawer.

Class 4. Double pedestal with typing pedestal
1500 mm W x 750 mm D X 750 mm H
Style A - Left typing pedestal
Style B - Right typing pedestal
Center drawer plus one storage drawer over one file drawer; one typewriter compartment with door.

Type II. Conference Desk.
Class 5. Double pedestal
1800 mm W X 900 mm D X 750 mm H
Center drawer plus four storage drawers and one file drawer.

Note: 1. Height shall be measured with glides fully retracted.
2. Unless otherwise specified, dimensions shall have atolerance of ±25 mm.
3. For Classes 1, 3, and 4, the plus tolerance on the width dimension shall be 55 mm. For Class 2, the plus tolerance on the width dimension shall be 110 mm. For Class 5, the plus tolerance on the width dimension shall be 65 mm.

General construction.

Top. Steel construction reinforced with formations extending the full length of the top for maximum rigidity. Top edges shall have a binding strip. The top shall be covered with decorative, high pressure laminated plastic. Alternatively, the top may be particleboard with a high pressure laminated plastic face and backing sheet to produce a balanced sandwich construction. A protective edging shall be around the entire top and the color shall be gray, similar to the gray enamel finish (self-edging, not allowed). The white leather laminated plastic shall match GSA Standard Sample No. FSS-L-01001. Alternatively, the manufacturer may provide his equivalent commercial, white leather laminated plastic, subject to contracting officer approval. Overall top thickness shall be 25 mm, minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Pedestal. Pedestals shall be reinforced by vertical uprights. Suspension case rails shall be secured to the vertical uprights.

Typewriter compartment. The typewriter pedestal shall be on either the right or left hand and shall contain an elevation type platform. The typewriter platform mechanism shall be constructed of steel, having sufficient structural strength to easily withstand a load of 45 kg, minimum, without sagging, deformation, or structural damage. The mechanism shall be properly spring counterbalanced and shall have a positive metal locking device which operates automatically to hold the platform in place in the elevated position. The top of the typewriter platform, in the raised position, shall be 660 mm ± 25 mm above the floor. The mechanism shall operate easily and smoothly with the typewriter in place and shall have ample clearance to accommodate typewriters having maximum outside dimensions of 460 mm wide, 435 mm deep, and 255 mm high. A label shall be permanently affixed to the back of the compartment door captioned "Warning" or "Caution" and setting forth complete operating instructions for the mechanism.

Drawers. The drawers shall have stops to prevent accidental removal but allow removal without the use of tools. The minimum inside clear dimensions shall be as specified in Table I. File and storage drawers shall be welded construction with double wall drawer fronts. The storage drawer body shall be constructed to accommodate partitions. Each storage drawer shall have a minimum of two (2) partitions. The storage drawers shall be suspended on telescoping ball bearing slides, rollers, or nylon glides. The slides, glides, or rollers shall promote smooth quiet operation and prevent metal to metal contact between suspension members. The file drawers shall be on full progressive suspensions or telescoping ball bearing slides. The file drawer shall have a spring-activated follower block which operates smoothly. Bumpers shall cushion drawer stops in both closed and extended positions. The center drawer shall contain a convenience tray and a locking mechanism controlling all drawers. The lock control may be located in other convenient places.

TABLE I Drawer dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Drawer types	Minimum inside clear dimension		
	Width	Height	Depth
Storage drawers	300 mm	110 mm	560 mm
File drawers	300 mm	250 mm	585 mm
Center drawers	455 mm	38 mm	355 mm

Locks. The locks shall be of the disk or pin tumbler type, having not less than four disks or pin tumblers, and shall be operated by a grooved key. The locks shall have not less than 125 key changes. No one key shall open more than one lock on one unit, up to a minimum of 125 units, consecutively produced. Duplicate keys shall be furnished for each lock.

Legs. Legs shall be attached to the under side of the desk pedestal or end panel. The legs shall be equipped with adjustable glides. Alternatively, end panels, full panel to the floor with glides, may be substituted for legs.

Shelf, dictation. A sliding dictation shelf with a minimum extension of 380 mm shall be provided in each desk pedestal. Alternatively, a sliding reference shelf shall be provided in the top storage drawer of each pedestal.

Attachment bracket. Each Type I, Class 3 desk shall be furnished with a bracket complying with Figure 1.

Finish. The finish shall be baked enamel. The color shall match Fed. Std. No. 595 - Gray (26134). Alternatively, the manufacturer may provide his equivalent commercial, gray, baked enamel finish, subject to contracting officer approval.

Identification label. The label shall have the contractor's name or trademark, contract number, National Stock Number (if specified), and month, and year of manufacture legibly marked in dark ink. The label shall be located on the inside of the knee space, near the top and back of the pedestal. The label shall not be removable by hand without defacement after being affixed for four hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Workmanship. The workmanship shall be of the quality to produce finished desks acceptable in appearance, function, and serviceability and to prevent potential hazard to personnel or their clothing.

Quality assurance provisions. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements specified herein. Sampling for inspection shall be performed in accordance with MIL-STD-105, unless an equal or better plan is approved by the contracting officer of his/her representative. A lot shall consist of units of one type, class, style, and color. The sample shall be one each. Inspection levels and AQL's shall be as follows:

For fit, finish, and all other workmanship - Level II, AQL 6.5 defects per hundred units.

For packaging, packing, and marking - Level S-2, AQL 4.0 percent defective.

Any failure to meet the dimensions, color, identification label or performance requirements shall cause rejection of the lot.

Performance.

ANSI/BIFMA. Each desk shall comply with the requirements of BIFMA Desk Products Standard X5.5-1989, with the following exceptions.

Exceptions to BIFMA American National Standard X5.5-1989: Sections 13.2.2, 13.2.3, 14, 15, 16, 17, 18, and 19 are not applicable.

Level test for top. This test unit shall be located on a flat surface. Place a steel straight-edge on edge, diagonally (corner to corner) across the top. The length of the straight-edge shall be greater than the diagonal length of the top. There shall be no gap between the straight-edge and top greater than 3 mm at any point along the diagonal length of the top. This test shall be performed along both diagonals of the top before and after

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:19Z
Check the source to verify that this is the current version before use.

performing the top loading test specified in BIFMA.

Chromium plating test. Plated samples shall be tested for corrosion in accordance with the 5 percent neutral salt spray at 35°C in accordance with ASTM Test Method B-117. The test period shall be not less than 48 hours. After the specified exposure is completed, the specimen shall be visually examined to assure that the plating shows no evidence of peel, chip, uneven color, powder film, pits, or stain. Widely scattered spots of corrosion are permitted, however, none of these spots shall exceed 1.6 mm along the greatest dimension.

Regulatory requirement. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Standards. The issues of ANSI/BIFMA X5.5, MIL-STD-105, and Fed. Std. 595 in effect on the date of the solicitation shall be used to determine compliance with the stated requirements.

Notes.

Ordering options. Purchaser should specify type, class, style, and size.

Plastic laminate panel. A sample of the decorative plastic laminate sheet is available from the General Services Administration, Federal Supply Service, National Furniture Center, Engineering Division, Washington, DC 20406.

Color panel. A sample of the baked enamel finish referenced in Fed. Std. No. 595 is available from the General Services Administration, Business Center, Federal Supply Service, Washington, DC 20407 or the Business Service Center in the nearest General Services Administration Regional Offices.

Federal standards. Federal Standard No. 595 is available from

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

ANSI/BIFMA standard. Copies of the ANSI/BIFMA Standard X5.5 are available from the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.

MIL-STD-105. Copies of MIL-STD-105 are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2022-10-26T08:19Z
Check the source to verify that this is the current version before use.


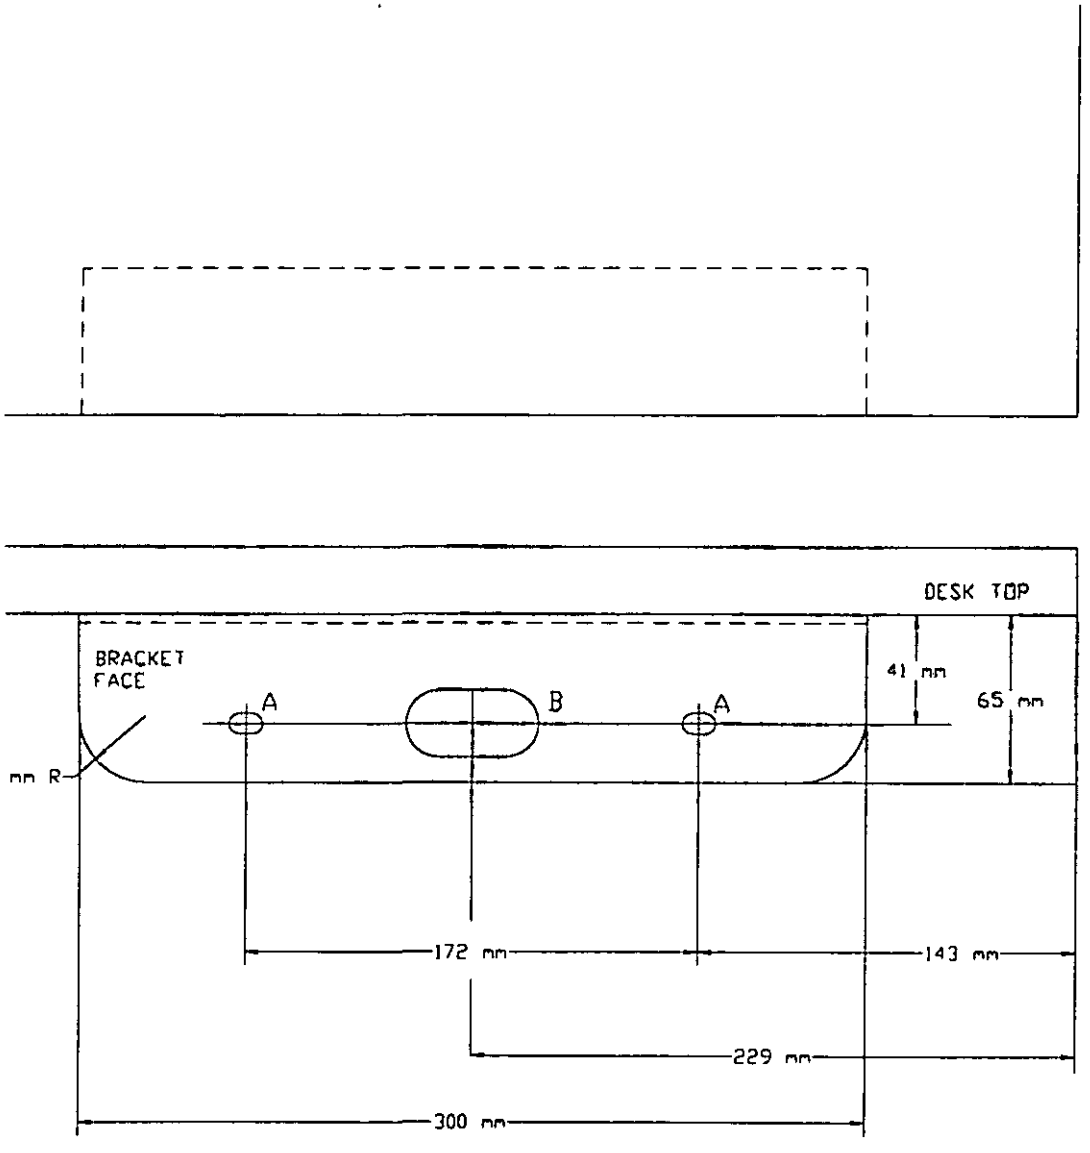


Figure 1
Desk Attachment Bracket

This drawing describes one leg of an L-shaped bracket intended for use in joining a 1500 mm single pedestal desk with a secretarial or clerical L-unit.

The other leg, where the bracket is fastened to the desk or L-unit, should be the manufacturer's own design.



DESK ATTACHMENT BRACKET
MATERIAL - 1.9 mm STEEL

NOTES:
A - 8mm x 13mm slot
B - 25mm x 50mm slot

Tolerance on dimensions: ± 1 mm

A-A-2086D