[INCH-POUND]
A-A-2586
NOVEMBER 18, 1992

COMMERCIAL ITEM DESCRIPTION

HOLDER AND GUIDE, DRIVE PIN

The General Services Administration has authorized the use of this Commercial Item Description in preference to GGG-H-570.

This description covers the requirements for a holder and guide used for hand hammering drive pins into dense material such as concrete and steel and is assigned National Stock Number 5120-00-892-5898.

Salient characteristics.

Design. The drive pin holder and guide shall consist of a barrel, ram, and handgrip. It shall be designed to utilize the striking force of a 2-1/2 to 3 pound hammer to drive fasteners (drive pins) into dense material such as steel or concrete. The drive pins shall be designed for loading without the use of tools. Means shall be provided whereby the holder can be converted into a drill holder to accept tapered shank, twist flute, masonry drills conforming to A-A-2556.

The barrel shall be fabricated of high grade, heat-treated, alloy steel AISI 4140 or greater. The construction of the barrel may be one-piece, or an assembly of several components, provided with a finished bore to accommodate the ram.

The ram shall be made of high-grade, heat-treated, alloy steel AISI 4140 or greater. The ram shall be finished to fit the barrel and, when assembled as a complete tool, shall be capable of withstanding repeated blows with a 2-1/2 or 3 pound hammer, when driving pins without damage or distortion.

The handgrip shall be of molded neoprene or rubber composition. The handgrip shall be capable of withstanding blows from a 2-1/2 or 3 pound hammer without damage. The handgrip shall be provided with a comfortable nonslip grip. The top of the handgrip shall be provided with a flange or enlarged portion to serve as a handguard. The handgrip shall have at least one flat surface that shall prevent the tool from rolling off an inclined surface.

The drive pin holder and guide shall be designed to drive pins which are in accordance with type III of FF-P-395.

All accessories normally furnished, shall be furnished with each drive pen holder and guide.

When requested, manufacturers shall furnish repair parts. All parts having the same manufacturer's part number shall be manufactured to definite standards, tolerances, and clearances to insure that such parts are interchangeable, replaceable, and adjustable without modification.


Each holder shall be furnished with complete operating instructions including safety instructions.

FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Illustration. The illustration shown herein is for the convenience of identification and is not intended to preclude the purchase of holders which are otherwise in accordance with this description.

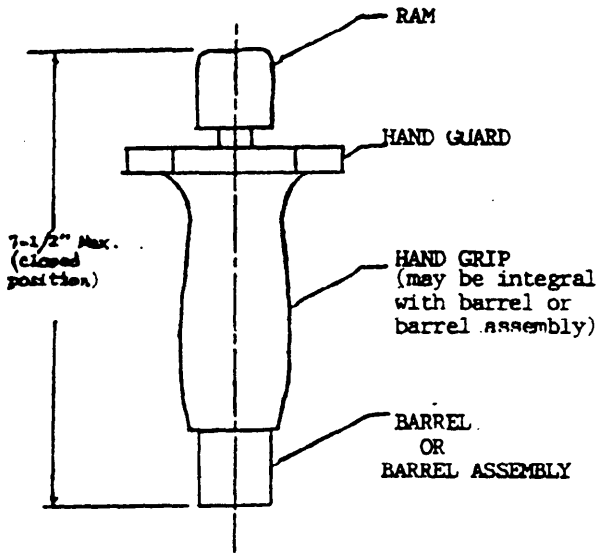

Identification marking. Each holder shall be marked with the manufacturer's name or identifying symbol, and the state or country of manufacture, unless otherwise specified. All marking shall be engraved, etched, molded, or stamped directly on the item's surface in such a manner that it remains clearly legible throughout the life of the item.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch/pound units, provided they fall within tolerances specified using conversion tables contained in the latest revision of Fed-Std-376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, the contracting officer has the option of accepting or rejecting the product.

Workmanship. Details of workmanship shall be in accordance with the best commercial standards and practices. Paints, coatings, platings, and finishes shall be smooth, adherent, continuous, and not stained or discolored. Fasteners shall be firmly secured and show no evidence of deformation, cross threading, or hazardous burrs. Adhesives and lubricants adequate for their intended purpose shall be properly and neatly applied. Adhesives shall be adequately cured. There shall be no interference, binding, or galling of parts. External and bearing surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections. The item shall be clean and free of corrosion and debris (e.g., chips, shavings, slivers) or other foreign material. The item shall be free from manufacturing workmanship defects (e.g., loose, missing, binding or misaligned parts, sharp or rough external edges, corners or surfaces) and material workmanship defects (e.g., pits, rips, fins, burrs, tears, nodules, cracks, blisters) which may adversely impact the item's serviceability, durability, safety, or appearance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS

Sampling for inspection and testing. Sampling shall be in accordance with MIL-STD-105. The lot size shall conform to the requirements of MIL-STD-105, paragraph 4.3. The sample unit shall be one holder.

Visual inspection. The inspection level shall be S-4 with an acceptable quality level (AQL) of 1.5 defects per hundred units.

Dimensional inspection. The inspection level shall be S-3 with an AQL of 1.5 per hundred units.

End item testing. Each sample drive pin holder and guide shall be tested by driving five drive pins through a standard 1-1/2 inch piece of lumber attached to a piece of steel 3/16 inch thick to the full depth of the shank. The pins shall be two inches long conforming to type III of FF-P-395. The steel plate shall conform to ASTM A 36 with a Brinell hardness of 126 to 140. The sample shall be rejected if any cracking or distortion of the drive pin holder and guide occurs. The inspection level shall be S-4 with an AQL of 4.0 defects per hundred units.

Preparation for delivery. An examination shall be made to determine whether packaging, packing, and marking comply with the requirements of the contract and this description. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 with an AQL of 2.5 percent defective.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580, as amended, to the maximum extent practicable.

Preservation, packaging, packing, labeling and marking. Preservation, packaging, packing, labeling and marking shall be as specified in the contract or purchase order.

Notes. The issue of reference documents in effect on date of invitation for bid or request for proposal shall be used to determine compliance with the stated requirements. Sources for obtaining referenced documents may be determine by the Contracting Officer.

Military Standards are available from the Standardization Documents Order Desk, 700 Robbins Avenue, Building #4, Section D, Philadelphia, PA 19111-5094.

ASTM standard is available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

AISI standard is available from the American Iron and Steel Institute, 1000 16th Street N.W., Washington, DC 20005.

Copies of Federal specifications, standards and commercial item descriptions are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; and Seattle, WA.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Military Coordinating Activity:

Army - GL

Custodians:

Army - GL
Air Force - 99

Review activity:

Air Force - 84

User activities:

Army - ME, ER
Navy - MC

PREPARING ACTIVITY:

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.