[INCH-POUND]
A-A-3118
July 15, 1997
SUPERCEDES
(see para. 7.4)

COMMERCIAL ITEM DESCRIPTION

BRUSH, PLATER'S, HAND (CURVED HANDLE STYLE)

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. SCOPE. This commercial item description (CID) covers 3 and 4 row wire brushes with curved handles.

2. CLASSIFICATION. The brushes shall be of the following types and classes:

Type I - 4 rows of filler
Type II - 3 rows of filler

Class 1 - Hog bristle or polypropylene.
Class 2 - Tampico or polypropylene.
Class 3 - Carbon steel wire (0.014 inch (0.36 mm)).
Class 4 - Carbon steel wire (0.005 inch (0.13 mm)).
Class 5 - Copper alloy wire.
Class 6 - Copper-beryllium alloy wire.
Class 7 - Aluminum alloy wire.
Class 8 - Corrosion-resistant steel wire.

3. SALIENT CHARACTERISTICS

3.1 Filler material.

3.1.1 Class 1. The class 1 filler shall be 100% hog bristle or 100% polypropylene. The hog bristle shall be pure black without artificial coloring, cleaned and sterilized. The brush shall contain 0.72 ounces (20 g) minimum of hog bristle. The polypropylene for the class 1 brush shall be straight and 0.020 inch (0.5 mm) minimum in diameter. Each brush shall contain 1.25 ounces (35 g) minimum of polypropylene.

3.1.2 Class 2. The class 2 filler shall be 100% tampico or 100% polypropylene. The tampico shall be new and unused commercially available tula tampico fiber; the brush shall contain 1 ounce (28 g) minimum of tampico. The polypropylene for the class 2 brush shall be straight and 0.020 inch (0.5 mm) minimum in diameter. Each brush shall contain 0.67 ounces (19 g) minimum of polypropylene.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Branch (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

3.1.3 Class 3 and 4. The class 3 and 4 filler materials shall be a high carbon, round, oil tempered brush wire. The class 3 filler shall be 0.014 ±0.003 inch (0.36 ±0.07 mm) diameter wire, and the brush shall contain 1.1 ounce (31 g) minimum. The class 4 filler shall be 0.005 to 0.006 inch (0.13 to 0.15 mm) in diameter wire, and each brush shall contain 2.3 ounces (65 g) minimum.

3.1.4 Class 5. The class 5 filler material shall be round, spring tempered, copper alloy wire, 0.005 to 0.006 (0.13 to 0.15 mm) in diameter. Each brush shall contain 2.3 ounce (65 g) minimum of this filler.

3.1.5 Class 6. The class 6 filler material shall be copper-beryllium alloy wire, 0.014 ±0.001 inch (0.36 ±0.02 mm) in diameter, with a tensile strength of 145,000 to 205,000 lbf/in^2 (1000 to 1400 MPa). The brush shall contain 1.0 ounce (28 g) minimum of this filler.

3.1.6 Class 7. The class 7 filler shall be round aluminum alloy wire, 0.10 inch (2.5 mm) minimum in diameter. The brush shall contain 0.20 ounce (6 g) minimum of this filler.

3.1.7 Class 8. The class 8 filler material shall be round cross-section, spring tempered, corrosion resistant steel wire, 0.005 to 0.006 inch (0.13 to 0.15 mm) in diameter. The brush shall contain 1.6 ounce (45 g) minimum of this filler.

3.2 Block (handle). The block shall be a close grained, straight grained wood, or a general purpose impact resistant plastic. The type I, class 3 brush shall be wood only.

3.3 Construction. The blocks shall be one piece. The filler shall be staple set. The brushes shall be similar in appearance to figure 1 and shall meet the dimensional requirements of table I. The filler shall be evenly spread across the brush face.

Table I, Dimensional requirements.

Overall length	
Classes 1-7	13-1/2 ±1 inches (34.3 ±2.5 cm)
Class 8	7-1/2 inches (19.1 cm) minimum
Block thickness	3/8 inch (1.0 cm) minimum
Block width	1-1/4 ±1/4 inch (3.2 ±0.6 cm)
Brush part length	5 to 6 inches (12.7 to 15.2 cm)
Tuft holes	
Diameter	1/8 ±1/16 inch (0.32 ±0.16 cm)
Number of holes	
Type I	72 minimum
Type II	57 minimum
Number of rows	
Type I	4
Type II	3
Length of exposed filler	1 inch (2.5 cm) minimum

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.

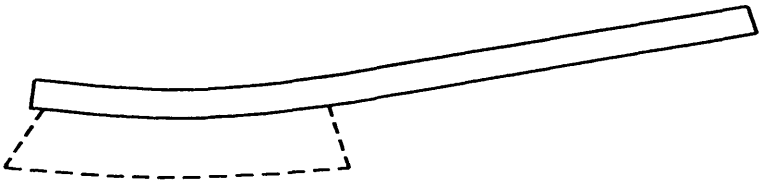


Figure 1

3.4 Workmanship. The brushes shall be clean and free of defects that may affect appearance or serviceability. The filler shall be evenly trimmed to form a flat surface.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within tolerances specified and all other requirements of this document are met.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING, PACKING AND MARKING

6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this CID.
b. Type and Class.
c. The packaging, packing and marking desired.

7.2 Part Identification Number (PIN). This part numbering system is intended for identification and cross-indexing of the item by the government only and does not constitute a requirement for the contractor.

```
Example:  AA3118 / A 1
            |      | |_________________ Classes 1 - 8
            |      |
            |      |_______Type I = A
            |                     II = B
            |
      CID A-A-2075
```


Source: https://assist.dla.mil -- Downloaded: 202610-26T08:30Z
Check the source to verify that this is the current version before use.

7.3 National Stock Numbers. The following NSNs (with the appropriate part number) are known to use this document:

NSN	Part Number
7920-00-244-7429	AA3118/A1
7920-00-244-7431	AA3118/A2
7920-00-291-5815	AA3118/A3
7920-00-267-1215	AA3118/A4
7920-00-267-1213	AA3118/A5
7920-01-067-6192	AA3118/A7
7920-01-067-6191	AA3118/A8
7920-01-122-5011	AA3118/B3
7920-00-255-5135	AA3118/B6
7920-01-067-6190	AA3118/B8

7.4 Supersession data. This CID is intended to replace H-B-178D/GEN dated May 10, 1976, H-B-178/1 dated May 10, 1976, H-B-178/2 dated May 10, 1976, and CID A-A-2075 dated May 2, 1983.

Preparing Activity:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:30Z
Check the source to verify that this is the current version before use.