A-A-693
November 4, 1980

COMMERCIAL ITEM DESCRIPTION

CHAIR, ROTARY (GENERAL OFFICE, WOOD)

The General Services Administration has authorized the use of this commercial item description in lieu of Interim Federal Specification AA-O-001628.

This commercial item description covers two types of rotary wood chairs made for heavy office use.

Salient characteristics:

Design. Contemporary style similar in appearance to chairs in figure I with padded and upholstered seat and back, rotary and tilt control, and casters.

Classification.
Type II. Rotary
Style A. Secretarial chair without arms.
Style B. Desk chair with arms.

Chair frame and base. Constructed of wood. Metal reinforcements are permitted provided they are not visible when viewing the chair from seat level or above. (Excluding spindles and rotary mechanisms.)

Finish of frame and base. Walnut color matching Government standard sample FSS-L-01002, satin finish.

Rotary tilt mechanisms. Seat height and tilt tension shall be easily adjustable.

	Seat Rotation	Seat height adjustment	Seat	Back
Style A	Continuous (360°)	2" minimum	Non-tilting	Tilting
Style B	Continuous (360°)	2" minimum	Seat and back tilt as a unit	

Adjustment instructions: Clearly illustrates each adjustment control and how to use it. Instructions attached to chair.

Fabric. One hundred percent flat nylon, dyed plain weave, minimum 21 oz./linear yd. (width 54 n.) exclusive of back coating; conformance with table I of ASTM D 3597 except; minimum breaking strength - 250 lbs; minimum tear strength - 20 lbs.; surface abrasion test - 8,000 revolutions without a complete breakthrough of a yarn using Taber Abrader Method (with CS#10 wheels and 500 gr. load) in accordance with ASTM D 1175; minimum seam efficiency - 80 percent using method 5110 of Federal Test Method Standard 19L.

Fabric color. Colors shall match the following Government standard samples as specified below:

Blue-Green	FSS-F-01007	Orange-Rust	FSS-F-01011
Black	FSS-F-01009	Yellow-Gold	FSS-F-01018

Upholstery padding. Commercial quality polyurethane foam with or without other padding material, providing a comfortable, durable seat and back.

Casters. Wheel diameter: 2 1/2 inches; wheel tread: rubber or urethane with Shore durometer D scale hardness of 33 to 46; ball bearing swivel.

Safety features. Tilt mechanisms must have positive tilt stop in case of failure. Spindle must be prevented from accidently detaching from base when seat is raised. Seat height must remain fixed when height is not being adjusted. Rotary-tilt mechanism must be securely and permanently attached to chair frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:10Z
Check the source to verify that this is the current version before use.

Performance tests. Chairs must meet applicable performance test in ANSI X5.1.1977 and Amendment X5.1a.1979 listed below.

Style	ANSI Type	Applicable ANSI Test Section
A	Type IV, Class 2, Style B	5, 7, 8, 9, 11, 12**, 16, 17***, & 18
B	Type II, Class 5, Style A	4, 7*, 8, 9, 10, 11, 12**, 13, 14, 15, 17***, & 18

*Test 7 - This test is required even though not required in ANSI X5.1.1977.

**Test 12 - Use procedures in ANSI X5.1a.1979.

***Test 17 - All tests shall be run over the obstacle course with the following acceptance criteria; 36,000 cycles allowing one caster related failure in the first 20,000 cycles and a maximum of two caster related failures up to 36,000 cycles.

Identification marking. The bottom of each chair seat shall be clearly and permanently marked with the following information: Federal stock number, contract or order number, this commercial item description number, the month and year of manufacture, and the manufacturer's name or trademark.

Workmanship. The upholstery, tailoring, construction and finish shall be of the quality necessary to provide durable, functional chairs, acceptable in appearance and to prevent potential hazard to personnel or their clothing.

Certification. The contractor shall certify that the product offered meets the salient characteristics of this description. For characteristics not specified, the product shall conform to the producer's own drawings, specifications, standards and quality assurance practices and shall be the same product as the product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Recovered materials. The manufacturer shall utilize recovered materials to the maximum extent practicable.

Packaging, packing, and marking. The chairs shall be individually packaged in accordance with normal commercial practice. The complete package shall be designed to insure delivery at destination, provide for redistribution by the initial receiving activity, and protect the chair against loss, abrasion, or damage during multiple shipments, handling, and storage. The shipping container and its packing components shall, as a minimum, be capable of withstanding prolonged storage while stacked up to six tiers high and shall comply with the applicable "F" pack requirements of the National Motor Freight Classification and Uniform Freight Classification. Form fitting and open bottom boxes shall not be acceptable. Marking shall be as specified in the contract or order and shall include the precautionary marking required for furniture items.


Notes:
Fabric color: As specified in solicitation.

Government standard samples are available from: Customer and Industry Research Branch, National Furniture Center, GSA-FSS, Washington, DC 20406.


ANSI Standards are available from American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

GSA DC-01102297

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:10Z
Check the source to verify that this is the current version before use.

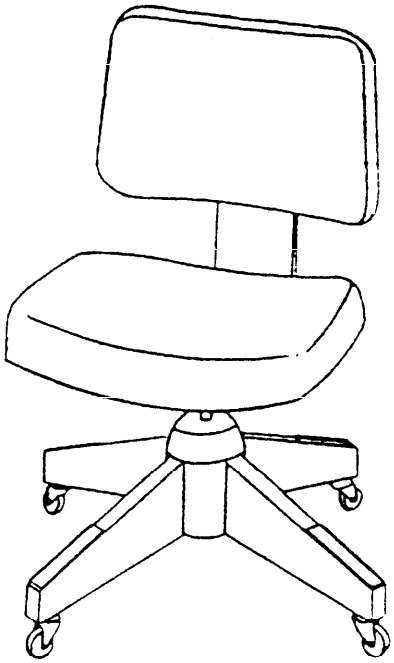

TYPE II, STYLE A

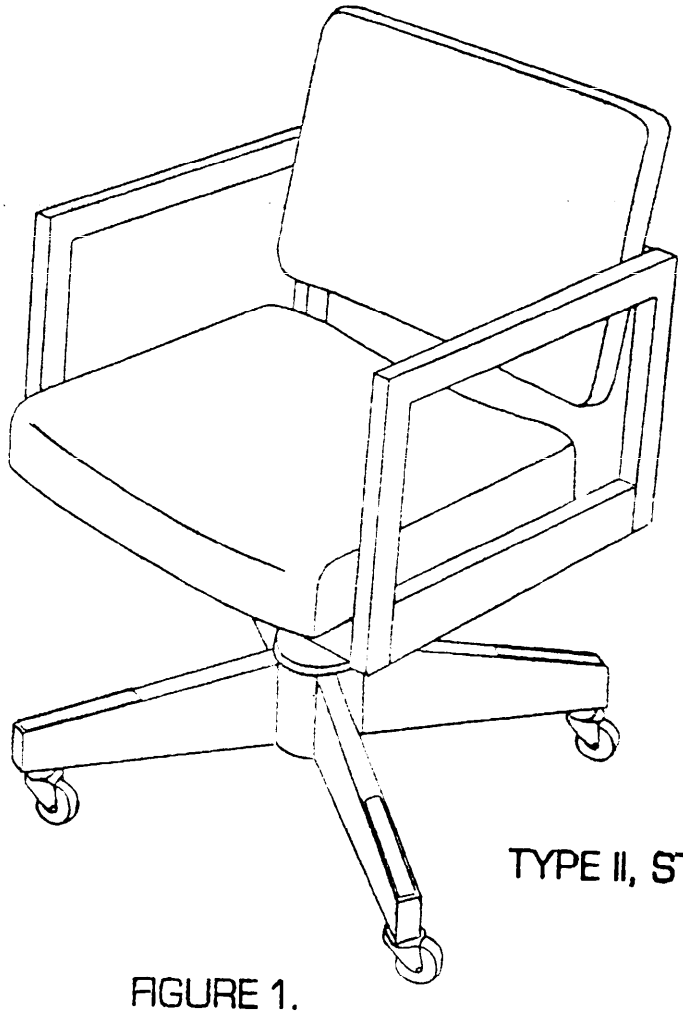

TYPE II, STYLE B

FIGURE 1.
CHAIRS, GENERAL OFFICE, ROTARY, WOOD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:10Z
Check the source to verify that this is the current version before use.