A-A-55485/5
September 30, 1993
SUPERSEDING
MIL-M-38527/5D
September 10, 1990

COMMERCIAL ITEM DESCRIPTION

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, LEAD CONVERSION, .200 OR .230 DIAMETER PIN CENTER TO A GRID PATTERN

The General Services Administration has authorized the use of this commercial item description (CID) in preference to MIL-M-38527/5D.

Abstract. This CID covers mounting pads with pin through-holes beginning on a .200 or .230 diameter circle and tapering at an angle to an exit grid pattern.

Part or Identifying Number (PIN). The PIN shall be A-55485/05- (plus a dash number from figure 1 and a material letter as shown below). Complete PIN example: A-55485/05-001D.

Salient characteristics.

Material. Material shall be diallyl phthalate (D), nylon (N), or polyphenylene sulfide (S).

Configurations and dimensions. Configurations and dimensions shall be as specified on figure 1.

Regulatory requirements. This section is not applicable to this CID.

Quality assurance provisions. Quality assurance provisions shall be as specified in A-A-55485.

Packaging. Packaging shall be as specified in A-A-55485.

Suggested sources of supply. Suggested sources of supply are shown in table I.

Supersession data. Supersession data shall be as specified in table II.

Notes. The following information may be useful in acquiring the items described, but is not directive in nature.


Ordering data. Ordering data shall be as specified in A-A-55485.

Comments. Comments and requests for changes to this CID should be directed to Defense Electronics Supply Center, ATTN DESC-EMM, 1507 Wilmington Pike, Dayton, OH 45444-5270, telephone (513) 296-5255, FAX (513) 296-8868

AMSC N/A
FSC 5999

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

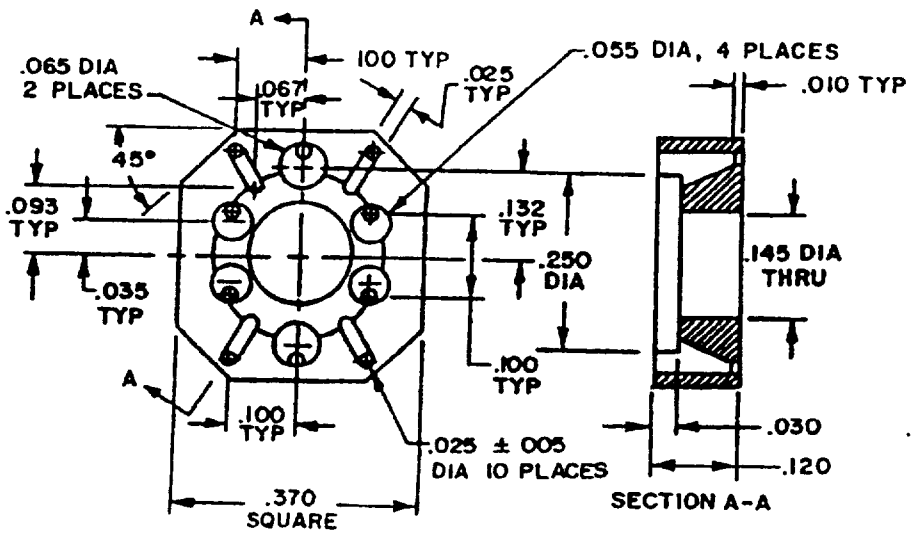


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.030	0.76
.035	0.89
.055	1.40
.065	1.65
.067	1.70
.093	2.36
.100	2.54
.120	3.05
.132	3.35
.145	3.68
.250	6.35
.370	9.40

A-55485/05-001

Figure 1. Configurations and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

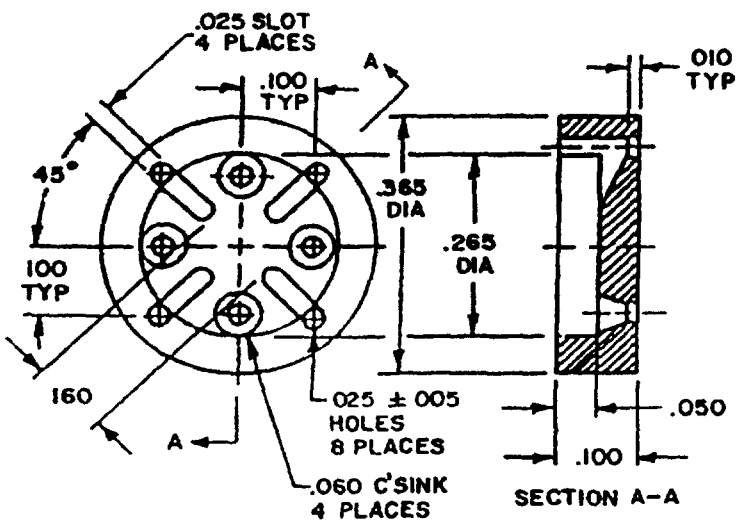


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.050	1.27
.060	1.52
.100	2.54
.160	4.06
.265	6.73
.365	9.27

A-55485/05-002


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

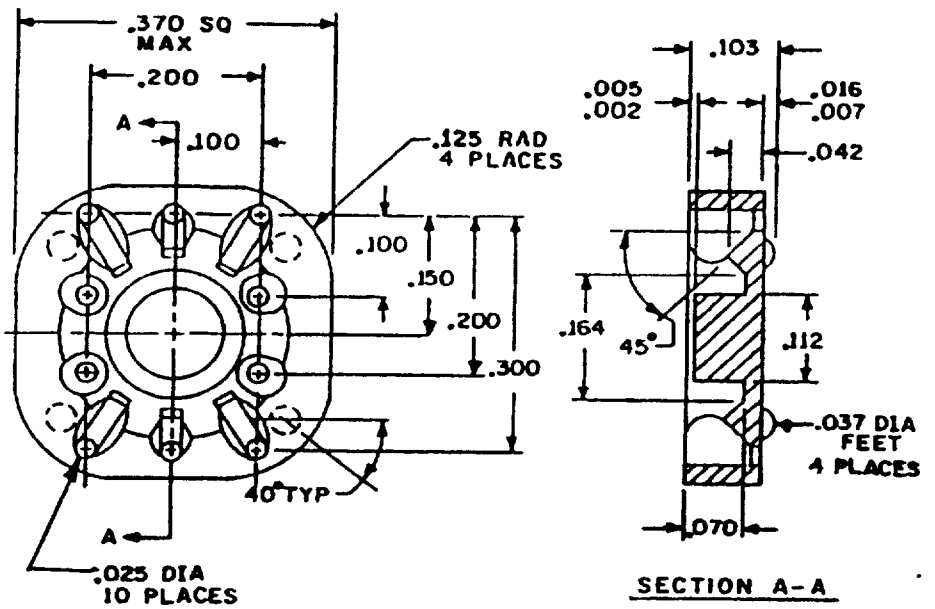

Inches	mm
.002	0.05
.003	0.08
.005	0.13
.012	0.30
.016	0.41
.025	0.64
.037	0.94
.042	1.07
.070	1.78
.100	2.54
.103	2.62
.112	2.84
.150	3.81
.164	4.16
.200	5.08
.250	6.35
.300	7.62
.340	8.64
.370	9.40

A-55485/05-003

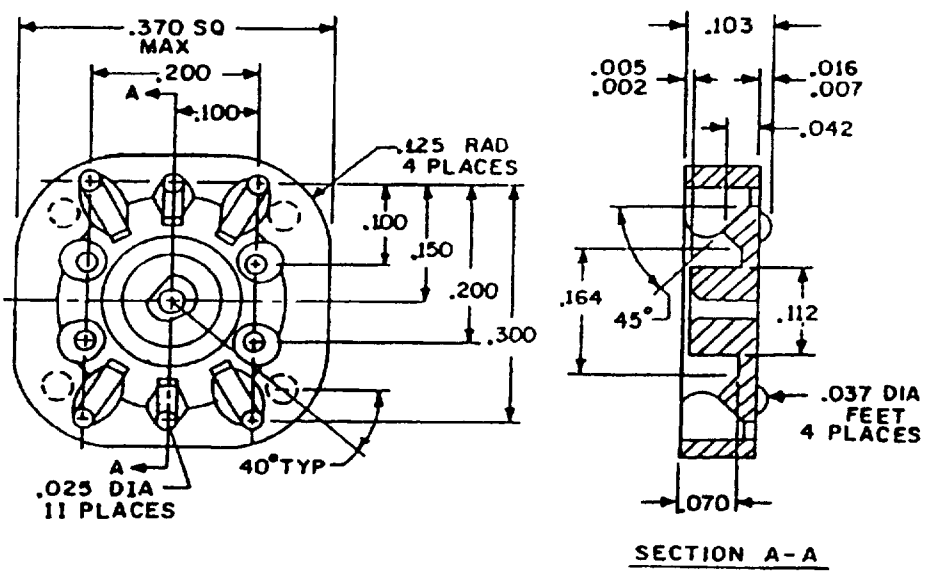


Inches	mm
.002	0.05
.003	0.08
.005	0.13
.012	0.30
.016	0.41
.025	0.64
.037	0.94
.042	1.07
.070	1.78
.100	2.54
.103	2.62
.112	2.84
.150	3.81
.164	4.16
.200	5.08
.250	6.35
.300	7.62
.340	8.64
.370	9.40

A-55485/05-004


Figure 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

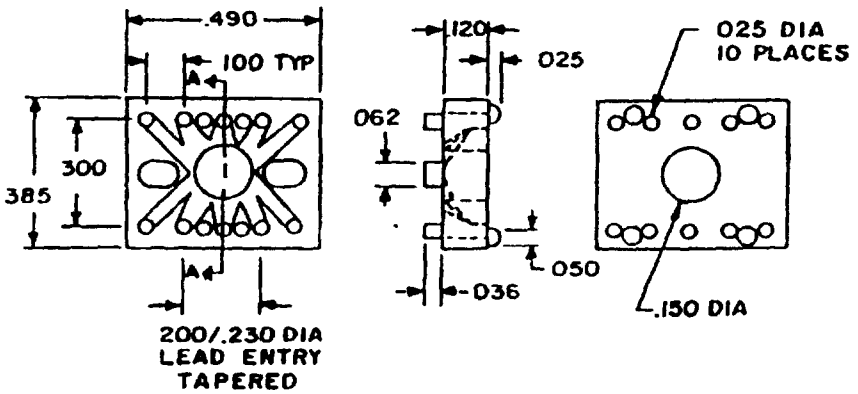


Inches	mm
.025	0.64
.036	0.91
.050	1.27
.062	1.57
.100	2.54
.125	3.18
.150	3.81
.200	5.08
.230	5.84
.300	7.62
.385	9.78
.490	12.45

A-55485/05-005

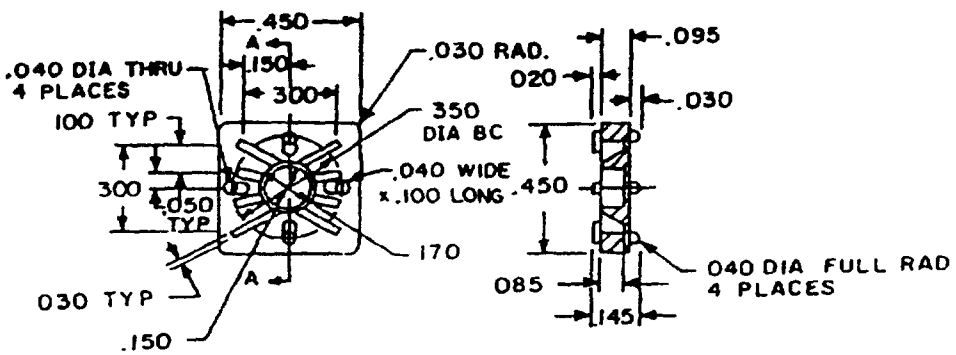

Inches	mm
.020	0.51
.030	0.76
.040	1.02
.050	1.27
.085	2.16
.095	2.41
.100	2.54
.145	3.68
.150	3.81
.170	4.32
.300	7.62
.350	8.89
.450	11.42

A-55485/05-006

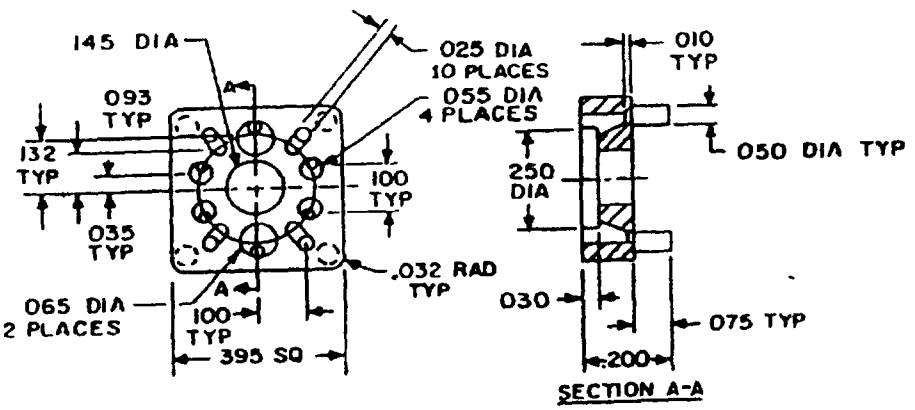


Inches	mm
.010	0.25
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.065	1.40
.075	1.91
.093	2.36
.100	2.54
.145	3.68
.152	3.86
.200	5.08
.250	6.35
.395	10.03

A-55485/05-007


Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

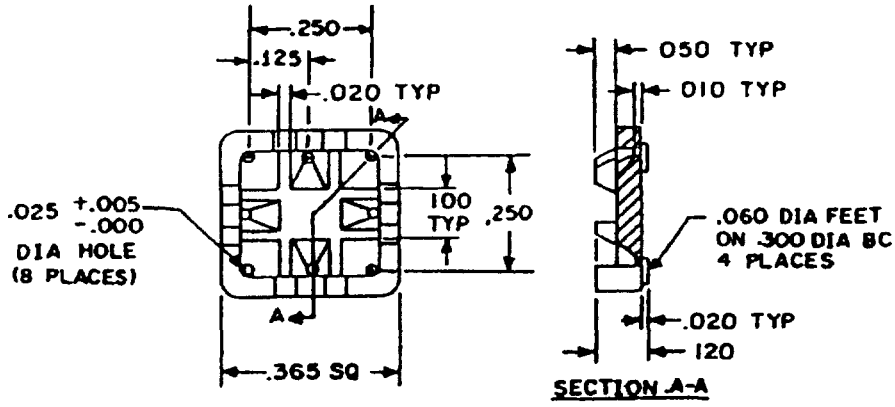

Inches	mm
.010	0.25
.020	0.51
.050	1.27
.100	2.54
.120	3.05
.365	9.27

A-55485/05-008

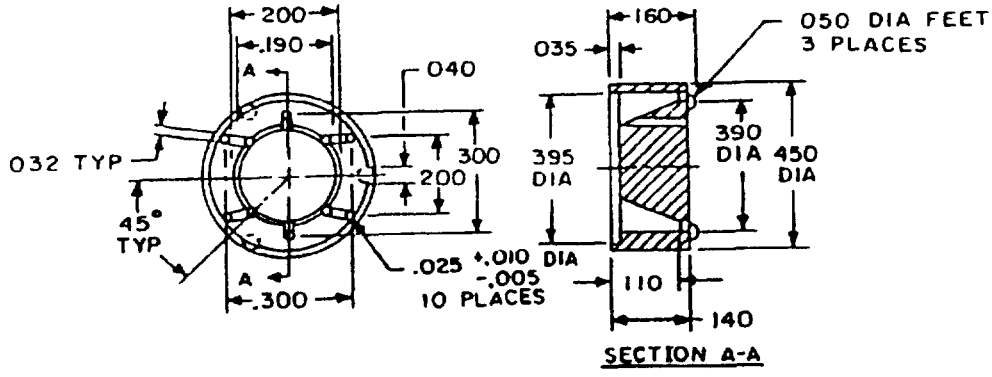


Inches	mm
.005	0.13
.010	0.25
.025	0.64
.032	0.81
.035	0.89
.040	1.02
.050	1.27
.110	2.79
.140	3.56
.160	4.06
.190	4.83
.200	5.08
.300	7.62
.390	9.91
.395	10.03
.450	11.43

A-55485/05-009

Figure 1. Configurations and dimensions - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

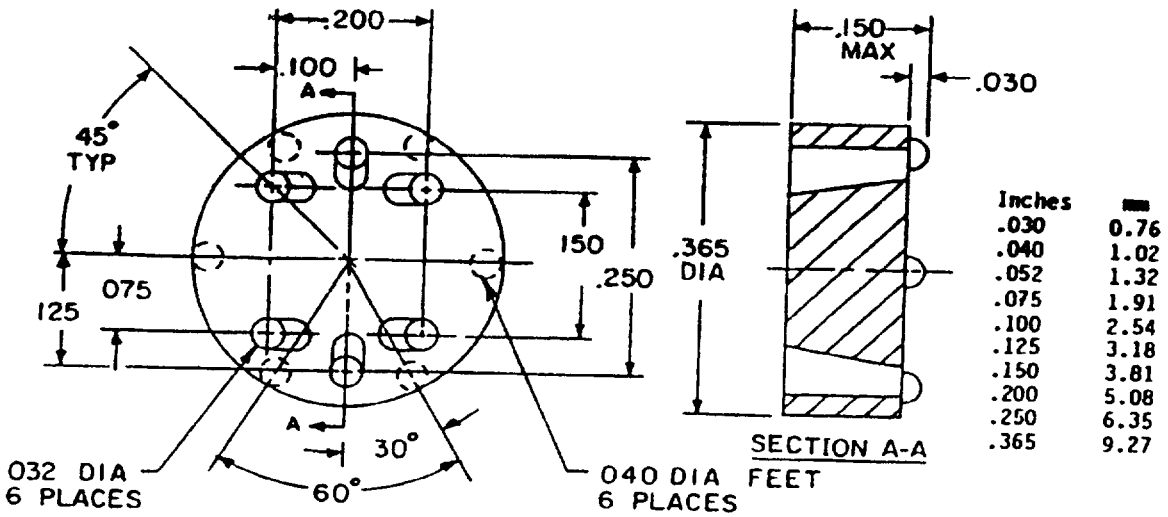

A-55485/05-010

Figure 1 Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

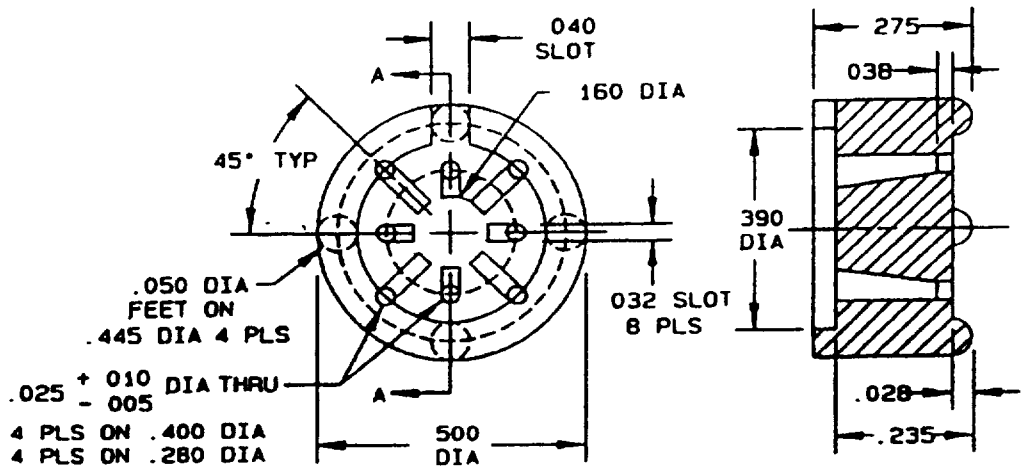


Inches	mm
005	0 13
.010	0.25
025	0.64
028	0 71
032	0.81
038	0 97
040	1 02
.050	1.27
.160	4.06
.235	5.97
.275	6.99
.280	7.11
.390	9.91
.400	10.16
.445	11.30
.500	12.70

A-55485/05-011

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

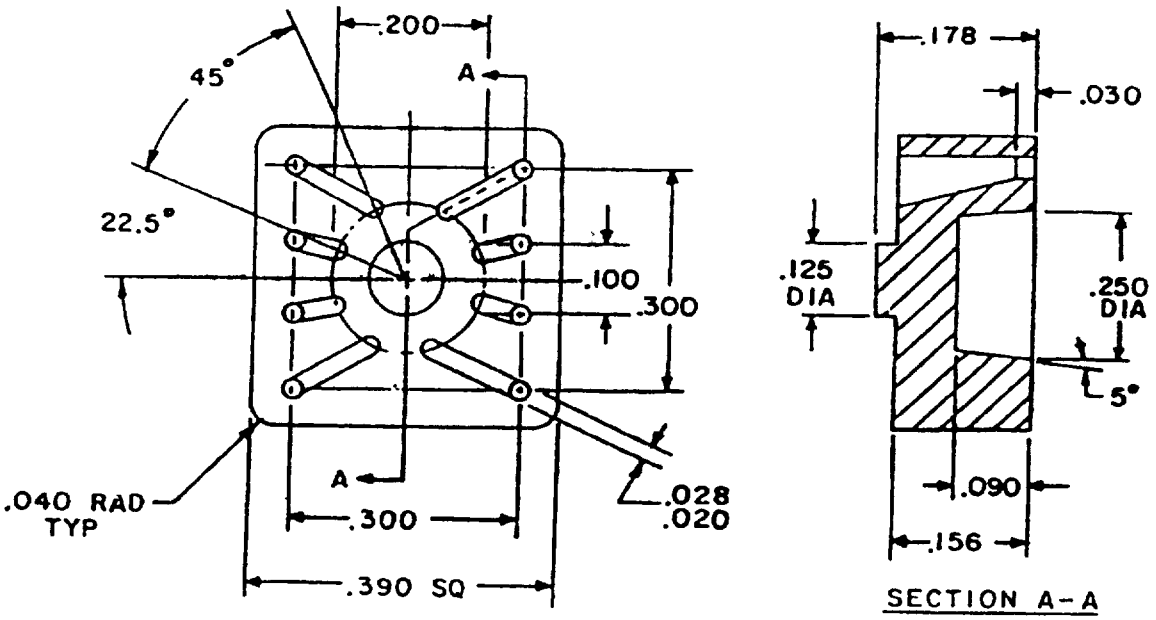


Inches	mm
.020	0.51
.028	0.71
.030	0.76
.040	1.02
.090	2.29
.100	2.54
.125	3.18
.156	3.96
.178	4.52
.200	5.08
.250	6.35
.300	7.62
.390	9.91

A-55485/05-012

Figure 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

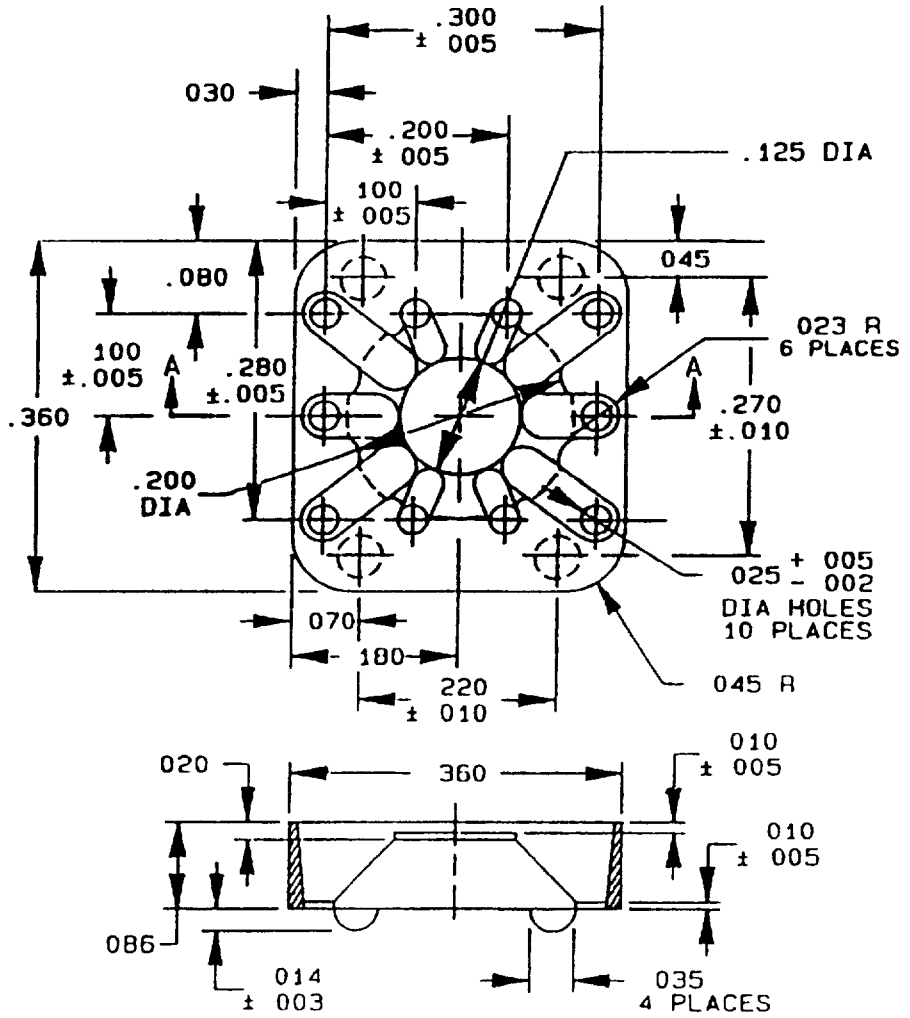


Inches	mm
.002	0.05
.003	0.08
.005	0.13
.010	0.25
.014	0.36
.020	0.51
.023	0.58
.025	0.64
.030	0.76
.035	0.89
.045	1.14
.070	1.78
.080	2.03
.086	2.18
.100	2.54
.125	3.18
.180	4.57
.200	5.08
.220	5.59
.270	6.86
.300	7.62
.360	9 14

SECTION A-A

A-55485/05-013

Figure 1. Configurations and dimensions - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

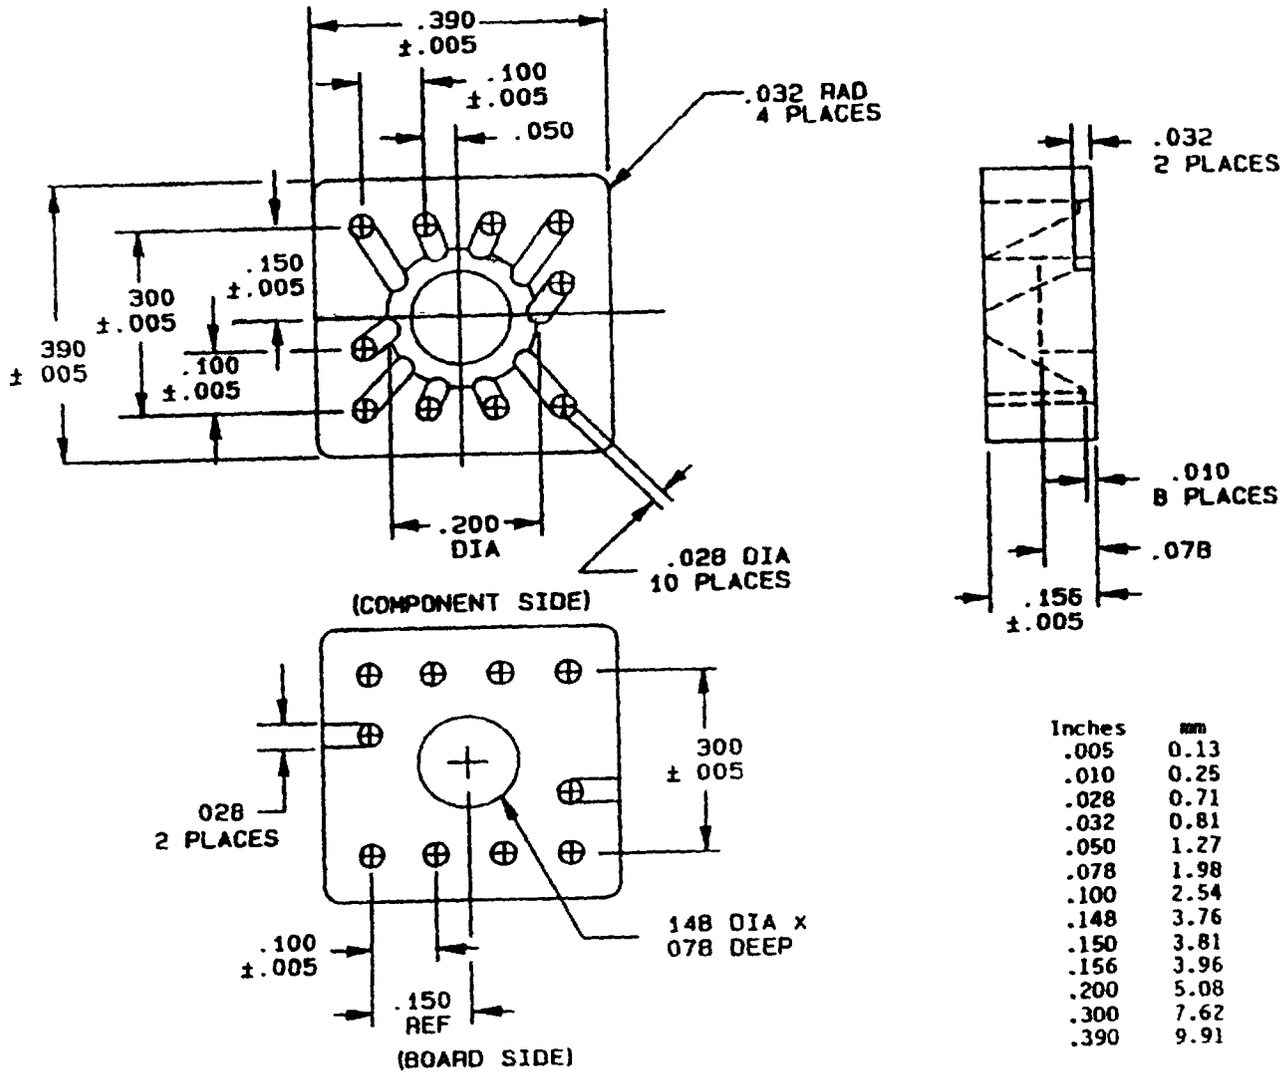

Inches	mm
.005	0.13
.010	0.25
.028	0.71
.032	0.81
.050	1.27
.078	1.98
.100	2.54
.148	3.76
.150	3.81
.156	3.96
.200	5.08
.300	7.62
.390	9.91

A-55485/05-014

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pad shall be ±.015 (0.38 mm).
4. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for decimals and ±1° on angles. A .010 (0 25 mm) radius is permissible on corners and edges. A 1° draft is permitted on sides.

Figure 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply. 1/

CID PIN (see figure 1) A-55485/05-	Vendor commercial PIN 2/					
	CAGE code 07047	CAGE code 13103	CAGE code 21071	CAGE code 32559	CAGE code 53174	CAGE code 54355
001D	10335D		10462-2		AP-327/D	965-569D
001N	10335N		10462-1		AP-327/N	965-569N
001S			10462-5		AP-327/R	r65-569S
002D	10336D		10682-2		AP-385/D	965-570D
002N	10336N		10682-1		AP-385/N	965-570N
002S			10682-5		AP-385/R	965-570S
003D	10510D		10524-2		AP-434/D	965-574D
003N			10524-1		AP-434/N	965-574N
003S			10524-5		AP-434/R	965-574S
004D			10526-2		AP-500/D	965-654D
004N			10526-1		AP-500/N	965-654N
004S			10526-5		AP-500/R	965-654S
005D			10528-2		AP-461/D	965-655D
005N			10528-1	810-187	AP-461/N	965-655N
005S			10528-5		AP-461/R	965-655S
006D			10530-2		AP-424/D	965-580D
006N			10530-1		AP-424/N	965-580N
006S			10530-5		AP-424/R	965-580S
007D	10318D		10660-2		AP-435/D	965-588D
007N	10318N		10660-1		AP-435/N	965-601N
007S			10660-5		AP-435/R	965-601S
008D	10272D				AP-403/D	965-656D
008N	10272N				AP-403/N	965-656N
008S					AP-403/R	
009D					AP-489/D	965-657D
009N					AP-489/N	965-657N
009S						
010D			10536-2		AP-235/D	965-578D
010N	10175N		10536-1		AP-235/N	965-578N
010S			10536-5		AP-235/R	965-578S
011D			10314-2		AP-018/D	965-519D
011N			10314-1		AP-018/N	965-519N
011S			10314-5		AP-018/R	965-519S
012D			10538-2		AP-453/D	965-660D
012N		7717-245N			AP-453/N	965-660N
012S			10538-5		AP-453/R	965-660S

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply - Continued. 1/

CID PIN (see figure 1) A-55485/05-	Vendor commercial PIN 2/							
	CAGE code 07047	CAGE code 08289	CAGE code 13103	CAGE code 21071	CAGE code 24227	CAGE code 32559	CAGE code 53174	CAGE code 54355
013D				10888-2			AP-443/D	965-661D
013N				10888-1			AP-443/N	965-661N
013S				10888-5			AP-443/R	965-661S
014D				10892-2			AP-372/D	965-662D
014N				10892-1			AP-372/N	965-662N
014S				10892-5			AP-372/R	965-662S

1/ This table is not a qualified products list or an approved source list. The vendors listed have submitted Certificates of Compliance (see A-A-55485) to DESC-EMM; however, parts may be ordered from any manufacturer who agrees to supply products that meet all the requirements of this CID.

2/ Vendor commercial PIN's are given for reference only. Do not use these numbers for ordering purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Suggested sources of supply - Continued. 1/

Vendor CAGE number	Vendor name and address
07047	Milton Ross Company 262 Valley Road Warrington, PA 18976-2533 (215) 491-0600
13103	Thermalloy, Incorporated 2021 West Valley View Lane Dallas, TX 75381-0839 (214) 243-4321
21071	Globe Plastics, Incorporated 13477 Twelfth Street Chino, CA 91710-9998 (909) 464-1520
32559	Bivar, Incorporated 4 Thomas Irvine, CA 92718-2512 (714) 951-8808
53174	APX Plastics Company 3407 Dalworth Street Arlington, TX 76011-6815 (817) 275-3883
54355	Accessories for Electronics, Incorporated 800 Merrick Road Baldwin, NY 11510-3593 (516) 546-1751

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Supersession information. 1/

Superseded (old) PIN in accordance with MIL-M-38527/5D: M38527/05-	Superseding (new) CID PIN A-55485/05-
001	001
002	002
003	003
004	004
005	005
006	006
007	007
008	008
009	009
010	010
011	011
012	012
013	013
014	014

1/ Complete PIN shall include a suffix letter to denote material.

MILITARY INTERESTS

Custodians

Army - ER
Navy - EC
Air Force - 85

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 7FXE

PREPARING ACTIVITY:

DLA-ES

(Project 5999-0313-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.