A-A-55621
31 MAY 1996
SUPERSEDING
MS27982
21 OCTOBER 1994

COMMERCIAL ITEM DESCRIPTION

FASTENERS, SNAP, STYLE 3
PRONGED RING HEAD TYPE (16 LIGNE)

THE GENERAL SERVICES ADMINISTRATION HAS AUTHORIZED THIS COMMERCIAL ITEM DESCRIPTION FOR ALL FEDERAL AGENCIES.

1. SCOPE: THIS COMMERCIAL ITEM DESCRIPTION (CID) DEPICTS THE REQUIREMENTS FOR PRONGED RING HEAD TYPE (16 LIGNE) STYLE 3 SNAP FASTENERS.

2. SALIENT CHARACTERISTICS.

2.1. MATERIAL SHALL BE: BRASS. SHEET AND STRIP BRASS SHALL BE COMMERCIAL QUALITY 7030 COPPER ALLOY (UNS 26000) OF ASTM B36.

2.2 FINISH:

A. BLACK:

BLACK CHEMICAL FINISH. THE PRONGED RINGS SHALL HAVE A BLACK CHEMICAL FINISH PRODUCED BY CHEMICAL OR ELECTROCHEMICAL TREATMENT. OTHER COMPONENTS OF THE FASTENER SHALL BE GIVEN A COMMERCIAL DARK OXIDE FINISH. (COMMERCIAL DARK OXIDE IS A NOMINALLY DARK COLOR, APPROACHING BLACK, BUT PERMISSIBLE LATITUDE AS TO SHADE AND TONE.)

BLACK ENAMEL. THE BLACK ENAMEL FINISH ON THE PRONGED RINGS SHALL BE A BAKED-ON ENAMEL. PRIOR TO ENAMELING, THE PRONGED RING SHALL BE THOROUGHLY CLEANED AND MAY BE GIVEN PREPARATORY PREPAINT TREATMENTS. THE ENAMEL SHALL BE UNIFORMLY COATED OVER THE PRONGED RING.

GLOSS. THE GLOSS OF THE ENAMEL SHALL BE NO MORE THAN 40 WHEN TESTED BY VISUALLY COMPARING AGAINST A BLACK ENAMEL PLAIN PANEL WHOSE GLOSS HAS BEEN DETERMINED TO BE 40 IN ACCORDANCE WITH ASTM D523. A GLOSS GREATER THAN 40 SHALL CONSTITUTE FAILURE OF THIS TEST.

ENAMEL CHIPPING. THE ENAMEL SHALL BE CAPABLE OF WITHSTANDING ATTACHMENT OPERATIONS WITHOUT REMOVAL OF ANY ENAMEL. THIS SHALL BE TESTED BY ATTACHING A PRONGED RING AND APPLICABLE SOCKET TO A SUITABLE FABRIC USING THE CONTRACTOR'S RECOMMENDED ATTACHING DEVICE. ANY EVIDENCE OF REMOVAL OF ENAMEL DUE TO ATTACHMENT OPERATIONS CONSTITUTES FAILURE OF THE TEST.

RESISTANCE TO BRITTLENESS. THE ENAMEL SHALL BE CAPABLE OF BEING FURROWED WITH A KNIFE BLADE WITHOUT EVIDENCE OF BRITTLENESS, SUCH AS JAGGED FURROW EDGES, WHEN TESTED. THIS TEST SHALL BE PERFORMED BY HOLDING A KNIFE BLADE AT 30 DEGREES FROM THE HORIZONTAL AND DRAWING IT ACROSS THE ENAMELED SURFACE MAKING A FURROW. THE EDGES OF THE FURROW SHALL BE EXAMINED VISUALLY. ANY EVIDENCE OF JAGGED FURROW EDGES SHALL CONSTITUTE FAILURE OF THIS TEST.

APPEARANCE. THE ENAMEL COATING SHALL BE FREE OF SAGS, RUNS AND STREAKS.

BENEFICIAL COMMENTS, RECOMMENDATIONS, ADDITIONS, DELETIONS, CLARIFICATIONS, ETC., AND DATA WHICH MAY IMPROVE THIS DOCUMENT SHOULD BE SENT TO: DEFENSE INDUSTRIAL SUPPLY CENTER. ATTN: DISC-EED, 700 ROBBINS AVENUE, PHILADELPHIA, PA 19111-5096.

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

B. NICKEL PLATE.

PARTS PLATING. ALL COMPONENT PARTS OF THE FASTENERS, EXCEPT FOR THE OPTIONAL PROVISIONS SPECIFIED, SHALL BE GIVEN A NICKEL PLATED FINISH WITH A .003 INCH (.076 mm) MINIMUM THICKNESS, EXCEPT THE PLATING MAY BE APPLIED AFTER FORMING AND THERE SHALL BE NO VISIBLE GAPS IN THE PLATING.

2.3. ASSEMBLING TO END USE ARTICLE DATA. WHEN REQUESTED THE SUPPLIER SHALL FURNISH DATA FOR ATTACHING SNAP FASTENERS TO END USE ARTICLES. ASSEMBLING DATA SHALL INCLUDE THE SUPPLIERS RECOMMENDATIONS FOR THE ATTACHING TOOL (E.G. CHUCK, HAND PUNCH, DIE, HAND SCREW DRIVER OR SPECIAL EQUIPMENT).

2.4. MARKING FOR IDENTIFICATION. AT LEAST ONE COMPONENT PART OF EACH COMPLETE FASTENER SHALL BEAR THE MANUFACTURER'S IDENTIFICATION EITHER BY NAME, TRADE NAME, OR TRADEMARK. IDENTIFICATION MARKINGS SHALL BE PERMANENT AND SHALL NOT AFFECT THE PROPER FUNCTION OF THE FASTENER.


2.5. FASTENER COMPONENTS. UNLESS OTHERWISE SPECIFIED, COMPONENTS NECESSARY FOR COMPLETE FASTENERS SHALL BE FURNISHED AND ALL COMPONENTS SHALL BE OF ONE MANUFACTURER'S CONSTRUCTION ONLY. WHEN MALE OR FEMALE HALVES OF COMPLETE FASTENERS ARE SPECIFIED, INDIVIDUAL COMPONENTS SHALL BE OF ONE MANUFACTURER'S CONSTRUCTION ONLY.

2.6. UNLESS OTHERWISE SPECIFIED, FASTENERS SHALL BE EITHER CONSTRUCTION A, B, C OR D, AT THE OPTION OF THE CONTRACTOR, ACCORDING TO DISC DRAWING 02754. FASTENERS SHALL CONSIST OF FOUR SEPARATE COMPONENTS: PRONGED RING, SOCKET, STUD, AND EYELET. REVERSIBLE STUD FOR USE WITH CONSTRUCTION B, C AND D COMPONENTS SHALL BE FURNISHED ONLY WHEN SPECIFIED. REINFORCED SOCKET IN LIEU OF REGULAR SOCKET SHALL BE FURNISHED ONLY WHEN SPECIFIED.

2.7. DIMENSIONS & TOLERANCE. DIMENSIONS FOR INFORMATION PURPOSES ONLY. PRODUCTION DIMENSIONS & TOLERANCES IN ACCORDANCE WITH DISC DRAWING 02754.


2.8. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.

2.9. UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITTION.

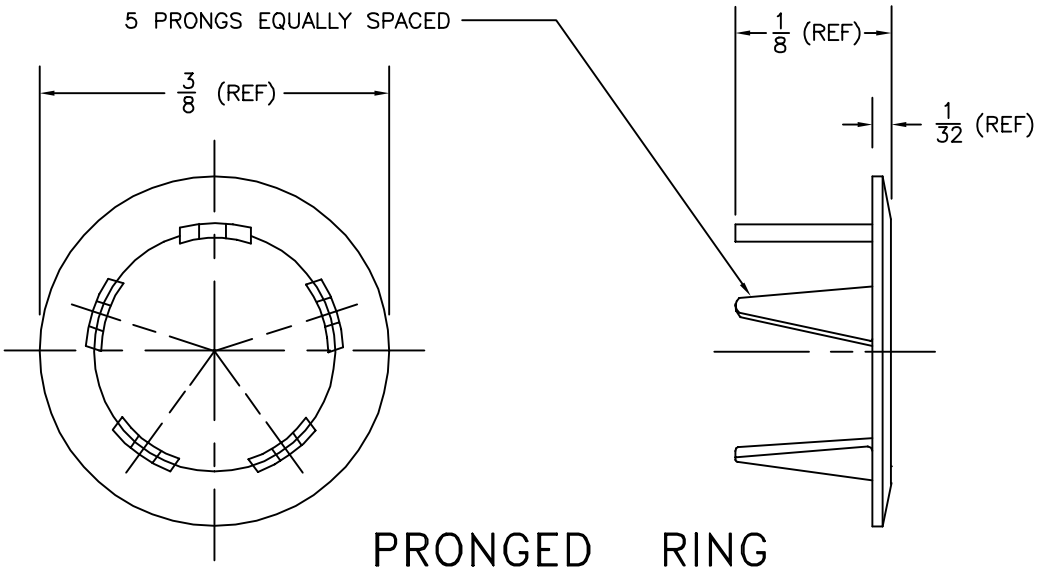


PRONGED RING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

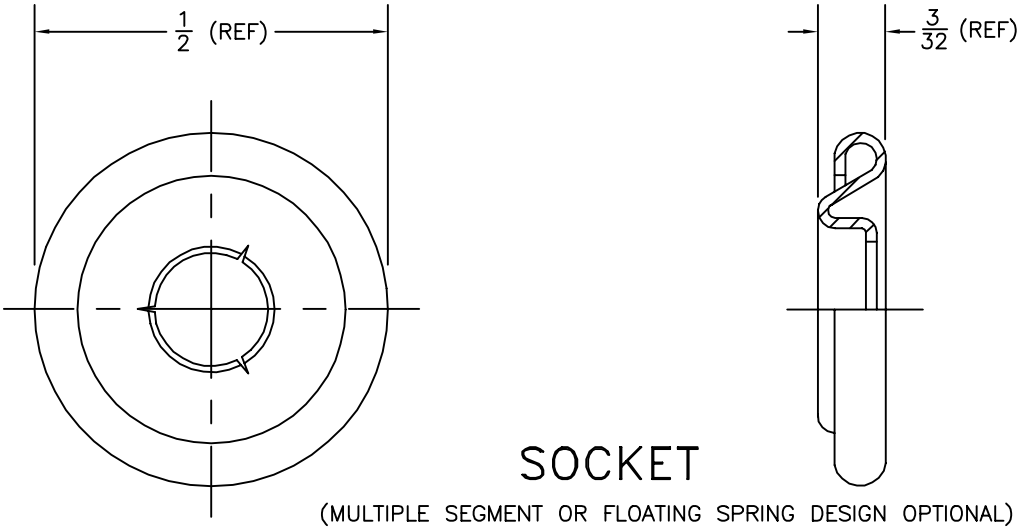

SOCKET

(MULTIPLE SEGMENT OR FLOATING SPRING DESIGN OPTIONAL)

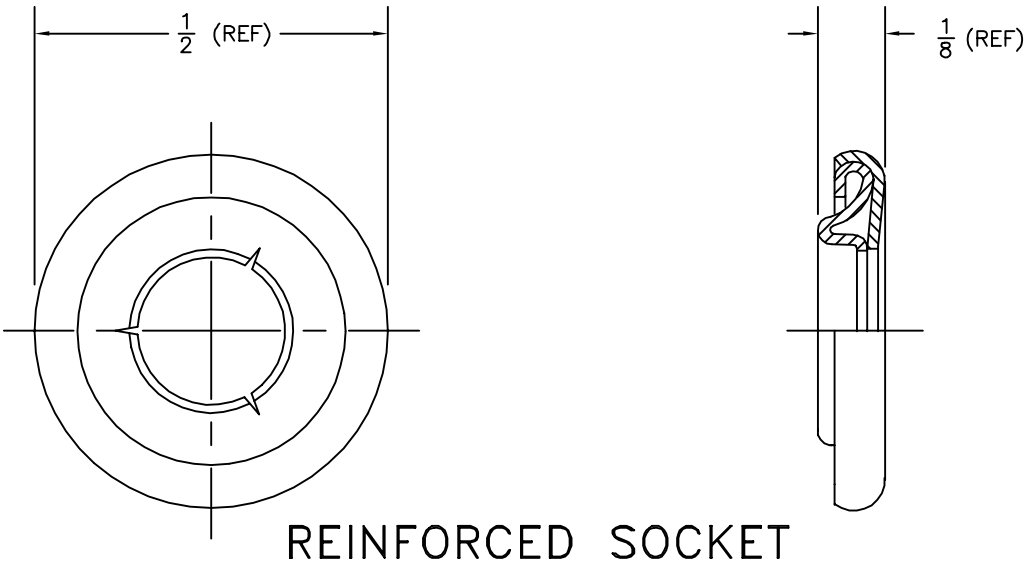


REINFORCED SOCKET

TABLE I. DASH NUMBERS.


	DASH NO.	
	BLACK	NICKEL PLATE
PRONGED RING	–1B	–1N
SOCKET	–2B	–2N
REINF. SOCKET	–3B	–3N

NOTE: PRONGED RING W/SOCKET OR PRONGED RING W/REINF. SOCKET CONSTITUTE THE FEMALE HALF OF STYLE 3 FASTENER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

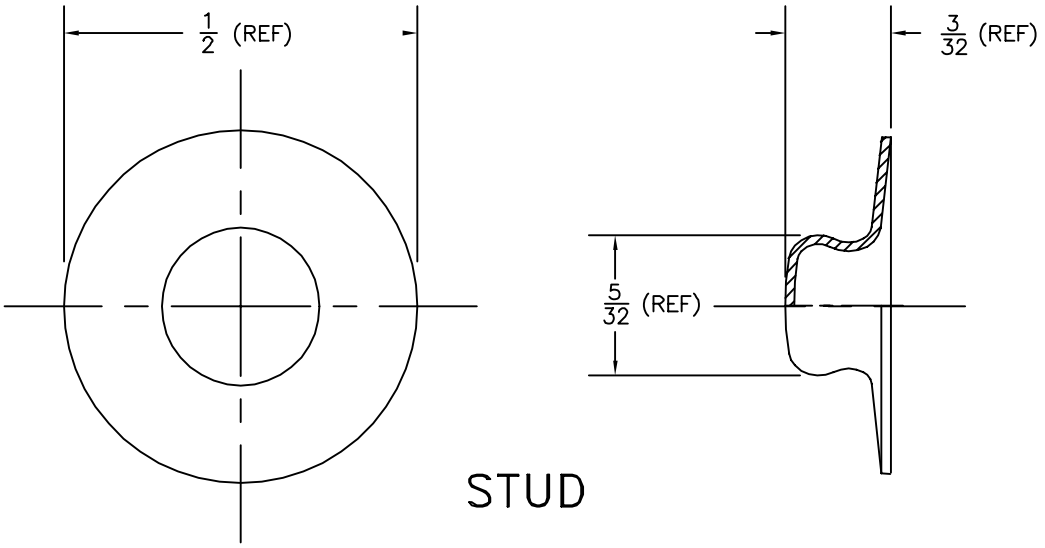


STUD

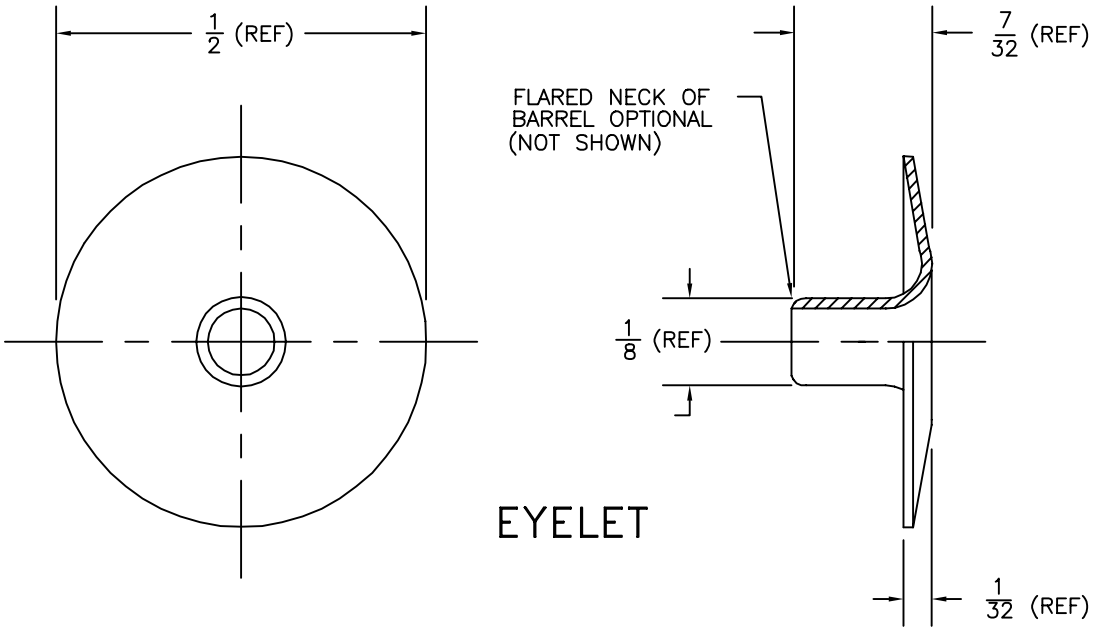

EYELET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

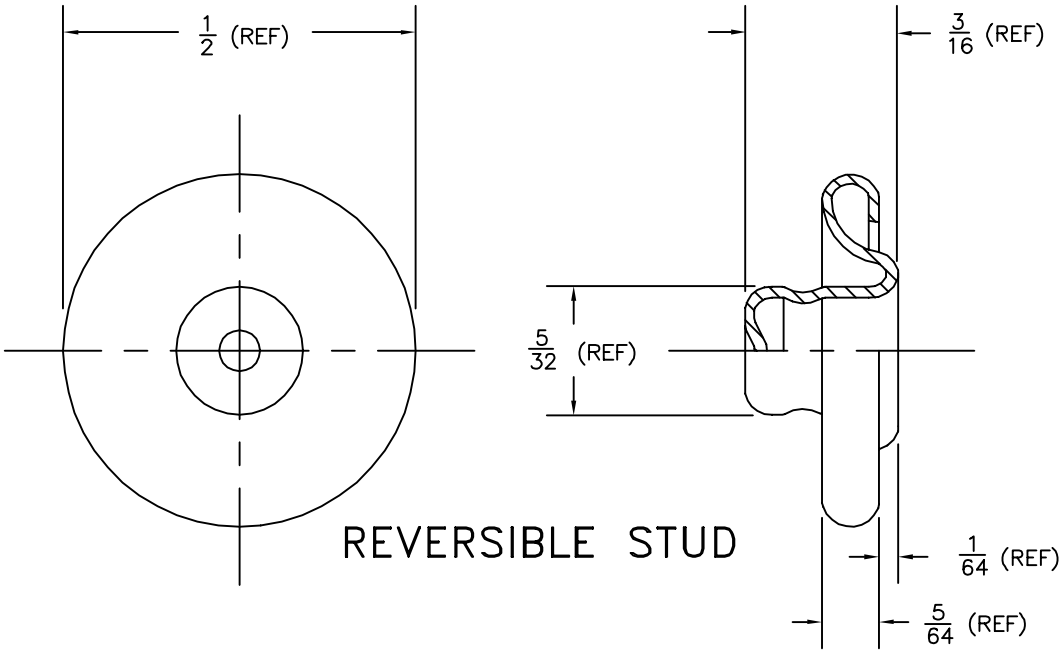

REVERSIBLE STUD

TABLE II. DASH NUMBERS.

	DASH NO.	
	BLACK	NICKEL PLATE
STUD	–4B	–4N
EYLET	–5B	–5N
REVERSIBLE STUD	–6B	–6N

NOTE: STUD AND EYELET CONSTITUTE THE MALE HALF STYLE 3 FASTENER. REVERSIBLE STUD, WHEN APPLICABLE, IS USED WITH PRONGED RING SHOWN ON SHEET 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3. QUALITY CONFORMANCE PROVISIONS:

3.1. THE SUPPLIERS SHALL BE RESPONSIBLE FOR THOSE IN PROCESS CONTROLS AND INSPECTIONS NECESSARY TO SUPPLY A PRODUCT CONSISTENTLY CONFORMING TO THE REQUIREMENTS OF THIS DOCUMENT.

3.2. UPON REQUEST, THE SUPPLIER WILL CERTIFY WITH DOCUMENTED TEST/INSPECTION EVIDENCE, THAT THE PARTS SUPPLIED MEET THE REQUIREMENTS OF THIS DOCUMENT.

4. NOTES:

4.1. DIMENSIONS ARE IN INCHES.

4.2. FASTENER SHALL BE FREE FROM BURRS, SEAMS, LAPS, LOOSE SCALE AND ANY OTHER DEFECTS THAT EFFECT SERVICEABILITY.

4.3. THE PART IDENTIFYING NUMBER (PIN) SHALL CONSIST OF THE BASIC CID NUMBER PLUS A DASH NUMBER TAKEN FROM TABLE I OR TABLE II.

EXAMPLE 1: A–A–55621 – 1B – PRONGED RING, BRASS, BLACK
- DASH NUMBER (SEE TABLE I)
- BASIC CID NUMBER

EXAMPLE 2: A–A–55621 – 2N – SOCKET, BRASS, NICKEL PLATE
- DASH NUMBER (SEE TABLE I)
- BASIC CID NUMBER

EXAMPLE 3: A–A–55621 – 4B – STUD, BRASS, BLACK
- DASH NUMBER (SEE TABLE II)
- BASIC CID NUMBER

EXAMPLE 4: A–A–55621 – 5N – EYELET, BRASS, NICKEL PLATE
- DASH NUMBER (SEE TABLEII1)
- BASIC CID NUMBER

TABLE III. CROSS – REFERENCE TABLE.

CANCELLED MS PIN	REPLACEMENT CID PIN
MS27982 – * 1/	A–A–55621– * 1/

1/ * REPRESENTS THE SAME DESIGNATION CODES FOR BOTH MS AND CID PINS.

MILITARY INTERESTS

CUSTODIANS
NAVY – AS
ARMY – GL
AIR FORCE – 99

REVIEWER:
NAVY – SA
ARMY – AR, MI

PREPARING ACTIVITY
DLA–IS

(PROJECT: 5325–0325–05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.