INCH-POUND
A-A-58045D
09 March 2022

SUPERSEDING
A-A-58045C
23 May 2018

COMMERCIAL ITEM DESCRIPTION

TRACTOR, AIRCRAFT TOWING, MB-2

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-T-26023 for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the requirements for the MB-2 aircraft towing tractor, hereafter referred to as tow tractor. The tow tractor is capable of towing military aircraft weighing up to 500,000 pounds on dry level concrete on US Air Force installations.

2. CLASSIFICATION

2.1 Tow tractor classes. The two tow tractor classes specified shall be of the same design, with the only difference being in the ballasting, gross vehicle weight (GVW), and resulting drawbar pull force (DBPF) for towing KC-135 and bomber aircraft. The tow tractor shall be one of the following classes specified:

Class 1 GVW = 40,000 pounds (standard equipment) resulting DBPF > or = 30,000 pounds

Class 2 GVW = 53,000 pounds (optional equipment, see 7.3) resulting DBPF > or = 40,000 pounds

3. SALIENT CHARACTERISTICS

3.1 MB-2 description. The Class 1 tow tractor is typically used at base locations with warmer climates and mild winters. The Class 2 tow tractor is typically used at base locations with colder climates and severe winters with freezing precipitation. The ballast weight of the Class 2 tow tractor provides additional tractive effort when pulling aircraft in snow and ice conditions.

Beneficial comments, recommendations, additions deletions, clarifications, etc., and any data which may improve this document should be sent to: AFLCMC/EZSS, Bldg. 28, 2145 Monahan Way, Wright-Patterson AFB, OH 45433-7017 or email engineering.standards@us.af.mil. Since contact information can change, you should verify the currency of this information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 1740

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

3.2 Design and construction. The tow tractor shall be designed and manufactured in accordance with SAE International specifications ARP1247 and AIR 1363. The tow tractor shall be designed and constructed so that no parts will work loose in service, and to withstand the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service. It shall be weatherproof and designed to prevent the intrusion of water, sand, and dust into critical operating components. The tow tractor shall have an all-welded, one-piece frame structure. It shall be designed with maximum usage of sealed lifetime lubrication bearings.

3.2.1 Materials, protective coatings, and finish.

3.2.1.1 Protective coatings. Materials that deteriorate when exposed to sunlight, weather, or operational conditions normally encountered during the service life of the item shall not be used or shall have means of protection against such deterioration that does not prevent compliance with the performance requirements specified herein. Protective coatings that chip, crack, or scale with age or extremes of climatic conditions or when exposed to heat shall not be used.

3.2.1.2 Finish. The exterior finish of the tow tractor shall be the manufacturer's standard commercial color. When specified, the exterior finish color shall be gloss white. When specified, the exterior finish color of the tow tractor shall be Coast Guard blue, color number 15182 of SAE AMS-STD-595 (see 7.3). Prior to the application of the finish top coat, any cab or chassis component or assembly specifically manufactured by or for the tow tractor manufacturer from sheet, plate, angular, or tubular steel, shall be coated with a zinc-rich primer. The top surfaces of the tow tractor that are walked on in association with routine maintenance shall be covered with anti-skid material.

3.2.1.3 Exclusion of water. The design of the tow tractor shall be such as to prevent water leaking into, or being driven into, any part of the tow tractor interior when either in an operating or travelling configuration. All windows, doors, panels, covers, or related type items, shall be provided with sealing arrangements such that the entry of water is minimized when these items are correctly closed. Particular care shall be taken to prevent wetting of equipment and heat and soundproofing materials. Sharp corners and recesses shall be avoided so that moisture and solid matter cannot accumulate to initiate localized attack. Sealed floors with suitable drainage shall be provided for storage compartments, engine compartments, and other areas in the tow tractor that could collect and retain water.

3.2.1.3.1 Fluid traps and faying surfaces. There shall be no fluid traps on the tow tractor. Faying surfaces of all structural joints, except welded joints, shall be sealed to preclude fluid intrusion.

3.2.1.3.2 Ventilation. Ventilation shall be sufficient to prevent moisture retention and buildup.

3.2.1.3.3 Drainage. Drain holes shall be provided to prevent collection or entrapment of water or other unwanted fluid in areas where exclusion is impractical. All designs shall include considerations for the prevention of water or fluid entrapment and so located as to effect the maximum drainage of accumulated fluids. The number and location of drain holes shall permit drainage of all fluids. The minimum size of the drain holes shall be 0.25 inch.

3.2.1.4 Corrosion protection.

3.2.1.4.1 Permanent corrosion preventative compound (CPC). The tow tractor shall be corrosion-protected with a permanent, black, commercially available CPC that is difficult to remove (CORTEC® VpCI® 375 or equivalent). Application shall include the exposed chassis-frame metal underneath the tow tractor (excluding the drive train), the inside of the wheel wells, and behind the fender skirts. Any equivalent CPC used shall meet the salient characteristics defined in Table I, when applied on American Iron and Steel Institute (AISI) 1010 carbon steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

TABLE I. CORTEC® VpCI® 375 equivalent salient characteristics requirements.

Specification	Dry Film Thickness (Mils)	Hours to Failure
ASTM B117	4.0-4.5	2500+
ASTM D1748	4.0-4.5	2000+
ASTM D870	4.0	312+

3.2.1.4.2 Pencil hardness. The pencil hardness of the CPC shall be "H" in accordance with the American Society for Testing and Materials (ASTM) D3363.

3.2.1.4.3 Temperature resistance. The temperature resistance of the CPC shall be -150 – 350 °F.

3.2.1.4.4 Adhesion. The adhesion of the CPC shall be "5B" in accordance with ASTM D3359.

3.2.1.4.5 Temporary CPC. When specified, tow tractors that are to be shipped overseas shall be temporarily corrosion-protected from the effect of salt spray both on the ship and at port with the application of a thin, soft-film, semi-transparent, commercially available CPC that is easily removable by washing or with a low-pressure steam (CORTEC® VpCI® 389 or equivalent) (see 7.3). Application of the temporary CPC shall be to the exterior of the tow tractor, in critical or corrosion-sensitive areas of the tow tractor. Any equivalents used shall meet the salient characteristics defined in Table II when applied on AISI 1010 carbon steel.

TABLE II. CORTEC® VpCI® 389 equivalent salient characteristics.

Specification	Dry Film Thickness (Mils)	Hours to Failure
ASTM B117	2.0	600+
ASTM D1748	1.0	1000+
ASTM G85 (94)	1.0	600+

3.2.2 Markings. All external devices which require an operational or maintenance interface shall be marked in accordance with MIL-STD-130. Markings shall be applied with decals and shall be 1-inch high block letters, unless prohibited by the available space. In such cases, the markings shall be the largest size possible. Each side of the tow tractor shall be marked with a center of gravity decal applied within 1 inch of the calculated center of gravity.

a. Information/Caution shall be black international, color number 37038 of SAE AMS-STD-595.

b. Warning/Danger shall be red international, color number 31136 of SAE AMS-STD-595.

3.2.2.1 Tire inflation pressures. Tire inflation pressures shall be marked above all wheel-well openings, with 0.50-inch high letters/numbers that are black in color.

3.2.2.2 Wheel-well decal. A decal shall be adhered near the top of each wheel-well opening that warns personnel of the dangers of placing any part of the body into the wheel-well area. The warning shall be documented in the technical manual.

3.2.2.2 Maximum towing capacity. A maximum-towing-capacity decal shall be adhered on the front and rear of the tow tractor near each coupler position that states the maximum towing capacity in terms of DBPF of the tow tractor and GVW of the towed aircraft.

a. For Class 1 tow tractors with GVW of 40,000 pounds (standard equipment), the decal shall read as follows:

MAXIMUM TOWING CAPACITY:
30,000 LBS DRAWBAR PULL FORCE/500,000 LBS GVW AIRCRAFT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

b. For Class 2 tow tractors with GVW of 53,000 pounds (optional equipment, see 7.3), the decal shall read as follows:

MAXIMUM TOWING CAPACITY:
40,000 LBS DRAWBAR PULL FORCE/500,000 LBS GVW AIRCRAFT

3.2.3 Identification and data plates.

3.2.3.1 Identification plate. The tow tractor shall be provided with a permanently marked identification plate constructed of a non-corroding metal, mounted on the inside of the tow tractor cab, and a rear license-plate mounting bracket with license-plate attaching hardware. The variable information on the identification plate shall be engraved onto the plate by a method that produces a consistent lettering quality. At a minimum, the identification plate shall include the following information:

a. Vehicle nomenclature.

b. Manufacturer's part number and/or model number.

c. Vehicle identification number (VIN).

d. Date of manufacture.

e. Manufacturer's name, address, and phone number.

f. Commercial and government entity (CAGE) code.

g. National stock number (NSN).

h. Contract number.

i. Registration number.

j. Date of warranty expiration.

3.2.3.2 UID and IUID data plate. The invariable information contained on the identification plates shall be documented in the technical manual. The tow tractor shall have unique identification (UID) (also known as item unique identification (IUID)) information permanently affixed on or near the respective identification plate, marked in accordance with MIL-STD-130. UID information shall be included as both a bar code and human readable markings.

3.2.3.3 Transportation data plate. The information contained on the transportation data plate shall be documented in the technical manual. The tow tractor shall be provided with a permanently-marked transportation data plate constructed of a non-corroding metal, mounted on the exterior surface of the tow tractor. The plate shall contain at least the following information:

a. Side and rear silhouette views of the tow tractor.

b. Horizontal and vertical location of the center of gravity of the tow tractor in air transportable configuration, marked on the silhouette views.

c. Shipping weight.

d. Loading cubage.

e. Overall height, width, and length.

f. Front and rear axle loads.

g. Tie-down information.

3.2.3.4 Lubrication data plate. The tow tractor shall be provided with a permanently marked lubrication data plate constructed of a non-corroding metal, mounted on the exterior surface of the tow tractor that

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

shall direct attention to all lubrication fittings and components that require lubrication. The plate shall identify the type and grade of lubricant required for operational temperatures specified in 3.3.1. The information contained on the lubrication data plate shall be documented in the technical manual.

3.2.4 Environment, Safety, and Occupational Health (ESOH).

3.2.4.1 Component protection. All wires, cables, tubes, and hoses shall be supported and protected to minimize chafing and abrasion and shall be located to provide adequate clearance from moving parts and high operational temperatures. Grommets shall be provided wherever wires, cables, tubes, or hoses pass through bulkheads, partitions, or structural members.

3.2.4.2 Foreign object damage (FOD). All loose metal parts, such as pins or connector covers, shall be securely attached to the tow tractor with wire ropes or chains. "Dog tag" style beaded chains shall not be provided. Removable panels, if provided, shall be attached with captive fasteners. Tire valve stem caps shall be made of plastic.

3.2.4.3 Fire extinguisher. The tow tractor shall be equipped with one 17 pound (minimum) dry chemical type fire extinguisher with mounting bracket suitable for use on vehicles, and an Underwriters' Laboratories (UL) rating of 20B:C, (minimum). The fire extinguisher shall be mounted on the rear surface of the tow tractor.

3.2.4.4 Back-up alarm. An externally-mounted back-up warning alarm shall be included in the reverse light circuit.

3.2.5 Fastening devices. All screws, bolts, nuts, pins, and other fastening devices shall be properly designed, manufactured, and installed with adequate means of preventing loss of torque or adjustment. Tapped threads shall have a minimum thread engagement in accordance with the material specified in Table III.

TABLE III. Minimum thread engagement.

Material	**Minimum Thread Engagement**
Steel	1.0 times the nominal fastener diameter
Cast iron, brass, or bronze	1.5 times the nominal fastener diameter
Aluminum, zinc, or plastic	2.0 times the nominal fastener diameter

3.2.6 Welders and welding. Welding and post-heat treatment procedures shall be in accordance with the American Welding Society (AWS) welding code. The surface parts to be welded shall be free from rust, scale, paint, grease, and other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the welded parts. Welds shall transmit stress without cracking or permanent distortion when the parts connected by the welds are subjected to test, proof, and service loadings.

3.2.7 Special tools. The design of the item shall minimize the requirement for special tools (see 7.5.1). All special tools shall be provided with, and stored on, the tow tractor.

3.2.8 Cab specifications.

3.2.8.1 Cab design. The tow tractor shall be equipped with a front-mounted, enclosed, two-man cab. Doors shall be constructed of rigid materials. The first entrance step to the cab shall not exceed 18 inches in height from the ground. If there is more than one step to the cab (including the cab floor), then each step shall be offset out from the next step up by at least 3 inches. Steps shall be designed to prevent slipping. Cab instrumentation shall be standard commercial installation to include an hour meter, odometer, tachometer, speedometer, voltmeter, engine oil pressure gauge, engine coolant temperature gauge, transmission temperature gauge, and a fuel-level gauge. If an air system is used as the power assist for the braking system (see 3.6.5.2), cab instrumentation shall include an air-pressure gauge and a low-pressure indicator with buzzer and/or warning light. The tow tractor shall be equipped with an air

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

conditioning system. The tow tractor cab shall be equipped with wipers, a windshield washer, driver and passenger-door rear-view mirrors, windshield-area rear-view mirror, visors, heater/defroster, ventilating fan, interior dome light, seat belts, and other equipment as found in standard commercial offerings. The driver and passenger seats shall incorporate a scissors-type suspension for driver and passenger comfort.

3.2.8.2 Cab visibility. The tow tractor shall be designed to provide maximum visibility in all directions for the range of persons represented between the 5th percentile female driver and the 95th percentile male driver in accordance with Table B-IV of MIL-STD-1472. Rearward visibility shall be provided within an envelope defined by a point 1 foot behind the tractor and 54 inches above the ground to a point 15 feet from the rear of the tractor and 30 inches from the ground. Rearward visibility may be accomplished or enhanced with the use of a rear-mounted camera and an in-cab monitor. Camera(s) and related monitors shall not have the ability to record or transmit information. Additionally, the front and rear couplers shall be visible from the driver position either directly or via a single mirror mounted on the front and rear of the tow tractor.

3.2.8.3 Cab noise levels. Interior cab sound level shall not exceed 84 decibel adjusted (dB(A)) with doors and windows closed. If the sound level is above 84 dB(A), the contractor shall provide a hazardous-noise warning plate stating that operator's hearing protection is required when operating this tow tractor. The plate shall be made of a corrosion resistant material and shall be at least 4 square inches. It shall have black lettering on a yellow background and shall be located to be visible as the operator enters the cab, or is seated. Sound level shall not exceed 94 dB(A).

3.2.9 Tires and wheels. The tow tractor shall be equipped with steel disc wheels and tubeless steel-belted radial tires with an appropriate tread pattern. The valve stems may be rubber or metal. Tire valve stem caps shall be plastic. The wheels and tires shall be in accordance with the Tire and Rim Association (TRA) recommendations for the application. All wheels and tires shall be uniform. If tire loads and tire inflation pressures that exceed the specifications on the tire sidewall markings are required, a copy of the application approval from the tire manufacturer shall be documented in the technical manual.

3.3 Environmental conditions.

3.3.1 Operating temperature range. The tow tractor shall be capable of operating in ambient temperatures ranging from –20 to 125 °F. The tow tractor shall be capable of operating in ambient temperatures to –40 °F when heavy-duty (type A) winterization system is specified (see 7.3). Any requirements for towing in high ambient temperatures (recommended coolant ratios, oil types and viscosities, or other fluid types, for various temperature ranges) shall appear in the technical manual.

3.3.2 Storage temperature. The tow tractor shall be capable of being stored in ambient temperature to –65 °F when heavy-duty (type A) winterization system is specified (see 7.3).

3.4 GVW and dimensions. Overall weight and maximum dimensions shall be:

GVW	40,000 pounds (Class 1 – Standard equipment) 53,000 pounds (Class 2 – Optional equipment, see 7.3)
Length	220 inches, without couplers
Width	110 inches, without mirrors
Height	100 inches

3.5 Transportability.

3.5.1 Air transportability. The tow tractor shall be transportable on C-17 and C-5 aircraft without removing ballast, and in accordance with MIL-STD-1791. In all air transport configurations, the tow tractor shall be capable of being restrained and withstanding, without loss of serviceability, 2.0 G up and 4.5 G down accelerations, and shall be capable of being restrained and withstanding, without loss of structural integrity, 3.0 G forward, 1.5 G aft, and 1.5 G lateral accelerations. The tow tractor shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

equipped with pressure-relief devices or configured for air transport to prevent any part from becoming a projectile in the event of catastrophic loss of aircraft cabin pressure.

3.5.1.1 Shoring. The use of shoring to load the aircraft (referred to as approach shoring and step-up shoring) and during flight (referred to as load shoring, parking shoring, and sleeper shoring) is permitted, but not desired. The use of shoring, especially in loading the aircraft, is not an alternative to a good tow-tractor design. The tow tractor shall be designed to the maximum extent possible with adequate clearances for the tow tractor to drive on and off the aircraft, negotiating the required maximum ramp angles without shoring.

3.5.1.2 Axle weight. Single axle weight shall not exceed 36,000 pounds.

3.5.1.3 Tire pressure. Tire pressure shall not exceed 100 pounds per square inch (psi) for air transport.

3.5.1.4 Air-transportable configuration. The air-transportable configuration shall include all equipment, half tank of fuel, and no crewmembers. At least 6 inches sidewall and 6 inches overhead clearance shall be maintained between the tow tractor and the aircraft at all times during loading and flight. The restrained tow tractor shall allow for loadmaster in-flight access from the front to the rear of the aircraft.

3.5.1.5 Equipment removal and reconfiguration. Preparation and restoration of the tow tractor for air transportability shall take no more than 30 minutes for two persons using common non-powered hand tools. All equipment removed shall be stored on the tow tractor; caps and plugs shall permit driving and storage in transport configuration.

3.5.2 Tie downs. The tow tractor shall be symmetrically restrained during air and ground transport. Tie-down points shall be rated at a minimum of 25,000 pounds, marked for capacity, with a clear opening compatible with MIL-DTL-25959 and MIL-PRF-27260 tie-down devices. Each end of each tie-down device shall terminate at a tie-down point and not pass through any other tie-down point. There shall be no interference between tie-down devices and the tow tractor. The tie-down provisions shall be in accordance with MIL-STD-209.

3.5.3 Lifting provisions. The tow tractor shall be equipped with sufficient attachment points so located that it can be lifted by crane; each attachment point shall be marked "Lift Point". The lifting provisions shall be in accordance with MIL-STD-209.

3.6 Performance.

3.6.1 Mobility. The tow tractor shall be capable of traveling a minimum of 15 miles per hour (MPH) forward and 2.5 MPH in reverse on flat asphalt or concrete surfaces without a trailing load.

3.6.2 Drawbar pull force (DBPF). The tow tractor shall have the following minimum DBPF on dry, level concrete (coefficient of friction of 0.8):

a. DBPF >/= 30,000 pounds when GVW = 40,000 pounds (Standard equipment).

b. DBPF >/= 40,000 pounds when GVW = 53,000 pounds (Optional equipment, see 7.3).

3.6.3 Suspension. The tow tractor shall have a suspension that will allow for articulation of one or both of the tow tractor axles, so that an axle position relative to the other will allow for four-wheel contact with the normal working surfaces found in the above described conditions.

3.6.3.1 Suspension lubrication system. The tow tractor shall be equipped with a lubrication system that automatically and manually provides lubricant to several points on the suspension of the tow tractor, including kingpins, ball joints, steering cylinders, and articulation bolsters. The automatic lubrication system components shall include a pump with integral reservoir, lubricant injectors, tubing, and fittings for the lubrication points.

3.6.4 Driveline and steering. The tow tractor shall have four-wheel drive, and two-wheel and four-wheel power steering. Axles shall be planetary-drive/steer axles. Four-wheel steering shall feature both crab and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

coordinated steering. The selection of the steering mode shall be accomplished by the movement of a one-hand-operated lever or switch. When switching from the crab or coordinated four-wheel mode of steering to the two-wheel mode of steering, the rear wheels shall center automatically (wheels perpendicular to axle) as the steering wheel is rotated to the wheel center, without additional operator input or adjustment. The tow tractor shall have a maximum wall-to-wall turning radius of 18 feet or less while in four-wheel coordinated steering mode. Wheel-wells shall be designed so that tire chains may be used without interference.

3.6.5 Brakes.

3.6.5.1 Parking brake. The tow tractor shall be equipped with a spring-applied and hydraulic-release parking brake. A lockout system shall be provided that disallows the transmission to go into forward or reverse gear, or shuts the engine down, or disallows the engine to respond to throttle when the parking brake is on and the tow-tractor gear selector is placed in forward or reverse gear. The lockout system shall also include a cab-mounted warning light.

3.6.5.2 Service brakes. The tow tractor shall feature a four-wheel, hydraulically operated braking system with power assist. If an air system is used as the power assist (air-over-hydraulic brakes), cab instrumentation shall include an air-pressure gauge and a low-pressure indicator with buzzer and/or warning light (see 3.2.8.1).

3.6.6 Couplers. The tow tractor shall be equipped with front and rear, heavy-duty, clevis-pin-type couplers. The clevis-pin-type couplers shall accommodate lunettes (drawbar rings) with a 3-inch inside diameter. The couplers shall incorporate a spring-loaded or counter-weighted pin retention device to prevent the pin from bouncing out of the hitch while towing. If spring-loaded, the spring shall be stainless steel. The couplers shall incorporate a chain lanyard between the hitch and the pin. The length and attachment points of the chain lanyard shall prevent the chain from hanging into the coupled area when towing. The couplers shall be located such that the coupling positions are at 24 inches, plus or minus 0.50 inch, above the ground. Coupling positions are measured to the centerline of lunette (drawbar ring) as it rests within the coupler. The lunette has a material diameter or height of 1.63 inches. The coupler shall be installed using design-selected fasteners for the application. The coupler fasteners shall be installed with a design fastening torque applied such that an adequate preload is introduced in the fastener to prevent losing or fatiguing the fasteners and/or the coupler. A description of the coupler fastener type and the fastening torque shall be documented in the technical manual.

3.7 Engine and related equipment.

3.7.1 Engine. The tow tractor shall have a commercially available, liquid-cooled, turbocharged diesel engine of not less than six cylinders and power train sufficient to develop the required drawbar pull and obtain the required tow-tractor speeds. The diesel engine shall operate on high-sulfur diesel fuels (containing over 15 parts per million (ppm) sulfur), and ultra-low-sulfur diesel fuels (containing less than 15 ppm sulfur). At a minimum, the tow tractor shall meet a Tier III level exhaust and evaporative emissions standard (see 7.6.1) for industrial (off-highway) engines. The engine shall include an anti-restart, as well as a neutral safety-start feature. The engine shall have an automatic engine shutdown system for high coolant temperature, low oil pressure, and engine over speed (engine in excess of 110 % of rated speed).

3.7.2 Engine starting aids. The engine shall start within 15 seconds cranking in any ambient temperature within the required operating range of the tow tractor. Internal engine starting aids, fluid starting aids, and heat from the winterization system (see 3.7.6) may be used prior to and during the start period to facilitate engine starting under the conditions defined in Table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

TABLE IV. Engine starting aids.

Temperature Range	Starting Aids Permitted
40 to 125 °F	None
0 to 39 °F	Internal engine starting aids and fluid starting aids
–40 to –1 °F	Internal engine starting aids, fluid starting aids, and heat from the winterization system

3.7.3 Engine cooling system. The tow tractor engine shall possess sufficient cooling capacity to perform continuous maximum-performance towing in high ambient temperatures of 125 °F without exceeding the manufacturer's maximum allowable temperatures on the individual engine components.

3.7.4 Exhaust system. The exhaust system shall be constructed of stainless steel. The muffler(s) shall be constructed of aluminized steel or stainless steel. The exhaust-system outlet shall exit on the right-hand side, over the rear axle and behind the rear wheel, oriented at 90 degrees from the centerline of the tow tractor, and not directed toward the ground.

3.7.5 Transmission. Transmission shall be of the power-shift type, with an integral, limited-slip, inter-axle differential. Maximum allowable transmission temperature during all operations shall not exceed 260 °F.

3.7.6 Winterization system. A standard (type C) winterization system shall be provided for operation in temperatures to –20 °F. When specified (see 7.3), a heavy-duty (type A) winterization system shall be provided for operation to –40 °F and storage to –65 °F. The winterization systems may include heaters for engine coolant, engine oil, fuel, and battery warmers. The winterization system shall incorporate high-temperature shutoff switches to prevent overheating of any fluid or component. For each winterization system, a breakdown of the winterization components and requirements (recommended coolant ratios, oil types and viscosities, or other fluid types, for the various temperature ranges) shall be documented in the technical manual.

3.7.6.1 Winterization plugs and connectors. Winterization package components with external power requirements shall be compatible with 110-volt (V) alternating current (AC), 60-hertz (Hz) power source utilizing covered male inlet plugs in accordance with American National Standards Units (ANSI) National Electrical Manufacturers Association (NEMA) ANSI/NEMA WD 6.

3.8 Electrical system. The tow tractor shall be equipped with a 12V or 24V negative-ground electrical system. All external chassis wiring shall incorporate weather-proof connections and terminations. Exceptions to this are under-hood terminal strips and electrical posts that are protected from the elements. Any wire splicing (typically resulting from special-request options) shall incorporate a mechanically-crimped connector, solder, and heat-shrink tubing. Crimped-on wire connectors shall be installed with a corresponding crimping tool. All wiring shall be sized to handle the system voltage and current levels. Battery cables shall be identified with "+" and "-" or red and black markings, and shall not be spliced.

3.8.1 Lighting. The tow-tractor lighting shall be equivalent to or exceed the standard commercial offering to include front and rear coupling lights, parking lights, head lights (high and low beam), brake lights, turn signals, hazard lights wired to a constant-hot circuit, and reverse lights. A flashing amber beacon light shall be mounted on the cab roof on the tow tractor centerline. The specified lights shall be constructed with light-emitting diodes (LED).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

3.8.2 Batteries and battery compartment.

3.8.2.1 Batteries. Batteries shall be of the commercial maintenance-free sealed lead-acid, starved electrolyte, gas recombination, spiral wrapped, absorbent gas mat (AGM), top-post type in accordance with MIL-B-18013/1.

3.8.2.2 Battery compartment. The batteries shall be enclosed in a corrosion-resistant, weatherproof box or compartment and shall be readily accessible.

3.9 Diagnostic software. A copy of any diagnostic software on CD-ROM or DVD-ROM and/or an accessory module, required or recommended for maintaining the tow tractor, shall be provided.

3.10 Workmanship. The tow tractor, including all parts and accessories, shall be constructed and finished in a thoroughly workmanlike manner. Workmanship objectives shall include freedom from blemishes, defects, burrs and sharp corners and edges; accuracy of dimensions, surface finish, and radii of fillets; thoroughness of welding, painting, and riveting; marking of parts and assemblies; and proper alignment of parts and tightness of assembly fasteners.

3.10.1 Bolted connections. Bolt holes shall be accurately punched or drilled and shall be deburred. Threaded fasteners shall be tight and shall not work loose during testing or service usage.

3.10.2 Riveted connections. Rivet holes shall be accurately punched or drilled and shall be deburred. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the component.

3.10.3 Gear and lever assemblies. Gear and lever assemblies shall be properly aligned and meshed and shall be operable without interference, tight spots, loose spots, or other irregularities. Where required for accurate adjustment, gear assemblies shall be free of excessive backlash.

3.10.4 Cleaning. The tow tractor shall be thoroughly cleaned. Loose, spattered, or excess solder; welding slag; stray bolts, nuts, and washers; rust; metal particles; pipe compound; and other foreign matter shall be removed during and after final assembly.

3.11 Cybersecurity. The tow tractor shall be designed, produced, and delivered with cybersecurity considerations in accordance with Department of Defense Instructions (DoDI) 8500.01, DoDI 8510.01, and Air Force Instructions (AFI) 17-101 and referenced security controls for applicable information technology (IT) and/or operational technology (OT), commonly referred to as platform information technology (PIT). Commercial policy and standards, such as SAE J3061, SAE J3101, and various International Organization for Standardization/International Electrotechnical Commission (ISO/IEC) standards may be used in lieu of DoDI/AFI, as applicable. The safety of the driver, passengers, and bystanders shall be the most important security consideration.

3.11.1 Secure communication. The tow tractor shall be designed, produced, and delivered with the bare minimum of any wireless communication (i.e., cellular, Wi-Fi, telematics, over-the-air (OTA) updates, etc.) while still meeting operational/performance specifications within this CID. All attempts shall be made to utilize original equipment manufacturer (OEM) commercial basic ordering features (i.e., lack of options) to meet the intent of this requirement without physical modification to commercial vehicles that could adversely affect vehicle functionality via internal communication or void any standard commercial warranty. Any wireless communications remaining within the final configuration of the tow tractor shall be secured to mitigate known vulnerabilities and threats in accordance with applicable policy and standards as referenced in paragraph 3.11. All risks associated with known vulnerabilities and potential threats of any wireless communication capability shall be identified, assessed, and reported.

3.11.2 Hardware supply-chain integrity. The tow tractor shall be designed, produced, and delivered with security controls for the supply-chain integrity of electronics hardware (i.e., engine control units (ECUs)) that involve memory storage, data processing, and/or interfaces with the communication system or controller area network (CAN bus) within the vehicle. The tow tractor shall be produced with mitigation

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

to the risk of counterfeit electronic parts being installed in end items or otherwise entering the Department of Defense (DoD) inventory.

3.11.3 Software/firmware supply-chain integrity. The tow tractor shall be designed, produced, and delivered with security controls for the supply-chain integrity of all delivered software and firmware. All software and firmware shall function as intended, and shall be free of vulnerabilities (i.e., defects, bugs, malware, etc.), either intentionally or unintentionally inserted as part of the software/firmware throughout the lifecycle. Any diagnostic and troubleshooting software or utility software for updating firmware shall be compatible for use on the latest Microsoft Windows (64-bit) operating system computer. Any interface hardware/cable (i.e., CAN bus, USB, RS-232) required to communicate between a host computer with utility/diagnostic software and the tow tractor shall be provided with each vehicle

4. REGULATORY REQUIREMENTS

4.1 Recovered, recycled, biobased, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements and promotes economically advantageous lifecycle costs. The offeror/contractor is encouraged to use recovered, recycled, biobased, or environmentally preferable materials to the maximum extent practicable, in accordance with the Federal Acquisition Regulation (FAR) part 23.403. However, used, rebuilt, or refurbished items shall not be provided.

4.2 Green Procurement Program (GPP). GPP is a mandatory Federal acquisition program that focuses on the purchase and use of environmentally preferable products and services. GPP requirements apply to all acquisitions using appropriated funds, including services and new requirements. FAR 23.404(b) applies and states that the GPP requires that 100% of EPA-designated product purchases (that are included in the CPP list) contain recovered materials, unless the item cannot be acquired competitively within a reasonable timeframe, meeting appropriate performance standards, or at a reasonable price. The prime contractor is responsible for ensuring that all subcontractors comply with this requirement.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID; conform to the producer's own drawings, specifications, standards, and quality assurance practices; and be the same product offered for sale in the commercial marketplace, modified as necessary to comply with the requirements herein. The Government reserves the right to require proof of such conformance.

5.2 Classification of inspections.

5.2.1 Pre-production inspection. The pre-production tow tractor shall be subjected to demonstrations, examinations, and tests, and supplied with analyses, certifications, and lists of components, as described in 5.4.1 through 5.4.27. The contractor shall provide or arrange for all test equipment and facilities.

5.2.2 Conformance inspection. Each production tow tractor shall be subjected to the examination described in 5.4.1.

5.3 Inspection requirements.

5.3.1 General inspection requirements. Apparatus used in conjunction with the inspections specified herein shall be laboratory precision type, calibrated at proper intervals to ensure laboratory accuracy.

5.3.2 Data. During all testing specified herein, at least the following data shall be recorded. Additional data shall be provided as appropriate for any specific test.

a. Date.

b. Time started.

c. Time finished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

5.3.3 Test rejection criteria. Throughout all tests specified herein, the tow tractor shall be closely observed for the following conditions, which shall be cause for rejection.

a. Failure to conform to design or performance requirements specified herein.

b. Any spillage or leakage of any liquid, including fuel, coolant, lubricant, or hydraulic fluid, under any condition, except as allowed herein.

c. Structural failure of any component, including permanent deformation, or evidence of impending failure.

d. Evidence of excessive wear. If excessive wear is suspected, the OEM specifications or tolerances shall be utilized for making a determination.

e. Evidence of corrosion or deterioration.

f. Misalignment of components.

g. Conditions that present a safety hazard to personnel during operation, servicing, or maintenance.

h. Interference between the tow-tractor components or between the tow tractor, the ground, and all required obstacles, with the exception of normal contact by the tires.

i. Evidence of undesirable mobility characteristics, including instability in handling during cornering, braking, and while traversing all required terrain.

j. Shutdown faults from the engine cooling system, engine lubrication system, and engine protective circuits.

5.4 Test methods.

5.4.1 Examination of product. Each tow tractor shall be examined to verify compliance with the requirements. The pre-production tow tractor (see 5.2.1) shall be examined using a contractor-generated, Government-approved test procedure to identify each requirement verified by demonstration, examination, or test. Attention shall be given to materials, workmanship, dimensions, surface finishes, protective coatings and sealants and their application, welding, fastening, and markings. Proper operation of each tow tractor function shall be verified. Analyses, certifications, and lists of components shall be provided in accordance with contractor certification outlined in Table V. Each production tow tractor (see 5.2.2) shall be examined using a contractor-generated, Government-approved checklist that is a reduced version of the pre-production checklist.

TABLE V. Analyses, certifications, and lists of components.

Paragraph	**Required Analyses, Certifications, and Lists of Components**
3.2 Design and construction.	Contractor certification (see 5.4.2)
3.3.1 Operating-temperature range.	Contractor certification (see 5.4.11.1)
3.3.2 Storage temperature.	Contractor certification (see 5.4.11.2)
3.5.1 Air transportability.	Contractor air-transportability analysis (see 5.4.13.1)
3.5.1.1 Shoring.	
3.5.1.4 Air-transportable configuration.	
3.5.2 Tie downs.	Contractor tie-down provision analysis (see 5.4.13.3)
3.5.3 Lifting provisions.	Contractor lifting provision analysis (see 5.4.13.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

3.6.4 Driveline and steering (axles).	Axle manufacturer certification (see 5.4.18.1)
3.7.1 Engine.	Engine manufacturer certification (see 5.4.21)
3.7.3 Engine cooling system.	
3.7.5 Transmission.	Transmission manufacturer certification (see 5.4.21)
3.7.6 Winterization system.	Contractor list of components and requirements (see 5.4.23)
3.9 Diagnostic software.	Contractor list of components (see 5.4.27)
3.11 Cybersecurity	Contractor certification and analysis (see 5.4.28)

5.4.2 Design and construction certification. A contractor certification shall be submitted to the Government representative at the pre-production inspection stating that the tow tractor has been designed and constructed in accordance with SAE ARP1247 and SAE AIR1363.

5.4.3 Finish examination. The pre-production tow tractor shall be examined for verification of the anti-skid material on the top surfaces of the tow tractor, in compliance with the requirements of 3.2.1.2.

5.4.4 Corrosion-protection examination. The pre-production tow tractor shall be examined for verification of the permanent CPC, in compliance with the requirements of 3.2.1.4.

5.4.5 Markings examination. The pre-production tow tractor shall be examined for verification of markings, in compliance with the requirements of 3.2.2.

5.4.6 Identification and data plates examination. The pre-production tow tractor shall be examined for verification of the identification and data plates, in compliance with the requirements of 3.2.3.1, 3.2.3.2, and 3.2.3.3.

5.4.7 Fire extinguisher examination. The pre-production tow tractor shall be examined for verification of the fire extinguisher, in compliance with the requirements of 3.2.4.3.

5.4.8 Back-up alarm examination. The pre-production tow tractor shall be examined for verification of the back-up alarm, in compliance with the requirements of 3.2.4.4.

5.4.9 Cab verification.

5.4.9.1 Cab design examination. The pre-production tow tractor shall be examined for verification of cab design, in compliance with the requirements of 3.2.8.1.

5.4.9.2 Cab visibility examination and test. The pre-production tow tractor shall be examined and measured for verification of cab visibility, in compliance with the requirements of 3.2.8.2.

5.4.9.3 Cab noise-level test. The pre-production tow tractor shall be tested by measuring the noise level at the operator's ear with the engine operating at maximum rpm and windows and doors closed, for verification of compliance with the requirements of 3.2.8.3. If noise level is between 84 and 94 dB(A), the noise warning plate required by 3.2.8.3 shall be on all tow tractors delivered on this contract.

5.4.10 Tires and wheels examination. The pre-production tow tractor shall be examined for verification of tires and wheels, in compliance with the requirements of 3.2.9.

5.4.11 Environmental conditions verification.

5.4.11.1 Operating-temperature range certification. A contractor certification shall be submitted to the Government representative at the pre-production inspection stating that the tow tractor and all temperature sensitive components are capable of operation in the specified temperature ranges, in compliance with the requirements of 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

5.4.11.2 Storage-temperature certification. A contractor certification shall be submitted to the Government representative at the pre-production inspection stating that the tow tractor and all temperature sensitive components are capable of storage to the specified temperature, in compliance with the requirements of 3.3.2.

5.4.12 Weight and dimension tests.

5.4.12.1 Weight test. The pre-production tow tractor shall be weighed for verification of the GVW and axle weights, in compliance with the GVW requirement of 3.4 and the single-axle weight requirement of 3.5.1.2.

5.4.12.2 Dimension measurement test. The pre-production tow tractor shall be measured verification of the dimensions, in compliance with the requirements of 3.4.

5.4.13 Transportability verification.

5.4.13.1 Air-transportability analysis. An engineering analysis shall be performed for verification of compliance with the air-transportability requirements of 3.5.1 and 3.5.1.4. The analysis shall include the tie downs and all major components and their ability to withstand the accelerations specified. The engineering analysis shall also include a dimensional analysis for the tow tractor while traversing the ramp and while being loaded aboard C-17 and C-5 aircraft.

5.4.13.2 Equipment removal and reconfiguration demonstration. The pre-production tow tractor shall be configured for transport on C-17 and C-5 aircraft and then reconfigured for operation and verification of compliance with the requirements 3.5.1.5. It shall be demonstrated that the forces required do not exceed those allowed in MIL-STD-1472.

5.4.13.3 Tie-down provision analysis. An engineering analysis shall be performed and submitted to the Government representative at the pre-production inspection for verification of compliance with the tie-down provision requirements of 3.5.2.

5.4.13.4 Lifting provision analysis. An engineering analysis shall be performed and submitted to the Government representative at the pre-production inspection for verification of compliance with the lifting provision requirements of 3.5.3.

5.4.14 Mobility tests. The pre-production tow tractor shall be tested for verification of the forward and reverse speeds on a flat asphalt or concrete surface without a trailing load, using the tow tractor speedometer as the speed-measuring device, in compliance with the requirements of 3.6.1.

5.4.15 Drawbar pull test. The pre-production tow tractor shall be tested for verification of the DBPF on dry, level concrete using a load-sensing device and a fixed anchoring position, in compliance with the requirements of 3.6.2. The drawbar position shall be horizontal and level.

5.4.16 Suspension examination. The pre-production tow tractor shall be examined for verification of an articulating suspension, in compliance with the requirements of 3.6.3.

5.4.17 Suspension lubrication system examination. The pre-production tow tractor shall be examined for verification of a lubrication system for the suspension, in compliance with the requirements of 3.6.3.1.

5.4.18 Driveline and steering verification.

5.4.18.1 Axles certification. A manufacturer certification shall be submitted to the Government representative at the pre-production inspection stating that the axles are the correct application for the torque and power ratings of the tow tractor at the specified temperature ranges, for verification of compliance with the requirements of 3.6.4.

5.4.18.2 Driveline and steering test. The pre-production tow tractor shall be tested in two-wheel steer and four-wheel steer, using both crab and coordinated steering for verification of compliance with the requirements of 3.6.4. The tow tractor shall be tested for verification of tire chain use without interference

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

in wheel wells. Tire chains shall be fitted to the tires, and the tow tractor shall be operated by driving a short distance and turning the wheels to the extreme left and right. The tow tractor shall be tested for verification of the maximum wall-to-wall turning radius while in four-wheel coordinated steering mode. The fully ballasted pre-production tow tractor shall be tested as follows for verification of compliance with the turning-radius specification:

a. Facility. Perform the test on a dry, level, paved area that is free from loose material and is larger in all directions than three times the length of the tow tractor being tested.

b. Equipment required.

(1) A device suitable for measuring three times the length of the tow tractor being tested with an accuracy of at least ±1 inch.

(2) Markers or marking device suitable for marking the pavement.

(3) A plumb bob suitable for locating a point on the pavement directly below a fixed point on the tow tractor.

(4) A test report notebook or similar record forms to be used as a test report worksheet and incorporated into the documentation package.

c. Test conditions.

(1) The tow tractor shall be fully ballasted and in operational form.

(2) The tow tractor steering system shall be fully operational, and the steering linkage stops shall be adjusted to the manufacturer's specified production tolerance limits.

d. Test Procedure.

(1) Drive the tow tractor slowly in a full-cramp circle (left or right) to establish a steady state in the steering linkage.

(2) Continue driving the slow full-cramp circle.

(3) At approximately three equidistant points (identified as A, B, and C) around the circle, gently stop the tow tractor using the service brakes.

(4) At each stop, place a plumb bob against the outermost point of the tow tractor and mark the spot on the ground directly below where the plumb bob comes to rest.

(5) Measure and record the straight line distances between each pair of points, that is, lengths AB, BC, and CA.

(6) Calculate the wall-to-wall turning radius (R) as follows:

$R = D/2$ where

$$D = \frac{(AB \times BC \times CA)}{2 \times \sqrt{(S \times (S - AB) \times (S - BC) \times (S - CA))}}$$ and

$S = (AB + BC + CA)/2$

e. Repeat steps (1) through (6) with the tow tractor moving in the opposite direction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

5.4.19 Brakes verification.

5.4.19.1 Parking brake examination and test. The pre-production tow tractor shall be examined and tested for verification of the spring-applied and hydraulic-release parking brake and the parking-brake lockout system, in compliance with the requirements of 3.6.5.1.

5.4.19.2 Service brake examination and test. The pre-production tow tractor shall be examined for verification of a four-wheel, hydraulically-operated braking system with power assist, and tested for verification of the service brake operation from 15 mph on a flat asphalt or concrete surface without a trailing load, in compliance with the requirements of 3.6.1 and 3.6.5.2.

5.4.20 Coupler examination. The pre-production tow tractor shall be examined for verification of the coupler, in compliance with the requirements of 3.6.6.

5.4.21 Engine and related equipment certification. A manufacturer certification shall be submitted to the Government representative at the pre-production inspection stating that the engine and transmission are in compliance with the requirements of 3.7.1, 3.7.3, and 3.7.5, including exhaust emissions standards and fuels. Engine manufacturer application approval for the engine and its installation, including cooling system, lubrication system, and mounting system shall be included in the certification.

5.4.22 Exhaust system examination. The pre-production tow tractor shall be examined for verification of the exhaust system, in compliance with the requirements of 3.7.4.

5.4.23 Winterization system, list of components, system requirements, and examination. A list of components for the winterization system and requirements (recommended coolant ratios, oil types and viscosities, or other fluid types, for the various temperature ranges) for each winterization system shall be submitted to the Government representative at the pre-production inspection. The pre-production tow tractor shall be examined for a winterization system (either type A or type C) in compliance with the requirements of 3.7.6.

5.4.24 Electrical system examination. The pre-production tow tractor shall be examined for verification of an electrical system, in compliance with the requirements of 3.8.

5.4.25 Lighting examination. The pre-production tow tractor shall be examined for verification of lighting, in compliance with the requirements of 3.8.1.

5.4.26 Batteries and battery-compartment examination. The pre-production tow tractor shall be examined for verification of batteries and battery compartment, in compliance with the requirements of 3.8.2.

5.4.27 Diagnostic software, list of components. A list of components for the diagnostic software to be supplied shall be submitted to the Government representative at the pre-production inspection, in compliance with the requirements of 3.9.


5.4.28 Cybersecurity analysis. An engineering analysis shall be performed to verify compliance with the cybersecurity and security controls requirements of 3.11. Contractor and/or manufacturer certification may be used in lieu of or to augment the analysis, where applicable, to verify compliance.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

7. NOTES

7.1 Part or Identifying Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

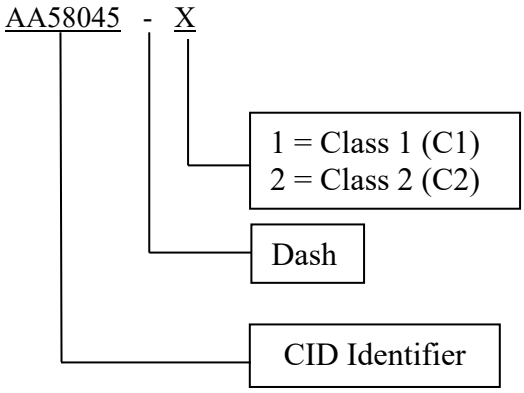

7.2 Source of documents.

7.2.1 Air Force Instructions (AFI). Electronic copies of AFIs are available online at https://www.e-publishing.af.mil/.

7.2.2 ASTM International. Copies of these documents may be obtained from the American Society for Testing and Materials International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, or online at https://www.astm.org/.

7.2.3 American Welding Society (AWS). Copies of AWS documents may be obtained from American Welding Society, 8669 NW 36 Street, # 130, Miami, FL 33166-6672, or online at https://www.aws.org.

7.2.4 Code of Federal Regulations (CFR). CFRs may be obtained from the Superintendent of Documents, U.S. Government Printing Office, 732 North Capitol Street, NW, Washington, DC 20401-0001, or online at https://www.ecfr.gov/.

7.2.5 CORTEC®. Electronic copies of CORTEC® standards may be obtained online at https://www.cortecvci.com.

7.2.6 Department of Defense Instructions (DoDI). Electronic copies of DoDIs are available online at https://www.esd.whs.mil/DD/.

7.2.7 Environmental Protection Agency (EPA). Copies of these documents may be obtained from Environmental Protection Agency, 1200 Pennsylvania Avenue, N.W., Washington, DC 20004, or online at https://www.epa.gov/.

7.2.7 Federal Acquisitions Regulations (FAR). Electronic copies of the FAR may be obtained from https://www.acquisition.gov/far/.

7.2.8 Government documents. Electronic copies of specifications, standards, and handbooks are available online at https://assist.dla.mil.

7.2.9 National Electric Manufacturers Association (NEMA). Copies of documents may be obtained from NEMA, 1300 North 17th Street, Suite 900, Arlington, VA 22209, or online at https://www.nema.org/stds/.

7.2.10 Occupational Safety and Health Association (OSHA). Copies of OSHA documents may be obtained from Occupational Safety and Health Association, 200 Constitution Ave., NW, Washington, DC 20560, or online at https://www.osha.gov/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

7.2.11 SAE International standards. Copies of SAE standards may be obtained from the Society of Automotive Engineers International, 400 Commonwealth Drive, Warrendale, PA 15096, or online at https://www.sae.org/.

7.2.12 Tire and Rim Association (TRA) standards. Copies of TRA standards may be obtained from the Tire and Rim Association, Inc., 4000 Embassy Parkway, Suite 390, Akron, Ohio 44333, or online at https://www.us-tra.org/.

7.2.13 Underwriters' Laboratories (UL). Copies of UL standards may be obtained from the Underwriters Laboratories,Inc., 333 Pfingsten Road, Northbrook, IL 60062, or online at https://www.ul.com/.

7.3 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.

b. Finish color required (gloss white) (see 3.2.1.2).

c. Finish color required (Coast Guard blue) (see 3.2.1.2).

d. Temporary CPC (see 3.2.1.4).

e. Winterization A (see 3.3.1, 3.3.2, and 3.7.6).

f. Class 2 with GVW of 53,000 pounds (see 3.4).

g. Diagnostic software (see 3.9).

h. Packaging requirements (see 6.).

7.4 National Stock Number (NSN). The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with this CID.

NSN		Class	PIN
1740-00-143-8464		1	AA58045-C1
1740-01-552-9854		2	AA58045-C2

7.5 Definitions.

7.5.1 Common hand tool. A non-powered tool that is likely to be found in a typical mechanic's toolbox. Common hand tools include open-end, boxed-end, combination, socket (both 6- and 12- point in both standard and deep-well), and hex-key wrenches, in SAE sizes up to and including 1 inch and metric sizes up to and including 25 mm; ratchet handles, extensions, and swivels; slotted and Phillips-head screwdrivers; regular and snap-ring pliers; and a ball-peen hammer.

7.5.2 Special tool. A tool that is not commercially and readily available from a source other than the tow-tractor contractor.

7.6 Additional information.

7.6.1 Engine waiver. Tier III "off-highway" represents the highest level of exhaust and evaporative emissions standards that will permit the use of high-sulfur fuels. The Air Force possesses an Environmental Protection Agency (EPA) waiver to allow for deviation from EPA emissions guidelines. The waiver will be transferred from the Air Force to the engine manufacturer. The transfer process requires the engine manufacturer to supply a tag or decal for the engine stating, "Insert engine description here – This engine has an exemption for national security under Title 40 of the Code of Federal Regulations (40 CFR), part 89.908 and/or 40 CFR § 1068.225."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.

7.7 Key words.

Aircraft parking
Flight line
Tow tractor
Tug

7.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due the extent of the changes.

Concluding Material:

Custodian:
Air Force – 184

Preparing activity:
Air Force – 184

Agent:
Air Force – 110
(Project No. 1740-2022-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:59Z
Check the source to verify that this is the current version before use.