INCH-POUND
A-A-58075A
17 March 2022
SUPERSEDING
A-A-58075
02 August 1996

COMMERCIAL ITEM DESCRIPTION

HOLDER, COUNTERSINK, ADJUSTABLE, MICROMETER STOP

The General Services Administration has authorized the use of this commercial item description as a replacement for holders type I and type II, of MIL-H-4081B for all federal agencies.

1. SCOPE. This commercial item description (CID) covers holders for countersinking cutters used on ferrous and non-ferrous materials.

2. CLASSIFICATION. The spindle holders shall be classified as follows:

Type I Internal taper spindle

Type II Internal threaded spindle

3. SALIENT CHARACTERISTICS.

3.1 Design. Holders shall be type I or II as specified. The holder length shall be adjustable and shall have provisions to prevent unintentional adjustment, disengagement or separation of parts. The spindle travel length shall not be less than 9/32 inch. The design will ensure, that damage will not occur to the material surface, during the countersinking operation.

3.2 Spindles.

3.2.1 Spindle for type I holder. The internal self-locking cutter mounting taper shall be 0.250 ± 0.001 inch diameter at large end with 0.600 + 0.000 - 0.005 inch per foot taper. A knockout pin hole through the spindle shall be provided.

3.2.2 Spindle for type II holder. Cutter mounting end of the spindle shall be threaded 1/4 - 28 UNF-2B for a length of 1/2 inch. Cutter centering angle at the thread entrance shall be 118 degrees ±1/2 degree included angle by 0.340 inch diameter. Wrenching flats shall be provided for installing and removing cutters (see Figure 1).

3.3 Threads. All threads shall be in the inch system and shall conform to the class 2 tolerance limits specified in FED-STD-H28/2.

Beneficial comments, recommendations, additions deletions, clarifications, etc, and any data which may improve this document should be sent to: AFLCMC/EZSS, Bldg. 28, 2145 Monahan Way, Wright-Patterson AFB, OH 45433-7017 or email engineering.standards@us.af.mil. Since contact information can change, you should verify the currency of this information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5133

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.

3.4 Knockout pin. Type I holders shall be of the knockout pin variety and shall be able to knock out seated cutter conforming to A-A-58076 without damaging pin or holder.

3.5 Length adjustment. The holder shall allow overall length adjustment.

3.6 Depth control. The holder shall provide for cutter depth control adjustment. A permanent index line, marked with a zero indicator, shall be clearly visible over the entire adjustment range.

3.7 Adjusting. The holder shall allow all adjustments to be made without the use of tools, and adjustment surfaces will allow easy gripping by hand. Depth adjustments shall be permanently marked in increments of 0.001 inch and shall be marked with progressive numerical characters at every fifth increment; (i.e. 5-10-15 etc...).

3.8 Identification marking. The holder shall be marked with the manufacturers name or identifying symbol, and the state or country of manufacturer, unless otherwise specified. All markings shall be engraved, etched, molded, or indented directly on the items surface in such a manner that it remains clearly legible throughout the life of the item.

3.9 Workmanship. Details of workmanship shall be in accordance with the best commercial practice. Paints, coatings, platings, and finishes shall be smooth, dry adherent, continuous, and not stained or discolored. External surfaces shall be free of tool and gouge marks, nicks, or other surface imperfections.

4. REGULATORY REQUIREMENTS.

4.1 Recovered, recycled, and biobased materials. The offerer/contractor is encouraged to use recovered, recycled, and biobased materials to the maximum extent practicable, in accordance with the Federal Acquisition Regulation (FAR) part 23.403.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they meet all provisions of this document.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producers own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID.

5.2.1 The company producing the item must have been producing a product meeting the requirements of this CID, for at least two years.

5.2.2 The company must have sold 1000 units meeting the requirements of this CID, in the commercial market place over the past two years.


5.3 Sampling inspection. As a minimum sampling inspection, the supplier shall randomly select the number of samples in Table I that is applicable to the quantity of items being purchased. Each sample item shall be inspected to determine conformance with the performance tests. Should any of the sample items fail to meet the test requirements the entire lot shall be considered defective and unsuitable for acceptance. A lot is defined as all items presented at one time for acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.

TABLE I. Sampling plan.

Quantity of items being purchased	Sample size
1 to 10	1
11 to 25	2
21 to 45	3
46 to 90	5
91 to 150	7

FIGURE 1. Type I and II spindle holders.

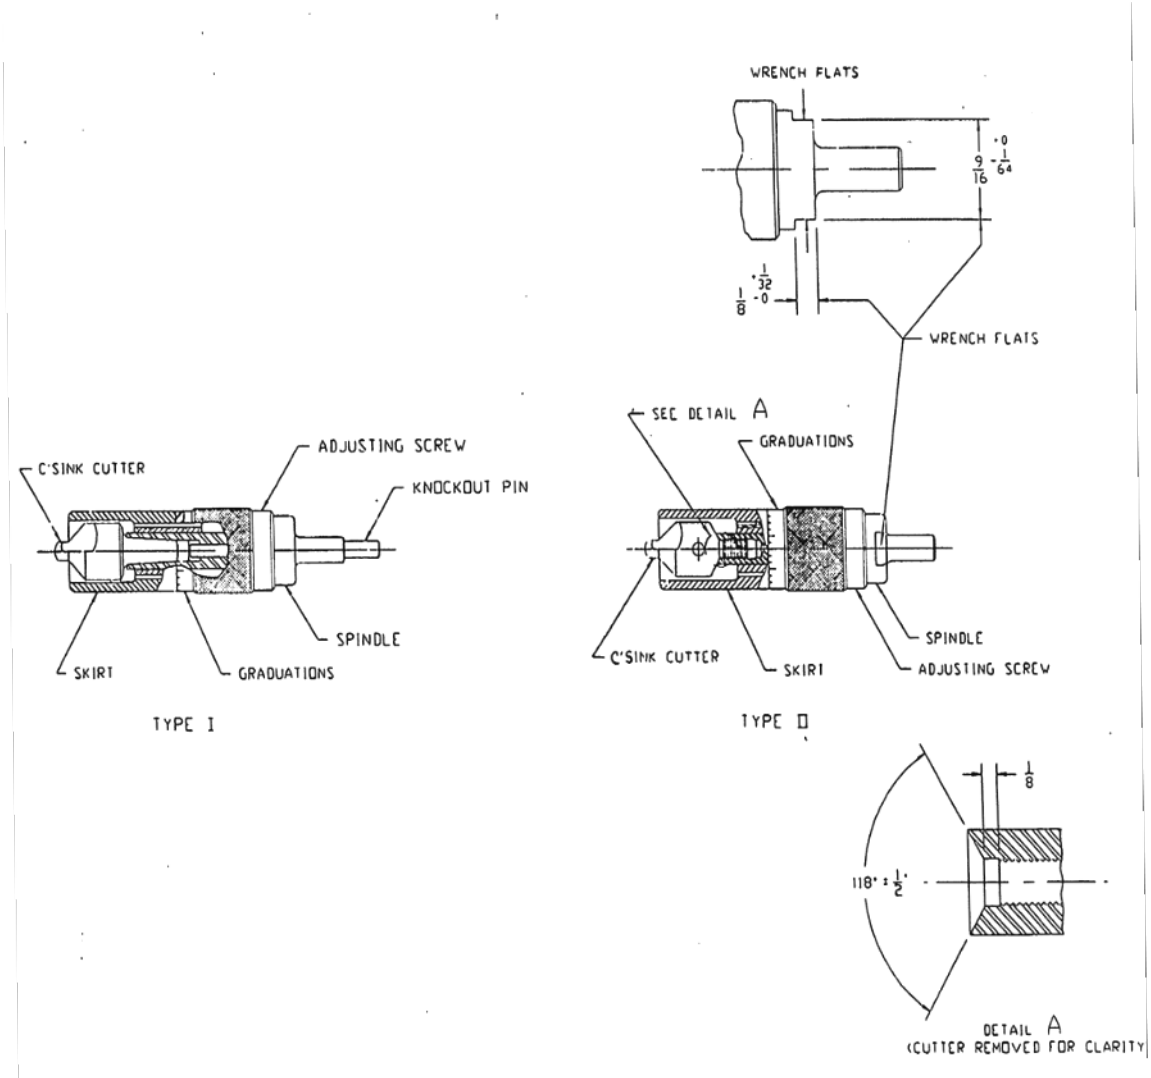

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.

5.4 Performance tests.

5.4.1 Visual and dimensional inspection. Each sample selected shall be visually and dimensionally inspected for conformance with this CID.

5.4.2 Functional test. Each sample selected shall be tested for freedom of spindle rotation. Mount the chucking shank in a rotating spindle and bring in firm contact with a smooth metal surface. Advance the holder spindle approximately 1/4 inch, for firm spindle pre-load and positive footplate pressure, to simulate actual operating condition. Rotate the spindle at 750 and 1,000 revolutions per minute (RPM) respectively for not less than 15 minutes at each spindle speed. Excessive heating, spindle seizure, or unintentional loosening or disengagement of any parts shall be cause for rejection of the representative lot. Lot size will be specified in contract.

5.4.3 Spindle concentricity and adjustment accuracy. After successful completion of tests in 5.3.2, mount each holder in a stationary fixture and inspect the spindle concentricity and cutter depth control accuracy. The internal taper or cutter centering angle, as applicable, shall be concentric with the chucking shank to 0.003 inch total indicator reading (TIR). Adjust the cutter depth control to 0.005 inch increments as marked on the adjusting sleeve for one complete revolution. Actual deviation at each 0.005 inch adjustment shall not exceed 0.001 inch (non-cumulative) with not more than 0.005 inch total deviation for one complete revolution.

5.4.4 Cutting test. Each sample holder shall be subjected to the cutting test. The cutting test shall be performed with the holder mounted in a portable, electrical or pneumatic powered hand tool. Holders shall be subjected to not less than ten repetitive countersink operations in stainless steel sheet, type 302, 8 gage minimum thickness. The countersink used in this test shall be at least 0.406 ±0.005 inch major diameter for all holes. The included countersink angle and the relation of the angle to the reference plane shall be accurate to ±1/2 degree.

6. PACKAGING.

6.1 Preservation, packing, and marking. Requirements for preservation, packing, and marking of containers shall be specified in the contract or order.

7. NOTES.

7.1 Source of documents.

7.1.1 FAR. Electronic copies of the FAR may be obtained from https://www.acquisition.gov.

7.1.2 Government documents. Specifications, standards, and handbooks referenced herein may be obtained at https://quicksearch.dla.mil/.

7.2 National Stock Numbers (NSNs). The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

00-517-6015
00-517-6016
00-897-6457

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.

7.3 Ordering data. Purchasers should select the preferred options permitted herein and should include the following information in procurement documents:

a. Title, number, and date of this CID.
b. When applicable, the appropriate NSN.
c. The number of bid samples.
d. Applicable lot sampling requirements.
e. The applicable type.
f. Product conformance provisions.
g. Packaging requirements.

7.4 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

MILITARY INTERESTS:

Custodians:
Air Force - 184
Army – GL
DLA – GS

Reviewers:
Army – AV
GSA - FAS

CIVIL AGENCY COORDINATING ACTIVITY:

Preparing activity:
Air Force - 184

Agent:
Air Force - 110
(Project: 5133-2022-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:00Z
Check the source to verify that this is the current version before use.