[INCH-POUND]
A-A-59242
June 16, 1998
SUPERSEDING
OO-E-2772
May 14, 1992

COMMERCIAL ITEM DESCRIPTION

EXCAVATORS, CRAWLER MOUNTED, DED, HYDRAULICALLY OPERATED

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description (CID) covers diesel-engine-driven, crawler mounted, hydraulically operated, excavators. The excavators covered by this CID are used in digging or moving loose gravel, sand, or hardpack soil.

2. CLASSIFICATION. The excavators shall be of the following types and sizes as specified (see 7.2):

Type I - Telescoping boom, type.
Type II - Hoe type.

Type	Size	Minimum over the side rated lifting capacity (SAE J 1097)
I	1	6,500 pounds (lb) at 15-foot (ft) (2 948 kilograms (kg) at 4.6 metre (m)) radius and ground level.
I	2	7,500 lb (3 402 kg) at 20-ft (6.1 m) radius and ground level.
II	1	5,000 lb (2 268 kg) at 15-ft (4.6 m) radius and ground level.
II	2	7,000 lb (3 175 kg) at 15-ft (4.6 m) radius and ground level.
II	3	12,000 lb (5 443 kg) at 15-ft (4.6 m) radius and ground level.

NOTE: Radius equals any point through 360 degrees.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Officer In Charge (Code 15E2), Seabee Logistics Center, 4111 San Pedro St., Port Hueneme, CA 93043-4401, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3805

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. This CID consists of diesel-engine-driven, crawler mounted, fully revolving, upperstructure type excavators and allied equipment of conventional design, and heavy-duty construction. The excavators shall be complete with all necessary operating accessories customarily furnished with excavators of these types, whether stipulated herein or not. The excavator shall be capable of traveling over rough ground under adverse or severe conditions.

3.2 Standard commercial product. The excavators shall, as a minimum, be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this CID but which are a part of the manufacturer's standard commercial product, shall be included in the excavators being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Interchangeability. All excavators of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to ensure interchangeability of component parts, assemblies, accessories, and spare parts.

3.4 Safety. The excavators shall comply with PCSA Standard No. 5 and OSHA regulations. All rotating or reciprocating parts and all parts subject to high operational temperature, that are of such a nature or are so located as to become a hazard to the operating or attending personnel, shall be substantially guarded or insulated. The principal platform walking surfaces shall be of an antiskid type. Ladders, steps, and handholds shall be provided on the sides of the excavator cab or superstructure that entrance thereto and exit therefrom may be unhampered and nonhazardous. Engine cooling fans shall be provided with guards.

3.4.1 Noise. When the noise level, measured in accordance with MIL-STD-1474, is greater than 85 decibels (dB(A)), a caution plate shall be permanently posted on the excavator in a conspicuous protected location. The plate shall be clearly visible to all personnel exposed to the excessive noise levels. The caution plate shall read: CAUTION - HEARING PROTECTION REQUIRED. The plate shall have a yellow background with black lettering and plate shall be made of corrosion-resistant material.

3.4.2 Electrical warning decal. An electrical warning decal, in accordance with OSHA requirements, cautioning an operator about operating the excavator near electric power lines, shall be provided.

3.4.3 Strike-hazard. Hazard marking stripes shall be applied to the counterweight. Stripes shall be alternating yellow and black stripes to denote a strike-hazard to personnel on the ground. Colors shall be reflective for night operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3.5 Environmental conditions. The excavators shall start and maintain constant performance characteristics as specified herein under any of the following conditions or combination of conditions:

a. Temperature conditions. In any ambient temperature from - 5 degrees Fahrenheit (°F) to 110 °F (- 20.5 degrees Celsius (°C) to 43.3 °C), except as specified in 3.5b below.
b. Elevation conditions. At any elevation from sea level, barometric pressure 29.92 inches of mercury (101.32 kilopascal (kPa)) and an ambient temperature of not greater than 110 °F, to 5,000 ft (43.3 °C to 1 524 m) with barometric pressure 24.89 inches mercury (84.29 kPa) and a temperature of 100 °F (37.7 °C).

3.6 Upperstructure. The upperstructure shall consist essentially of a cab enclosing the machinery and operator's position, mounted on a fully revolving platform. The upperstructure shall be furnished with work lights at front and rear, with not less than two at each end, located near the outer edges of the machine.

3.6.1 Cab. The cab shall have sufficient windows and glazed doors to permit 270 degrees vision for the operator. All glass shall be of the safety type. The front window shall be arranged for easy opening or removal. Provision shall be made to fold or store the front window clear of the operator. Cab doors, whether of the sliding, folding, or swinging type, shall be adequately restrained from accidentally opening or closing while the excavator is traveling or operating. A comfortable seat for the operator with four-way adjustment shall be furnished. When specified (see 7.2), the cab shall be provided with a fan type defroster and a heater.

3.6.2 Swing stop device. A means capable of locking the upperstructure in position shall be provided. The swing stop controls shall be of the automatic type, with provisions made for easy adjustment. The swing stop and the swing function must be nondirectional.

3.7 Operating controls. Operator controls shall conform to SAE J 1197. All brakes shall be capable of being easily locked or unlocked.

3.8 Hydraulic system. The hydraulic oil reservoir shall be equipped with site level gages to indicate oil level. High pressure hydraulic hoses shall conform to SAE J 517. The following functions shall be hydraulically operated and controlled:

a. Telescoping boom or boom arm.
b. Rotation of bucket or boom tilt.
c. Vertical control of boom.
d. Revolving of upperstructure.
e. Operation of attachments.
f. Forward, reverse drive for each track of crawler undercarriage.

3.9 Boom. The excavator shall be supplied with manufacturer's standard boom with the following minimum characteristics and capabilities when measured in accordance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

SAE J 1193 recommended practice. Boom shall be furnished with work lights, attached to each side, located to illuminate maximum work area.

a. Extended length (AU) not less than 24 ft (7.3 m) for type I, size 1 excavator, and not less than 29 ft (8.8 m) for type I, size 2 excavator.
b. Retracted length (AV) not greater than 14 ft (4.3 m) for type I, size 1 excavator, and not greater than 15 ft 9 inches (4.8 m) for type I, size 2 excavator.
c. Maximum digging depth (AB) not less than 16 ft (4.9 m) (below ground level) for all types and sizes of excavators.
d. Digging reach (AA) not less than 26 ft (7.9 m) for all types and sizes of excavators.
e. Dumping height (BD) not less than 15 ft (4.6 m) for all types and sizes of excavators.
f. Digging through a range around the excavator not less than 360 degrees continuous.
g. Swing shall be continuous.
h. Boom or bucket rotation or tilt (AX) type I, not less than 45 degrees to right and left.
i. Bucket pivot (AS) not less than 150 degrees for all types and sizes.

3.10 Attachments. The following attachments shall be furnished as specified (see 7.2):

	Minimum capacity yd^3	m^3
a. Type I, size 1 excavator:		
Bucket, excavating, 24-inch (610 mm) cutting width	0.3125	(0.24)
Bucket, ditch cleaning, 60-inch (1 524 mm) width	0.75	(0.57)
Bucket, ditch cleaning, 72-inch (1 829 mm) width	1.00	(0.76)
Bucket, excavating, 30-inch (762 mm) width	0.50	(0.38)
Bucket, sidewalk removal, 40-inch (1 016 mm) width		
Blade, grading, 8-ft (2.4 m) width with straight edge		
Boom extension, not less than 4-ft (1.2 m), complete with necessary mounting gear		
b. Type I, size 2 excavator:		
Bucket, excavating, 26-inch (660 mm) cutting width	0.375	(0.29)
Bucket, excavating, 36-inch (914 mm) cutting width	0.625	(0.48)
Bucket, excavating, 46-inch (1 168 mm) cutting width	0.75	(0.57)
Bucket, dredging, 72 inches (1 829 mm)	1.00	(0.76)
Bucket, ditching, cleaning 72 inches (1 829 mm)	1.25	(0.96)
Bucket, concrete pouring	0.50	(0.38)
Bucket, pavement removal, not less than 40 inches (1 016 mm)	0.50	(0.38)
Ripper, single tooth, heavy duty		
Blade, grading 8-ft (2.4 m) width, with straight edge		
Boom extension, not less than 4-ft (1.2 m), complete with necessary mounting gear		
Boom extension, not less than 8-ft (2.4 m), complete with necessary mounting gear		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

	Minimum capacity yd^3	m^3
c. Type II, size 1 excavator:		
Bucket, general purpose 18-inch (457 mm) cutting width	0.32	(0.24)
Bucket, general purpose 22-inch (559 mm) cutting width	0.41	(0.31)
Bucket, general purpose 26-inch (660 mm) cutting width	0.50	(0.38)
Bucket, general purpose 30-inch (762 mm) cutting width	0.59	(0.45)
Bucket, general purpose 34-inch (864 mm) cutting width	0.68	(0.52)
Bucket, general purpose 38-inch (965 mm) cutting width	0.77	(0.59)
Bucket, general purpose 42-inch (1 069 mm) cutting width	0.86	(0.66)
Bucket, general purpose 46-inch (1 168 mm) cutting width	0.95	(0.73)
Bucket, rock purpose 22-inch (559 mm) cutting width	0.43	(0.33)
Bucket, rock purpose 28-inch (711 mm) cutting width	0.58	(0.44)
Bucket, rock purpose 38-inch (965 mm) cutting width	0.82	(0.63)
d. Type II, sizes 2 and 3 excavators:		
Bucket, general purpose 24-inch (610 mm) cutting width	0.50	(0.38)
Bucket, general purpose 30-inch (762 mm) cutting width	0.75	(0.57)
Bucket, general purpose 36-inch (914 mm) cutting width	0.75	(0.57)
Bucket, general purpose 48-inch (1 219 mm) cutting width	1.00	(0.76)
Bucket, rock purpose 24-inch (610 mm) cutting width	0.62	(0.47)
Bucket, rock purpose 29-inch (737 mm) cutting width	0.75	(0.57)
Bucket, rock purpose 35-inch (889 mm) cutting width	0.75	(0.57)
Bucket, rock purpose 42-inch (1 069 mm) cutting width	0.75	(0.57)
Bucket, rock purpose 48-inch (1 219 mm) cutting width	1.13	(0.86)

3.10.1 Hydraulically operated impact hammer. A hydraulically operated impact hammer capable of operating from the excavator's hydraulic system, complete with tool bits as listed shall be provided when specified (see 7.2). The hammer shall meet the following requirements:

a. Energy output per minute	Not less than 750,000 foot pound force (1 016 864 joule).
b. Impact force	Not less than 1,200 lb (544 kg).
c. Impacts per minute	Not less than 500.

3.10.2 Tool bits. The following tool bits shall be provided:

a. Moil point	3 each.
b. Chisel point	1 each.
c. Spade	1 each
d. Tamping plate, not less than 144 square inch (929 square centimetre) face	1 each.

3.10.3 Quick connect-disconnect attachments. A quick-disconnect coupler system shall be fitted to the boom tip and all attachments. Hand tools required shall be furnished with each excavator. Quick-disconnect hydraulic fitting shall be furnished with captive sealing cap, or plugs, or both, to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

prevent contamination entering the system. All attachments shall be permanently marked with the NSN number.

3.11 Lifting capacity and tipping load. Lift capacities shall be calculated and in compliance with SAE J 1097. Loads shall be not greater than 87 percent of hydraulic lifting capacity or 75 percent of tipping capacity. A load chart for the entire digging range must be shown. The minimum rated lift requirement shall be demonstrated at six equally spaced intervals throughout the full 360-degree range.

3.12 Crawler undercarriage. The undercarriage for the excavator shall be a tractor type crawler with heavy-duty frames equipped with lifetime lubricated sealed rollers and idlers, independent reversible, hydrostatic/hydraulic drive motors (each track), enclosed recoil spring, hydraulic track adjusters, sealed link track chain with heavy-duty, triple-base, semi-grouser pads, and track guides.

3.12.1 Brakes. Brakes shall be spring-set, automatic hydraulic release with travel, and shall hold excavator stationary on a 55-percent grade.

3.12.2 Speed. The excavator shall be capable of traveling on a level road at a maximum speed of not less than 1.5 miles per hour (mph) (2.41 kilometre per hour (km/h)).

3.12.3 Gradeability. The excavator shall be capable of negotiating a 55-percent grade. The excavator shall be capable of crossing an obstruction such as a timber or pipeline, of not less than 10 inches (254 mm) in diameter, lying upon a flat surface. The excavator, with the upperstructure faced in the same longitudinal position, shall be capable of negotiating the obstruction in forward and reverse gears at not less than 1 mph (1.61 km/h).

3.13 Engine. The excavator shall be furnished with the manufacturer's standard diesel engine, which shall meet EPA regulations. The engine shall operate on the grade of diesel fuel specified (see 7.2). The fuel tank shall be of sufficient capacity to operate for not less than 8 hours at full load rating. The engine shall be equipped with a two-stage dry-type air cleaner. The manufacturer's standard instrument panel shall include the following:

a. An hourmeter.
b. Gages or electronic indicator lights/buzzers.
c. High water temperature.
d. Low oil pressure.
e. High hydraulic oil temperature warnings.
f. Battery voltage or charge indicator.
g. Fuel level gage.

3.13.1 Cold starting system. Excavator diesel engine shall be capable of starting in temperatures of - 5 °F (- 20.5 °C), with or without the use of a cold start device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3.13.2 Battery(s). Battery(s) shall be wet charged, furnished with electrolyte, and provided with sealed caps to prevent the intrusion of atmospheric moisture.

3.14 Toolbox. When specified (see 7.2), the excavator shall be provided with a lockable metallic toolbox. The toolbox shall be securely fastened to the excavator in a readily accessible and protected location.

3.15 Lifting and tiedown attachments. When specified (see 7.2), the excavator shall be equipped with lifting and tiedown attachments. Lifting and tiedown attachments shall conform to MIL-STD-209. A nonferrous transportation plate shall be provided and mechanically attached to the excavator. Transportation plates shall be inscribed with a diagram showing the lifting attachments and lifting slings, the capacity of each attachment, and the required length and size of each sling cable. A silhouette of the item furnished showing the center of gravity shall be provided on the transportation plate. Tiedown attachments may be identified by stenciling or other suitable marking. Tiedown marking shall clearly indicate that the attachments are intended for the tiedown of the excavator on the carrier when shipped.

3.16 Air transportability configuration. When specified (see 7.2), the excavator shall be transportable by aircraft in a roll-on/roll-off configuration in accordance with MIL-STD-1791. The air transportability configuration shall be for air transport by C-5, C-17, C-130, or C-141 aircraft as specified (see 7.2).

3.17 Rail impact. When specified (see 7.2), the excavator shall meet the rail impact requirements of MIL-STD-810.

3.18 Instruction plates. The excavator shall be equipped with instruction plates suitably located, describing any special or important procedures to be followed in operating and servicing the equipment. Plates shall be of a material which will last and remain legible for the life of the equipment. Plates shall be securely affixed to the equipment with nonferrous screws, bolts, or rivets.

3.19 Cleaning, treatment, and painting. Surfaces normally painted in good commercial practice shall be cleaned, treated, and painted as specified herein. The color of the finish coat shall be as specified (see 7.2). Surfaces to be painted shall be cleaned and dried to ensure that they are free from contaminants such as oil, grease, welding slag and spatter, loose mill scale, water, dirt, corrosion product, or any other contaminating substances. As soon as practicable after cleaning and before any corrosion product or other contamination can result, the surfaces shall be prepared or treated to ensure the adhesion of the coating system. The painting shall consist of at least one coat of primer and one finish coat. The primer shall be applied to a clean, dry surface as soon as practicable after cleaning and treating. Painting shall be with manufacturer’s current materials according to manufacturer’s current process and the total dry film thickness shall be not less than 2.5 mil (0.06 mm) over the entire surface. The paint shall be free from runs, sags, orange peel, or other defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3.20 Lubrication. Means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. Hydraulic lubrication fittings shall be in accordance with SAE J 534. Where use of high-pressure lubricating equipment, 1,000 pound-force per square inch (6 895 kPa) or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location. The unit shall be lubricated prior to delivery with type of lubricant specified in the operator's manual and grade of lubricant recommended for ambient temperature at the delivery point. The unit shall be conspicuously tagged to identify the lubricants and their temperature range.

3.21 Servicing and adjusting. Prior to acceptance of the excavators by the Government, the contractor shall service and adjust the excavators for immediate operational use as required in the operator's manual. The servicing and adjusting shall include at least the following:

a. Proper functioning of all lighting and electrical systems.
b. Adjustment of engine (when required).
c. Adjustment of brakes (when required).
d. Complete lubrication with grades of lubricants recommended for ambient temperature at the delivery point.
e. Cooling system filled to capacity with a clean solution of equal parts by volume of water and antifreeze (ethylene glycol). The excavators shall be conspicuously tagged to identify the lubricants and their temperature range.

3.22 Identification plate. An identification plate will be furnished by the contracting officer for each excavator. The contractor shall stamp all necessary data in the blank spaces of the plate provided for that purpose. The plate shall be affixed to each excavator in a conspicuous place with nonferrous screws, rivets, or bolts. The applicable nomenclature contained in the contract item description shall be placed in the top blank.

3.23 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of ASTM SI-10 and all other requirements of this commercial item description including form, fit and function are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING. The preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Source of documents.

7.1.1 Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

7.1.2 The Federal Acquisition Regulation (FAR) and Occupational Safety and Health Administration (OSHA) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.3 ASTM Standards are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.1.4 PCSA Standards are available from the Power Crane and Shovel Association, Marine Plaza, Suite 1700, 111 East Wisconsin Avenue, Milwaukee, WI 53202.

7.1.5 SAE Standards and Recommended Practices is available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.

7.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CID.
b. Type and size of excavator required (see 2.).
c. When defroster and heater for revolving upperstructure cab is required (see 3.6.1).
d. Attachments required for each size of excavator (see 3.10).
e. When a hydraulically operated impact hammer and tool bits are to be provided (see 3.10.1).
f. Grade of diesel fuel engine is to operate on (see 3.13).
g. When a toolbox is provided (see 3.14).
h. When lifting and tiedown attachments are required (see 3.15).
i. When the excavator is to be configured for air transportation. Type of aircraft for which excavator is to be configured (see 3.16).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

j. When the excavator is to be subjected to the rail impact test of MIL-STD-810 (see 3.17).
k. Color of finish coat (see 3.19).

7.3 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PIN used for items acquired to this description are created as follows:

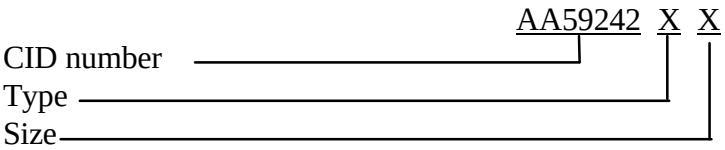

PIN codes:

1 = Type 1
2 = Type 2

A = Size 1
B = Size 2
C = Size 3

7.4 Supersession data. This commercial item description replaces Federal Specification OO-E-2772, dated May 14, 1992.

7.6 Classification cross reference. Classifications used in this commercial item description (see 2.) are identical to those found in the superseded Federal Specification OO-E-2772.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD1

Review Activities:
Army - MT
DLA-CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:
Navy - YD1

(Project 3805-0021)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** A-A-59242	**2. DOCUMENT DATE (YYMMDD)** 980616

3. DOCUMENT TITLE

EXCAVATORS, CRAWLER MOUNTED, DED, HYDRAULICALLY OPERATED

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME R. E. PAMPLONA	b. TELEPHONE *Include Area Code)* (1) Commercial 805-982-5843 (2) AUTOVON 551-5843
c. ADDRESS *(Include Zip Code)* OFFICER IN CHARGE, SEABEE LOGISTICS CENTER (CODE 15E2), 4111 SAN PEDRO ST. PORT HUENEME, CA 93043-4410	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil/Document Id: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.