[INCH-POUND]
A-A-59247
June 16, 1998
SUPERSEDING
GGG-D-2782
June 11, 1991

COMMERCIAL ITEM DESCRIPTION

DRIVE, POWER, PORTABLE; FOR PIPE AND BOLT THREADING, ELECTRIC (WITH ACCESSORIES)

The General Services Administration has authorized the use of this commercial item description for all Federal agencies.

1. SCOPE. This commercial item description (CID) covers hand-held, and stand-mounted power drives powered by integral or separately mounted electric motors for cutting threads on pipe and bolt stock. Included are optional items to tailor the power drive to perform various functions. The power drives provide rotational power to turn pipe and bolt stock or turn geared threaders for threading, cutting, and reaming pipe. The type I is a hand-held drive which can also be adapted for turning large valves and turning geared threaders. Type II is a portable power drive unit which is normally bolted to a portable stand and used for threading pipe and bolt stock using a mounted carriage with attached die-heads, reamer, and cutter, or coupled to a geared threader. Both power drive units are intended for use in the shop or on the construction site due to the portability.

2. CLASSIFICATION. The power drives covered by this CID shall be of the following types as specified (see 7.2):

TYPES

Type I	-	Hand-held.
Type II	-	Stand-mounted.
Type III	-	Accessories only (without power drive).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Officer In Charge (Code 15E2), Seabee Logistics Center, 4111 San Pedro St., Port Hueneme, CA 93043-4410, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3450

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The power drive units shall be of the types specified herein.

3.1.1 Type I. The type I power drive shall consist of a portable frame, integral motor, control, and supply cord; gearing and provisions for mounting and supplying power to the die-head or other attachments.

3.1.2 Type II. The type II power drive shall consist of a housing, gearing, drive motor, control, and supply cord. The power drive shall also have a spindle, rear centering chuck, front gripping check, support or extension arms or way rods.

3.1.3 Type III. The type III shall consist of only the accessories or accessory sets for type I or type II power drive as specified (see 7.2). The accessories shall comply with the requirements specified herein.

3.2 Standard commercial product. The power drive shall, as a minimum, be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this CID but which are a part of the manufacturer's standard commercial product, shall be included in the power drive being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Interchangeability. All power drives of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to ensure interchangeability of component parts, assemblies, accessories, and spare parts.

3.4 Design. Types I and II power drives shall be designed to be adapted by accessories to standard die-heads and geared threaders for cutting threads on pipe and boltstock. Type I shall include a ring gear in which the die-head or adapter is mounted. This gear shall be mounted on sleeve or journal bearings and driven by the enclosed motor through a gear reduction. The gear shall weigh not more than 45 pounds (lb) (20 kilogram (kg)) with one die-head and adapter included. Type II shall be a self-contained, fully enclosed assembly with necessary reduction gears, a cam-action rear centering device adjustable from 0.125- through 2-inch (3.175 millimetre (mm) through 51 mm). It shall have an adjustable positive grip drive-chuck capable of operation either with machine or geared die-heads. The drive-chuck shall be adjustable up to 2-inch (51 mm) diameter pipe size and shall be suitable for operation with a universal drive shaft. The drive-chuck shall be the wrenchless type. Jaws of the drive chuck shall have easily replaceable jaw inserts for when the jaw teeth become worn. Type II shall weigh not more than 100 lb (45 kg) (net weight without die-head, dies, adapters, stand, cutter, reamer or other accessories).

3.5 Maintainability. Design and configuration of the power drives, accessories, and adjustment features shall ensure that maintenance of operational capability and accuracy will be reduced to the simplest form or procedures. The operation maintenance will require a minimum of skills and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

common maintenance equipment. Instructions shall be provided for disassembly, repair, assembly, and adjustment and shall be clear, concise, and definitive in application. The power drive and component parts requiring lubrications, adjustment, cleaning, and operator maintenance shall be accessible without disassembly or removal of parts or components, such items as safety covers or guards excluded.

3.6 Performance.

3.6.1 Type I. The type I power drives shall turn the drop-head die-head with dies and cut quality threads on steel pipe 0.125-inch through 2-inch (6 mm through 50 mm) diameter. The type I shall turn the geared threader to produce threads on steel pipe 2.5-inch through 6-inch (65 mm through 150 mm) diameter. With the proper dies, it shall cut metric threads on steel pipe or conduit 0.125-inch through 2-inch (6 mm through 50 mm) diameter. It shall also turn dies to cut threads on steel bolt stock from 0.25-inch through 1-inch (8 mm through 25 mm) diameter. When die-heads and dies are provided as part of the unit, the threads produced shall conform to ANSI B18.2.1, ISO 7/1, 68, and 261, as applicable.

3.6.2 Type II. The type II power drives shall turn pipe and bolt stock for threading with die-head and dies mounted on a moveable carriage attached to the power drive. It shall turn pipe for cutting and reaming with the cutter and reamer mounted on a moveable carriage. The type II shall turn geared threaders short coupled or long coupled to the power drive. Steel pipe from 0.125-inch through 2-inch (6 mm through 50 mm) diameter and bolt stock from 0.25-inch through 2-inch (8 mm through 50 mm) diameter shall be threaded by the carriage mount (machine mount dies). Steel pipe from 2.5-inch through 6-inch (65 mm through 150 mm) diameter shall be threaded by geared threaders. When die-heads and dies are provided as part of the unit, the threads produced shall conform to ANSI B18.2.1, ISO 7/1, 68, and 261, as applicable.

3.7 Construction. The units shall be constructed to withstand the strains and vibrations encountered in normal start-stop and turning or threading operations. The body shall enclose the power drives moving parts and shall be of a suitable metal, either cast or fabricated. The type I power drive body shall consist of a separate or integral housing for the drive motor mounted to the body. The type II threader shall include a separate body or housing for the drive motor with an attached base with not less than four mounting holes for mounting to a stand. The type II housing shall include support or extension bars or way rods on which the attachments are to be mounted.

3.7.1 Motor. The motor shall be a reversible universal type rated at not less than 0.5 horsepower (3.7 watt) before gear reduction, 115/230 volts alternating current (Vac), 25 to 60 Hertz. The type II spindle speed shall be not less than 35 revolutions per minute standard. Unless otherwise specified (see 7.2), the motor internal wiring shall be connected for 115Vac operation.

3.7.1.1 Power cord. The power cord shall be not less than 8 feet (2.4 metre (m)) long, type SO or ST, no. 16 AWG or larger, copper, stranded, with 3 conductors. The plug shall be a 3-wire grounding type. The power cord shall otherwise conform to NFPA no. 70-400. Grounding shall conform to NFPA no. 7-250.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3.7.1.2 Motor control. The motor control shall be a 3-position switch rated for the motor full load current. The switch for type I shall be the momentary type. The switch may be a combination directional control and on-off momentary type. The switch shall be mounted convenient to the operator and protected against accidental starting. The switch shall be marked to indicate FORWARD, OFF, and REVERSE positions. Type II shall include a momentary OFF and ON foot switch with a switch shield in addition to the Forward-Off-Reverse switch. The shield shall be oversize to accommodate safety-toe shoes. A guard to prevent unintentional operation of the treadle shall be included.

3.8 Power drive attachments, components, and material. Types I and II power drives, when augmented from options covered in 3.9 through 3.11.7, can be tailored to perform a variety of functions. Augmented items shall be considered as part of the power drive unit when selected for a specific contract or order. Augmented items shall be compatible with the complete unit for fit and function.

3.9 Threading attachments for type I. When specified (see 7.2), threading attachments for type I shall include the die-heads, dies, die-head adapter (for bolt threading die-head), adapter (gear threader), support (torque) arm, and carrying case(s). Dies for pipe threading shall be the die segment insert type. Bolt dies for the drop-head may be the button type.

3.9.1 Die-head and dies. Die-head and dies include the drop-head die-head with alignment guide, and die inserts for threading pipe and bolt stock in the inch and ISO metric system (pipe threads 0.125-inch through 2-inch (6 mm through 50 mm) and 0.630-inch through 1.900-inch (16 mm through 48 mm) diameter). Threads produced shall conform to ANSI B18.2.1 or ISO 7/1, as appropriate.

3.9.2 Adapters. When adapters are required, the adapters shall adapt the bolt threading die-head, and the gear threader to the type I power drive.

3.9.3 Support arm. The support arm shall clamp onto the work to resist the torque of the type I when threading.

3.9.4 Carrying case. Carrying case(s) shall be provided for the type I power drive, adapters, and support arm, and for pipe and bolt die-heads and dies. The case(s) shall include latches and partitions or nests to keep contents separated and in location.

3.10 Threading attachments for type II. When specified (see 7.2), threading attachments for type II shall include a carriage with lever arm, reamer, cutter, dies, and die-heads (machine die-heads).

3.10.1 Carriage. The carriage mounts on the support arm(s) of the power drive and provides a moveable base for the reamer, cutter, and die-head. Increased mechanical leverage is provided by the lever arm to move the carriage laterally for threading and reaming operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3.10.2 Reamer. The reamer is attached to the carriage at a pivot point to permit rotating the reamer into position for reaming the pipe. The reamer shall be of the straight-fluted cone type.

3.10.3 Cutter. The cutter is attached to the carriage at a pivot point to permit rotating the cutter into position for cutting the pipe. The cutter shall be the full floating wheel type.

3.10.4 Dies and die-head. Dies and die-heads include the self-opening, and quick-opening (universal) die-heads with die segment inserts. Automatic opening die-heads must be manually opened in size 0.375-inch (9.525 mm) IPS and smaller.

3.10.4.1 Self-opening die-head. The closing movements shall be controlled manually, opening shall be controlled both manually, and automatically when the full thread is complete. Provisions for adjustment of dies to produce oversize and undersized threads shall be included.

3.10.4.2 Quick-opening (universal) die-head. The opening and closing movements shall be controlled manually and the die-head shall include provisions for adjustment of dies to produce oversize and undersize threads.

3.11 Miscellaneous threading components, attachments, and accessories. Items selected from this group are intended as options to augment either the type I or type II power drive or selected individually for replacement of broken, or worn-out items of a unit or to expand the function of an existing unit. When individual items are requisitioned and are not part of an order with a power drive, the make and model of the unit the item is intended to fit must be indicated to ensure compatibility. When specified (see 7.2), items selected include geared threaders with dies, drive bar, nipplechuck, and adapters for threading short and close pipe nipples, and bolts, a tool stand with tray, pipe support stand, oiler, cutting oil, and ratchet with handle.

3.11.1 Geared pipe threader. The geared pipe threader is powered by a separate power drive through a short or long drive shaft. The threader is adjustable from diameters 2.5-inch through 4-inch range or 4-inch through 6-inch range (64 mm through 102 mm or 102 mm through 152 mm) with one set of dies in each range. The geared threader is attached to the drive unit for short couple or supported on the pipe to be threaded for long couple. A safety device to prevent accidental jamming, and an integral adjustable guide to maintain pipe alignment shall be included. The geared threaders shall be adjustable for oversize and undersize (NPSM) threads.

3.11.2 Dies. The dies include pipe and bolt dies in the inch and IS metric systems to fit the self-opening and quick-opening (universal) die-heads, and geared threader. Dies shall be of high speed steel and shall cut threads conforming to ANSI B18.2.1 or ISO 7/1 or 261, as applicable. Dies shall be hardened to a hardness range of Rockwell C58 to C66.

3.11.3 Chuck and adapters for nipples and bolts. The nipple-chuck is attached to the main chuck of the power drive. Nipple and bolt adapters are attached to nipple-chuck for holding and turning short and close nipples and bolt stock for threading. Threads are cut by the dies provided for the die-heads. Threads cut by adapters shall conform to ANSI B18.2.1 or ISO 7/1 or 261, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3.11.4 Tool stand. The tool stand shall be designed to support the type II power drive during normal threading operations, without buckling, distorting, or moving. Provisions for bolting the power drive to the stand shall be included. The height of the stand shall be such as to permit threading operations by an operator who works in the standing position. A tray or shelf shall be mounted between the legs to afford additional rigidity to the stand and permit storage of the tools and parts. The stand shall be designed for easy assembly and disassembly.

3.11.5 Pipe support stand. The adjustable stand shall be capable of supporting pipe without tipping or rocking, yet allowing the pipe to rotate over rollers mounted in the crotch of the stand. The stand shall have a vertical adjustment range from 24 to 32 inches (610 to 813 mm) and be of height suitable for operating with type II while mounted on the tool stand and close coupled to the gear threader. Capacity of the stand shall be for 10-inch (254 mm) diameter pipe.

3.11.6 Oiler. The oiler for oiling the dies, when threading, shall include a hand pump attached to a pan by an oil-resistant hose (not less than 4-foot (1.2 m) long). The chip pan serves as an oil reservoir and catch for oil run-off to prevent oil waste and permit the reuse of the oil. The pan shall provide screening of oil run-off before the oil is drawn from the pan by the pump. The pan shall include a hinged cover.

3.11.7 Ratchet and handle. The ratchet shall have a 1-inch (25 mm) square drive socket to fit a pinion shaft 0.96875-inch (25 mm) square on the geared pipe threader. The square socket drive hole extends through the ratchet drum so that the ratchet may be placed on the pinion shaft through either side of the drum. The ratchet shall provide forward and reverse operation either by control of the ratchet pawls or by inserting the driven shaft in the socket-drive-hole on the opposite side of the ratchet drum. Ratchet and handle shall withstand the force on the end of the handle to produce 200 foot pounds (lbf·ft) (271 Newton metre (N·m)) torque on a shaft inserted in the square drive socket. The handle and ratchet combined shall measure between 30 and 36 inches (762 and 914 mm) long with the handle not less than 27 inches (686 mm) long. The ratchet drum, frame, and pawl assembly shall not fail when subjected to not less than 400 lbf·ft (542 N·m) torque. Unless otherwise specified (see 7.2), the ratchet and handle shall weigh not less than 9 lb (4 kg). The handle shall be threaded on one end for attaching to the ratchet and to permit removal of the handle from the ratchet.

3.11.8 Cutting oil. The thread cutting oil shall provide cooling to tools, and work and aid in the cutting of smooth threads by reducing friction. The oil shall be nonfoaming, nontoxic, and noncorrosive to steel, copper, and tool parts.

3.12 Instruction plates. The power drives shall be equipped with instruction plates suitably located, describing any special or important procedures to be followed in operating and servicing the equipment. Plates shall be of a material which will last and remain legible for the life of the equipment. Plates shall be securely affixed to the equipment with nonferrous screws or bolts of not less than 0.125-inch (3.175 mm) diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

3.13 Identification plate. Unless otherwise specified (see 7.2), the contracting officer will furnish to the Government inspector the required identification plates. The contractor will be required to stamp the necessary data in the blank spaces thereon and securely affix said plates in a conspicuous place on each unit, assembly, or subassembly, and parts as directed by the Government inspector. Screws, rivets, or bolts shall be used to affix the plates. Nomenclature shall be "DRIVE-POWER, PORTABLE: FOR PIPE AND BOLT THREADING, HAND HELD, ELECTRIC" or "DRIVE-POWER, PORTABLE: FOR THREADING, STAND MOUNTED, ELECTRIC" as appropriate.

3.14 Painting. Unless otherwise specified (see 7.2), painting and finishing of the power drive shall be in accordance with the contractor's standard practice provided the following minimum criteria are met or exceeded: All surfaces to be painted shall have been cleaned to be free of all foreign matter prior to painting.

3.15 Spare parts and maintenance tools. When specified (see 7.2), spare parts and maintenance tools shall be furnished.

3.16 Gears. As to design and fit, spur, pinions, worm, and bevel gears shall be machined in the inch, or SI metric system (manufacturer's option), and shall otherwise conform to AGMA 201.02, 207.06, 2005-B, 6010-E, 6030-C, and 6034-A as appropriate.

3.17 Workmanship. Workmanship of the power drive and accessories shall be of the best quality prevailing among manufacturers of this type of equipment. The items shall be free from all imperfections which will adversely affect the general appearance, function, and serviceability.

4. REGULATORY REQUIREMENTS.

4.1 Materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR). Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this commercial item description are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest version of ASTM SI-10 (IEEE/ASTM SI-10), and all other requirements of this commercial item description including form, fit, and function are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING. The preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Source of documents.

7.1.1 The Federal Acquisition Regulation (FAR) and Code of Federal Regulations may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.2 AGMA Standards are available from the American Gear Manufacturers' Association, 1500 King Street, Suite 201, Alexandria, VA 22314.

7.1.3 ANSI Standards are available from the American National Standards Institute, 11 West 42nd Street, New York, NY 10036.

7.1.4 ASTM Standard is available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.1.5 IEEE Standard is available from the Institution of Electrical and Electronics Engineers, IEEE Service Center, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331.

7.1.6 NFPA Codes are available from the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.

7.1.7 SAE Standards and Recommended Practices is available from the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.

7.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, date of this CID.
b. Type of power drive (see 2).
c. When type III is other than as specified (see 3.1.3).
d. When motor wiring is other than as specified (see 3.7.1).
e. Threading attachments, if required, for type I (see 3.9, 3.11 and tables I, II, III, IV, V, VI, VIII and PIN dash numbers on tables).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

1. Attachment set for type I or II (see table I).
2. Pipe die-head (see 3.9.1 and tables I, II, III, and IV).
3. Pipe dies (see 3.9.1 and tables II through VIII).
4. Bolt die-head (see 3.9.2 and tables V and VIII).
5. Bolt die-head adapter (see 3.9.2 and table IV).
6. Geared threader adapter (see 3.9.2 and table VIII).
7. Support (torque) arm (see 3.9.3 and table VI).
8. Carrying cases (see 3.9.4 and table VI).

f. Threading attachments, if required, for type II (see 3.10, 3.11, and table VII PIN dash numbers).

1. Carriage (see 3.10.1 and tables VII through VIII).
2. Reamer (see 3.10.2 and table VII).
3. Cutter (see 3.10.3 and table VII).
4. Dies (see 3.10.4 and table VII).
5. Die-head (see 3.10.4.1, 3.10.4.2, and table VII).

g. Miscellaneous threading components, attachments, and accessories, if required (see 3.11 and table VIII PIN dash numbers).

1. Geared threader (see 3.11.1 and table VIII).
2. Drive bar for geared threader (see 3.11.1 and table VIII).
3. Dies, inch or metric (see 3.11.2 and table VIII).
4. Chuck and adapters for nipples and bolt (see 3.11.3 and table VIII).
5. Tool stand (see 3.11.4 and table VIII).
6. Pipe support stand (see 3.11.5 and table VIII).
7. Oiler (see 3.11.6 and table VIII).
8. Ratchet and handle (see 3.11.7 and table VIII).
9. Cutting oil (see 3.11.8 and table VIII).

h. When ratchet and handle weigh less than 9 lb (4 kg) (see 3.11.7).
i. When identification plates are furnished to the Government other than by the contracting officer (see 3.13).
j. When painting and finishing of the power drives is other than contractor’s standard practice (see 3.14).
k. When spare parts and maintenance tools are furnished (see 3.15).

7.3 Supersession data. This CID replaces Federal Specification GGG-D-2782, dated June 11, 1991.

7.4 Metric units. The values stated in either inch-pound units or SI units are to be regarded separately as standard. Within the text, the SI units are shown in brackets. The values stated in each system are not exact equivalents; therefore, each system should be used independently of the other. Combining values from the two systems may result in non-conformance with the standard.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

7.5 Handbook of instructions. When specified, the contractor should furnish two copies of the manufacturer's standard handbook.


7.6 Part Identification Number (PIN). Items covered by this CID are identified by a PIN which is derived using the following numbering system. The PIN permits the identification of the power drives separate from accessories, power drives in combination with one individual accessory, and in combination with sets of accessories, and single accessories and sets of accessories separate from the power drives. When the power drives need to be identified with more than one individual accessory, but not a complete set of accessories, each of the items should be identified as separate and unique items.

7.6.1 PIN makeup. The PIN is arrived at by combining this CID number (AA59247) and the type power drive dash number and corresponding PIN dash numbers from tables I through VIII for the specific item required.

Example 1: AA59247-1-A00 (this would indicate that the type I power drive was required) (without accessories).

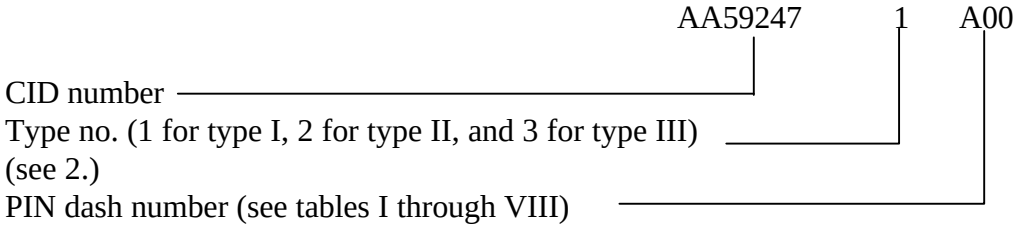

Example 2: AA59247-1-B02 (this would indicate that the die-head for type I power drive was required).

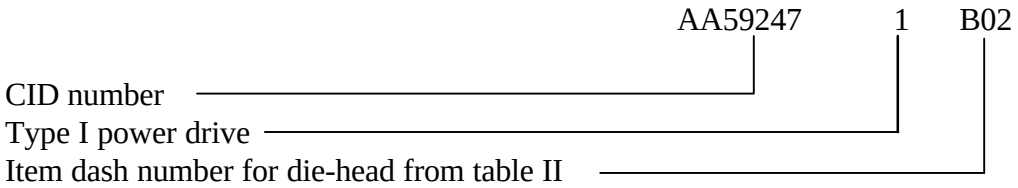

7.7 Subject term (key word) listing.

Hand-held drive
Stand-mounted

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

TABLE I. Combination of attachment sets for type I and type II power drives.

Item description	PIN dash no.
POWER DRIVE WITH NO ATTACHMENTS	A00
ATTACHMENT SET COMBINATION - TYPE I POWER DRIVE:	
Attachment sets B01 & C01	A01
Attachment sets B01 & D01	A02
Attachment sets B01 & E01	A03
Attachment sets B01 & F01	A04
Attachment sets C01 & D01	A05
Attachment sets C01 & E01	A06
Attachment sets C01 & F01	A07
Attachment sets D01 & E01	A08
Attachment sets D01 & F01	A09
Attachment sets E01 & F01	A10
Attachment sets B01, C01, & D01	A11
Attachment sets B01, C01, & E01	A12
Attachment sets B01, C01, & F01	A13
Attachment sets B01, D01, & E01	A14
Attachment sets B01, D01, & F01	A15
Attachment sets B01, E01, & F01	A16
Attachment sets C01, D01, & E01	A17
Attachment sets C01, D01, & F01	A18
Attachment sets C01, E01, & F01	A19
Attachment sets D01, E01, & F01	A20
Attachment sets B01 C01, D01, & E01	A21
Attachment sets B01 C01, D01, & F01	A22
Attachment sets B01 C01, E01, & F01	A23
Attachment sets B01 D01, E01, & F01	A24
Attachment sets C01 D01, E01, & F01	A25
Attachment sets B01 C01, D01, & F01	A26
ATTACHMENT SET COMBINATION - TYPE II POWER DRIVE:	
Attachment sets G01 & H01	A027

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

TABLE II. Pipe (inch) threading attachments for type I power drive.

Item name	Type[1/]	Size[2/]	PIN dash no.
Complete set of all accessories in the table.			B01
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	0.125-inch - 27 TPI	B02
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	0.25- inch - 18 TPI	B03
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	0.375-inch - 18 TPI	B04
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	0.5-inch - 14 TPI	B05
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	0.75-inch - 14 TPI	B06
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	1.0-inch - 11.5 TPI	B07
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	1.25-inch - 11.5 TPI	B08
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	1.5-inch - 11.5 TPI	B09
Die-head, pipe, high speed, complete	Right hand NPT (segment insert)	2.0-inch - 11.5 TPI	B10

NOTES:
1/ NPT = National Pipe Thread.
2/ TPI = Threads Per Inch.

TABLE III. Conduit (metric) threading attachments for type I power drive.

Item name	Type [1/]	Diameter-thread [2/] pitch	PIN dash no.
Complete set of accessories in the table.			C01
Die-head, conduit, complete	Conduit, IS, taper, R-1.5 (segment insert)	16 mm - 1.5 mm TP	C02
Die-head, conduit, complete	Conduit, IS, taper, R-1.5 (segment insert)	20 mm - 1.5 mm TP	C03
Die-head, conduit, complete	Conduit, IS, taper, R-1.5 (segment insert)	25 mm - 1.5 mm TP	C04
Die-head, conduit, complete	Conduit, IS, taper, R-1.5 (segment insert)	32 mm - 1.5 mm TP	C05
Die-head, conduit, complete	Conduit, IS, taper, R-1.5 (segment insert)	40 mm - 1.5 mm TP	C06

NOTES:
1/ IS = International Standards, R = Taper, external.
2/ TP = Thread Pitch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

TABLE IV. Pipe (metric) threading attachments for type I power-drive.

Item name	Die [1/] thread type, and designator	Pipe size nominal (mm)	Thread designator (inch)	Thread pitch (mm)	PIN dash no.
Complete set of accessories in table.					D01
Die-head, pipe, high-speed complete	Pipe (segment insert) IS, taper, R-0.125	6	0.125-inch	0.907	D02
Die-head, pipe, high-speed complete	Pipe (segment insert) IS, taper, R-0.25		0.25-inch	1.337	D03
Die-head, pipe, high-speed complete	Pipe (segment insert) IS, taper, R-0.375	10	0.375-inch	1.337	D04
Die-head, pipe, high-speed complete	Pipe (segment insert) IS, taper, R-0.5	15	0.5-inch	1.814	D05
Die-head, pipe, high-speed complete	Pipe (segment insert) IS, taper, R-0.75	20	0.75-inch	1.814	D06
Die-head, pipe, high-speed, complete	Pipe (segment insert), IS, taper R-1.0	25	1.0-inch	2.309	D07
Die-head, pipe, high-speed, complete	Pipe (segment insert), IS, taper R-1.25	32	1.25-inch	2.309	D08
Die-head, pipe, high-speed, complete	Pipe (segment insert), IS, taper R-0.5	40	1.5-inch	2.309	D09
Die-head, pipe, high-speed, complete	Pipe (segment insert), IS, taper R-2.0	50	2.0-inch	2.309	D10

NOTE:
1/ IS = International Standard, R = Taper, external.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

TABLE V. Bolt (inch) threading attachments for type I power drive.

Item name	Type [1/]	Size (inch)[2/]	PIN dash no.
Complete set of accessories in table.			E01
Die-head, bolt, complete	RH, UNC (button or insert)	0.25-inch - 20 TPI	E02
Die-head, bolt, complete	RH, UNC (button or insert)	0.3125-inch - 18 TPI	E03
Die-head, bolt, complete	RH, UNC (button or insert)	0.375-inch - 16 TPI	E04
Die-head, bolt, complete	RH, UNC (button or insert)	0.4375-inch - 14 TPI	E05
Die-head, bolt, complete	RH, UNC (button or insert)	0.5-inch - 13 TPI	E06
Die-head, bolt, complete	RH, UNC (button or insert)	0.5625-inch- 12 TPI	E07
Die-head, bolt, complete	RH, UNC (button or insert)	0.625-inch- 11 TPI	E08
Die-head, bolt, complete	RH, UNC (button or insert)	0.75-inch 10 TPI	E09
Die-head, bolt, complete	RH, UNC (button or insert)	0.875-inch- 9 TPI	E010
Die-head, bolt, complete	RH, UNC (button or insert)	1.0-inch- 8 TPI	E011
Die-head adapter	Bolt die-head		E012

NOTES:
1/ Right hand, UNC = Unified National Course.
2/ TPI = Threads Per Inch.

TABLE VI. Miscellaneous attachments for type I power drive.

Item name	Type	Size	PIN dash no.
Complete set of accessories in the table.			F01
Support arm	Clamp-on	2-inch capacity	F02
Adapter	Gear threader	Standard	F03
Carrying case	Metal	For type I power-drive and attachments	F04
Carrying case	Metal	For type I dies and die heads	F06

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

TABLE VII. Threading attachments for type II power drive.

Item name	Type [1/]	Size [2/]	PIN dash no.
Complete set of accessories in the table.			G01
Carriage with lever arm	For die-head, reamer, and cutter	Standard	G02
Reamer	Straight flute, carriage mount	See 3.10.2	G03
Cutter	Wheel, floating, carriage mount	See 3.10.3	G04
Die-head (inch)	Self-opening, RH	0.125- to 2.0-inch IPS	G05
Die-head (inch)	Quick opening (universal) RH	0.125- to 2.0-inch IPS	G06
Die, high speed (set)	Pipe, RH, NPT	0.25- and 0.375-inch 18 TPI	G07
Die, high speed (set)	Pipe, RH, NPT	0.5- and 0.75-inch 14 TPI	G08
Die, high speed (set)	Pipe, RH, NPT	1.0-, 2.0-inch 11.5 TPI	G09
Die-head (metric)	Self-opening, RH	6 mm - 50 mm IPS	G010
Die-head (metric)	Quick opening (universal) RH	6 mm - 50 mm IPS	G011
Die, high speed (set)	Pipe, IS, taper, R 0.25 and R 0.375	8 mm - 10 mm	G012
Die, high speed (set)	Pipe, IS, taper, R 0.5 and R 0.75	15 mm -20 mm	G013
Die, high speed (set)	Pipe, IS, taper, R 1 to R 2	25 mm -50 mm	G014
Die-head (metric)	Bolts, IS	6 mm through 26 mm	G015
Die-head (metric)	Bolts, IS	27 mm through 52 mm	G016

NOTES:

1/ RH = Right Hand, IS = International Standard, NPT = National Pipe Thread, R = Taper, External.

2/ TPI = Threads Per Inch, IPS = Iron Pipe Size.

1. The above dies shall fit both the self-opening, and quick-opening (universal) die-heads.

2. Three sets of dies are required to cover the range from 0.25-inch through 2.0-inch diameter. Sets of dies are adjustable through diameter ranges 0.25- and 0.375-inch, 0.5- and 0.75-inch, and 1.0-inch through 2.0 inches or ranges 8-10 mm, 15-20 mm, 25-50 mm diameter with either of the above die-heads.

3. Dies in one size range shall be provided in matched sets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

TABLE VIII. Miscellaneous threading components, attachments, and accessories.

Item name	Type [1/]	Size range [2/] (nominal)	PIN dash no.
Complete set of accessories in table.			H01
Pipe threader	Geared, adjustable	2.5- to 4.0-inch diameter	H02
Pipe threader	Geared, adjustable	4.0- to 6.0-inch diameter	H03
Pipe threader (metric)	Geared, adjustable	65 mm through 100 mm	H04
Pipe threader (metric)	Geared, adjustable	125 mm through 150 mm	H05
Die, geared pipe threader (set)	High speed, RH, NPSM, NPT	2.5- through 4.0-inch - 8 TPI	H06
Die, geared pipe threader (set)	High speed, RH, NPSM, NPT	4.0- to 6.0-inch - 8 TPI	H07
Die, geared pipe threader	High speed, IS, taper	65 mm through 100 mm diameter	H08
Die, geared pipe threader (metric)	High speed,IS, taper	100 mm through 150 mm diameter	H09
Drive bar, geared threader	Close couple	Standard, 1.0-inch square	H010
Die, bolt (inch) (set)	RH, UNC, closed	0.375-inch - 16 TPI	H011
Die, bolt (inch) (set)	RH, UNC, closed	0.4375-inch - 14 TPI	H012
Die, bolt (inch) (set)	RH, UNC, closed	0.5-inch - 13 TPI	H013
Die, bolt (inch) (set)	RH, UNC, closed	0.5625-inch - 12 TPI	H014
Die, bolt (inch) (set)	RH, UNC, closed	0.625-inch - 11 TPI	H015
Die, bolt (inch) (set)	RH, UNC, closed	0.75-inch - 10 TPI	H016
Die, bolt (inch) (set)	RH, UNC, closed	0.875-inch - 9 TPI	H017
Die, bolt (inch) (set)	RH, UNC, closed	1.0-inch - 8 TPI	H018
Die, bolt (inch) (set)	RH, UNC, closed	1.25-inch - 7 TPI	H019
Die, bolt (inch) (set)	RH, UNC, closed	1.5-inch - 6 TPI	H020
Die, bolt (inch) (set)	RH, UNC, closed	1.75-inch - 5 TPI	H021
Die, bolt (inch) (set)	RH, UNC, closed	2.0-inch - 4.5 TPI	H022
Die, bolt metric (set)	RH, IS, closed	6 mm - 1 mm TP	H023
Die, bolt metric (set)	RH, IS, closed	8 mm - 1.25 mm TP	H024
Die, bolt metric (set)	RH, IS, closed	10 mm - 1.5 mm TP	H025
Die, bolt metric (set)	RH, IS, closed	12 mm - 1.75 mm TP	H026
Die, bolt metric (set)	RH, IS, closed	16 mm - 2 mm TP	H027
Die, bolt metric (set)	RH, IS, closed	18 mm - 2.5 mm TP	H028
Die, bolt metric (set)	RH, IS, closed	20 mm - 2.5 mm TP	H029
Die, bolt metric (set)	RH, IS, closed	22 mm - 2.5 mm TP	H030
Die, bolt metric (set)	RH, IS, closed	24 mm - 3 mm TP	H031
Die, bolt metric (set)	RH, IS, closed	30 mm - 3.5 mm TP	H032
Die, bolt metric (set)	RH, IS, closed	36 mm - 4 mm TP	H033
Die, bolt metric (set)	RH, IS, closed	42 mm - 4.5 mm TP	H034
Die, bolt metric (set)	RH, IS, closed	48 mm - 5 mm TP	H035
Die, bolt metric (set)	RH, IS, closed	50 mm - 5 mm TP	H036
Chuck, nipple & bolt	Short & close nipple & bolt	0.5- to 2.0-inch	H037
Adapter nipple	RH, NPT	0.375-inch - 18 TPI	H038

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

TABLE VIII. Miscellaneous threading components, attachments, and accessories - Continued.

Item name	Type 1/	Size range 2/ (nominal)	PIN dash no.
Adapter, bolt	RH, UNC	0.375-inch - 16 TPI	H039
Adapter, bolt	RH, UNC	0.4375-inch - 14 TPI	H040
Adapter, bolt	RH, UNC	0.5-inch - 13 TPI	H041
Adapter, bolt	RH, UNC	0.5625-inch - 12 TPI	H042
Adapter, bolt	RH, UNC	0.625-inch - 11 TPI	H043
Adapter, bolt	RH, UNC	0.75-inch - 10 TPI	H044
Adapter, bolt	RH, UNC	0.875-inch - 9 TPI	H045
Adapter, bolt	RH, UNC	1.0-inch - 8 TPI	H046
Adapter, bolt	RH, UNC	1.25-inch - 7 TPI	H047
Adapter, bolt	RH, UNC	1.5-inch - 6 TPI	H048
Adapter, bolt	RH, UNC	1.75-inch - 5 TPI	H049
Adapter, bolt	RH, UNC	2.0-inch - 4.5 TPI	H050
Adapter, bolt metric	RH, IS	6 mm - 1 mm TP	H051
Adapter, bolt metric	RH, IS	8.25 mm - 1 mm TP	H052
Adapter, bolt metric	RH, IS	10 mm - 1.5 mm TP	H053
Adapter, bolt metric	RH, IS	12 mm - 1.75 mm TP	H054
Adapter, bolt metric	RH, IS	16 mm - 2 mm TP	H055
Adapter, bolt metric	RH, IS	18 mm - 2.5 mm TP	H056
Adapter, bolt metric	RH, IS	20 mm - 2.5 mm TP	H057
Adapter, bolt metric	RH, IS	22 mm - 2.5 mm TP	H058
Adapter, bolt metric	RH, IS	24 mm - 3 mm TP	H059
Adapter, bolt metric	RH, IS	30 mm - 3.5 mm TP	H060
Adapter, bolt metric	RH, IS	36 mm - 4 mm TP	H061
Adapter, bolt metric	RH, IS	42 mm - 4.5 mm TP	H062
Adapter, bolt metric	RH, IS	48 mm - 5 mm TP	H063
Adapter, bolt metric	RH, IS	50 mm - 5 mm TP	H064
Tool stand	Adjustable, power-drive	Standard	H065
Support stand	Pipe	6.0-inch pipe diameter	H066
Oiler	Hand operated, with pan	1-gallon capacity minimum	H067
Ratchet & handle	Reversible	1.0-inch drive	H068
Oil	Thread cutting	5 gallons	H069

NOTES:

1/ RH = Right Hand, IS = International Standard, UNC = Unified National Coarse, NPSM = National Pipe Straight -Mechanical, NPT = National Pipe Taper.

2/ TP = Thread Pitch, TPI = Threads Per Inch.

1. Dies for threading nipples or bolts are to fit the self-opening and quick-opening die-heads of table VII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AL
Navy - YD1
Air Force - 99

Review Activities:
Navy - MC
Air Force - 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:
Navy - YD1

(Project 3450-0028)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** A-A-59247	**2. DOCUMENT DATE (YYMMDD)** 980616

3. DOCUMENT TITLE

DRIVE, POWER, PORTABLE; FOR PIPE AND BOLT THREADING, ELECTRIC (WITH ACCESSORIES)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED** (YYMMDD)

8. PREPARING ACTIVITY

a. NAME BERNADETTE ROSE	b. TELEPHONE *Include Area Code)* (1) Commercial 805-982-5464 (2) AUTOVON 551-5464
c. ADDRESS *(Include Zip Code)* OFFICER IN CHARGE, SEABEE LOGISTICS CENTER CODE 15E2, 4111 SAN PEDRO ST. PORT HUENEME, CA 93043-4410	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil/Document Id: 2026-10-26T10:07Z
Check the source to verify that this is the current version before use.