
INCH-POUND
MIL-PRF-23269/10D
31 July 2009
SUPERSEDING
MIL-PRF-23269/10C
10 June 1999

PERFORMANCE SPECIFICATION SHEET

# CAPACITORS, FIXED, GLASS DIELECTRIC, (RADIAL OR AXIAL WIRE-LEAD TERMINALS), ESTABLISHED RELIABILITY, STYLES CYR51, CYR52, AND CYR53

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-23269.

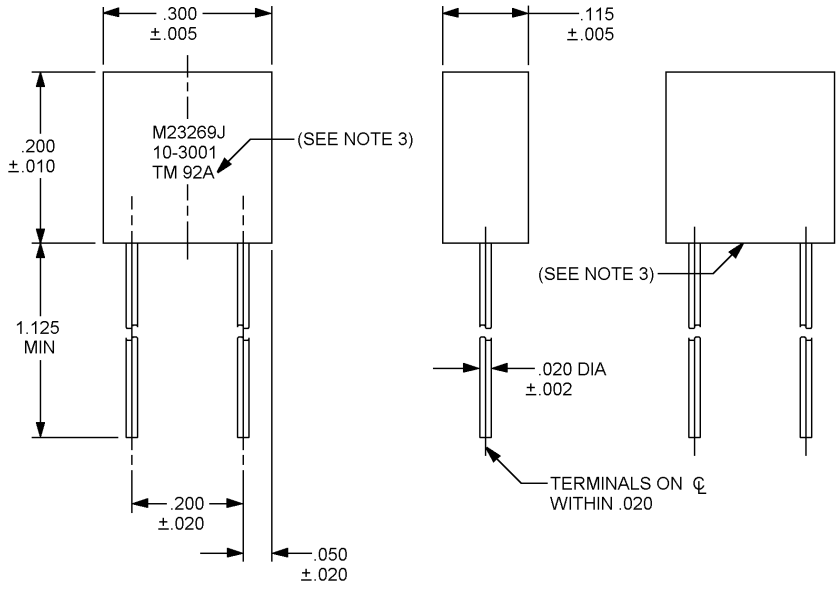


STYLE CYR51 (SEE TABLE I)

| Inches | mm | Inches | mm |
|---|---|---|---|
| .002 | 0.05 | .115 | 2.92 |
| .005 | 0.13 | .200 | 5.08 |
| .010 | 0.25 | .300 | 7.62 |
| .020 | 0.51 | 1.25 | 31.8 |
| .050 | 1.27 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See marking requirement.

FIGURE 1. Dimensions and configuration for style CLR51.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1, figure 2, and figure 3 and table I, table II, and table III.

Case material: Epoxy.

Terminals: Solderable

Capacitance (nominal): See table I, table II, and table III.

Capacitance tolerance: See table I, table II, and table III.

Rated voltage: 300 V dc.

Failure rate level: M, P, R, or S.

Rated temperature: -55°C to +125°C.

Temperature coefficient: 140 parts per million (ppm)/°C ±25 ppm/°C.

Capacitance drift: 0.1 percent or 0.1 pF, whichever is greater.

Seal: Test II of MIL-PRF-23269.

Insulation resistance: 10,000 megohms (qualification inspection only at +125°C). 100,000 megohms minimum (at +25°C).

Dissipation factor (DF): 0.2 percent maximum (1.0 pF through 100 pF) or 0.1 percent maximum (110 pF and up).

Thermal shock and moisture resistance, qualification and group C inspection:

DF: 0.3 percent maximum (1 pF through 100 pF) or 0.1 percent maximum (110 pF and up).

Thermal shock, group A inspection: Capacitance shall be within the tolerance specified (see table I). DF shall be within the initial limits.


Quality factor (Q): 500 minimum (1.0 pF through 100 pF) or 1,000 minimum (110 pF and up).

Life:

ΔCapacitance (240 hours and 2,000 hours): 0.5 percent or 0.5 pF, maximum.

DF (240 hours and 2,000 hours): 0.45 percent maximum (1.0 pF through 100 pF) or 0.25 percent maximum (110 pF and up).

Marking: “M” Part or Identifying Number (PIN) “J” Brand in lieu of slash

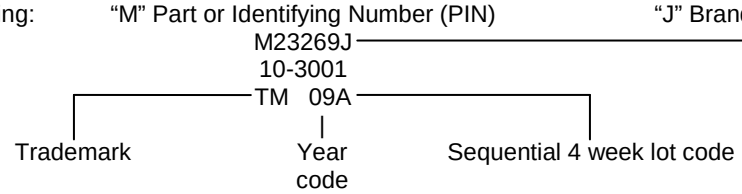


Substitutability data: See table IV.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers for styles CYR51.

| Capacitance (pF) | Capacitance tolerance | Dash number M23269/10- FRL in percent/1,000 hours | | | |
|---|---|---|---|---|---|
| | | 300 V dc | | | |
| | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 1.0 | ±0.25 pF | 3001 | 4001 | 5001 | 6001 |
| 1.5 | ±0.25 pF | 3002 | 4002 | 5002 | 6002 |
| 2.2 | ±0.25 pF | 3003 | 4003 | 5003 | 6003 |
| 2.7 | ±0.25 pF | 3004 | 4004 | 5004 | 6004 |
| 3.0 | ±0.25 pF | 3005 | 4005 | 5005 | 6005 |
| 3.3 | ±0.25 pF | 3006 | 4006 | 5006 | 6006 |
| 3.6 | ±0.25 pF | 3007 | 4007 | 5007 | 6007 |
| 3.9 | ±0.25 pF | 3008 | 4008 | 5008 | 6008 |
| 4.3 | ±0.25 pF | 3009 | 4009 | 5009 | 6009 |
| 4.7 | ±0.25 pF | 3010 | 4010 | 5010 | 6010 |
| 5.1 | ±0.25 pF | 3011 | 4011 | 5011 | 6011 |
| 5.1 | ±5% | 3012 | 4012 | 5012 | 6012 |
| 5.6 | ±0.25 pF | 3013 | 4013 | 5013 | 6013 |
| 5.6 | ±5% | 3014 | 4014 | 5014 | 6014 |
| 6.2 | ±0.25 pF | 3015 | 4015 | 5015 | 6015 |
| 6.2 | ±5% | 3016 | 4016 | 5016 | 6016 |
| 6.8 | ±0.25 pF | 3017 | 4017 | 5017 | 6017 |
| 6.8 | ±5% | 3018 | 4018 | 5018 | 6018 |
| 7.5 | ±0.25 pF | 3019 | 4019 | 5019 | 6019 |
| 7.5 | ±5% | 3020 | 4020 | 5020 | 6020 |
| 8.2 | ±0.25 pF | 3021 | 4021 | 5021 | 6021 |
| 8.2 | ±5% | 3022 | 4022 | 5022 | 6022 |
| 9.1 | ±0.25 pF | 3023 | 4023 | 5023 | 6023 |
| 9.1 | ±5% | 3024 | 4024 | 5024 | 6024 |
| 10 | ±0.25 pF | 3025 | 4025 | 5025 | 6025 |
| 10 | ±5% | 3026 | 4026 | 5026 | 6026 |
| 11 | ±0.25 pF | 3027 | 4027 | 5027 | 6027 |
| 11 | ±5% | 3028 | 4028 | 5028 | 6028 |
| 12 | ±0.25 pF | 3029 | 4029 | 5029 | 6029 |
| 12 | ±5% | 3030 | 4030 | 5030 | 6030 |
| 13 | ±0.25 pF | 3031 | 4031 | 5031 | 6031 |
| 13 | ±2% | 3032 | 4032 | 5032 | 6032 |
| 13 | ±5% | 3033 | 4033 | 5033 | 6033 |
| 15 | ±0.25 pF | 3034 | 4034 | 5034 | 6034 |
| 15 | ±2% | 3035 | 4035 | 5035 | 6035 |
| 15 | ±5% | 3036 | 4036 | 5036 | 6036 |
| 16 | ±0.25 pF | 3037 | 4037 | 5037 | 6037 |
| 16 | ±2% | 3038 | 4038 | 5038 | 6038 |
| 16 | ±5% | 3039 | 4039 | 5039 | 6039 |
| 18 | ±0.25 pF | 3040 | 4040 | 5040 | 6040 |
| 18 | ±2% | 3041 | 4041 | 5041 | 6041 |
| 18 | ±5% | 3042 | 4042 | 5042 | 6042 |
| 20 | ±0.25 pF | 3043 | 4043 | 5043 | 6043 |
| 20 | ±2% | 3044 | 4044 | 5044 | 6044 |
| 20 | ±5% | 3045 | 4045 | 5045 | 6045 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers for style CYR51 - Continued.

| Capacitance (pF) | Capacitance tolerance | Dash number M23269/10- FRL in percent/1,000 hours | | | |
|---|---|---|---|---|---|
| | | 300 V dc | | | |
| | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 22 | ±0.25 pF | 3046 | 4046 | 5046 | 6046 |
| 22 | ±2% | 3047 | 4047 | 5047 | 6047 |
| 22 | ±5% | 3048 | 4048 | 5048 | 6048 |
| 24 | ±0.25 pF | 3049 | 4049 | 5049 | 6049 |
| 24 | ±2% | 3050 | 4050 | 5050 | 6050 |
| 24 | ±5% | 3051 | 4051 | 5051 | 6051 |
| 27 | ±1% | 3052 | 4052 | 5052 | 6052 |
| 27 | ±2% | 3053 | 4053 | 5053 | 6053 |
| 27 | ±5% | 3054 | 4054 | 5054 | 6054 |
| 30 | ±1% | 3055 | 4055 | 5055 | 6055 |
| 30 | ±2% | 3056 | 4056 | 5056 | 6056 |
| 30 | ±5% | 3057 | 4057 | 5057 | 6057 |
| 33 | ±1% | 3058 | 4058 | 5058 | 6058 |
| 33 | ±2% | 3059 | 4059 | 5059 | 6059 |
| 33 | ±5% | 3060 | 4060 | 5060 | 6060 |
| 36 | ±1% | 3061 | 4061 | 5061 | 6061 |
| 36 | ±2% | 3062 | 4062 | 5062 | 6062 |
| 36 | ±5% | 3063 | 4063 | 5063 | 6063 |
| 39 | ±1% | 3064 | 4064 | 5064 | 6064 |
| 39 | ±2% | 3065 | 4065 | 5065 | 6065 |
| 39 | ±5% | 3066 | 4066 | 5066 | 6066 |
| 43 | ±1% | 3067 | 4067 | 5067 | 6067 |
| 43 | ±2% | 3068 | 4068 | 5068 | 6068 |
| 43 | ±5% | 3069 | 4069 | 5069 | 6069 |
| 47 | ±1% | 3070 | 4070 | 5070 | 6070 |
| 47 | ±2% | 3071 | 4071 | 5071 | 6071 |
| 47 | ±5% | 3072 | 4072 | 5072 | 6072 |
| 51 | ±1% | 3073 | 4073 | 5073 | 6073 |
| 51 | ±2% | 3074 | 4074 | 5074 | 6074 |
| 51 | ±5% | 3075 | 4075 | 5075 | 6075 |
| 56 | ±1% | 3076 | 4076 | 5076 | 6076 |
| 56 | ±2% | 3077 | 4077 | 5077 | 6077 |
| 56 | ±5% | 3078 | 4078 | 5078 | 6078 |
| 62 | ±1% | 3079 | 4079 | 5079 | 6079 |
| 62 | ±2% | 3080 | 4080 | 5080 | 6080 |
| 62 | ±5% | 3081 | 4081 | 5081 | 6081 |
| 68 | ±1% | 3082 | 4082 | 5082 | 6082 |
| 68 | ±2% | 3083 | 4083 | 5083 | 6083 |
| 68 | ±5% | 3084 | 4084 | 5084 | 6084 |
| 75 | ±1% | 3085 | 4085 | 5085 | 6085 |
| 75 | ±2% | 3086 | 4086 | 5086 | 6086 |
| 75 | ±5% | 3087 | 4087 | 5087 | 6087 |
| 82 | ±1% | 3088 | 4088 | 5088 | 6088 |
| 82 | ±2% | 3089 | 4089 | 5089 | 6089 |
| 82 | ±5% | 3090 | 4090 | 5090 | 6090 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers for style CYR51 - Continued.

| Capacitance (pF) | Capacitance tolerance | Dash number M23269/10- FRL in percent/1,000 hours | | | |
|---|---|---|---|---|---|
| | | 300 V dc | | | |
| | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 91 | ±1% | 3091 | 4091 | 5091 | 6091 |
| 91 | ±2% | 3092 | 4092 | 5092 | 6092 |
| 91 | ±5% | 3093 | 4093 | 5093 | 6093 |
| 100 | ±1% | 3094 | 4094 | 5094 | 6094 |
| 100 | ±2% | 3095 | 4095 | 5095 | 6095 |
| 100 | ±5% | 3096 | 4096 | 5096 | 6096 |
| 110 | ±1% | 3097 | 4097 | 5097 | 6097 |
| 110 | ±2% | 3098 | 4098 | 5098 | 6098 |
| 110 | ±5% | 3099 | 4099 | 5099 | 6099 |
| 120 | ±1% | 3100 | 4100 | 5100 | 6100 |
| 120 | ±2% | 3101 | 4101 | 5101 | 6101 |
| 120 | ±5% | 3102 | 4102 | 5102 | 6102 |
| 130 | ±1% | 3103 | 4103 | 5103 | 6103 |
| 130 | ±2% | 3104 | 4104 | 5104 | 6104 |
| 130 | ±5% | 3105 | 4105 | 5105 | 6105 |
| 150 | ±1% | 3106 | 4106 | 5106 | 6106 |
| 150 | ±2% | 3107 | 4107 | 5107 | 6107 |
| 150 | ±5% | 3108 | 4108 | 5108 | 6108 |
| 160 | ±1% | 3109 | 4109 | 5109 | 6109 |
| 160 | ±2% | 3110 | 4110 | 5110 | 6100 |
| 160 | ±5% | 3111 | 4111 | 5111 | 6111 |
| 180 | ±1% | 3112 | 4112 | 5112 | 6112 |
| 180 | ±2% | 3113 | 4113 | 5113 | 6113 |
| 180 | ±5% | 3114 | 4114 | 5114 | 6114 |
| 200 | ±1% | 3115 | 4115 | 5115 | 6115 |
| 200 | ±2% | 3116 | 4116 | 5116 | 6116 |
| 200 | ±5% | 3117 | 4117 | 5117 | 6117 |
| 220 | ±1% | 3118 | 4118 | 5118 | 6118 |
| 220 | ±2% | 3119 | 4119 | 5119 | 6119 |
| 220 | ±5% | 3120 | 4120 | 5120 | 6120 |
| 240 | ±1% | 3121 | 4121 | 5121 | 6121 |
| 240 | ±2% | 3122 | 4122 | 5122 | 6122 |
| 240 | ±5% | 3123 | 4123 | 5123 | 6123 |
| 270 | ±1% | 3124 | 4124 | 5124 | 6124 |
| 270 | ±2% | 3125 | 4125 | 5125 | 6125 |
| 270 | ±5% | 3126 | 4126 | 5126 | 6126 |
| 300 | ±1% | 3127 | 4127 | 5127 | 6127 |
| 300 | ±2% | 3128 | 4128 | 5128 | 6128 |
| 300 | ±5% | 3129 | 4129 | 5129 | 6129 |
| 330 | ±1% | 3130 | 4130 | 5130 | 6130 |
| 330 | ±2% | 3131 | 4131 | 5131 | 6131 |
| 330 | ±5% | 3132 | 4132 | 5132 | 6132 |
| 360 | ±1% | 3133 | 4133 | 5133 | 6133 |
| 360 | ±2% | 3134 | 4134 | 5134 | 6134 |
| 360 | ±5% | 3135 | 4135 | 5135 | 6135 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical and physical characteristics and dash numbers for style CYR51 - Continued.

| Capacitance (pF) | Capacitance tolerance | Dash number M23269/10- FRL in percent/1,000 hours | | | |
|---|---|---|---|---|---|
| | | 300 V dc | | | |
| | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 390 | ±1% | 3136 | 4136 | 5136 | 6136 |
| 390 | ±2% | 3137 | 4137 | 5137 | 6137 |
| 390 | ±5% | 3138 | 4138 | 5138 | 6138 |
| 430 | ±1% | 3139 | 4139 | 5139 | 6139 |
| 430 | ±2% | 3140 | 4140 | 5140 | 6140 |
| 430 | ±5% | 3141 | 4141 | 5141 | 6141 |
| 470 | ±1% | 3142 | 4142 | 5142 | 6142 |
| 470 | ±2% | 3143 | 4143 | 5143 | 6143 |
| 470 | ±5% | 3144 | 4144 | 5144 | 6144 |
| 510 | ±1% | 3145 | 4145 | 5145 | 6145 |
| 510 | ±2% | 3146 | 4146 | 5146 | 6146 |
| 510 | ±5% | 3147 | 4147 | 5147 | 6147 |
| 560 | ±1% | 3148 | 4148 | 5148 | 6148 |
| 560 | ±2% | 3149 | 4149 | 5149 | 6149 |
| 560 | ±5% | 3150 | 4150 | 5150 | 6150 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

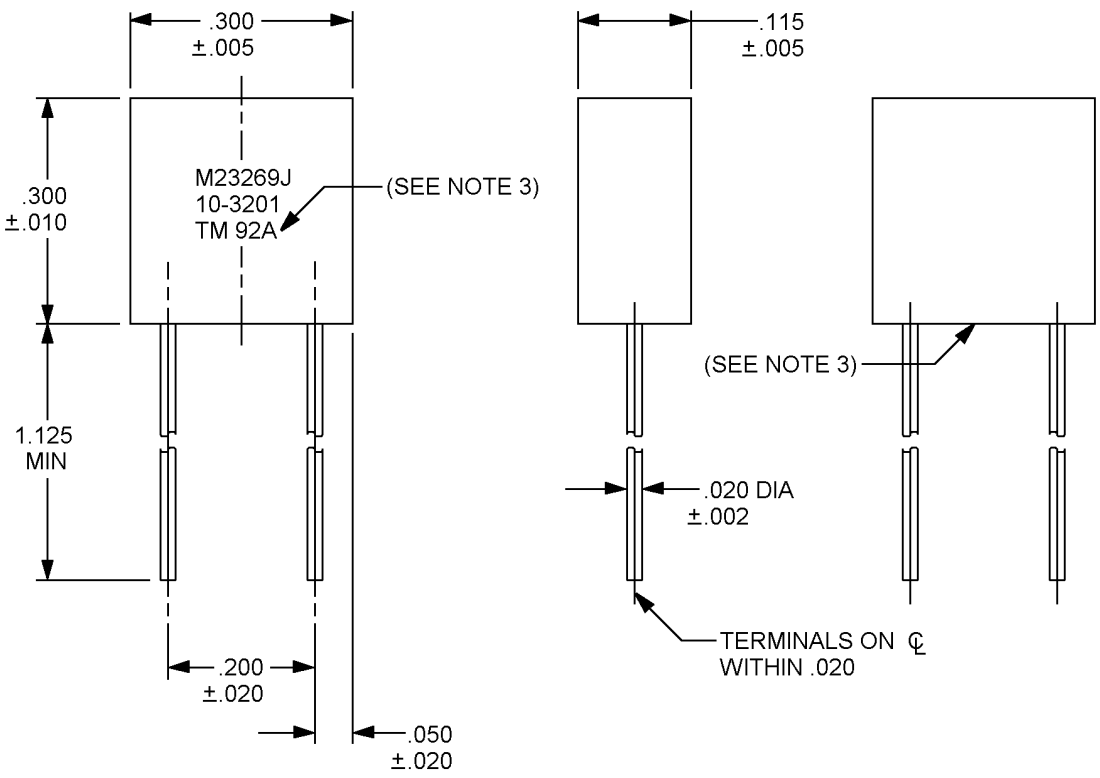


STYLE CYR52 (SEE TABLE II)

| Inches | mm | Inches | mm |
|---|---|---|---|
| .002 | 0.05 | .115 | 2.92 |
| .005 | 0.13 | .200 | 5.08 |
| .010 | 0.25 | .300 | 7.62 |
| .020 | 0.50 | 1.25 | 31.75 |
| .050 | 1.27 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See marking requirement.

FIGURE 2. Dimensions and configuration for style CYR52.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical and physical characteristics and dash numbers for style CYR52.

| Capacitance (pF) | Capacitance tolerance | Dash number M23269/10- FRL in percent/1,000 hours | | | |
|---|---|---|---|---|---|
| | | 300 V dc | | | |
| | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 620 | ±1% | 3201 | 4201 | 5201 | 6201 |
| 620 | ±2% | 3202 | 4202 | 5202 | 6202 |
| 620 | ±5% | 3203 | 4203 | 5203 | 6203 |
| 680 | ±1% | 3204 | 4204 | 5204 | 6204 |
| 680 | ±2% | 3205 | 4205 | 5205 | 6205 |
| 680 | ±5% | 3206 | 4206 | 5206 | 6206 |
| 750 | ±1% | 3207 | 4207 | 5207 | 6207 |
| 750 | ±2% | 3208 | 4208 | 5208 | 6208 |
| 750 | ±5% | 3209 | 4209 | 5209 | 6209 |
| 820 | ±1% | 3210 | 4210 | 5210 | 6210 |
| 820 | ±2% | 3211 | 4211 | 5211 | 6211 |
| 820 | ±5% | 3212 | 4212 | 5212 | 6212 |
| 910 | ±1% | 3213 | 4213 | 5213 | 6213 |
| 910 | ±2% | 3214 | 4214 | 5214 | 6214 |
| 910 | ±5% | 3215 | 4215 | 5215 | 6215 |
| 1,000 | ±1% | 3216 | 4216 | 5216 | 6216 |
| 1,000 | ±2% | 3217 | 4217 | 5217 | 6217 |
| 1,000 | ±5% | 3218 | 4218 | 5218 | 6218 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

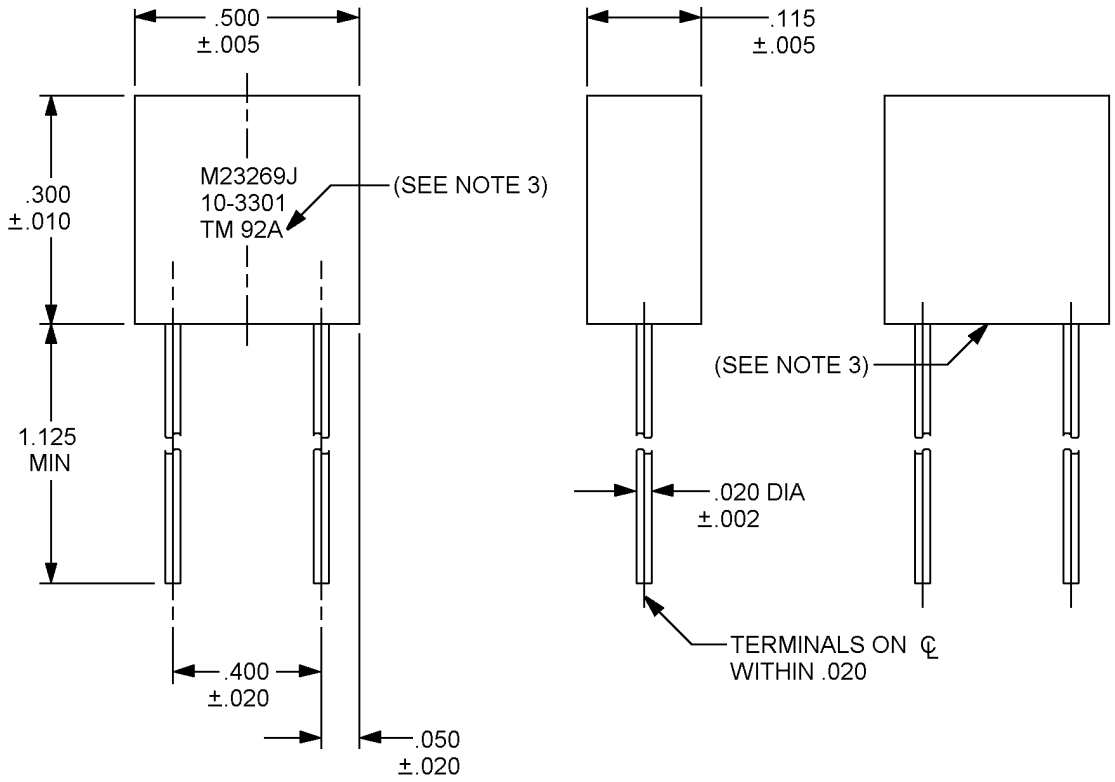


STYLE CYR53 (SEE TABLE III)

| Inches | mm | Inches | mm |
|---|---|---|---|
| .002 | 0.05 | .115 | 2.92 |
| .005 | 0.13 | .300 | 7.62 |
| .010 | 0.25 | .400 | 10.16 |
| .020 | 0.50 | .500 | 12.75 |
| .050 | 1.27 | 1.25 | 31.75 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See marking requirement.

FIGURE 3. Dimensions and configuration for style CYR53.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE III. Electrical and physical characteristics and dash numbers for style CYR53.

| Capacitance (pF) | Capacitance tolerance | Dash number M23269/10- FRL in percent/1,000 hours | | | |
|---|---|---|---|---|---|
| | | 300 V dc | | | |
| | | M (1.0) | P (0.1) | R (0.01) | S (0.001) |
| 1,100 | ±1% | 3301 | 4301 | 5301 | 6301 |
| 1,100 | ±2% | 3302 | 4302 | 5302 | 6302 |
| 1,100 | ±5% | 3303 | 4303 | 5303 | 6303 |
| 1,200 | ±1% | 3304 | 4304 | 5304 | 6304 |
| 1,200 | ±2% | 3305 | 4305 | 5305 | 6305 |
| 1,200 | ±5% | 3306 | 4306 | 5306 | 6306 |
| 1,300 | ±1% | 3307 | 4307 | 5307 | 6307 |
| 1,300 | ±2% | 3308 | 4308 | 5308 | 6308 |
| 1,300 | ±5% | 3309 | 4309 | 5309 | 6309 |
| 1,500 | ±1% | 3310 | 4310 | 5310 | 6310 |
| 1,500 | ±2% | 3311 | 4311 | 5311 | 6311 |
| 1,500 | ±5% | 3312 | 4312 | 5312 | 6312 |
| 1,600 | ±1% | 3313 | 4313 | 5313 | 6313 |
| 1,600 | ±2% | 3314 | 4314 | 5314 | 6314 |
| 1,600 | ±5% | 3315 | 4315 | 5315 | 6315 |
| 1,800 | ±1% | 3316 | 4316 | 5316 | 6316 |
| 1,800 | ±2% | 3317 | 4317 | 5317 | 6317 |
| 1,800 | ±5% | 3318 | 4318 | 5318 | 6318 |
| 2,000 | ±1% | 3319 | 4319 | 5319 | 6319 |
| 2,000 | ±2% | 3320 | 4320 | 5320 | 6320 |
| 2,000 | ±5% | 3321 | 4321 | 5321 | 6321 |
| 2,200 | ±1% | 3322 | 4322 | 5322 | 6322 |
| 2,200 | ±2% | 3323 | 4323 | 5323 | 6323 |
| 2,200 | ±5% | 3324 | 4324 | 5324 | 6324 |
| 2,400 | ±1% | 3325 | 4325 | 5325 | 6325 |
| 2,400 | ±2% | 3326 | 4326 | 5326 | 6326 |
| 2,400 | ±5% | 3327 | 4327 | 5327 | 6327 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE IV. Substitutability data.

| Superseded type designation in MIL-C-23269/10 | Use dash number M23269/10- in M23269/10A through /10D | | Superseded type designation in MIL-C-23269/10 | Use dash number M23269/10- in M23269/10A through /10D | |
|---|---|---|---|---|---|
| | FRL in percent/1,000 hours | | | FRL in percent/1,000 hours | |
| | L (2.0) | M (1.0) | | L (2.0) | M (1.0) |
| CYR51C1R0C | 2001 | 3001 | CYR51C270F | 2052 | 3052 |
| CYR51C1R5C | 2002 | 3002 | CYR51C270G | 2053 | 3053 |
| CYR51C2R2C | 2003 | 3003 | CYR51C270J | 2054 | 3054 |
| CYR51C2R7C | 2004 | 3004 | CYR51C300F | 2055 | 3055 |
| CYR51C3R0C | 2005 | 3005 | CYR51C300G | 2056 | 3056 |
| CYR51C3R3C | 2006 | 3006 | CYR51C300J | 2057 | 3057 |
| CYR51C3R6C | 2007 | 3007 | CYR51C330F | 2058 | 3058 |
| CYR51C3R9C | 2008 | 3008 | CYR51C330G | 2059 | 3059 |
| CYR51C4R3C | 2009 | 3009 | CYR51C330J | 2060 | 3060 |
| CYR51C4R7C | 2010 | 3010 | CYR51C360F | 2061 | 3061 |
| CYR51C5R1C | 2011 | 3011 | CYR51C360G | 2062 | 3062 |
| CYR51C5R1J | 2012 | 3012 | CYR51C360J | 2063 | 3063 |
| CYR51C5R6C | 2013 | 3013 | CYR51C390F | 2064 | 3064 |
| CYR51C5R6J | 2014 | 3014 | CYR51C390G | 2065 | 3065 |
| CYR51C6R2C | 2015 | 3015 | CYR51C390J | 2066 | 3066 |
| CYR51C6R2J | 2016 | 3016 | CYR51C430F | 2067 | 3067 |
| CYR51C6R8C | 2017 | 3017 | CYR51C430G | 2068 | 3068 |
| CYR51C6R8J | 2018 | 3018 | CYR51C430J | 2069 | 3069 |
| CYR51C7R5C | 2019 | 3019 | CYR51C470F | 2070 | 3070 |
| CYR51C7R5J | 2020 | 3020 | CYR51C470G | 2071 | 3071 |
| CYR51C8R2C | 2021 | 3021 | CYR51C470J | 2072 | 3072 |
| CYR51C8R2J | 2022 | 3022 | CYR51C510F | 2073 | 3073 |
| CYR51C9R1C | 2023 | 3023 | CYR51C510G | 2074 | 3074 |
| CYR51C9R1J | 2024 | 3024 | CYR51C510J | 2075 | 3075 |
| CYR51C100C | 2025 | 3025 | CYR51C560F | 2076 | 3076 |
| CYR51C100J | 2026 | 3026 | CYR51C560G | 2077 | 3077 |
| CYR51C110C | 2027 | 3027 | CYR51C560J | 2078 | 3078 |
| CYR51C110J | 2028 | 3028 | CYR51C620F | 2079 | 3079 |
| CYR51C120C | 2029 | 3029 | CYR51C620G | 2080 | 3080 |
| CYR51C120J | 2030 | 3030 | CYR51C620J | 2081 | 3081 |
| CYR51C130C | 2031 | 3031 | CYR51C680F | 2082 | 3082 |
| CYR51C130G | 2032 | 3032 | CYR51C680G | 2083 | 3083 |
| CYR51C130J | 2033 | 3033 | CYR51C680J | 2084 | 3084 |
| CYR51C150C | 2034 | 3034 | CYR51C750F | 2085 | 3085 |
| CYR51C150G | 2035 | 3035 | CYR51C750G | 2086 | 3086 |
| CYR51C150J | 2036 | 3036 | CYR51C750J | 2087 | 3087 |
| CYR51C160C | 2037 | 3037 | CYR51C820F | 2088 | 3088 |
| CYR51C160G | 2038 | 3038 | CYR51C820G | 2089 | 3089 |
| CYR51C160J | 2039 | 3039 | CYR51C820J | 2090 | 3090 |
| CYR51C180C | 2040 | 3040 | CYR51C910F | 2091 | 3091 |
| CYR51C180G | 2041 | 3041 | CYR51C910G | 2092 | 3092 |
| CYR51C180J | 2042 | 3042 | CYR51C910J | 2093 | 3093 |
| CYR51C200C | 2043 | 3043 | CYR51C101F | 2094 | 3094 |
| CYR51C200G | 2044 | 3044 | CYR51C101G | 2095 | 3095 |
| CYR51C200J | 2045 | 3045 | CYR51C101J | 2096 | 3096 |
| CYR51C220C | 2046 | 3046 | CYR51C111F | 2097 | 3097 |
| CYR51C220G | 2047 | 3047 | CYR51C111G | 2098 | 3098 |
| CYR51C220J | 2048 | 3048 | CYR51C111J | 2099 | 3099 |
| CYR51C240C | 2049 | 3049 | CYR51C121F | 2100 | 3100 |
| CYR51C240G | 2050 | 3050 | CYR51C121G | 2101 | 3101 |
| CYR51C240J | 2051 | 3051 | CYR51C121J | 2102 | 3102 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

TABLE IV. Substitutability data - Continued.

| Superseded type designation in MIL-C-23269/10 | Use dash number M23269/10- in M23269/10A through /10D | | Superseded type designation in MIL-C-23269/10 | Use dash number M23269/10- in M23269/10A through /10D | |
|---|---|---|---|---|---|
| | FRL in percent/1,000 hours | | | FRL in percent/1,000 hours | |
| | L (2.0) | M (1.0) | | L (2.0) | M (1.0) |
| CYR51C131F | 2103 | 3103 | CYR51C621F | 2201 | 3201 |
| CYR51C131G | 2104 | 3104 | CYR51C621G | 2202 | 3202 |
| CYR51C131J | 2105 | 3105 | CYR51C621J | 2203 | 3203 |
| CYR51C151F | 2106 | 3106 | CYR51C681F | 2204 | 3204 |
| CYR51C151G | 2107 | 3107 | CYR51C681G | 2205 | 3205 |
| CYR51C151J | 2108 | 3108 | CYR51C681J | 2206 | 3206 |
| CYR51C161F | 2109 | 3109 | CYR51C751F | 2207 | 3207 |
| CYR51C161G | 2110 | 3110 | CYR51C751G | 2208 | 3208 |
| CYR51C161J | 2111 | 3111 | CYR51C751J | 2209 | 3209 |
| CYR51C181F | 2112 | 3112 | CYR51C821F | 2210 | 3210 |
| CYR51C181G | 2113 | 3113 | CYR51C821G | 2211 | 3211 |
| CYR51C181J | 2114 | 3114 | CYR51C821J | 2212 | 3212 |
| CYR51C201F | 2115 | 3115 | CYR51C911F | 2213 | 3213 |
| CYR51C201G | 2116 | 3116 | CYR51C911G | 2214 | 3214 |
| CYR51C201J | 2117 | 3117 | CYR51C911J | 2215 | 3215 |
| CYR51C221F | 2118 | 3118 | CYR51C102F | 2216 | 3216 |
| CYR51C221G | 2119 | 3119 | CYR51C102G | 2217 | 3217 |
| CYR51C221J | 2120 | 3120 | CYR51C102J | 2218 | 3218 |
| CYR51C241F | 2121 | 3121 | CYR51C112F | 2301 | 3301 |
| CYR51C241G | 2122 | 3122 | CYR51C112G | 2302 | 3302 |
| CYR51C241J | 2123 | 3123 | CYR51C112J | 2303 | 3303 |
| CYR51C271F | 2124 | 3124 | CYR51C122F | 2304 | 3304 |
| CYR51C271G | 2125 | 3125 | CYR51C122G | 2305 | 3305 |
| CYR51C271J | 2126 | 3126 | CYR51C122J | 2306 | 3306 |
| CYR51C301F | 2127 | 3127 | CYR51C132F | 2307 | 3307 |
| CYR51C301G | 2128 | 3128 | CYR51C132G | 2308 | 3308 |
| CYR51C301J | 2129 | 3129 | CYR51C132J | 2309 | 3309 |
| CYR51C331F | 2130 | 3130 | CYR51C152F | 2310 | 3310 |
| CYR51C331G | 2131 | 3131 | CYR51C152G | 2311 | 3311 |
| CYR51C331J | 2132 | 3132 | CYR51C152J | 2312 | 3312 |
| CYR51C361F | 2133 | 3133 | CYR51C162F | 2313 | 3313 |
| CYR51C361G | 2134 | 3134 | CYR51C162G | 2314 | 3314 |
| CYR51C361J | 2135 | 3135 | CYR51C162J | 2315 | 3315 |
| CYR51C391F | 2136 | 3136 | CYR51C182F | 2316 | 3316 |
| CYR51C391G | 2137 | 3137 | CYR51C182G | 2317 | 3317 |
| CYR51C391J | 2138 | 3138 | CYR51C182J | 2318 | 3318 |
| CYR51C431F | 2139 | 3139 | CYR51C202F | 2319 | 3319 |
| CYR51C431G | 2140 | 3140 | CYR51C202G | 2320 | 3320 |
| CYR51C431J | 2141 | 3141 | CYR51C202J | 2321 | 3321 |
| CYR51C471F | 2142 | 3142 | CYR51C222F | 2322 | 3322 |
| CYR51C471G | 2143 | 3143 | CYR51C222G | 2323 | 3323 |
| CYR51C471J | 2144 | 3144 | CYR51C222J | 2324 | 3324 |
| CYR51C511F | 2145 | 3145 | CYR51C242F | 2325 | 3325 |
| CYR51C511G | 2146 | 3146 | CYR51C242G | 2326 | 3326 |
| CYR51C511J | 2147 | 3147 | CYR51C242J | 2327 | 3327 |
| CYR51C561F | 2148 | 3148 | | | |
| CYR51C561G | 2149 | 3149 | | | |
| CYR51C561J | 2150 | 3150 | | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2009-044)

Review activities:
Navy - AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:15Z
Check the source to verify that this is the current version before use.