INCH-POUND

MIL-C-31002(CG)
30 March 1992

MILITARY SPECIFICATION

CAP, GARRISON, MAN'S (COAST GUARD)

This specification is approved for use by the Unites States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for lined and unlined garrison caps.

1.2 Classification. The caps shall be procured in the following types, classes and sizes as specified (see 6.2):

1.2.1 Types and classes.

Type I - Lined, Polyester/Wool Serge, Blue 3362
Class 1 - Artificial Leatherband
Class 2 - Terrycloth Sweatband
Type II - Unlined, Polyester/Cotton Twill, Blue 3362

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, ATTN: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:54Z
Check the source to verify that this is the current version before use.

1.2.2 Sizes.

6-1/2, 6-5/8, 6-3/4, 6-7/8, 7, 7-1/8, 7-1/4, 7-3/8, 7-1/2, 7-5/8, 7-3/4, 7-7/8, 8

2. APPLICABLE DOCUMENT

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50199	- Thread, Polyester Core, Cotton - or Polyester-Covered
A-A-52094	- Thread, Cotton
NN-P-71	- Pallet, Material Handling, Wood, Stringer Construction 2 Way and 4 Way (Partial)
DDD-L-20	- Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-823	- Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-B-17757	- Boxes, Shipping, Fiberboard (Modular Sizes)
MIL-C-29127	- Cloth, Twill, Polyester/Cotton (Crease-Resistant Finish)
MIL-S-43993	- Sweatband, Headwear, Artificial Leather
MIL-C-44121	- Cloth, Twill, Polyester

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:54Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-901 - Provisions for Evaluating Quality of Caps, Garrison, Men's
MIL-STD-2073-1 - DOD Materials Procedures for Development and Applications of Packaging Requirements
MIL-STD-2073-2 - Packaging Requirement Codes

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094).

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

US POSTAL MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402-0001).

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issue of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:54Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036-1404).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606-5808).

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades for Sewing Threads

(Applications for copies shall be addressed to the Color Association of the United States, 409 W. 44th Street, New York, NY 10016-0927).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents may also be available in or through libraries or other informational services).

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval, in accordance with 4.3.

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:54Z
Check the source to verify that this is the current version before use.

3.3 Material.

3.3.1 Basic material.

3.3.1.1 Cloth, polyester/wool. The basic cloth for the Type I, cap shall be a polyester/wool serge conforming to MIL-C-823. The cloth shall be dyed to match Blue Shade 3362. The standard sample piece number is 80353.

3.3.1.2 Basic cloth, twill, polyester/cotton. The basic cloth for the Type II cap shall be a polyester/cotton twill cloth conforming to MIL-C-29127. The cloth shall be dyed to match Blue Shade 3362. The standard sample piece number is 78349.

3.3.1.3 Cloth, lining. The cloth for lining the Type I cap shall be a rayon twill cloth conforming to Class 1 of MIL-C-368. As an alternate, the lining material may be a polyester twill conforming to MIL-C-44121. The cloth shall be dyed to approximate the shade of the cap.

3.3.2 Sweatband.

3.3.2.1 Sweatband, artificial leather. The sweatband for the Type I, class 1 caps shall be made from artificial leather conforming to MIL-S-43993 dyed black to finish not less than 7/8 inch in width.

3.3.2.2 Sweatband, terrycloth. The sweatband for the Type I, class 2 caps shall be made from three layers of material. The outer layer shall be made from a black 1-3/4 inch wide 75/25 cotton/polyester knitted terrycloth weighing a minimum of 10.0 oz/sq yd. The middle layer shall be a 0.090 inch thick, 1-1/4 inch wide charcoal grey klicker foam. The inner layer shall be a black 1-1/4 inch wide spunbonded nonwoven. The finished sweatband shall have good colorfastness to perspiration and dry cleaning and shall be 1-1/4 (+/- 1/16) inches wide.

3.3.2.3 Sweatband, cloth. The cloth sweatband for the Type II cap shall be made of the material specified in 3.3.1.2, cut 2-1/8 inches in width, unfinished.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

3.3.4 Thread. The thread for seaming and stitching the caps shall be cotton-covered or polyester-covered thread conforming to 2 ply, ticket No. 50 or 70 of A-A-50199. As an alternate, the thread for seaming and stitching the caps shall be cotton thread conforming to Type III, Ticket Nos. A, and B, 3-ply of A-A-52094. The thread for Type I and II caps shall be dyed to match shade Navy Blue AT, Cable No. 66060, in accordance with the Department of Defense Standard Shades for Sewing Threads, except that the thread used for the stitching the sweatband of the Type I cap shall approximate the shade of the sweatband.

3.3.4.1 Colorfastness. The dyed thread shall show fastness to light, laundering, wet-dry cleaning, and perspiration equal to or better than the standard sample when tested as specified in A-A-52094 or A-A-50199. As a limit of acceptability, or when a standard sample is not available, the dyed thread shall show a minimum of "good" fastness to light, laundering, wet-dry cleaning, and perspiration, when tested as specified in A-A-52094 or A-A-50199.

3.3.5 Labels. Each cap shall have a combination identification, size, and personal label and a separate instruction label in accordance with 3.3.5.1 and 3.3.5.2.

3.3.5.1 Combination label. Each cap shall have an identification, size and personal label conforming to Type VI, classes 4 and 10, of DDD-L-20, except that the inscription shall be as shown below. The size of the label shall be not more than 1-1/2 inches in height and 2-1/2 inches in length. The height of the lettering except for the applicable size shall be 1/16 to 1/8 inch. The size lettering shall be not less than 1/4 inch. The label shall show fastness to drycleaning only when Type I caps are applicable and to laundering only when Type II caps are applicable.

NAME:
SERVICE NO.:
CAP, GARRISON, MAN'S (65% POLYESTER/35% COTTON) (EXAMPLE)
CONTRACT NO.: DLA-100-00-0-000 (EXAMPLE)
STOCK NO.: 8405-00-000-0000 (EXAMPLE)
NAME OF CONTRACTOR:
SIZE:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

3.3.5.2 Instruction label. Each cap shall have an instruction label conforming to Type VI, Class 3 of DDD-L-20. The size of the label shall be not more than 1-1/2 inches in height and 2-1/2 inches in length. The size of the lettering shall be 1/16 to 1/8 inch. The label shall show fastness to drycleaning only when Type I caps are applicable and to laundering only when Type II caps are applicable.

The inscription for the Type I cap shall be as follows:

LAUNDERING INSTRUCTIONS

DRY CLEAN ONLY

The inscription for the Type II cap shall be as follows:

LAUNDERING INSTRUCTIONS

MACHINE WASH WARM, PERMANENT PRESS CYCLE
TUMBLE DRY, MEDIUM SETTING
REMOVE PROMPTLY

DO NOT USE CHLORINE BLEACH

3.4 Design. The cap shall be a garrison style, having a three piece crown and a one piece curtain turned up on the outside of the cap with the tapered ends crossing at the front. The caps shall be lined or unlined and shall have an artificial leather, terrycloth or basic cloth sweatband, as specified.

3.4.1 Figures. Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.5 Patterns. Standard patterns to be used to cut the working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability, or appearance requirements cited in the specification. Standard patterns shall show size, directional lines, placement marks, and notches for assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

3.5.1 List of pattern parts. The caps shall be cut from material as specified, and in accordance with pattern parts indicated below:

TABLE I - List of Pattern Parts

Material	Nomenclature	Cut parts
Basic material	Side crown	2
	Top crown (gusset)	1
	Curtain	1
Cloth, lining	Side crown lining (Type I only)	2

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seams, and stitching types, as specified in Table II shall conform to the requirements of FED-STD-751. Whenever two or more methods for seams or stitchings are given for the same operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the cap. Ends of all seams produced by stitch type 401 shall be caught in other seams or stitchings. The width of the safety stitch shall be 3/8 inch and the guides and knives on the safety stitch machine shall be set to trim only the ravelled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitchings, shall be backtacked not less than 3/8 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. For Type I only, the ends of the label stitching shall be overlapped not less than 3 stitches. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. Skipped stitches or thread breaks of 401 stitching shall be repaired by using 301 stitch type. When the ends of overedge stitching are not caught in other stitching or seams, the ends shall be tacked.

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:54Z
Check the source to verify that this is the current version before use.

3.7 Manufacturing operations requirements. The caps shall be manufactured in accordance with the operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations listed, provided that the finished cap is identical to that produced by following the sequence of operations as listed in Table II. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the appearance, serviceability, or dimensional requirements cited in the specification.

3.7.1 Shade and size marking. The component parts shall be marked or ticketed to insure a uniform shade and size throughout the cap. Any method may be used except:

1. Metal fastening devices
2. Sewn-on tickets
3. Adhesive type tickets whose adhesive causes discoloration or whose adhesive mass adheres to the material upon removal of the tickets.

The use of a rubber stamp, ink pad numbering machine, or pencil is acceptable provided the numbers are legible and are not visible on the outside of the cap.

3.7.2 Pressing. All pressing as required in Table II shall be performed with a steam iron or steam pressing machine.

3.7.3 Abbreviations in table of operations. The abbreviations used in Table II are as follows:

Stch	-	Stitch
in	-	inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
brtck	-	Bartack
Comrcl	-	Commercial
smlr	-	similar
incl	-	including
dbl	-	double

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cutting. a. The component parts of the garrison cap shall be cut in strict accordance with the patterns furnished, which show size, shape , directional lines for cutting and notches for proper assembly of all component parts. b. All component parts cut from basic material or lining (Type I only) shall be from one piece of material. Ends shall not be used. c. The component parts cut from the basic material or lining (Type I only) shall finish with the face side of the material on the outside. d. The artificial leather sweatband (Type I, class 1, only) shall be cut from one piece of material as specified in 3.3.2.1. e. The terrycloth sweatband for the Type I, class 2 cap shall be cut from materials specified in 3.3.2.2. Each component shall be cut from one piece of material.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	f. The cloth sweatband for the Type II garrison cap shall be cut from basic material with the edges turned under approximately 3/8 inch and finish in the cap 1-1/4 to 1-3/8 inches in width. (The length will vary with the size of the cap).					
2.	Replacement of defective components. During the spreading, cutting, and manufacturing processes, components having material defects or damages that are classified as defects in MIL-STD-901, shall be removed from production and replaced with non-defective and properly matched components.					
3.	Shade and size marking. All component parts cut from the basic material or lining (Type I only) shall be marked or ticketed in accordance with 3.7.1.					
Construction of Type I Cap.						
4.	Assemble top crown (gusset) and side crown pieces.					
	a. Fold the top crown (gusset) in half in the length direction and stitch a dart on the inside, 1/16 inch along the fold, extending to a point 3/8 inch from each pointed end of the gusset. Press the gusset flat with dart in folded position.	301 or 401	OSf-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. The finished top crown (gusset) piece shall measure 1-3/8 (± 1/8) inches in width at center.					
	c. Superimpose face of side crown pieces against face of top crown (gusset) with back of gusset against face of lining and with raw edges even. Stitch 1/4 (± 1/16) inch from raw edges through all plies.	301 or 401	SSq-2(a)	12-14	50 50	50 70
	d. Turn back lining piece and top crown (gusset) piece (see Figure 2) and topstitch 1/16 inch from the folded edge through the gusset, lining piece and seam allowance. NOTE: There shall be no visible evidence of top-stitching on the outside of the side crown piece.	301 or 401	SSq-2(b)	12-14	50 50	50 70
	e. Stitch the center front and center back seams of the side crown pieces, 1/4 (± 1/16) inch from the raw edges.	301 or 401	SSa-1	12-14	50 50	50 70
	f. Stitch the front and back seams of the lining pieces 1/4 (± 1/16) inch from the raw edges. The lining shall be free from the side crown proper.	301 or 401	SSa-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	g. Position the combination label on the right side lining piece and the instruction label on the left side lining piece, each approximately 2 inches from the bottom edge and center back seam of the lining piece. Stitch around all sides. The bottom edge of labels shall finish parallel to the bottom edge of the lining.	301	LSbj-1	12-14	50	50
	h. Overedge stitch lining pieces to side crown pieces around the bottom edge.	503 504 or 602	SSa-1	8-10	70	70
5.	Assemble curtain.					
	a. Overedge the outer edge and back side of the curtain.	503 504 or 602	EFd-1	8-10	70	70
	b. Turn under outer edge of curtain and double needle stitch 1/4 (± 1/16) inch gauge with the outer row of stitching 1/16 inch from folded edge. The finished hem shall measure 1/2 (± 1/8) inch in width.	301 or 401	EFa-2	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Overedge the bottom of curtain.	503 504 or 602	EFd-1	8-10	70	70
	d. Superimpose curtain indicated by marks on patterns and stitch 1/8 to 3/16 inch from the raw edge.	301 or 401	SSa-1	12-14	50 50	50 70
	e. The overlap of the curtain shall finish 4-5/8 (± 1/4) inches from end to center front and shall be on the right side as worn (see Figure 1).					
	f. Overlap side crown pieces over curtain 3/8 inch and stitch 1/4 (± 1/16) inch from the raw edge.	301 or 401	LSa-1	12-14	50 50	50 70
6.	Press Cap.					
	a. To insure proper size and fit, the cap shall be completely pressed with a heated pressing machine before sewing in the artificial leather sweatband. It is recommended that a suitable pressing template (backing) be inserted between the curtain and side crown on each side of cap.					
	b. Smooth curtain on template and press cap flat, carefully folding and creasing the bottom edge.					

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Remove all pressing marks and gloss.					
7.	Attach sweatband.					
	a. Stitch Type I, class 1 artificial leather sweatband (see 3.3.2.1) to the lower edge of the cap with ends overlapping 3/4 + 1/4 inch) at the back. The seam shall finish not more than 1-1/2 inches to the right or left of the seam at the back of the cap and the ends shall not finish on the back seam.	304 or 404	LSa-1	8-10	50 50	50 70
	b. Stitch overlapped ends of the sweatband together the full width of the sweatband.	304 or 404	LSa-1	8-10	50 50	50 70
	or					
	c. Cut the sweatband to the required length and butt the ends together. Stitch with a reinforced strip of coated material on the underside.	304 or 404	FSe-1	8-10	50 50	50 70
	NOTE: The reinforcement piece shall be a 5/8 inch wide strip of print cloth or sheeting, coated lightly on both sides with pyroxylin or vinyl.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	d. Stitch the sweatband to lower edge of cap.	304 or 404	LSa-1	12-14	50 50	50 70
	e. The Type I, class 2 sweatband shall be made of terrycloth (see 3.3.3.2).					
	(1). Superimpose the spun-bonded nonwoven over the charcoal grey foam and place these two layers against the back of the terrycloth, 1/4 inch in from both edges. Turn the top and bottom edges of the terrycloth over the edges of the nonwoven and stitch through all layers.	401	SSbc-1	6-8	50	50
	(2). Overlap ends of terry-cloth sweatband 3/4 (± 1/4) inch and stitch the full width of the sweatband.	304 or 404	LSa-1	8-10	50	50
	(3). Stitch terrycloth sweatband to lower edge of-cap. The seam shall finish not more than 1-1/2 inches to the right or left of the seam at the back and the ends shall not finish on the back seam.	304 or 404	LSa-1	8-10	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	(4). Overlap the ends of terrycloth sweatband and stitch through the lining and crown pieces.	304 or 404	LSaa-1	6-8	50	50
	f. The finished sweatband (artificial leather or terrycloth) shall conform to the following:					
	(1). The sweatband shall not be exposed beyond the bottom edge of the cap.					
	(2). The stitching shall not extend into the sweatband more than 1/8 inch from the edge.					
	(3). The sweatband shall be located 1/4 (± 1/16) inch from folded edge of curtain.					
8.	Finishing. Turn apron up to finished position. All thread ends shall be trimmed, and loose threads removed from cap. All spots, stains, and shade tickets shall be removed without damaging the material.					
	NOTE: Caution shall be taken so as not to harm the material when trimming.					

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
9.	Pressing. It is recommended that a suitable pressing template (backing) be inserted between the cap curtain and side crown piece on each side of the cap. Smooth curtain on template and press cap flat with a heated pressing machine, carefully folding and creasing the bottom edge. Remove all pressing marks and gloss. The sweatband shall not be exposed beyond the bottom edge of the cap.					
	Construction of Type II Cap					
10	Assemble top crown (gusset) and crown side pieces. a. Fold the top crown (gusset) in half in the length direction and stitch a dart on the inside, 1/16 inch along the fold, extending to a point 3/8 inch from each pointed end of the gusset. Press the gusset flat with dart in folded position. b. The finished top crown (gusset) piece shall measure 1-3/8 (± 1/8) inches in width at center.	301 or 401	Osf-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:54Z
Check the source to verify that this is the currentversion before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Superimpose the side crown pieces to the top crown (gusset), face to face, aligning raw edges. Stitch each crown side piece to appropriate edge of gusset, 1/4 (± 1/16) inch from the raw edge.	301 or 401	SSq-2(a)	12-14	50 50	50 70
	d. Overedge stitch the edges together.	503 504 or 602	SSa-1	8-10	70	70
	or					
	e. Operations 9c and 9d may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	12-14	50 (chain-stching) 70 (over-edging)	70 70
	f. Turn back the top crown (gusset) piece (see Figure 2) and topstitch through the gusset piece and seam allowances, 1/16 inch from the folded edge. NOTE: There shall be no visible evidence of topstitching on the outside of the side crown pieces.	301 or 401	SSq-2(b)	12-14	50 50	50 70
	g. Stitch the center front and center back seams of the side crown pieces, 1/4 (± 1/16) inch from the raw edges.	301 or 401	SSa-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	h. Overedge stitch the edges together.	503 504 or 602	SSa-1	8-10	70	70
	or					
	i. Operations 9g and 9h may be performed in one operation by simultaneously stitching and overedging.	515 516 or 519	SSa-2	12-14	50 (chain-stching) 70 (over-edging)	70 70
	j. Overedge raw edge around the bottom of the crown.	503 504 or 602	EFd-1	8-10	70	70
	k. Press top crown (gusset) and crown side pieces smooth and flat.					
11.	Assemble curtain.					
	a. Overedge outer edge of curtain.	503 504 or 602	SSa-1	8-10	70	70
	b. Turn under outer edge of curtain and double needle stitch 1/4 (± 1/16) inch gauge along turned edge with top row of stitching 1/16 inch from the folded edge. The finished hem shall measure 1/2 (± 1/8) inch in width.	301 or 401	EFa-2	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:54Z
Check the source to verify that this is the currentversion before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	c. Overlap curtain as indicated by marks on pattern and stitch 1/8 to 3/16 inch from the raw edge.	301 or 401	SSa-1	12-14	50 50	50 70
	d. Overlap side crown pieces over curtain 3/8 inch and stitch 1/4 (± 1/16) inch from the raw edge.	301 or 401	LSa-1	12-14	50 50	50 70
	e. The overlap of the curtain shall finish 4-5/8 (± 1/4) inches from end to center front and shall be on the right side as worn (see Figure 1).					
12.	Make and attach sweatband and labels.					
	a. Fold top and bottom ends of sweatband over 3/8 (± 1/16) inch. Press to maintain folds.		EFa			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	b. Align the bottom edge of the sweatband with the bottom edge of the crown around the inside of the cap. Stitch the sweatband to the cap with two rows of stitching, 1/16 inch from each folded edge, simultaneously inserting and catching the bottom edge of the combination label in the top edge of stitching on the right inside crown piece, and catching the bottom edge of the instruction label in the top edge of stitching on the left inside crown piece. Overlap ends of sweatband 1 (± 1/4) inch at the back of the cap, and turn top end under 1/4 to 3/8 inch.	304	Combination of LSd-2 and EFa-2	12-14	50	50
	c. The seam shall finish not more than 1-1/2 inches to the right or left of the seam at back of cap, and the ends shall not finish on the back seam.					
	d. Stitch the overlapped ends of the sweatband together across the full width, 1/16 to 1/8 inch from the outer folded edge.	304 or 404	LSd-1	12-14	50 50	50 70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

TABLE II - CONSTRUCTION OF GARRISON CAP

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
	e. Stitch around all the unattached edges of the labels, 1/16 inch from the edges.	301	LSbj-1	12-14	50	50
	NOTE: The label stitching shall not show above the curtain on the outside of the finished cap.					
13.	Finishing. Turn curtain up to finished position. All thread ends shall be trimmed, and loose threads removed from cap. All spots, stains, and shade tickets shall be removed without damaging the material.					
	NOTE: Caution shall be taken so as not to harm the material when trimming.					
14.	Pressing. It is recommended that a suitable pressing template (backing) be inserted between the cap curtain and side crown piece on each side of the cap. Smooth curtain on template and press cap flat with a heated pressing machine, carefully folding and creasing the bottom edge. Remove all pressing marks and gloss. The sweatband shall not be exposed beyond the bottom edge of the cap.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The finished caps shall conform to the measurements as shown in Table III. All measurements and tolerances are expressed in inches.

Table III - Sizes and finished measurements

	A	B	C	D	E	F	G
		Height of crown			Height of curtain		
Size	Head Measurement	Front	Center	Back	Front	Back	Length of overlap
6-1/2	20-1/2	3-1/4	4-1/2	4	2-1/2	3	4-5/8
6-5/8	20-7/8	3-1/4	4-1/2	4	2-1/2	3	4-5/8
6-3/4	21-1/4	3-1/4	4-1/2	4	2-1/2	3	4-5/8
6-7/8	21-5/8	3-1/4	4-1/2	4	2-1/2	3	4-5/8
7	22	3-1/4	4-1/2	4	2-1/2	3	4-5/8
7-1/8	22-3/8	3-1/4	4-1/2	4	2-1/2	3	4-5/8
7-1/4	22-3/4	3-1/4	4-1/2	4	2-1/2	3	4-5/8
7-3/8	23-1/8	3-1/4	4-1/2	4	2-1/2	3	4-5/8
7-1/2	23-1/2	3-1/4	4-1/2	4	2-1/2	3	4-5/8
7-5/8	23-7/8	3-1/4	4-1/2	4	2-1/2	3	4-5/8
7-3/4	24-1/4	3-1/4	4-1/2	4	2-1/2	3	4-5/8
7-7/8	24-5/8	3-1/4	4-1/2	4	2-1/2	3	4-5/8
8	25	3-1/4	4-1/2	4	2-1/2	3	4-5/8
Tol.	+ 1/4 -1/8	± 1/8	± 1/4	± 1/4	± 1/8	± 1/8	± 1/4

NOTE: A thru G refer to Figure 1

A. Twice the measurement taken at the base of the crown, with the curtain folded down.
B. Measurement shall be taken from bottom folded edge of curtain to juncture of side crown and top crown (gusset) at center front.
C. Measurement shall be taken at center of cap, from bottom folded edge of curtain to top edge of side crown.
D. Measurement shall be taken from bottom folded edge of curtain to junction of side crown and top crown (gusset) at center back.
E. Measurement shall be taken from bottom folded edge of curtain to top edge of curtain at center front.
F. Measurement shall be taken from bottom folded edge of curtain to top edge of curtain at center back.
G. Measurement shall be taken from base of overlap to folded edge of curtain at center front.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable point values specified in MIL-STD-901.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article, submitted in accordance with 3.2, shall be inspected for conformance with design, construction, workmanship, and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 20260-21T01:54Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-901, except when otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement document.

4.4.2 Examination of the end item. Examination of the end item shall be in accordance with MIL-STD-901.

4.4.3 Dimensional examination. The dimensional examination provisions for the finished caps shall be as specified in MIL-STD-901.

4.4.4 Examination of packaging requirements. Examination of packaging requirements shall be in accordance with MIL-STD-901.

4.4.5 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5 in accordance with MIL-STD-105.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each cap shall be inserted into a snug-fitting, flat style, clear polyethylene film bag of 0.00125 inch thickness (± 25 percent tolerance). The bag may be fabricated from polyethylene film tubing or sheeting. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. All seams and closures shall be formed by heat sealing. A 1/4 inch hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the polyethylene bag may be of the tuck-in or reverse flap type where a heat seal closure and corner hole are not required.

5.1.2 Level C. Caps shall be preserved to afford adequate protection against deterioration and physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Eighty (80) Type I Class 1 or 2 or seventy-five (75) Type II caps of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class weather-resistant, variety DW, grade V15c, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, with the length parallel to the side of the container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

5.2.2 Level B. Eighty (80) Type I Class 1 or 2 or seventy-five (75) Type II caps of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, class domestic, variety DW, grade 200, size 1A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic of MIL-B-17757. Level A packages shall be packed flat, with the length parallel to the side of the container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

Source: https://assist.dla.mil -- Downloaded: 202640-21T01:54Z
Check the source to verify that this is the currentversion before use.

5.2.3 Level C. Item preserved, as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.2.4 Palletization. When specified (see 6.2) item, packed as specified shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means C and D or Film Bonding F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type IV; type V, class 1, size 2; or type VIII, fabricated from wood groups I, II, III, or IV, grade A of NN-P-71, or 4-way, style 1, size A, type I, class 1 fabricated from wood groups specified, in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs, intermediate or exterior containers, and palletized unit loads, shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

CAP, GARRISON, MAN'S
STOCK NUMBER:
SIZE:
QUANTITY:

5.4 Packaging requirements and codes. When specified (see 6.2), preservation and packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The caps are intended for wear by the following Coast Guard personnel, as applicable:

a. Commissioned Officers.
b. Officer Candidates and Reserve Officer Candidates.
c. Chief Petty Officers.
d. Coast Guard male personnel.

6.2 Acquisition requirements. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Size, type and class required (see 1.2).
c. When first article inspection is required (see 3.2), the item will be tested and should be a first article sample. The Contracting Officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, testing, and approval of the first article.
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. When palletization is required (see 5.2.4).
f. When all packaging data is to be found in MIL-STD-2073-1 and MIL-STD-2073-2 (see 5.4).

6.3 Samples and patterns. For access to samples and patterns, address the procuring activity issuing the invitation for bids (see 3.1 and 3.5).

6.4 Recycled materials. It is encouraged that recycled materials be used when practical as long as the materials meet the requirements of this specification.

6.5 Subject term (Key Word) listing.
Hat, Male
Sweatband, Artificial Leather
Sweatband, Terrycloth

Custodian:

Coast Guard - CG

Preparing Activity:

DLA - CT

Project No. 8405-0179

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:54Z
Check the source to verify that this is the current version before use.



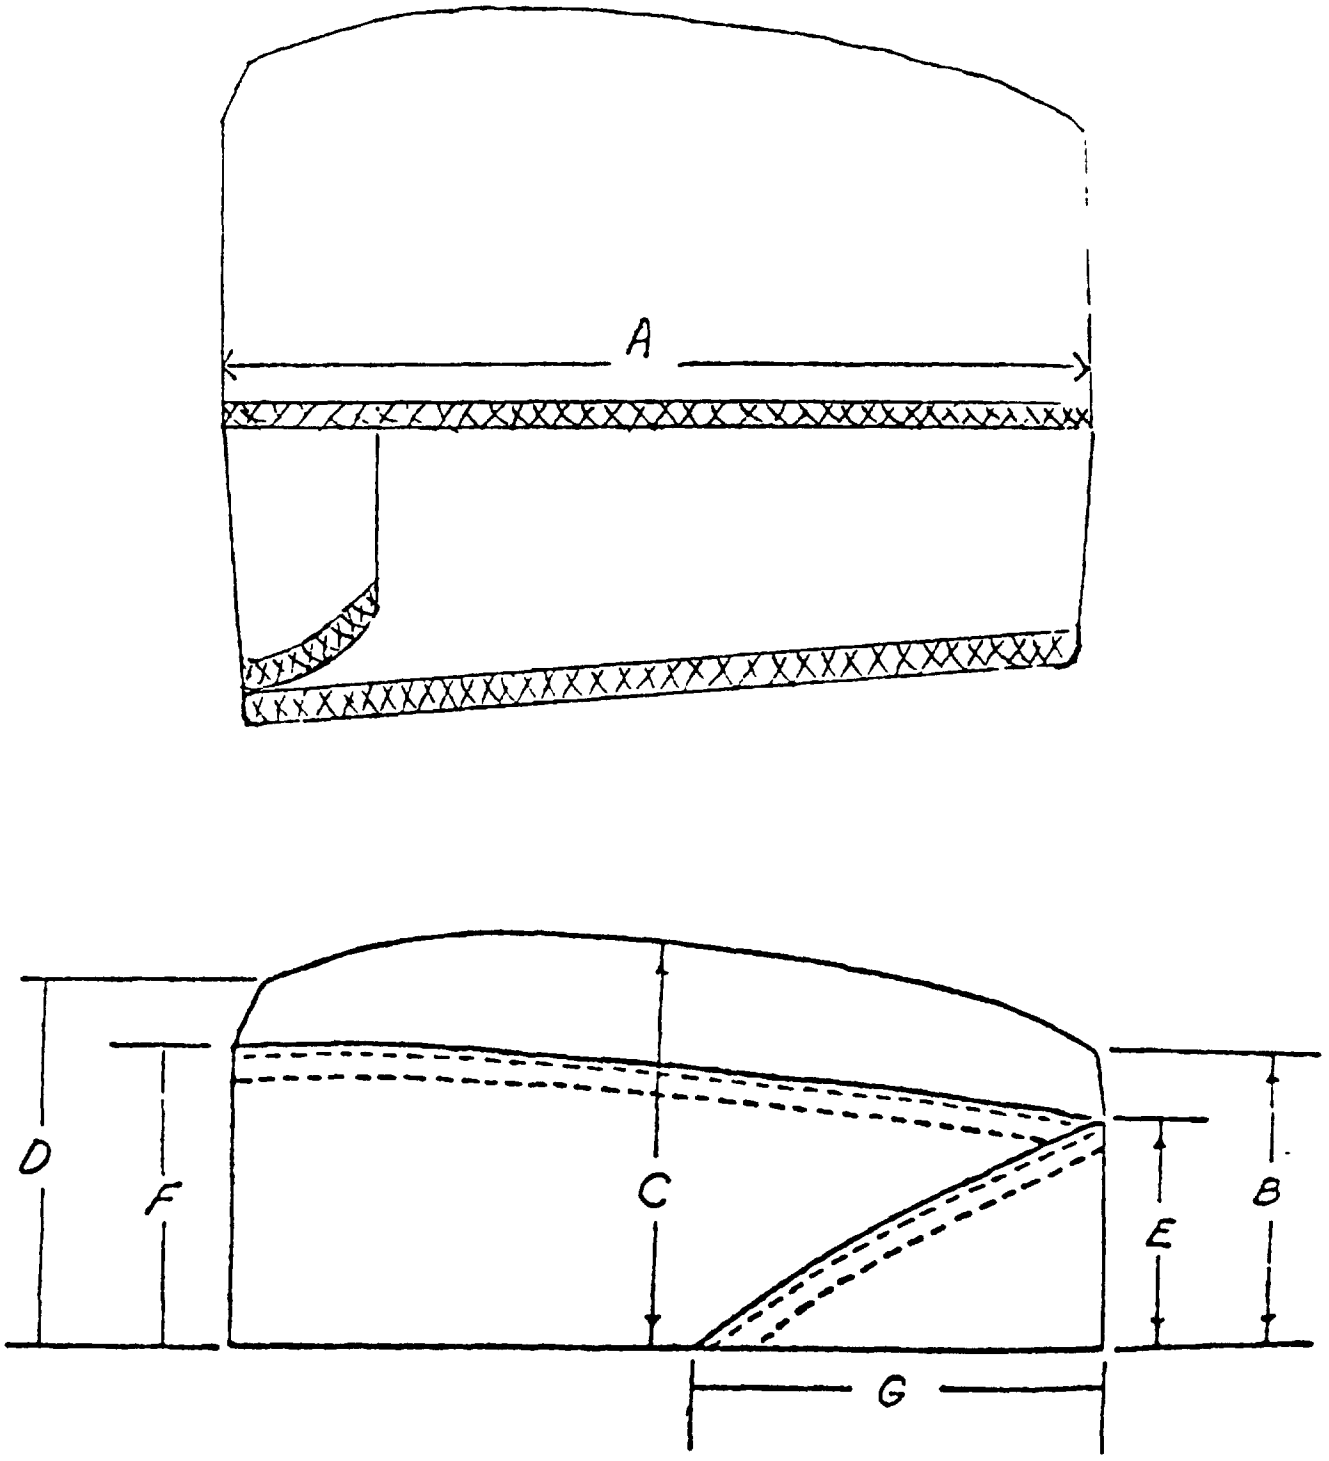


Figure 1 - Cap, Garrison, Man's

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

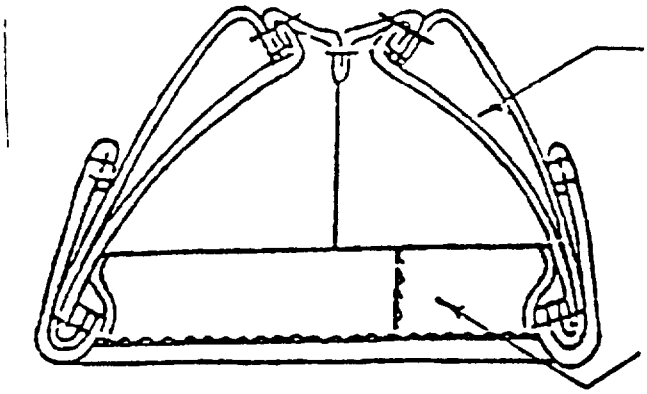

TYPE I CAP - LINED

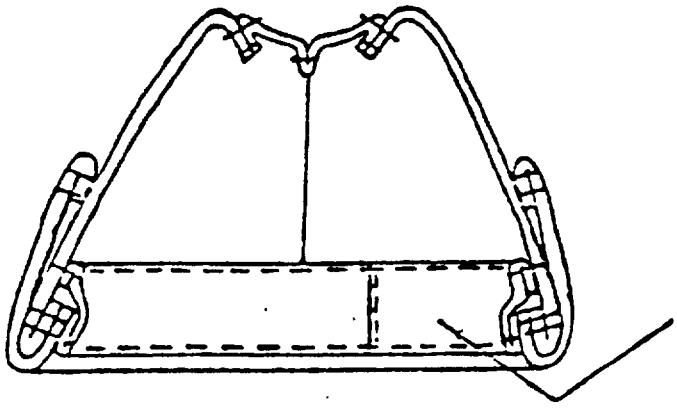

TYPE II CAP - UNLINED

Figure 2 - Cap, Garrison, Man's

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-31002(CG)	92-03-30

3. DOCUMENT TITLE
CAP, GARRISON, MAN'S (COAST GUARD)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center DPSC-FSSD	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, PA 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 — Previous editions are obsolete — 198/270

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:54Z
Check the source to verify that this is the current version before use.