INCH POUND

MIL-C-31003
4 January 1993
SUPERSEDING
FSSD/PD 92-01
20 March 1992

MILITARY SPECIFICATION

COVERALLS, UTILITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for the manufacture of general purpose utility coveralls for all services.

1.2 Schedule of sizes. The coveralls shall be in the following sizes as specified (see 6.2):

Schedule of sizes

XX-Small
X-Small
Small
Medium
Large
X-Large
XX-Large

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50199	-	Thread, Polyester Core: Cotton- or Polyester-Covered
V-F-106	-	Fasteners, Slide, Interlocking
DDD-L-20	-	Label: For Clothing, Equipage and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping Fiberboard

MILITARY

MIL-W-5664	-	Webbing, Textile, Elastic
MIL-C-10296	-	Cloth, Sateen, Cotton
MIL-F-21840	-	Fastener Tapes, Hook and Loop, Synthetic

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets
MIL-STD-1668	-	Provisions for Evaluating Quality of Cloth Coveralls
MIL-STD-2073-1	-	DoD Materials Procedures for Development and Application of Packaging Requirements
MIL-STD-2073-2	-	Packaging Requirement Codes

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government Publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIAL (ASTM)

ASTM D 3951 - Standard Practice For Commercial Packaging

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Samples. Samples, when furnished, are solely for guidance and information to the contractor. Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified, (see 6.3), a sample shall be subjected to first article inspection, in accordance with 4.3.

3.3 Material. It is encouraged that recycled materials be used when practical as long as the materials meet the requirements of this specification.

3.3.1 Basic material. The material for the coverall shall be cotton sateen cloth, Camouflage Green 483, conforming to class 1 of MIL-C-10296.

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

3.3.2 Thread. The thread for seaming and stitching shall be type I, ticket Nos. 50 or 70, 2-ply conforming to A-A-50199. The color of the thread shall be Camouflage Green 483.

3.3.3 Labels. Each coverall shall have an identification label and a size label or a combination identification and size label and an instruction label conforming to DDD-L-20. The labels shall have "good" colorfastness to accelerated laundering, accelerated dry cleaning, wet and dry crocking, and printing.

3.3.3.1 Identification label. The identification label shall conform to type VI, class 1.

3.3.3.2 Size label. The size label shall conform to type VI, class 2.

3.3.3.3 Instruction label. The instruction label shall conform to class 3 and contain the following information:

Laundering Instructions

Fasten all fastener tapes before laundering

Hand or Machine Wash, Hot

Tumble Dry, Medium

DO NOT REMOVE LABEL

Use NAVEDTRA 414-01-4581 Formula II:

Hot Formula without bleach (140°F)

3.3.3.4 Combination label. The identification, size, and instruction label may be combined into one label conforming to type VI, class 14 of DDD-L-20.

3.3.4 Elastic webbing. The elastic cotton webbing shall be 1-1/2 inches wide and a minimum of 0.035 inch thick conforming to type I, class 1 of MIL-W-5664. The color of the elastic webbing shall be Camouflage Green 483.

3.3.5 Slide fasteners. The slide fastener shall be type I, style 15 individual element molded plastic size MS conforming to V-F-106. The color of the plastic components shall approximately match Camouflage Green 483. The tape shall be 100% textured polyester. The length of the slide fastener shall fit the front opening shown on patterns. The color of the tape shall be Camouflage Green 483.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

3.3.5.1 Table I. Length of slide fastener. This table shall include each size coverall and the required length of the slide fastener for the front closure.

Table I. Length of Slide Fastener from top stop to bottom stop

Size	Length (inches)
XX-Small	26-3/8
X-Small	27-3/8
Small	28-3/8
Medium	29-3/8
Large	30-3/8
X-Large	31-3/8
XX-Large	32-3/8

Note: The slide fastener tape should extend 7/8 inch above top stop and 5/8 inch below bottom stop.

3.3.6 Hook and loop fastener tape. The hook and loop fastener tape shall be 1-inch wide, nylon fastener tape conforming to type I, class 1 of MIL-F-21840 and to Tables II and IV of this specification. The color of the hook and loop fastener tape shall be Camouflage Green 483.

TABLE II. Fastener tapes

Coverall sizes	Lengths of Fastener Tapes (inches)						
	Front patch pkts 1/	Hip pkts 1/	breast pkts 1/	leg tab 2/		sleeve tab 3/	
	hook & loop	hook & loop	hook & loop	hook	loop	hook	loop
XX-sm	2	1	1	1	1, 6	1	1, 3-1/2
X-sm	2	1	1	1	1, 6	1	1, 3-1/2
sm	2	1	1	1	1, 6	1	1, 3-1/2
md	2	1	1	1	1, 6	1	1, 3-1/2
lg	2	1	1	1	1, 6	1	1, 3-1/2
X-lg	2	1	1	1	1, 6	1	1, 3-1/2
XX-lg	2	1	1	1	1, 6	1	1, 3-1/2

1/ each side
2/ each leg
3/ each sleeve

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

3.4 Design. The coveralls shall be a one piece, unlined garment with a slide fastener front closure, shirt style collar and side pass through pockets and elastic webbing in the back waistband. The wrists and ankles shall have hook and loop fastener tape adjustments. The coveralls should have two front patch pockets with tape fasteners and double piped pass throughs, two hip patch pockets with flaps and tape fasteners, and two breast pockets with flaps and tape fasteners. The left breast pocket shall have a pencil opening (See figure 1).

3.5 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification. The standard patterns provide an allowance of 1/2 inch for double-lapped and double-stitched seams, pockets and flaps, and 3/8 inch for all other seams. Unless otherwise indicated in Table IV, seams shall be in accordance with these seam allowances.

3.5.1 List of pattern parts. The components of the coverall shall be cut from the material specified in accordance with the pattern parts indicated.

Table III. Pattern Parts

Material	Pattern nomenclature	Cut parts
	Shirt parts	
	back	1
	front	2
	collar	2
	sleeve	2
	breast patch pocket	2
	breast pocket flaps	2
	sleeve tabs	4
	back belt (for elastic)	1
	Trouser parts	
	back	2
	front	2
	hip patch pocket	2
	hip pocket flaps	2
	front patch pocket	2
	pass through piping	2
	leg tabs	4

Source: https://assist.dla.mil - Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam and stitching types, as specified in Table IV, shall conform to FED-STD-751. When two or more methods of seams or stitches are given for the same operation, either one may be used. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the coveralls. The gage of stitching for double stitched seams shall be 3/16 to 5/16 inch unless otherwise specified herein with the first row of stitching 1/32 to 1/16 inch from turned edge.

3.6.1.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table IV.

3.6.1.2 Seam type. Seam type shall be as specified in Table IV with seam allowances maintained and seams properly sewn so that no raw edges, run-offs, twists, pleats, puckers or open seams shall result.

3.6.1.3 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/4 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.6.1.3.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks, two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

3.6.1.4 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.1.3.1a and 3.6.1.3.1b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

3.6.1.5 Type 504 stitching. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the material. The cover thread shall be the same type as the looper thread, the lock on the top chainstitch portion shall be 3/8 inch from the raw edge and the bight of the overedge stitch portion shall be 3/16 to 1/4 inch.

3.6.1.6 Bartacking. Bartacking shall be 3/8 $\pm$ 1/16 long, 1/8 $\pm$ 1/32 inch wide, unless otherwise specified, and shall contain 28 stitches. Bartacks shall be free from thread breaks and loose stitching.

3.6.1.7 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping or backstitches are used to secure the ends of the stitching.

3.6.1.8 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

3.7 Manufacturing operations requirements. The coveralls shall be manufactured in accordance with operation requirements specified in Table IV. The contractor is not required to follow the exact sequence of operations provided the finished coverall is identical to that produced by following the sequence as listed in Table IV. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.7.1 Figure. Figure 1 is furnished for information purposes only. When inconsistencies exist between the written specification and the figure, the written specification shall govern.

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

3.8 Abbreviations in Table of Operations. The abbreviations used in Table IV are as follows:

Stch	-	Stitch
In	-	Inch
Ndl	-	Needle
Bob	-	Bobbin
Lpr	-	Looper
Mchne	-	Machine
Brtck	-	Bartack
Comrcl	-	Commercial
Smlr	-	Similar
Btn	-	Button
Btnhl	-	Buttonhole
Incl	-	Including
Dbl	-	Double

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cut coveralls. a. Cut the coveralls in strict accordance with patterns furnished which show size, directional lines, shape and placement of pockets, and notches for proper assembly. b. Directional lines shall be placed in the warp direction of the material. The directional lines for the fronts and backs of the trouser parts may vary by not more than 2-1/2 inches. Measurement shall be taken from the top and bottom of the directional line on pattern to the selvage edge of the fabric and the difference between two measurements shall not exceed the tolerance specified. c. Cut all components parts of the coveralls from one piece of material except undercollar sleeve back belt and leg tabs which may cut from ends. Parts cut from ends shall approximate the shade of the garment. d. The cord facing pieces for the pass through shall be cut from				

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
1.	Cut coveralls. (cont'd) the basic material in the warp direction to finish 2-5/8 ± inches in width and 8-1/2 ± inches in length.				
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to ensure that material defects or damages, as specified in MIL-STD-1668 are excluded and replaced with non-defective and properly matched components.				
3.	Marking. a. Mark, ticket or bundle all component parts of the coverall except those parts cut from ends to insure correct size, proper assembly and a uniform shade throughout the coverall. b. Any method of marking may be used except: (1) Metal fastening devices.				

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
3.	Marking. (cont'd)					
	(2) Sew-on tickets. (3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets					
	c. The use of ink pad numbering machine, rubber stamp or pencil will be acceptable provided the numbers do not show through the outside of the coverall and the numbers are covered by the seam allowance.					
4.	Labels.					
	a. Sew labels on all four sides not more than 3/16 inch from edges to inside center of back (1 inch tolerance) as follows. The stitching shall not be through the printing.					
	(1) Size label - The top edge caught in the stitching of the top collar to neck.	301	LSbj-1	10 - 14	50	70
	(2) Identification label- The top edge may abut or be caught in the bottom line of stitching of size label.	301	LSbj-1	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
4.	Labels. (cont'd)					
	(3) Instruction label - centered 1 to 1-1/4 inches below the identification label or combination identification and size label.					
	NOTE: When a combination size and identification label is used, the label shall be positioned as in (1) above.					
5.	Make collar.					
	Finished appearance. The points and edges of the collar shall be neatly and completely forced out and uniform in width. The plies shall be smooth and flat without distortion and with the edge stitching uniform in width.					
	Join top and undercollar plies along top and side edges. Turn collar, work out points and single stitch 3/16 to 1/4 inch from edge.	301 or 401 and 301	SSe-2(a)	10 - 14	50	70
			SSe-2(b)	10 - 14	50	70
6.	Make pass-through.					
	a. Position piping pieces on outside of trousers as indicated by marks on pattern and stitch to trousers with two rows of stitching.	301	SSa-1	10 - 14	50	70

Source: https://assist.dla.mil - Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE II - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
6.	Make pass-through. (cont'd)					
	b. Cut opening to the inside between the rows of stitching, through all plies simultaneously and lower parts of facing through the cut opening, fold edge 1/4 inch and topstitch top, sides and bottom forming a 3/16 inch to 1/4 inch cord edge. (A special two needle pocket machine with cutting knife may be used for this operation).	301	SSa-1	10 - 14	50	70
	c. Bartack through corners of opening 3/8 ± 1/16 inch.	bar-tack		28 per bar-tack		
7.	Make front trouser pockets.					
	a. Fold under pocket opening 3/8 inch from edge and fold again 5/8 inch. Topstitch one row 1/2 inch from edge. NOTE: All pockets may be creased on a creasing machine.	301	EFb-1	10-14	50	70
	b. Sew a 2 inch length of hook fastener tape to the outside of the under-side of pocket, as indi-cated by marks on pattern	301	LSbj-1	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
7.	Make front trouser pockets. (cont'd)					
	3/8 inch from finished edge. Stitch all four sides 1/16 inch from edge.					
	c. Position front patch pocket to trouser front, as indicated on pattern, and double stitch. The top and back raw edges of front pockets may be stitched to seam allowance of trouser prior to joining of outseams and waist seam.	301	LSd-2	10 - 14	50	70
	d. Attach loop tape to inside pocket pass through at indicated marks on pattern, matching hook tape. Stitch all sides 1/16 inch from edge of loop tape.	301	LSbj-1	10 - 14	50	70
	The tape shall be 2 inches long for front patch pockets.					
8.	Make hip pockets.					
	a. Turn in top edge of hip pockets 1/2 inch to 5/8 inch with raw edges turned in, and single stitch 1/16 to 3/32 inch from edge.	301	EFb-1	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
8.	Make hip pockets. (cont'd)					
	b. Position loop fastener tape to outside of hip pocket at indicated marks on pattern. Center 3/8 inch from finished edge. Stitch all sides of tape 1/16 inch from edge. The tape shall be 1 inch long.	301	LSbj-1	10 - 14	50	70
	c. Turn in raw edges of hip pocket 1/2 inch. Position hip patch pocket to back, as indicated on pattern, and double stitch.	301	EFb-2	10 - 14	50	70
	d. Place a vertical 3/8 inch bartack at each pocket opening corner. The bartack shall be in line with the inner row of stitching.	Bartack		28 per bartack		
9.	Make and attach hip flaps.					
	a. Fold flap at fold line (with face inside) at indicated marks on pattern. Stitch 1/4 inch from the sides. Turn to a finished position and work out edges. Topstitch 1/4 inch from sides and outer edge.	301	SSe-3(a)	10 - 14	50	70
		301	LSd-2	10 - 14	50	70

Source: https://assist.dla.mil-Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
9.	Make and attach hip flaps. (cont'd)					
	b. Overedge stitch the open raw edge together. Position hook fastener tape to the underside of outside of pocket flaps. The edge of the tape shall be centered 1/4 inch from finished edge of flap. Stitch all four sides of hook fastener tape 1/16 inch from edge with a single row of stitching. The tape shall be 1 inch long.	504	LSd-2	10 - 14	50	70
		504	SSa-1	10 - 14	50	70
		301	LSbj-1	10 - 14	50	70
	c. Position overedged edge of flap as indicated by marks on pattern. Stitch 1/2 inch from overedged edge. The distance between top of pocket and top edge of flap shall be 1/2 inch. The flap shall be centered over the pocket and extend 1/8 inch from each side.	301	LSbk-2(a)	10 - 14	50	70
	d. Turn flap down and topstitch 1/16 to 1/8 inch from the folded edge using a double stitch with a 1/4 inch gauge. The loop of the	301	LSbk-2(b)	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
9.	Make and attach hip flaps. (cont'd) fastener tapes shall match the hook portion of the fastener tape on the pocket.					
10.	Make breast pockets.					
	a. Turn in top edge of breast pockets 1/2 inch to 5/8 inch with raw edges turned in, and single stitch 1/16 to 3/32 inch from edge.	301	EFb-1	10 - 14	50	70
	b. Position loop tape to outside of breast pocket. Center 3/8 inch from finished edge. Stitch all sides 1/16 inch from edge with a single row of stitching. The tape shall be 1 inch long.	301	LSbj-1	10 - 14	50	70
	c. Turn in raw edges of breast pockets along the sides and bottom 1/2 inch. Position breast pocket to front, as indicated on pattern, and double stitch.	301	LSd-2	10 - 14	50	70
	d. The bartack shall be in line with the inner row of stitching. Place a vertical 3/8 ± 1/16 inch bartack at each of the pocket opening corner.	bar-tack		28 per bar-tack		

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
11.	Make and attach right breast pocket flap.	301	SSe-3(a)	10 - 14	50	70
	a. Fold flap at fold line (with face inside) at indicated marks on pattern. Stitch 1/4 inch from the sides. Turn to a finished position and work out edges. Topstitch 1/4 inch from sides and outer edge.	301	LSd-2	10 - 14	50	70
	b. Overedge stitch the open raw edge together. Position hook fastener tape to underside of outside of pocket flaps.	504	SSa-1	10 - 14	50	70
	The edge of the tape shall be centered 1/4 inch from finished edge of flap. Stitch all four sides of hook fastener tape 1/16 inch from edge with a single row of stitching. The tape shall be 1 inch long.	301	LSbj-1	10 - 14	50	70
	c. Position overedged edge of flap on upper front as indicated by marks on pattern. Stitch 1/2 inch from overedged edge. The distance between the top of pocket and top edge of flap shall be 1/2 inch. The flap shall be centered over the pocket and extended 1/8 inch from each side.	301	LSbk-2(a)	10 - 14	50	70

Source: https://assist.dla.mil - Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
11.	Make and attach right breast pocket flap. (cont'd)	301	SSe-3(a)	10 - 14	50	70
	d. Turn flap down and topstitch 1/16 to 1/8 inch from the folded edge using a double stitch with a 1/4 inch gauge. The hook of the fastener tapes shall match the loop portion of the fastener tape on the pocket.	301	LSbk-2(b)	10 - 14	50	70
12.	Make and attach left breast pocket flap.					
	NOTE: The pencil pocket opening shall be positioned at the end of the left flap closest to the slide fastener.					
	a. Fold flap at fold line (with face inside) at indicated marks on	301	SSa-1	10 - 14	50	70
	pattern. Stitch 1/4 inch starting at notch to folded edge. On opposite side stitch from fold to upper edge. Turn to a finished position and work out edges.	301	SSa-1	10 - 14	50	70
	b. Clip notch of pencil pocket opening, turn opening in and stitch 1/4 inch from notch across pencil pocket opening to end of flap.	301	SSc-1	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
12.	Make and attach left breast pocket. (cont'd)					
	c. Position hook fastener tape to the underside of outside of pocket flaps. The edge of the tape shall be centered 1/4 inch from finished edge of flap. Stitch all four sides of hook fastener tape 1/16 inch from edge with a single row of stitching. The tape shall be 1 inch long.	301	LSbj-1	10 - 14	50	70
	d. Position flap on front as indicated by marks on pattern, and stitch from notch end of pencil pocket opening to end of flap, 1/2 inch from raw edge. The distance between top of pocket and top edge of flap shall be 1/2 inch. The flap shall be centered over the pocket and extend 1/8 inch on each side.	301	LSbk- 2(a)	10 - 14	50	70
	e. Turn flap down and topstitch from both ends of pencil pocket, 1/16 inch from folded edge using a double stitch with a 1/4 inch gage, leaving pencil pocket opening free. The hook fastener tape shall match the loop portion of the pocket.	301	LSbk-2(b)	10 - 14	50	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
12.	Make and attach left breast pocket. (cont'd)					
	f. Place a vertical 1/2 (± 1/16) inch bartack on each side of the pencil pocket opening.	Bar-tack		28 per bar-tack		
	g. Pencil pocket opening shall measure 1-1/8 to 1-1/4 inches wide.					
13.	Join shoulders.					
	Join shoulders with a double lapped and double stitched seam 1/4 inch gage with the back overlapping the fronts.	301 or 401	LSc-2 LSc-2	10 - 14 10 - 14	50 50	70 70
14.	Set sleeves.					
	Finished appearance. The sleeves shall be carefully set without twists, pleats, puckers or raw edges. The gage of stitch shall be uniform.					
	Set sleeves to armhole with a double lapped and double stitched seam 1/4 inch gage with the back and front parts overlapping the sleeve.	301 or 401	LSc-2 LSc-2	10 - 14 10 - 14	50 50	70 70

Source: https://assist.dla.mil-Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
15.	Join side and underarm seams.					
	Join the side and underarm seams in one continuous operation with a double lapped and double stitched seam. The seam may lap in either direction, but shall be in the same direction as the outseams of the trousers. Seams at base of armhole may be staggered 3/8 inch (center to center).	301 or 401	LSc-2	10 - 14	50	70
16.	Hem sleeves.					
	Turn raw edges of sleeve under 1/4 inch (± 1/16) and fold again forming a 1 ± 1/8 inch hem, single stitch 1/16 to 3/32 inch from the edge. Position the loop fastener tapes at the pattern marks on the top sleeve. The loop pieces shall measure 1 inch and 3-1/2 inches. long. Stitch top, bottom and side of both pieces, 1/16 inch from the edge.	301	EFb-1	10 - 14	50	70
		301	LSbj-1	10 - 14	50	70
17.	Make and attach sleeve tabs and hook fastener tape.					
	a. Position plies of sleeve tab face to face and stitch 1/4 inch from the raw edge of one end and the length sides of the tab.	301	SSe-2(a)	10 - 14	50	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
17.	Make and attach sleeve tabs and hook fastener tape. (cont'd)					
	b. Turn, work out edges and topstitch with a single row of stitching 1/4 inch from edge.	301	SSe-2(b)	10 - 14	50 50	70 70
	c. Position hook fastener tape on tabs at pattern marks. Stitch top, bottom and sides 1/16 inch from edge. The fastener tape shall be 1 inch.	301	LSbj-1	10 - 14	50	70
	d. Overedge raw edge.	504	SSa-1	10 - 14	50	70
	e. Position tab on sleeve pattern marks and stitch 3/8 inch from tab edge.	301	LSbk-2(a)	10 - 14	50	70
	f. Position with pointed end toward loop, and top stitch 1/4 inch from edge.	301	LSbk-2(b)	10 - 14	50	70
18.	Join crotch seam.					
	a. Turn crotch seam of the right front to the outside and single stitch 1/16 to 1/8 inch from edge.	301	EFa-1	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV- TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
18.	Join crotch seam. (cont'd)					
	b. Turn edge of left front crotch seam to the inside and double stitch 1/4 inch gage catching the right front crotch seam with both rows of stitching.	301	LSb-2	10 - 14	50	70
19.	Join seat seam.					
	Join the seat seam with a double lapped and double stitched seam. The right back shall lap the left back.	301 or 401	LSc-2	10 - 14	50	70
20.	Join outseams.					
	Join outseams with a double lapped and double stitched 1/4 inch gage seam catching the back edge of the front patch pockets in the lines of stitching. The seam may lap in either direction, but shall be in the same direction as the outseams of the jacket.	301 or 401	LSc-2	10 - 14	50	70
21.	Join inseams.					
	Join inseams in one continuous operation with a double lapped and double stitched 1/4 gage seam.	301 or 401	LSc-2	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
21.	Join inseams. (cont'd) The fronts shall lap the backs and a 3/8 inch stagger at seat and crotch areas is permitted (measured from center to center).					
22.	Join trouser to jacket. a. Join trouser to jacket with a double lapped and double stitched seam with the jacket lapping the trouser and the top edges of front patch pockets caught in the lines of stitching. Seams of side and outseams may be staggered 3/8 inch (center to center). b. Position 1-1/2 inch wide (content) elastic webbing on inside of coverall at side seams above the waist joining seam according to the following lengths: Size — Length in inches XX-Small — 11 X-Small — 13 Small — 15 Medium — 17 Large — 19 X-Large — 21 XX-Large — 23	301 or 401	LSc-2	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
22.	Join trouser to jacket. (cont'd)					
	c. Double stitch width of elastic 1/8 inch from edge. Fold edge 1/4 inch and stretch back belt over elastic, and top stitch, 1/16 inch from the edge, without catching elastic.	301	LSa-2	10 - 14	50	70
		301	EFb-1	10 - 14	50	70
23.	Make facings.					
	a. Clean finish bottom raw edge of facing by turning under 1/8 inch and edge stitching.	301	SSa-1	10 - 14	50	70
	b. Turn facing to outside as indicated on pattern with outer raw edge folded 3/8 inch and single stitch across lapel steps.					
	c. Turn facing to inside, force out points and edge stitch along lapel steps and front opening 1/4 inch from the folded edge.	301	SSa-1	10 - 14	50	70
	d. Single stitch facing through front along entire length of facing, 1/8 inch from facing's folded edge.	301	LSd-1	10 -	50	70

Source: https://assist.dla.mil/ Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
24.	Attach front slide fastener.					
	a. Join slide fastener to the left front with the top of the tape folded 1/2 inch and. placed adjacent to the stitching across the top.	bar-tack		28 per bar-tack		
	b. Stitch with a single row of stitching 1/8 inch from edge of the tape continuing up to the collar. Distance from center of teeth to left front folded edge shall measure 1-1/4 inch.	301	SSa-1	10 - 14	50	70
	c. Join the slide fastener to the right front with a single row of stitching, 1/8 inch from back edge of the tape. Tape fastener stopper shall finish 5/8 ± 1/8 bottom of fly and 3/8 inch from finished collar.	301	SSa-1	10 - 14	50	70
25.	Finish front opening.					
	Finished appearance. The fly shall finish smooth and flat without twists, gathers, puckers, pleats or raw edges. The left and right front shall be equal in length.					

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
25.	Finish front opening.					
	Box stitch base of front opening with the bottom line of stitching superimposed on the stitching at bottom ends of facings. The box stitching shall measure 2-1/2 to 2-3/4 inches in length and 3/8 to 1/2 inch in width.	301	LSd-1	10 - 14	50	70
26.	Attach collar.					
	Finished appearance. The collar shall be uniform in appearance and placement with edges smooth and flat.					
	Attach undercollar to outside edge of the neckline 3/8 inch from raw edge. Turn collar to	301	SSa-1 and	10 - 14	50	70
	finished position, turning in lower edge of topcollar 3/16 to 1/4 inch and edgestitch 1/16 inch from folded edge inserting the size label approximately centered on the back of coverall.	301	LSb-1	10 - 14	50	70
27.	Hem bottoms.					
	Turn in leg bottoms with raw edges turned in and single stitch 1/16 to 3/32 inch from edge. The hem shall finish 1 ± 1/8 inches.	301	EFb-1	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL	THREAD BOB/ LPR
28.	Make and attach leg tabs and hook and loop fastener tape.					
	a. Position plies of leg tab face to face and stitch 1/4 inch from the raw edge on one end and the length sides of the tab.	301	SSe-2(a)	10 - 14	50	70
	b. Turn, work out edges and raise with a single row of stitching 1/4 inch from edge.	301	SSe-2(b)	10 - 14	50	70
	c. Position hook fastener tape on tabs at pattern marks and stitch all four sides 1/16 inch from edge.	504	SSa-1	10 - 14	50	70
	d. Overedge raw edge	301	LSbk-2(a)	10 - 14	50	70
	e. Position leg tab on trouser at pattern marks and stitch 3/8 inch from tab edge.	301	LSbk-2(b)	10 - 14	50	70
	f. Turn down tab end toward outseam and stitch with a single row of stitching 1/4 inch gage.	301	LSbj-1	10 - 14	50	70
	g. Position the 1 inch and 6 inch loop tapes on hem at pattern marks and stitch all four edges.	301	LSbj-1	10 - 14	50	70

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

TABLE IV - TABLE OF OPERATIONS - continued

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH IN	THREAD NDL BOB/ LPR
29.	Bartacks. Bartacks shall be vertically positioned at the corners of the breast pocket openings on the outermost seams. right angles to pocket openings and extending into the outseams.	Bar-tack		28 per bar-tack	
30.	Clean coveralls. a. Trim all thread ends and remove loose threads. b. Remove all spots, stains, shade and size markings.				

Source: https://assist.dla.mil - Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The finished coveralls shall conform to measurements as shown in Table V.

TABLE V. Table of measurements (inches) 1/

Size	XX-Small	X-Small	Small	Medium	Large	X-Large	XX-Large
1/2 chest 2/	18-1/2	20-1/2	22-1/2	24-1/2	26-1/2	28-1/2	30-1/2
1/2 Waist 3/	15	17	19	21	23	25	27
Sleeve inseams 4/	23	23	23	23	23	23	23
Leg inseam 5/	32	32	32	32	32	32	32
Overall length 6/	63-1/2	64-1-2	65-1/2	66-1/2	67-1/2	68-1/2	69-1/2

1/ Tolerance shall be ± 1/2 inch.

2/ The coverall when fastened shall be smooth and flat and measured across the front from base of armhole to base of armhole.

3/ The coverall when fastened shall be smooth and flat and measure across the waist from side seam to side seam in a relaxed position.

4/ The sleeve inseam shall be measured from the base of armhole along inseam to bottom of sleeve hem.

5/ The leg inseam shall be measured from crotch seam along inseam to bottom of leg hem.

6/ Measure from base of neck along center back to bottom of leg.

3.10 Workmanship. The finished coveralls shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable point value or defect limit.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility For Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3)
2. Quality conformance inspection (see 4.4)

4.3 First article inspection. When a first article is required, (see 3.1 and 6.3), it shall be examined for defects specified in MIL-STD-1668.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.4.2 Point count inspection. Sampling and inspection provisions for end item examination, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1668.

4.4.3 Shipping container examination. The fully packaged end items shall be examined for the defects listed below. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2, and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate, application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling. Bulged or distorted container.
Contents	Number of unit packs per container less than required. Size shown on one or more unit packs not as specified on shipping container.

4.4.4 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully package. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units shall be 6.5.

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be B or Commercial as specified (see 6.2).

5.1.1 Level B. Each pair of coveralls shall be folded to approximate 17 by 12 inches in such a manner that the size label is clearly visible to permit ready identification.

5.1.2 Commercial. Coveralls shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level B or Commercial as specified (see 6.2).

5.2.1 Level B. Twenty coveralls of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 24 inches in length, 17 inches in width, and 14 inches in depth. Each container shall have the contents completely covered on the top with a sheet of kraft paper. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2 Commercial packing. Coveralls, preserved, as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. Coveralls packed as specified in 5.2, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III or IV of MIL-STD-731. Each prepared load shall be bonded with straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern number ninety shall be used as found in the appendix of MIL-STD-147.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

5.4 Marking. In addition to any special marking required by the contract or order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.5 MIL-STD-2073. When specified (see 6.2), preservation and packing shall be in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The coveralls are intended for wear by civilian and military personnel of all the services.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When first article inspection is required, (see 3.2, 4.3 and 6.3) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
f. When all packing data is in accordance with MIL-STD-2073-1 and MIL-STD-2073-2.

6.3 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Subject term (key word) listing.

clothing, utility
cotton, sateen

Source: https://assist.dla.mil-Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review Activities:

Army - MD
Air Force - 11, 45
Coast Guard - CG

User Activity:


Navy - MC

Preparing Activity:

DLA - CT

Project No. 8415-0871

Source: https://assist.dla.mil/ Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

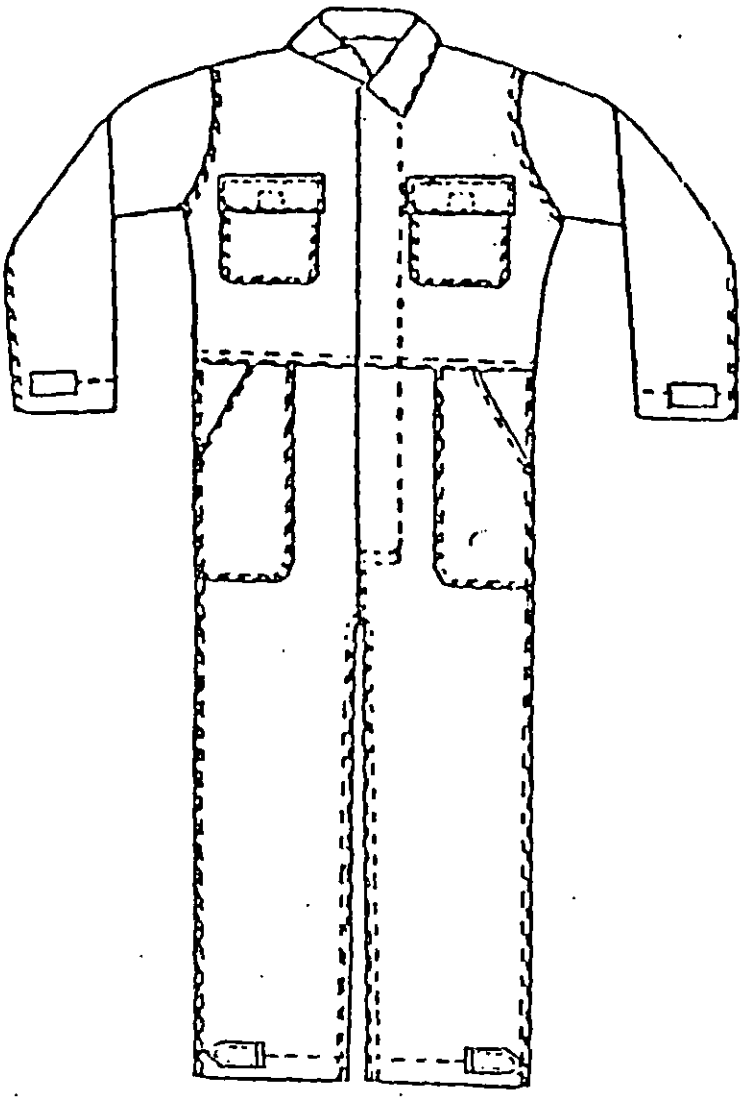

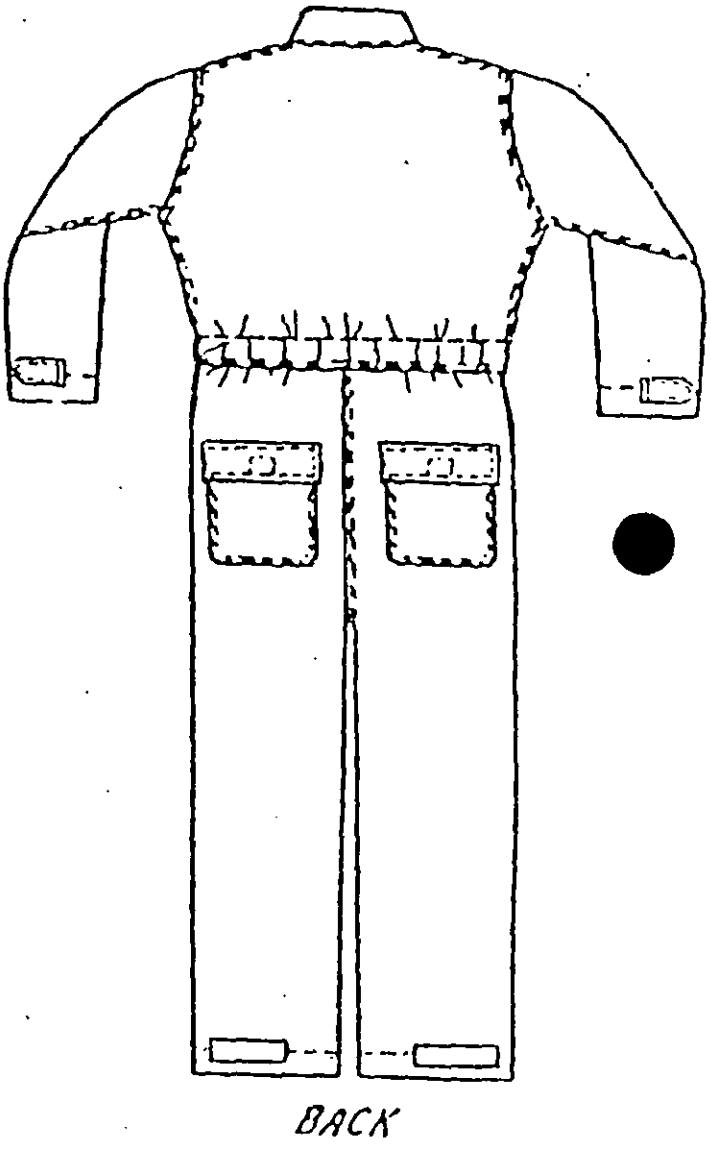


FIGURE 1 - COVERALLS, UTILITY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-31003	93-01-04

3. DOCUMENT TITLE: COVERALL, UTILITY

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil - Downloaded: 2024-10-21T01:56Z
Check the source to verify that this is the current version before use.