INCH-POUND


MIL-PRF-31031/11C
w/AMENDMENT 1
16 February 2024
SUPERSEDING
MIL-PRF-31031/11C
02 July 2018

PERFORMANCE SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, RADIO FREQUENCY, SERIES BMA, FLANGE MOUNT, FOR SEMIRIGID CABLE, SOCKET CONTACT, HIGH RELIABILITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-31031.

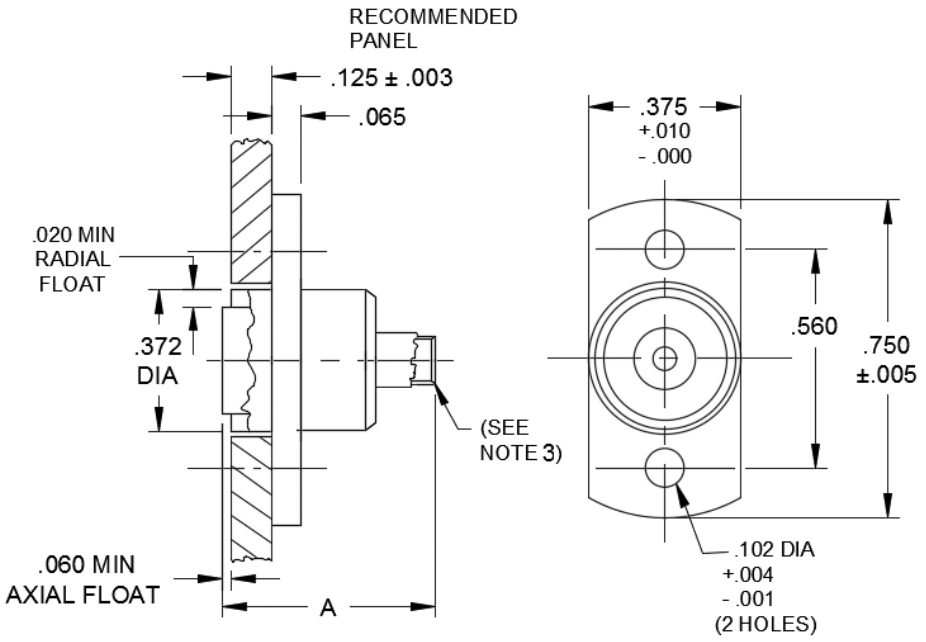


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, all tolerances are ±.005 inch.
3. See table I for cable accommodation.
4. For dimension A see table I.
5. Dimension A defines the overall length of the connector when assembled to the cable.

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:21Z
Check the source to verify that this is the current version before use.

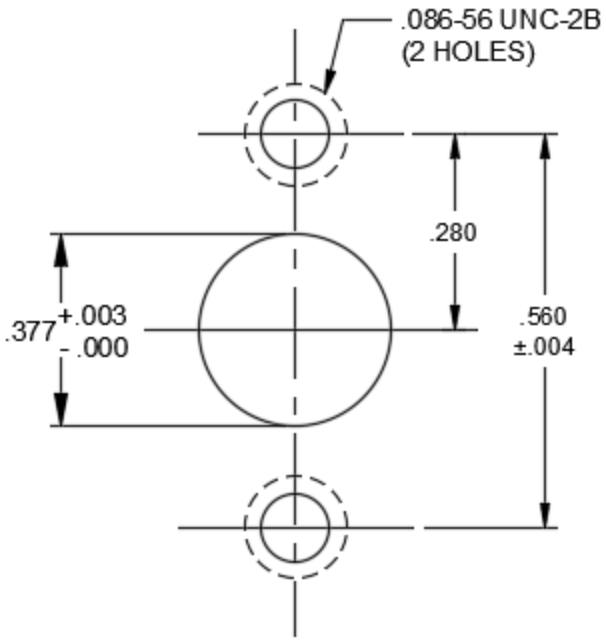


Spring compression force and travel: The face of the push-on interface shall have a total travel capability of .060 Inch toward the connector retainer clip. Force versus displacement shall be as follows:

Displacement Inches	Force pounds
.010	3.0 ± .5
.050	3.7 ± .5
.060	3.8 ± .5

NOTES:
1. Dimensions are in inches.

FIGURE 2. Recommended mounting hole.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:21Z
Check the source to verify that this is the current version before use.

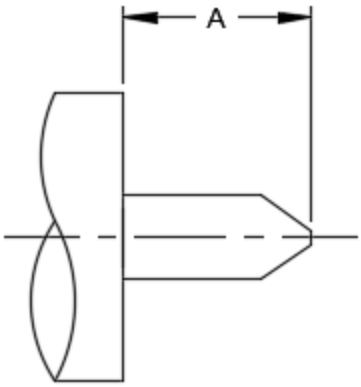

Stripping dimensions

Cable	Dimension A	
	Minimum	Maximum
M17/130-RG402 group XVI	.080	.090
M17/133-RG405 group XVII	.065	.075

NOTES:
1. Dimensions are in inches.
2. Tapering of the center conductor is required see manufacturers instructions.
3. All undimensioned pictorial configurations are for reference purposes only.

FIGURE 3. Cable stripping dimensions.

TABLE I. PIN's cross-reference and dimensions.

PIN 1/ M31031/11	Applicable cable and group 2/ 3/ M17/	Dimensions	Inches maximum
Category E - Field serviceable (no special tools required) 4/			
E**01	130-RG402 group XVI	A	.715
E**02	133-RG405 group XVII	A	.715

1/ These connectors have captivated center contacts.
2/ The cables are to be used when performing tests, however, all the cables in the specification sheet must accommodate the connectors.
3/ The latest version of the cable is applicable.
4/ Kit number - Omni Spectra T-200, Amphenol 901-2500, or equivalent.

TABLE II. Cable retention force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:21Z
Check the source to verify that this is the current version before use.

Cable	Pounds (minimum)	Torque (minimum)
MIL-DTL-17/130 group XVI	60	55
MIL-DTL-17/133 group XVII	30	16

1/ Torque to be applied 4 inches maximum from the end of the connector reverse bend not applicable.

TABLE III. Group qualification. 1/ 2/ 3/ 4/

Group	Submission and qualification of any of the following connectors	Qualifies the following connectors
1	M31031/11E**02	M31031/11E**01 M31031/11E**02

* Options as defined in the PIN construction.

1/ Individual connectors other than those listed are self-qualifying.

2/ Qualification of connectors qualifies connectors of the same body materials only.

3/ Qualification of connectors qualifies connectors of the same environmental construction only.

4/ Changes in plating (body or center contact) shall require the corrosion and contact resistance tests be performed.

ENGINEERING DATA

Nominal impedance: 50 ohms ± 1 ohm.

Frequency range: 0 to 18 GHz (frequency limit is dependent on cable used).

Voltage rating:

MIL-DTL-17/130 and group XVI: 500 V rms at sea level: 125 V rms at 70,000 feet.

MIL-DTL-17/133 and group XVII: 335 V rms at sea level: 85 V rms at 70,000 feet.

Temperature rating: -65°C to +125°C.

REQUIREMENTS: The following tests assure connector integrity within typical operating conditions and applications. Alternate methods shall be made known to the qualifying authority prior to performance of the test. The test methods described in the general specification and herein are proven methods and shall be the referee method in case of dispute.

Dimensions and configurations: See figures 1 and 2 and MIL-STD-348.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:21Z
Check the source to verify that this is the current version before use.

Force to engage and disengage:

Longitudinal force: 3 pounds maximum.
Torque: Not applicable.
Radial misalignment: ±.020 inch minimum.
Axial misalignment: .060 inch minimum.
Coupling proof torque: Not applicable.

Mating characteristics:

Reference: MIL-STD-348 for dimensions.

Hermetic seal: Not applicable.

Permeability: Applicable.

Leakage (pressurized connectors): Not applicable.

Insulation resistance: Test procedure EIA 364-21, 5,000 megohms minimum.

Center contact retention: 6 pounds minimum axial force.

Radial torque: Not applicable.

Corrosion (salt spray): Test procedure EIA-364-26 condition B.

Voltage standing wave ratio (VSWR): From 500 to 18 GHz or approximately 80 percent of upper cutoff frequency of the cable, whichever is lower:

MIL-DTL-17/130 and group XVI: 1.02 +.005 F (GHz).
MIL-DTL-17/133 and group XVII: 1.05 +.005 F (GHz).

Connector durability: 500 cycles minimum at 12 cycles per minute maximum. The connector shall meet the mating characteristics and force to engage and disengage requirements.

Contact resistance: In milliohms maximum:

	Initial	After environment
Center contact	3.0	4.0
Outer contact	2.0	Not applicable
Outer cable conductor to body	0.5	Not applicable

Dielectric withstanding voltage: Test procedure EIA 364-20 condition I.

MIL-DTL-17/130 and group XVI: 1,500 volts rms at 60 Hz at sea level.

MIL-DTL-17/133 and group XVII: 1,000 volts rms at 60 Hz at sea level.

Vibration high frequency: Test procedure EIA 364-28 condition III. No discontinuity permitted. This test needs to be performed only during initial qualification, so long as the qualifying design does not change.

Shock: Test procedure EIA 364-27 condition F. No discontinuity permitted. This test needs to be performed only during initial qualification, so long as the qualifying design does not change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:21Z
Check the source to verify that this is the current version before use.

Temperature cycling: Test procedure EIA 364-32 condition I, 5 cycles, except test high temperature shall be +125°C. Low-test temperature shall be -65°C.

Moisture resistance: Test procedure EIA 364-31 condition B no measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level (at 70,000 feet): This test needs to be performed only during initial qualification, so long as the qualifying design does not change.

Cable group XVI: 375 volts rms minimum.

Cable group XVII: 250 volts rms minimum.

RF high potential withstanding voltage: This test needs to be performed only during initial qualification, so long as the qualifying design does not change.

Voltage and frequency (at a frequency from 5 to 7.5 MHz):

Leakage current: Not applicable.

Cable group XVI: 1,000 volts rms minimum.

Cable group XVII: 670 volts rms minimum.

Cable retention force: See table II.

Coupling mechanism retention force: Not applicable.

Shielding effectiveness: Test procedure EIA-364-66 -85 dB minimum. This test needs to be performed only during initial qualification, so long as the qualifying design does not change.

RF transmission loss (dB maximum): This test needs to be performed only during initial qualification, so long as the qualifying design does not change: $.03\sqrt{F(GH_z)}$ Test at a frequency between 9 and 12.4 GHz.

Porosity: Applicable.

Thermal vacuum outgassing: Applicable to space grade connectors only.

Flammability: Applicable to space grade connectors only.

Odor: Applicable to space grade connectors only.

Toxicity (offgassing): Applicable to space grade connectors only.

Safety wire hole pullout: Not applicable.

Part or Identifying Number (PIN): M31031/11 (see table I).

Group qualification: See table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:21Z
Check the source to verify that this is the current version before use.

NOTES:

1. If a connector manufacturer produces a connector that meets all the requirements for two or more connector PIN's (within the same series and of the same environmental grade), the manufacturer may receive qualification approval for two or more connector PIN's qualifying the one connector. It is not necessary that such connectors be in the same group. Each connector, however, must be marked with its own PIN. For group qualification, the connectors must be of the similar design.

2. For qualification retention, where more than one part is listed in a group in this column, data may be supplied on any of those parts in order to retain qualification for those parts in the corresponding right hand column. The part does not necessarily have to be the part initially qualified.

Supersession: This specification supersedes DSCC drawing 85071 when a QPL source becomes available.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

In addition to MIL-PRF-31031, this specification sheet references the following documents:

MIL-STD-348	EIA-364-20	EIA-364-27	EIA-364-32
MIL-DTL-17/130	EIA-364-21	EIA-364-28	EIA-364-66
MIL-DTL-17/133	EIA-364-26	EIA-364-31	

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2024-039)

Review activities:
Army - AT, AV, EA, MI
Navy - AS, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:21Z
Check the source to verify that this is the current version before use.