INCH-POUND

MIL-PRF-31031/12
AMENDMENT 1
23 March 2000

PERFORMANCE SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, RADIO FREQUENCY, SERIES BMA, JAMNUT MOUNT, FOR SEMIRIGID CABLE, PIN CONTACT, HIGH RELIABLILITY

This amendment forms a part of MIL-PRF-31031/12, dated 19 January 1995, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1: Delete and substitute as follows:

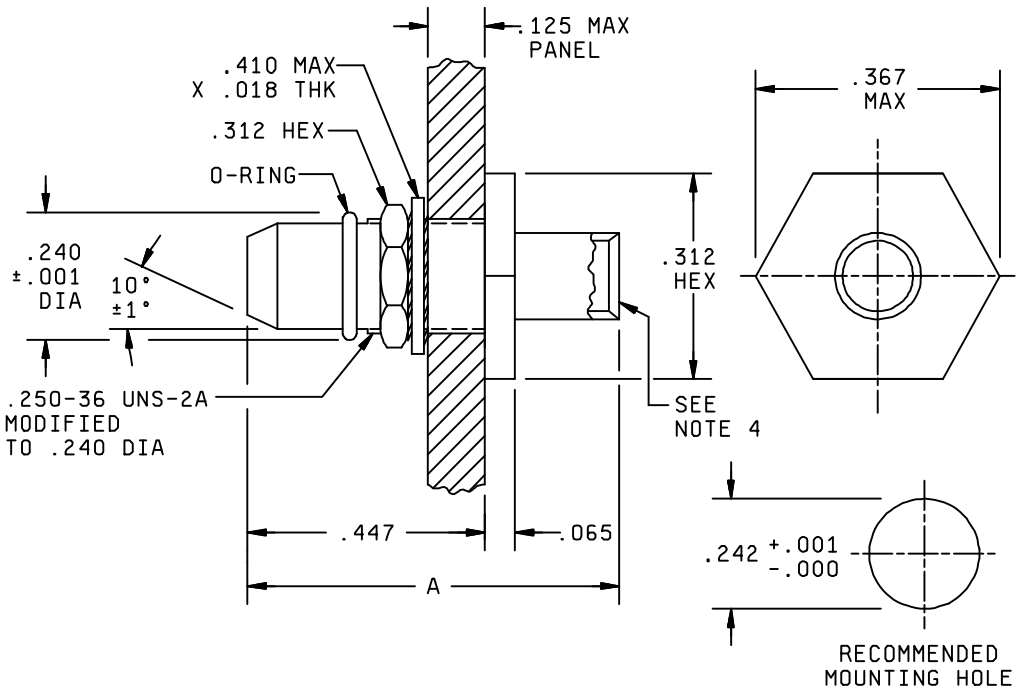

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:24Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.000	0.00	.242	6.15
.001	0.03	.250	6.35
.018	0.46	.312	7.92
.065	1.65	.367	9.32
.125	3.18	.410	10.41
.240	6.10	.447	11.35

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, all tolerances are ±.005 inch (0.13 mm).
4. See table I for cable accommodation.
5. For dimension A, see table I.
6. Dimension A defines the overall length of the connector when assembled to the cable.

FIGURE 1. General configuration – Continued.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA -CC

(Project 5935-4278-02)

Review activity:
Army - AT, AV, EA, MI
Navy – AS, MC, OS, SH
Air Force – 17, 19, 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T02:24Z
Check the source to verify that this is the current version before use.