INCH POUND

MIL-S-31004
27 January 1995

MILITARY SPECIFICATION

SKIRT, WOMEN'S, SERVICE, POLY/WOOL SERGE, BLUE 1620

This specification is approved for use by all departments and agencies of the Department of Defense.

1. **SCOPE**

1.1 Scope. This specification covers the requirements for women's service skirts made of a 55/45 polyester/wool serge.

1.2 Classification. The skirts shall be of one type, and in the following lengths and sizes:

Schedule of lengths and sizes

Misses										
Short	2	4	6	8	10	12	14	16		
Regular	2	4	6	8	10	12	14	16	18	20
Long			6	8	10	12	14	16	18	
Womens										
Short		4	6	8	10	12	14	16		
Regular		4	6	8	10	12	14	16	18	
Long			6	8	10	12	14	16	18	

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FQSD, 2800 South 20th Street, Philadelphia, PA 19145-5099, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:57Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50198	Thread, Gimp, Cotton, Buttonhole
A-A-50199	Thread, Polyester, Core, Cotton-Polyester-Covered
A-A-52071	Tape, Textile; Cotton, General Purpose
A-A-52094	Thread, Cotton
A-A-52106	Cloth, Twill or Plain Weave, Polyester and Polyester Blend
V-B-871	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	Fastener, Slide, Interlocking
V-T-295	Thread, Nylon
DDD-L-20	Label For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-368	Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-C-823	Cloth, Serge; Wool, Wool and Nylon, Polyester and Wool
MIL-C-44296	Cloth, Fusibles

STANDARDS

FEDERAL

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

MIL-STD-984	Provisions for Size Labeling for Women's Uniform Clothing
MIL-STD-1609	Provisions for Evaluating Quality of Women's Skirts

(Unless otherwise indicated, copies of Federal and military specifications, standards and handbooks are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Federal Acquisition Regulation (FAR 52.209)

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402-0001).

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS

D 3775	-	Fabric Count of Woven Fabric
D 3951	-	Standard Practice for Commercial Packaging
D 5034	-	Breaking Force and Elongation of Textile Fabrics (Grab Test)

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS

AATCC 8	-	Colorfastness to Crocking: AATCC Crockmeter Method

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

THE COLOR ASSOCIATION OF THE UNITED STATES

Department of Defense Standard Shades For Sewing Threads

Department of Defense Standard Shades For Buttons

(Applications for copies should be addressed to the Color Association of the United States, 409 W 44th St., New York, NY 10036.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection, in accordance with 4.4.

3.2 Material

3.2.1 Basic material. The basic material shall be 9.5 - 10.5 oz./sq. yd. blend of 55 percent polyester and 45 percent worsted wool serge cloth, Air Force Blue Shade No. 1620, conforming to MIL-C-823, type III, class 4.

3.2.2 Lining cloth. The material for the lining shall be rayon, 3.7 ounces per square yard, conforming to class 1 of MIL-C-368. The shade of the lining cloth shall approximate the shade of the basic material (see 6.3).

3.2.3 Pocketing. The material for pockets shall be polyester, or polyester and cotton, or polyester and rayon twill cloth and shall be dyed black, and shall conform to class 2 of A-A-52106, except that the nonfibrous material content and colorfastness requirements for perspiration and crocking shall not apply.

3.2.4 Fusible interlining

3.2.4.1 Waistband and belt loops. The interlining for the waistband and belt loops shall be a non-woven fusible interlining. It shall conform to type VI, style A, class 2 of MIL-C-44296. The waistband interlining shall be precut 1-3/4 inches wide and preslotted 1/4 inch from each edge to ensure a finished waistband width of 1-1/4 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

3.2.4.2 Pocket stabilizer. When fusible interlining is used as a pocket stabilizer, it shall be a woven fusible interlining strip 3/4 (± 1/8) inches by 9-1/4 (± 1/8) inches conforming to type I, style A or B, class 1 of MIL-C-44296. It shall be cut on the straight of the warp grain.

3.2.5 Tape

3.2.5.1 Skirt bottom finishing tape. The tape for finishing the bottom of the skirt shall be 1/2 (± 1/16) inch wide, 65 inches in length, plain weave, and woven of continuous filament polyester yarn. The tape shall weigh not less than 5.0 ounces per gross yards and shall contain not less than 66 ends full width and 52 picks per inch. The tape shall match the color of the basic material and shall have "good" colorfastness to wet dry cleaning and crocking.

3.2.5.2 Stay tape. Cotton twill tape used to stabilize pocket openings shall be 1/2 inch wide, conforming to A-A-52071, type I. The color of the tape shall be natural.

3.2.6 Braid. The braid for the hanger loops shall be cotton flat braid or rayon flat braid. The braid shall be 1/8 inch to 3/16 inch wide, shall have a minimum breaking strength of 75 pounds, and shall match the color of the basic material. The braid shall have good colorfastness to crocking and wet dry cleaning.

3.2.7 Labels. The skirt shall have an identification, a size, and an instruction label, or a combination identification, size, and instruction label conforming to DDD-L-20 and MIL-STD-984. The colorfastness to dry cleaning shall conform to the requirements of DDD-L-20.

3.2.7.1 Identification, size, and instruction labels. The identification, size, and instruction labels for the skirt shall conform to type VI, classes 1, 2, and 3 of DDD-L-20.

3.2.7.2 Combination identification, size, and instruction label. The combination identification, size, and instruction label for the skirt shall conform to type VI, class 14 of DDD-L-20 and shall include the following:

Skirt, Women's, Service
Contract No.: DLA-100-00-0-000 (Example) 1/
Fiber Products Act (information as applicable) 1/
Stock No.: 8410-00-000-0000 (Example) 1/
Size: 12R (Example)
Contractor 1/
DRY CLEAN ONLY

1/ The contractor shall include the applicable information.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

3.2.7.3 Label/tag. Each item shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and so that it causes no damage to the item.

3.2.8 Thread

3.2.8.1 Thread, polyester core: cotton-or polyester-covered. The cotton or polyester-covered polyester core thread for general stitching of the skirt shall be Ticket Numbers 50 and 70, 2-ply of A-A-50199. The thread for the sewing of the buttons shall be Ticket No. 30, 2-ply of A-A-50199. The color shall be as indicated in 3.2.8.3.

3.2.8.2 Thread, nylon. As an alternate to the thread specified in 3.2.8.1, the thread shall be type I, size B, class A of V-T-295. The color shall be as indicated in 3.2.8.3.

3.2.8.3 Color. The color of the polyester core or nylon threads shall be DoD Thread Shade Navy Blue AT, Cable No. 66060 in accordance with the Department of Defense Standard Shades for Sewing Threads.

3.2.8.4 Colorfastness. All dyed thread shall show colorfastness to light when tested according to FED-STD-191, TM-5660 and wet dry cleaning, equal to or better than the standard sample when tested according to FED-STD-191, TM-5622. When no standard sample is available, the dyed thread shall show "good" colorfastness to light and wet dry cleaning when tested as specified in A-A-50199 or V-T-295, as applicable.

3.2.9 Gimp. The gimp shall be Navy Blue AT, C.A. 66060 (see DoD Color Card) and shall conform to type I or II, size No. 8 of A-A-50198.

3.2.9.1 Colorfastness. The dyed gimp shall show colorfastness to wet dry cleaning equal to or better than the standard sample when tested according to FED-STD-191, TM-5622. When no standard sample is available, the dyed gimp shall show "good" colorfastness to wet dry cleaning when tested as specified in A-A-50198.

3.2.10 Button. The buttons for the waistband closure shall conform to type II, class D, style 20 or 21, size 24 line of V-B-871. The color of the buttons shall be shade Blue BV, Cable No. 62003 of the Standard Shade for Buttons.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

3.2.11 Slide fastener. The slide fastener chain shall be manufactured of polyester or nylon consisting of an automatic or cam lock and shall be equal to commercial size No. 2. Length shall be 7 inches. The tape shall be woven from 100 percent polyester or from blends of nylon and cotton, polyester and cotton or polyester and rayon, and shall have a minimum tape width (each side) of 3/8 inch. The completed slide fastener shall not shrink more than 2 percent when tested as specified in V-F-106. The color of the tape and the plastic coil and slider shall be navy blue to match the outershell.

3.2.12 Waistband elastic. The elastic for the waistband shall be one inch wide high stretch elastic, 1 inch wide BAN-ROL XL92, or equal (see 6.7). The color shall be natural, unbleached, or dyed black (see 6.5).

3.3 Design. The skirt shall be straight with back slide fastener closure. Design features shall include set-in waistband with belt loops and a waistband extension with button closure; four unpressed pleats in the front panel; four waist darts in back panels; back kick pleat; partial elasticized waist; and two side seam pockets. Skirt shall be fully lined. Figures 1 and 2 show the front and back views of the skirt, respectively.

3.4 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government (see 6.3). The working patterns shall be identical to the Government patterns. Neither the Government patterns nor the working patterns shall be altered in any way, except that additional notches for use during construction are allowed on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification. The standard patterns provide an allowance of 3/4 inch for the back, 1/2 inch for the side seams, and 3/8 inch for the waistband seam. The standard patterns for the lining shall provide for a 3/4 inch seam allowance for the back seams and a 1/2 inch seam allowance for the side seams. Unless otherwise indicated in Table II, seams shall be in accordance with these seam allowances.

3.4.1 Pattern parts. The component parts of the skirt shall be cut from the materials in accordance with the number of parts indicated in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE I. Pattern parts.

Materials	Pattern Parts	Cut Parts
Basic material (see 3.2.1)	Skirt front	1
	Skirt back	2
	Skirt waistband	1
	Skirt pocket facing	2
Rayon cloth (see 3.2.2)	Skirt front	1
	Skirt back	2
Polyester-blend twill cloth (see 3.2.3)	Skirt pocket	4

3.5 Construction. Construction of the skirt shall conform in all respects to the requirements specified in Table II and herein.

3.5.1 Stitches, seams, and stitchings. All stitches, seams, and stitching types specified in Table II shall conform to FED-STD-751. The type of stitches, seams, stitchings, and the minimum and maximum number of stitches per inch shall be as specified in Table II. Whenever two or more seam or stitch types are specified for the same part of the operation, any one may be used. The looper (underthread) of stitch type 401 shall be on the inside of the finished skirt. Seam allowances shall be maintained with seams sewn so that raw edges, runoffs, twists, pleats, puckers, or open seams will not result. All seams shall start and finish evenly at the seam line. Thread tension shall be properly maintained so that the stitching will not be tight or loose.

3.5.1.1 Thread breaks and ends of seams and stitchings. The ends of all seams and stitchings produced with stitch type 301, when not caught in other seams or stitchings shall be back tacked not less than 3 to 4 stitches. The ends of continuous lines of stitching shall be overlapped not less than 1/2 inch. Skipped stitches or thread breaks of stitched type 401 may be repaired using type 301.

3.5.1.2 Repair of stitching. Repairs of stitching shall be as follows:

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, the stitching shall be repaired by superimposing and restarting the stitching a minimum of 1/2 inch back of the end of the stitching (see **NOTE**).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

b. Except for prestitching, thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by over stitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner (see **NOTE**).

NOTE: When making the repairs above, the ends of the repairing stitch must be backstitched and thread ends trimmed close to the skirt.

3.5.1.3 Types 502, 503, 504 505 and 602 stitchings. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the material. All repairs shall be in accordance with 3.5.1.2.

3.5.1.4 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch patterns, stitches per inch, and size and type of thread are met; and at least three tying, overlapping, or back stitches are used to secure the ends of stitches.

3.5.2 Figures. The figures are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.6 Manufacturing operations requirements. The skirt shall be manufactured in accordance with operation requirements specified in Table II. The contractor is not required to follow the exact sequence of operations provided the finished skirt is identical to that produced by following the sequence as listed in Table II. Minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in the specification.

3.6.1 Shade and size marking. The component parts of the skirt and lining shall be marked, ticketed, or bundled to insure a uniform shade and size. Any method may be used except:

a. Corrosive metal fastening devices

b. Adhesive type tickets which discolor or adhere to the material upon removal of tickets

NOTE: The use of an ink pad numbering machine, rubber stamp, or pencil is allowed, provided the numbering does not show on the outside of the finished skirt or lining, and wherever possible, is covered by the same allowance.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

3.6.2 Abbreviations in Table of Operations. The abbreviations used in Table II are as follows:

Stch - Stitch
Ndl - Needle
Bob - Bobbin
Lpr - Looper
Brtck - Bartack
Btn - Button
Btnhl - Buttonhole

TABLE II. Construction of skirt

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
1.	Cut basic material. a. Spread the material without tension so that the cut parts in the top ply and in the bottom ply will match the patterns. b. Place the patterns so that the directional lines on the patterns will be in the warp direction of the basic material. Unless otherwise specified herein, cut all parts of the skirt that are made of the basic material from the same piece of basic material and in strict accordance with the patterns. The pocket facings may be cut from ends of the basic material.					
2.	Cut lining. Cut the parts of the lining with the directional lines on the patterns in the warp direction of the rayon cloth and in strict accordance with the patterns.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL BOB/ LPR
3.	Cut pockets. Cut pocket pieces with the directional lines on the pattern in the warp direction of the polyester-blend twill cloth and in strict accordance with the pattern.				
4.	Replace defective parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages as specified in MIL-STD-1609 are excluded and replaced with non defective and properly matched parts.				
5.	Mark parts. Mark, ticket, or bundle the cut parts to insure a uniform shade and size throughout the skirt (see 3.6.1).				
6.	Fuse parts. a. Fuse pre-cut, pre-perforated waistband interlining to waistband. b. If fusible pocket stabilizer is used, fuse woven interlining strip to skirt front. Interlining strip is placed along fabric edge starting at waist edge. c. Fuse belt loop interlining to belt loops. Interlining shall not extend beyond raw edge of loops.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
7.	Make stripping for belt loops. Finished appearance: The finished stripping shall measure 5/16 to 3/8 inch wide.					
	a. Fold stripping with both edges turned in and turned-in edges abutted at center and stitch with a covering stitch.	301	EFp-2	10-14	70	70
	or	or				
		401	EFp-2	10-14	70	70
	or					
	b. Turn in one side of stripping. Fold stripping with the turned-in edge overlapped on the raw edges at center and stitch with a covering stitch.	406	EFb-1	10-14	70	70
8.	Overedge stitch.					
	a. On skirt backs, overedge stitch raw edges of the side seams, kickpleat, top of kickpleat, and center seams.	502	EFd-1	8-10	70	70
		or				
		503	EFd-1	8-10	70	70
		or				
		504	EFd-1	8-10	70	70
		or				
		505	EFd-1	8-10	70	70
	b. If twill tape is used to stabilize pocket edge, on skirt front, single needle stitch side seam placing 1/2 inch twill tape on wrong side of skirt from waist to one inch below bottom pocket notch. Stitch 1/8 to 1/4 inch from cut edge. Edges of tape and skirt should match. Overedge remainder of side seams.	301	SSa-1	10-14	50	50
	c. Overedge pocket facing around all sides.	502	EFd-1	8-10	70	70
		or				
		503	EFd-1	8-10	70	70
		or				
		504	EFd-1	8-10	70	70
		or				
		505	EFd-1	8-10	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/LPR
8.	Overedge stitch. (contd.)					
	d. Overedge raw edges of belt loop ends.	502 or 503 or 504 or 505	EFd-1	8-10	70	70
	NOTE: Care shall be exercised during the overedging operation to ensure that no seam allowance is reduced by more than 1/16 inch. When knife is used in overedging operations, it should only trim the loose threads and not the fabric.					
9.	Make darts.					
	a. Fold the back darts in accordance with the pattern marks. Stitch each dart, tapering to nothing 1/2 inch below the dart point as indicated on pattern, chaining off 3/4 inch - not trimmed close.	301	OSf-1	10-14	50	50
	b. Press the back darts flat so that inside folded edge of the darts in the finished skirt will be toward the center back.					
10.	Make front pleats.					
	a. Fold each pair of front pleats in accordance with notches. Angle tack each pleat 1-1/4 to 1-1/2 inches from top raw edge of skirt front, and continue across pleat depth.	301	OSf-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
10.	Make front pleats. (contd.)					
	b. Stitch 1/4 inch from edge of waistband to stabilize location of pleats. Open folds of pleats shall face the side seams.	301	SSa-1	10-14	50	50
11.	Make back.					
	a. Stitch back kickpleat seam from top of pleat to bottom of skirt matching notches.	301	SSa-1	10-14	50	50
		or 401	SSa-1	10-14	50	50
	b. Stitch center back seam together from bottom of slide fastener notch to 1/2 inch below the top of the kickpleat seam.	301	SSa-1	10-14	50	50
		or 401	SSa-1	10-14	50	50
	c. Notch seam allowance at top of pleat. Press seams open and flat.					
	d. Top stitch pleat at the top through all plies.	301	OSe-1	10-14	50	50
12.	Set slide fastener.					
	a. Set slide fastener to back of skirt, from top of skirt down to notch, by folding skirt cloth over slide fastener and stitching 1/16 inch from edge on right back half, and stitching 1/2 (± 1/16) inch on left half, then crossing over and stitching bottom of slide fastener.	301	SSaa-1	10-14	50	50
	b. Stitching on right back half shall be covered by the fold of fabric on the left back half.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
13.	Make pockets.					
	a. If twill tape is used, stitch inner edge of twill tape to skirt front stitching 1/16 inch to 1/8 inch from edge of twill tape.	301	SSa-1	10-14	50	50
	b. Stitch pocket pieces to skirt front panel, according to notches on pattern stitching a 1/4 inch seam. Stitch pocket facing to back of pocket with right side of pocket to wrong side of facing, matching notches. Stitch 1/8 to 1/4 inch from edge of facing around all sides. Stitch back of pockets to back panels stitching a 1/4 inch seam.	301	SSa-1	10-14	50	50
14.	Stitch front to backs.					
	a. Stitch side seams from hem to bottom pocket notch, pivot stitching to stitch across seam allowance. Continue stitching around pocket to top of pocket. Use 1/2 inch seams.	301	SSa-1	10-14	50	50
	b. Stitch side seams from waist to upper pocket notch.	301	SSa-1	10-14	50	50
	c. Overedge stitch pocket edge all around.	502 or	EFd-1	8-10	70	70
		503 or	EFd-1	8-10	70	70
		504 or	EFd-1	8-10	70	70
		505	EFd-1	8-10	70	70
	d. Clip back only of side seam below pocket. Press seam open below pocket.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
14.	Stitch front to backs. (contd.)					
	e. Stitch top of pocket to front waist edge. Stitch 1/4 inch from edge.	301	SSa-1	10-14	50	50
15.	Make lining.					
	a. Overedge center back seam back panel pieces from waist to bottom edge.	502 or	EFd-1	8-10	70	70
		503 or	EFd-1	8-10	70	70
		504 or	EFd-1	8-10	70	70
		505	EFd-1	8-10	70	70
	b. Stitch center back seam from notch at bottom of opening kickpleat.	301	OSf-1	10-14	50	70
	c. Fold back edges of lining opening 5/8 inch and stitch folds on both sides from top of waist down to notch at bottom of opening.	502 or	EFa-1	8-10	70	70
		503 or	EFa-1	8-10	70	70
		504 or	EFa-1	8-10	70	70
		505	EFa-1	8-10	70	70
	d. Fold back edges of lining opening 5/8 inch and stitch folds on both sides from top of kickpleat opening to bottom.	301	OSf-1	10-14	50	70
	e. Fold lining darts in front and back panels in accordance with the pattern marks. Stitch each dart, tapering to nothing, 1/2 inch below the dart point as indicated on pattern.	301	OSf-1	10-14	50	70
	f. Join the front lining to the back lining at side seams.	301 or	SSa-1	10-14	50	50
		401	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
15.	Make lining. (contd.)					
	g. Overedge the bottom raw edge of the lining, with minimal trimming of cloth.	502 or	EFd-1	8-10	70	70
		503 or	EFd-1	8-10	70	70
		504 or	EFd-1	8-10	70	70
		602	EFd-1	8-10	70	70
16.	Join lining to outershell.					
	With the dart seams of back lining aligned to dart seams of back shell, align the top raw edges of the shell to the top raw edges of the lining, and stitch lining to shell 1/8 to 3/16 inch from top raw edges. Dart seams of the outershell shall face toward the center back seams of the lining shall face side seams.	301	SSa-1	10-14	50	50
17.	Attach belt loops to skirt.					
	a. Tack 3 loops on back panel. Place loop over the finished dart closest to center back seam on the left and right back panels. Align right edge of center loop with slide fastener stitching on left panel, 1/4 (± 1/8) inch from slide fastener stitching.	br-tck	----	21-28 per br-tck	50	50
	b. Tack loops on front panel on top of finished pleat closest to center front even with edge of pleat. Stitch 1/4 inch from waist edge.	br-tck	----	21-28 per br-tck	50	50

Source: https://assist.dla.mil Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
18.	Make waistband. Finished appearance: The waistband shall be sewn on smoothly and evenly and shall have a flat appearance without gathers, puckers, pleats, or other distortions, and shall be even width along its entire length. The finished waistband shall be 1-1/4 (± 1/8) inches wide. The waistband ends shall be even with the back opening on the right side, and shall have a 1-1/4 (± 1/8) inch square end extension on the left side (as worn).					
	a. Overedge the raw edge of the inside portion of the waistband.	502 or	EFd-1	8-10	50	70
		503 or	EFd-1	8-10	50	70
		504 or	EFd-1	8-10	50	70
		602	EFd-1	8-10	50	70
	b. Cut two pieces of one inch wide elastic, each 3-3/4 (± 1/8) inches long. Tack the ends of each piece on the underside of the waistband 1/2 inch in from the elastic ends. Stitching lines should align with notches.	301	SSau-1	10-14	50	50
	c. Attach waistband to skirt, matching notches, stitching a 3/8 inch seam. Do not catch elastic in seam.	301	SSa-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
18.	Make waistband. (contd.)					
	d. Fold the waistband in half lengthwise. Seam across the waistband ends. Trim, turn, and work out corners. The ends of the waistbands shall be flush and even with the slide fastener opening on the button (right) side and have a 1-1/4 (± 1/8) inch square end extension on the buttonhole (left) side. References to left and right sides are "as worn".	301	SSa-1	10-14	50	50
19	Make and attach two hanger loops.					
	Fold two hanger loops in half and attach one to each side of the waistband. The ends of the hanger braid shall be set onto the overlocked edge, at the top of the lining and in line with the side seam lines on each side.	301	SSa-1	10-14	50	70
	NOTE: The length of the hanger loops in the finished skirt shall be 1-1/2 (± 1/4) inches.					
20.	Attach waistband and set belt loops.					
	Two belt loops shall be attached to the front waistband and two belt loops shall be attached to the back waistband (see operation 17 for position).					
	a. Turn the free edge of the waistband to the inside and stitch on the outside, not more than 1/16 inch below the waistband seam through all plies catching hanger braid at side seams.	301	BSr-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
20.	Attach waistband and set belt loops. (contd.)					
	b. Tack bottom of loops 3/8 inch below bottom of finished waistband and turn up belt loops. Fold under top of loops and position folded edge 1/8 (± 1/16) inch from top of waistband and tack. The finished belt loop opening shall measure 1-1/2 (± 1/8) inches from inside edge of bar-tack to bottom folded edge.	301 or Br-tck	BSr-1 BSr-1	10-14 21-28 per brtck	50 70	50 70 br-tck
21.	Attach labels.					
	a. Position the tops of the identification, size, and instruction labels on the bottom of the waistband at the center back (± 1/2 inch), with the size label on the left side and the instruction label on the right side (as worn). Stitch the tops of the identification, size, and instruction labels to the bottom of the waistband with one row of stitching. Labels may be caught in the waistband joining seam.	301	LSbj-1	10-14	50	50
	or					
	b. In lieu of operation 18.a, position the top of the combination identification, size, and instruction label on the bottom of the waistband 2 inches (± 1/4) inch to the left of center back. Stitch the top of the combination identification, size, and instruction label to the bottom edge of the waistband with one row of stitching.	301	LSbj-1	10-14	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
21.	Attach labels. (contd.) **NOTE:** The stitching shall not be through the printing on the labels. Stitching lines should align with notches.					
22.	Make buttonhole in waistband. Make one buttonhole in the left side (as worn) of the waistband extension. The buttonhole shall be laced 1/2 (± 1/8) inch from the band end. The buttonhole shall be placed horizontally and centered on the waistband. **NOTE:** The buttonhole shall be a square bar-type, eyelet-end buttonhole, worked over the gimp, with the purling on the outside of the waistband and with the inside edge of the eyelet 7/16 to 9/16 inch from the edge of the waistband. The finished cut length of the buttonhole shall be 5/8 to 3/4 inch. Either a cut-before or a cut-after type buttonhole is acceptable.	Btn-hl	----	52-54 per btn-hl incl tack	50	70
23.	Attach button to waistband. There shall be no gaps, bulges, twists, or other distortions when waistband is buttoned. a. With slide fastener fully closed, mark placement of one button on the back part of the waistband corresponding to the eyelet of the buttonhole. b. Sew a button on the mark through all plies of the waist-band.	301	----	14-16 per btn	30	--

Source: https://assist.dla.mil -- Downloaded: 202610-21T01:57Z
Check the source to verify that this is the current version before use.

In excess of 10 ± of 8 c between rows, determine the variance

TABLE II. Construction of skirt (contd.)

NO.	OPERATION	STCH TYPE	SEAM & STCH TYPE	STCH PER INCH	THREAD NDL	THREAD BOB/ LPR
24.	Clean skirt. Finished appearance: Skirt shall be right side out, with slide fastener closed and waistband buttoned. a. Trim thread ends and remove all loose threads, inside and outside. b. Remove all spots, stains, and shade tickets.					
25.	Press skirt. a. Press the entire skirt, maintaining a soft press at the area of the front pleats. b. Remove all gloss marks, wrinkles, and impressions from thread, tickets, and seams.					
26.	Prepare skirt for packaging. a. Insert the tape for finishing the bottom of the skirt (see 3.2.5.) in a paper envelope. b. Using a string, attach the envelope containing the tape to the hanger loop on the left side of skirt (as worn).					

3.7 Finished measurements. The measurements of the finished unhemmed skirt shall conform to the requirements specified in Table III. When measuring, the skirt shall be buttoned, zipped, and placed flat upon a table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements (in inches)

SIZES		1/2 WAIST 1/	CENTER FRONT LENGTH 2/	1/2 HIP 3/	
				MISSES	WOMEN'S
Short	2	11-1/4	30	18-3/4	N/A
	4	11-3/4	30	19-1/4	20-1/4
	6	12-1/4	30	19-3/4	20-3/4
	8	12-3/4	30	20-1/4	21-1/4
	10	13-1/2	30	20-3/4	21-3/4
	12	14-1/4	30	21-1/2	22-1/2
	14	15	30	22-1/4	23-1/4
	16	16	30	23-1/4	24-1/4
Regular	2	11-1/4	30	18-3/4	N/A
	4	11-3/4	30	19-1/4	20-1/4
	6	12-1/4	30	19-3/4	20-3/4
	8	12-3/4	30	20-1/4	21-1/4
	10	13-1/2	30	20-3/4	21-3/4
	12	14-1/4	30	21-1/2	22-1/2
	14	15	30	22-1/4	23-1/4
	16	16	30	23-1/4	24-1/4
	18	17	30	24-1/4	25-1/4
	20	18	30	25-1/4	26-1/2
Long	6	12-1/4	30	19-3/4	20-3/4
	8	12-3/4	30	20-1/4	21-1/4
	10	13-1/2	30	20-3/4	21-3/4
	12	14-1/4	30	21-1/2	22-1/2
	14	15	30	22-1/4	23-1/4
	16	16	30	23-1/4	24-1/4
	18	17	30	24-1/4	25-1/4
Tolerances:		± 1/4	± 3/8	± 3/8	± 3/8

1/ Measure the 1/2 waist from folded edge to folded edge at the waistband seam with the elastic fully extended.

2/ Measure the length at the center front from the bottom edge of the waistband to the unfinished bottom edge of the skirt.

3/ Measure the 1/2 hip of the size Short skirt from folded edge to folded edge, 1/4 inch above the bottom of slide fastener.
Measure the 1/2 hip of the size Regular skirt from folded edge to folded edge, at the bottom of slide fastener.
Measure the 1/2 hip of the size Long skirt from folded edge to folded edge, 1/4 inch below the bottom of slide fastener.

3.8 Workmanship. The finished skirt shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the quality assurance standards defined by the technical data in the bid package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in FED-STD-191 or MIL-STD-1609, as applicable.

4.4 First article inspection. The first article, submitted in accordance with 3.1, shall be inspected as specified in 4.5.3 for compliance with design, construction, workmanship and dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-1609, except where otherwise indicated.

4.5.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.5.1.1 Component testing. In addition to any testing required by 4.5.1, components listed in Table IV shall be tested for the characteristics noted. The methods of testing specified in FED-STD-191 and as listed in Table IV shall be followed. All test reports shall contain the individual values used in expressing the final results. The lot size and sample size shall be as follows:

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,0001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The lot size units and the sample units shall be as follows:

Component	Lot size unit	Sample unit
Tape	Yard	3 linear yard
Braid	Yard	5 linear yards

TABLE IV. Component tests

Component	Characteristic	Rqmt. Para.	Test Method
Tape	Material identification	3.2.5.1	TM-1500 1/
	Width	3.2.5.1	TM-5020 2/
	Weight (per gross yards)	3.2.5.1	TM-5040 3/
	Yarns per inch:		
	Warp	3.2.5.1	ASTM D 3775
	Filling	3.2.5.1	ASTM D 3775
	Colorfastness:		
	Crocking	3.2.5.1	AATCC 8
	Wet dry cleaning	3.2.5.1	TM-5622

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

TABLE IV. Component tests (contd.)

Component	Characteristic	Rqmt. Para.	Test Method
Braid	Material Identification	3.2.6	TM-1200 or TM-1500 1/
	Width	3.2.6	TM-5020
	Breaking strength	3.2.6	ASTM D 5034 4/
	Colorfastness:		
	Crocking	3.2.6	AATCC 8
	Wet dry cleaning	3.2.6	TM-5622

1/ A certificate of compliance is acceptable for this requirement.

2/ Except that one determination per sample unit shall be made.

3/ The average of the ounces per linear yard shall be multiplied by 144 to yield ounces per gross yards.

4/ The breaking strength shall be determined on the full width of the braid and the jaw dimensions shall be greater than the width of the braid.

4.5.2 In-process inspection. Inspection shall be made at any point or during any phase of manufacturing. Inspections will be used to determine whether operations or assemblies are accomplished as specified and to verify that the working patterns conform to the Government patterns in all respects. The Government shall reserve the right to exclude from consideration for acceptance any material or service for which in-process inspection had indicated nonconformance.

4.5.3 End-item inspection

4.5.3.1 Individual examination. As a final step in the contractor's production control plan and before formation of a lot, each skirt shall be laid out flat on a table and examined for those defects identified by an asterisk (*) and listed as selected defects in MIL-STD-1609. Any skirt containing a selected defect shall not be included in an end item lot.

4.5.3.2 Point count inspection. After the skirts have been subjected to the individual examination, sampling, and inspection provisions for end item examination, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1609. The occurrence of defects during these examinations shall not exceed the applicable point value or defect limit specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

4.5.3.3 Palletization examination. An examination shall be made to determine that palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspected lot.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified.
	Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A

5.1.1.1 Unit packaging. Each skirt shall be laid out flat. A sheet of 20-pound (minimum) basis weight craft paper measuring approximately 26 inches by 22 inches and shall be placed on top of the skirt. Two lengthwise parallel folds of the skirt and the paper as a unit, resulting in a folded width of 12 inches, shall be made. If the paper is wider than the skirt, the excess paper may be folded over to the same width as the skirt. The top of the skirt shall then be folded downward to form a unit package measuring approximately 18-1/2 inches by 12 inches. Each folded skirt shall be placed in a flat style bag. The bag shall be made of clear polyethylene that is 0.00125 $\pm$ 20 percent in thickness. The bag shall be formed with heat-sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The bag shall be not less than 1 inch longer than the folded garment. The unsealed opening shall be at the smallest dimension of the bag.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

5.1.1.2 Intermediate packaging. Ten skirts of one class and size only, unit packed as specified in 5.1.1.1, shall be further packaged in a box conforming to type CF, class domestic, variety SW, grade 175, style FTC of PPP-B-636. The unit packs shall be alternated end for end, 10 in depth, within the box. The approximate inside dimensions of the box shall be 19-1/2 inches in length, 12 inches in width, and 4 inches in depth.

5.1.2 Commercial. Each skirt shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Thirty skirts of one class and size only, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V3s of PPP-B-636. Level A packages shall be packed flat, three in length within the shipping container. The approximate inside dimensions of each shipping container shall be 20-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Each shipping container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 Level B packing. Thirty skirts of one class and size only, preserved as specified in 5.1, shall be packed in a shipping container conforming to style RSC, type CF or SF, class domestic, variety SW, grade 275 of PPP-B-636. Level A packages shall be packed flat, three in depth within the shipping container. The approximate inside dimensions of each shipping container shall be 20-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Each shipping container shall be assembled, closed and reinforced in accordance with the appendix of PPP-P-636.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification, except that the inspection shall be in accordance with 4.5.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial packing. Skirts, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), skirts packed as specified shall be palletized on a 4-way, type I, style 1, 1A, or 1B, size A, class 1 pallet fabricated in accordance with MIL-P-15011. Each prepared load shall be in accordance from wood groups specified, of MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer. Inspection shall be in accordance with 4.5.3.3.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The skirts covered by this specification are intended to be worn as part of the service uniform by female personnel of the Department of the Air Force.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.
b. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. Classes, sizes, and lengths required (see 1.2.1).
d. When first article inspection is required, (see 3.1) the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
f. When weather-resistant fiberboard containers is required (see 5.2).
g. When palletization is required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

6.3 Samples. For access to guide samples of the end item and shade samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When a first article inspection is required, the item should be a first article sample, inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should consist of one skirt. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first article. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contracts.

6.5 Waistband elastic. Elastic conforming to the requirements of 3.2.12 may be obtained from Ban Roll, 231 South Jefferson Street, Chicago, IL 60606.

6.6 Subject term (key word) listing.

Skirt, women's
Uniform, service

6.7 Equal item. Prior to the use of an "or equal" item, the supplier shall submit a sample of the item with supporting data to the contracting officer for subsequent approval or disapproval by the responsible military agency.

Custodian:
Air Force - 45

Review Activities:
Air Force - 82, 32

Preparing activity:
DLA - CT

Project No. 8410-0846

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

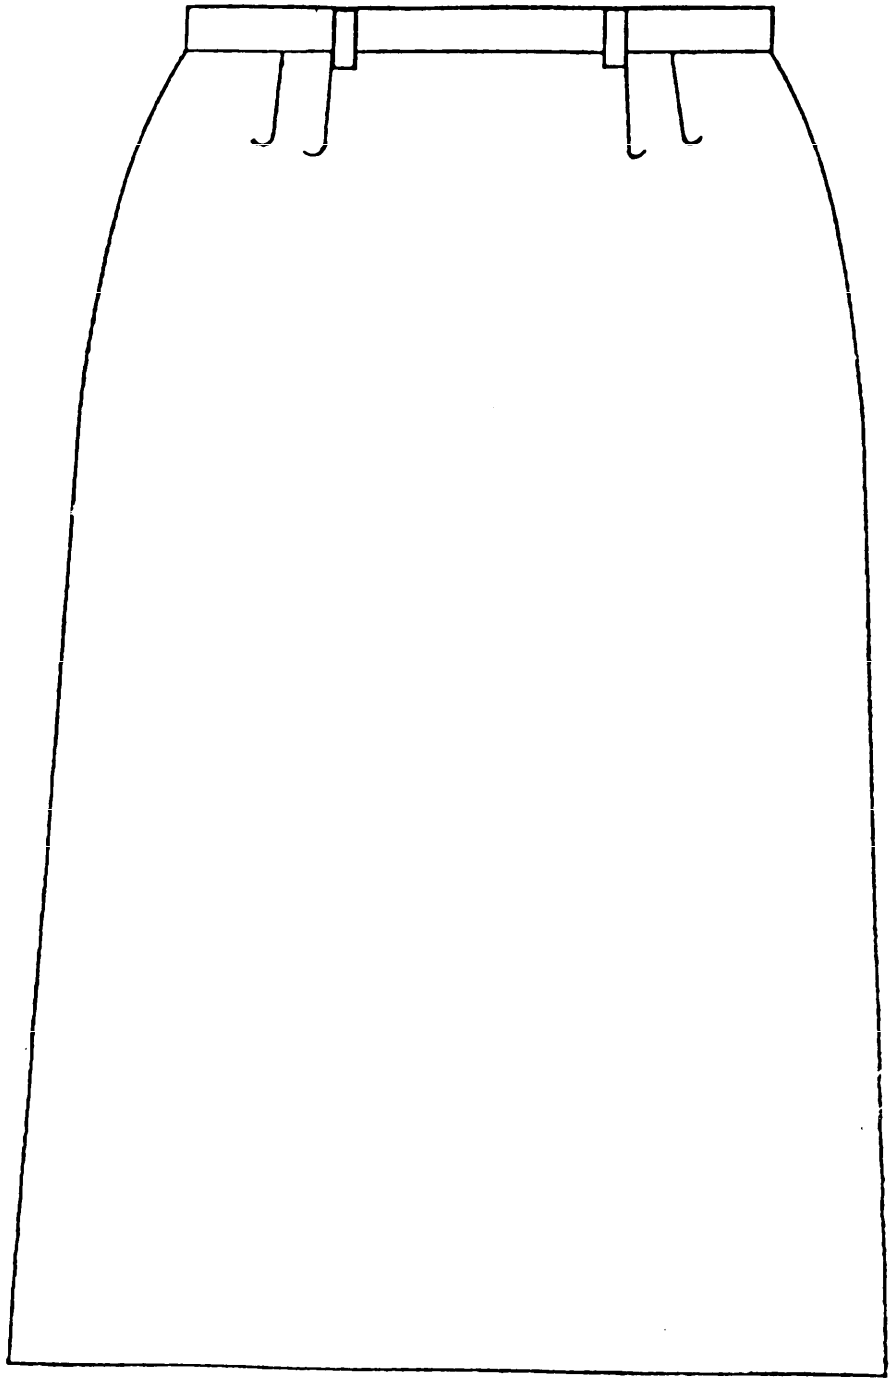


FIGURE 1 - SKIRT FRONT VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

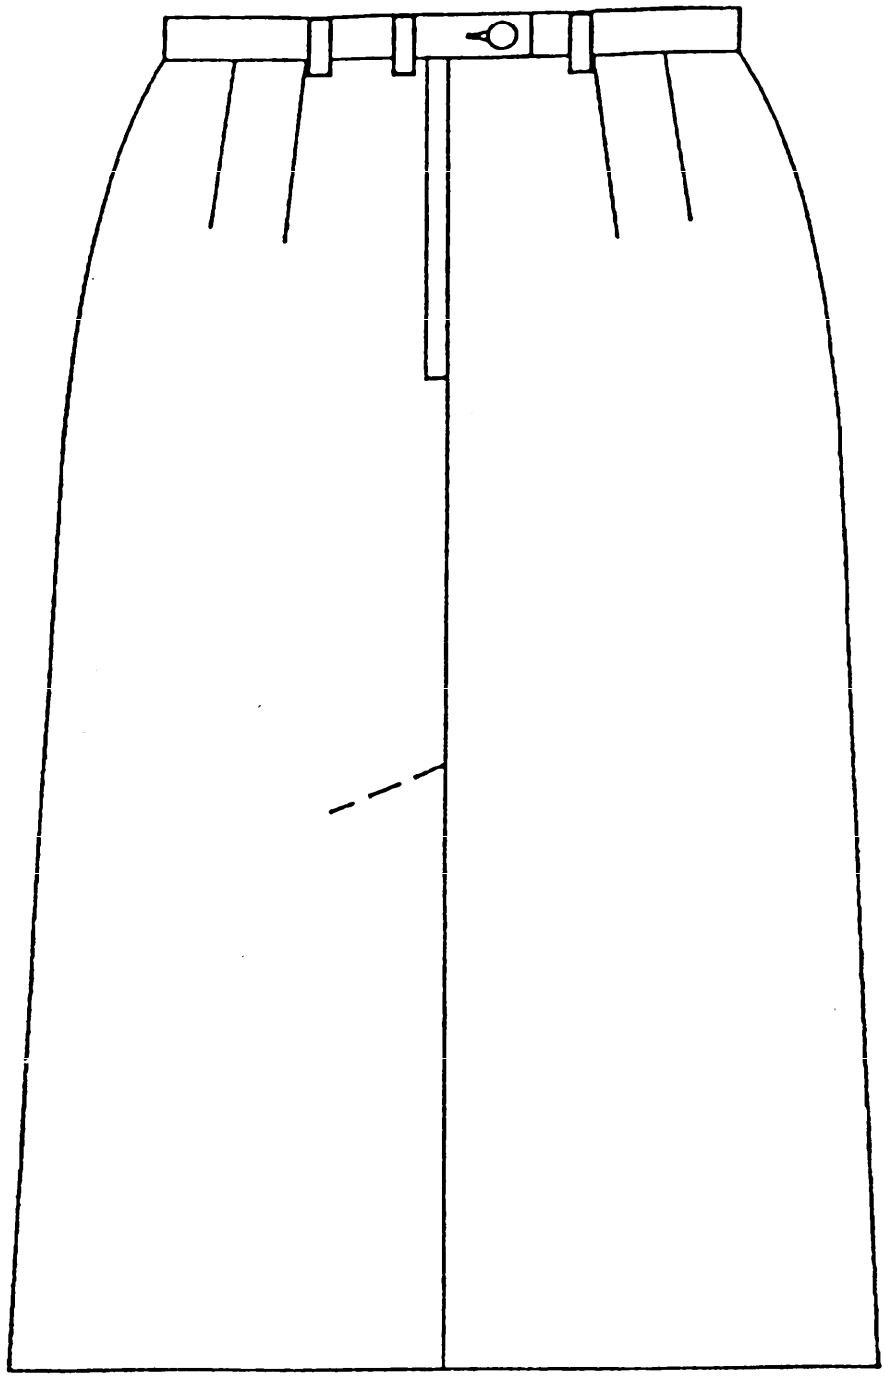


FIGURE 2 - SKIRT BACK VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T01:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-S-31004	950127

3. DOCUMENT TITLE
SKIRT, WOMEN'S, SERVICE, POLY/WOOL SERGE, BLUE 1620

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME DPSC FQSD	b. TELEPHONE (Include Area Code) (1) Commercial (215) 737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 S 20th Street Philadelphia, PA 19145-5099	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 20240-21T01:57Z
Check the source to verify that this is the current version before use.