METRIC
DOD-W-63474/1A
27 October 1983
SUPERSEDING
DOD-W-63474/1
31 October 1980

MILITARY SPECIFICATION SHEET

WASHERS, SPRING TENSION, CYLINDRICALLY CURVED AND WAVED, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the washers described herein shall consist of this specification and the latest issue of DOD-W-63474.

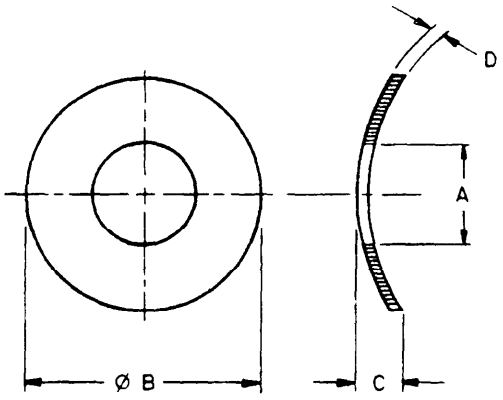


FIGURE 1. WASHER, CYLINDRICALLY CURVED. SEE TABLE I

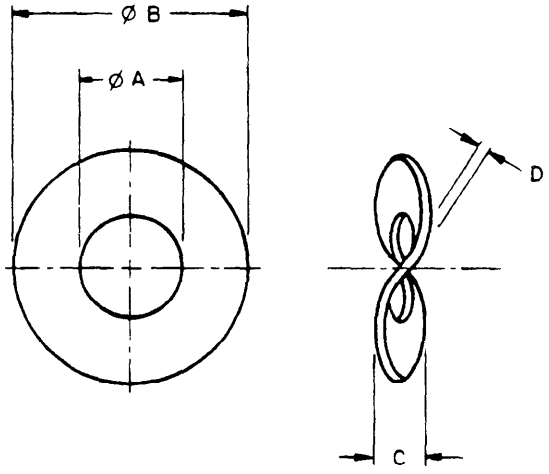


FIGURE 2. WASHER, WAVED. SEE TABLE II

NOTES:

1. All dimensions are in millimeters.

FSC 5310

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


1. Material: Spring steel.

2. Protective finish: Cadmium plate.

3. Edges: Break all edges, remove all burrs.

4. Part Number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from Table I, (Washer, Cylindrically Curved) or Table II, (Washer, Waved).

EXAMPLE: D63474/1-01



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

WASHER, CYLINDRICALY CURVED (SEE FIGURE 1)										
SIZE 1/	DASH NUMBER	Ø A 2/ (ID)		Ø B 2/ (OD)		C		D		FOR THREAD DIAMETER
						MIN	MAX			
1.0	01	1.1		2.5		0.35	0.7	0.20		1.0
1.2	02	1.3		3.0	±0.3	0.35	0.7	0.20		1.2
1.4	03	1.5		3.0		0.40	0.8	0.25	±0.02	1.4
1.7	04	1.8	+0.25	4.0		0.45	0.9	0.25		1.6, 1.7
1.8	05	1.9		4.0		0.45	0.9	0.25		1.8
2.0	06	2.2		4.5		0.50	1.0	0.30		2.0
2.3	07	2.5		5.0	±0.375	0.50	1.0	0.30	±0.03	2.3
2.6	08	2.8		5.5		0.55	1.1	0.30		2.5, 2.6
3.0	09	3.2		6.0		0.65	1.3	0.40		3.0
3.5	10	3.7		7.0		0.70	1.4	0.40		3.5
4.0	11	4.3	+0.3	8.0	±0.45	0.80	1.6	0.50		4.0
5.0	12	5.3		10.0		0.90	1.8	0.50	±0.05	5.0
6.0	13	6.4		11.0		1.10	2.2	0.50		6.0
7.0	14	7.4	+0.36	12.0	±0.55	1.20	2.4	0.50		7.0
8.0	15	8.4		15.0		1.70	3.4	0.50		8.0
10.0	16	10.5	+0.43	18.0		2.00	4.0	0.80	±0.06	10.0

1/ Size corresponds to thread size for which the washer is primarily designed.

2/ Tolerances apply to the washer in the flat condition, i.e. before curving or waving.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.

TABLE II. DASH NUMBERS AND DIMENSIONS.

WASHER, WAVED (SEE FIGURE 2)										
SIZE	DASH NUMBER	Ø A (ID)		Ø B (OD)		C		D		FOR THREAD DIAMETER
						MIN	MAX			
3.0	17	3.2	±0.30	8	±0.45	0.8	1.6	0.5	±0.05	3.0
3.5	18	3.7		8		0.9	1.8	0.5		3.5
4.0	19	4.3		9		1.0	2.0	0.5		4.0
5.0	20	5.3		11	±0.55	1.1	2.2	0.5		5.0
6.0	21	6.4	±0.36	12		1.3	2.6	0.5		6.0
7.0	22	7.4		14		1.5	3.0	0.8	±0.06	7.0
8.0	23	8.4		15		1.5	3.0	0.8		8.0
10.0	24	10.5	±0.43	21		2.1	4.2	1.0	±0.07	10.0
3/ 10.0	25	10.5		18		2.1	4.2	1.0		10.0
12.0	26	13.0		24	±0.65	2.5	5.0	1.2		12.0
14.0	27	15.0		28		3.0	5.9	1.6	±0.08	14.0
16.0	28	17.0		30		3.2	6.3	1.6		16.0
18.0	29	19.0	±0.52	34	±0.80	3.3	6.5	1.6		18.0
20.0	30	21.0		36		3.7	7.4	1.6		20.0
22.0	31	23.0		40		3.9	7.8	1.8	±0.1	22.0
24.0	32	25.0		44		4.1	8.2	1.8		24.0
27.0	33	28.0		50		4.7	9.4	2.0		27.0
30.0	34	31.0	±0.62	56	±0.95	5.0	10.0	2.2		30.0
33.0	35	34.0		60		5.3	10.6	2.2		33.0
36.0	36	37.0		68		5.8	11.6	2.5	±0.15	36.0
39.0	37	40.0		72		6.4	12.8	2.8		39.0
42.0	38	43.0		78		6.8	13.6	3.0	±0.02	42.0
45.0	39	46.0		85	±1.10	7.1	14.2	3.0		45.0
48.0	40	50.0		92		7.3	15.6	3.5		48.0
52.0	41	54.0	±0.72	98		8.2	16.4	3.5		52.0

3/ This washer has a smaller outside diameter (B) and is intended only for M10 Hexagon bolts (see ANSI B18.2.3.5M) and nuts with 15 mm width across flats.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - SH
Air Force - 99

Review activities:
Army - AV, GL
Navy - AS
Air Force - 11
DLA - IS

User activities:
Army - AT, ME
Navy - MC, YD

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5310-1313)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DOD-W-63474/1A	Military Specification Sheet Washers, Spring Tension, Cylindrically Curved & Waved, Metric (Project No.5310-

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)* 1313
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*. _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.