INCH-POUND

MIL-R-52343C(ME)
12 September 1988
SUPERSEDING
MIL-R-52343B(ME)
21 November 1980

MILITARY SPECIFICATION

REPAIR KIT, HOSELINE

This specification is approved for use within the USA Belvoir Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the. Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a repair kit, consisting of tools and materials necessary for temporary and permanent repairs to a petroleum hoseline. The components are contained in a fitted chest.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, and standards. The following specifications, and standards, form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research, Development, and Engineering, ATTN: STRBE-TSE, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3835
DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

P-D-680	Dry cleaning solvent.
DDD-R-30	Rags, Wiping, Cotton, and Cotton Synthetic.
GGG-K-481	Knives; Craftsman's (Hawkbill, Shoe, Chipping) Putty and Scraping.
GGG-S-121	Screwdriver and Screw Starter, Hand.
GGG-W-641	Wrench, Socket; (and Sockets, Handles, and Attachments for Socket Wrenches; Hand) .
MMM-A-182	Adhesive, Rubber.
PPP-B-601	Boxes, wood, Cleated-Plywood.
PPP-C-96	Cans, Metal., 28 Gage and Lighter.
PPP-T-60	Tape: Packaging, Waterproof.
PPP-T-66	Tape, Packaging, Vinyl Plastic Film.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-B-121	Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-T-704	Treatment and Painting of Materiel.
MIL-C-10387	Coupling, Clamp, Pipe; with Bolts and Synthetic-Rubber Gasket, for Grooved End Pipe and Tube.
MIL-T-13020	Tape, Rubber Unvulcanized, Splicing and Molding (Tapes TL-317/U and TL-318/U) .
MIL-C-46168	Coating, Aliphatic polyurethane, Chemical Agent Resistant.

STANDARDS

FEDERAL

FED-STD-H28	- Screw-Thread Standards for Federal Services.
FED-STD-313	- Material Safety Data Sheets Preparation and the Submission of.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-171	- Finishing of Metal and Wood Surfaces.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment and Facilities.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government drawings. The following other Government drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

ME

13222E9737	Coupling Ring, Grooved.
13222E7751	Adapter, Hose coupling.

(Copies of the specifications, standards, handbooks, drawings, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2 e 2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, (accept for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supercede applicable laws and regulation unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The hoseline repair kit (hereinafter Called "kit") shall consist of the following components fitted in a chest and as specified herein:

Component	Quantity
Grooved-to-hose adapters	10
Grooved couplings	3
Rubber adhesive (8-ounce can)	5
Hose clamps	4
Hammer	1
Knife	1
Rubber tape (feet)	150
Vinyl-plastic tape (feet)	350
Banding Strap (feet)	200
Banding buckles	100
Banding tool	1
solvent (1-quart can)	3
Screwdriver	1
Socket wrench	1
Socket wrench handle	1
Rags (pound)	50
Grooved coupling ring	2
Key, socket head screw	2

3.1.1 Drawings. The drawings forming a part of this specification are engineering design drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:15Z
Check the source to verify that this is the current version before use.

Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the kit. Any data (e.g. shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or designated representative.

3.2 First article. Unless otherwise specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3) . Any changes or deviations of kits from the approved first article during production will be subject to the approval of the contracting officer. Approval of the first article will not relieve the contractor of his obligation to furnish kits conforming to this specification.

3.3 Materials. Material shall be as specified herein and on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration prevention and control. The kit shall be fabricated from compatible materials, inherently corrosion resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable operating and storage environments to which the kit may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals shall not be used in intimate contact with each other unless protected against galvanic corrosion. Dissimilar metals and methods of protection are defined and detailed in MIL-STD-889.

3.3.1.2 Identification of materials and f finishes. The contractor shall identify the specific material, material finish or treatment for use with component and subcomponent, and shall make information available upon request to the contracting officer or designated representative.

3.3.1.3 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and reprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the kit my be newly fabricated from recovered materials to the maximum extent practicable, provided the kit produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the kit.

3.4 Grooved-to-hose adapters. The grooved-to-hose adapters shall conform to drawing 13222E7751.

3.5 Grooved Couplings . The grooved couplings shall conform to MIL-C-10387, class A, B, or C, size 4-inch (see 6.2).

3.5.1 Gaskets. Gaskets for coupling shall conform to MIL-C-10387 grade A, B, C, or D, size 4-inch (see 6.2) .

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

3.6 Rubber adhesive. The rubber adhesive shall conform to MMM-A-182, type I. The rubber adhesive shall be furnished in metal screw-top cans conforming to PIP-C-96, type V, class 4, with an 8-ounce capacity. Each can shall have a small brush, suitable for applying the adhesive, attached to the top. A Material Safety Data Sheet (MSDS) on the rubber adhesive shall be supplied in accordance with FED-STD-313 (see 6.5) .

3.7 Hose Clamp. The hose clamp shall consist of a base, latch hook, frame, crosshead, screw, and a screw handle (see figure 1 and 6.4) .

3.7.1 Base. The base shall be aluminum alloy. Vertical. ears with holes shall be provided for mounting the frame and latch hook. The face of the lower jaw shall be a circular arc with a radius of 16 inches and shall have a concave cross section.

3.7.2 Latch hook. The latch hook shall be aluminum alloy, and shall be anodized to a minimum thickness of 0.0007 inches. The latch hook shall be affixed to the base with a corrosion resistant steel pin in such a manner that it may move without binding and automatically engage a lug on the frame and lock it in the closed position.

3.7.3 Frame. The frame shall be aluminum alloy anodized to a minimum thickness of 0.0007 inches and shall be U-shaped. One end of the frame shall have a hole for mounting on the base and the other shall have a lug for engagement of the latch hook. The inside of the frame shall have parallel ways, free of burrs and fins, to act as guide for the crosshead. The crosshead shall slide over the entire length without binding. The frame shall have not less than 7.75-inch clearance between the legs of the "U" and shall provide not less than 4 l 50-inch clearance between the lower jaw and the crosshead when the frame is closed and the crosshead is in the uppermost position. Use helical steel insert to accommodate steel screw.

3.7.4 Crosshead. The crosshead shall be aluminum alloy anodized to a minimum thickness of o l 0007 inches. The lower face of the crosshead shall be the arc of a circle with a radius of 16 inches and shall have a convex cross section. The top of the crosshead shall provide for the screw to swivel and be designed to raise and lower the crosshead by rotating the screw handle. Use helical steel insert to accommodate steel screw.

3.7.5 Screw. The screw shall be a O.875-inch-diameter steel bar. The screw shall have American National Square Acme, modified Acme, or Buttress threads (class 1A or lB) Conforming to FED-STD-H28. One end of the screw shall have a steel head with a hole to receive the screw handle. The edges of the hole shall be chamfered to prevent pinching of the hands. The other end shall allow the screw to swivel in the crosshead. The screw shall be zinc plated steel with a coating in accordance with MIL-STD-171 with a finish 1.9.2.2.

3.7.6 Screw handle. The screw handle shall be a 0.750-inch-diameter steel bar. The sinew handle shall slide without binding in the screwhead and shall be equipped at each end with a ball to prevent the handle from pulling out. The handle shall be zinc plated steel with a coating in accordance with MIL-STD-171 with a finish 1.9.2.2.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

3.8 Hammer. The hammer, hand, shall be nonmagnetic and nonsparking, of machinist type ball peen and of 40 ounces weight.

3.9 Knife. The knife shall conform to GGG-K-481, type II, 6-inch blade.

3.10 Patching tree.

3.10.1 Rubber. The rubber tape shall conform to MIL-T-13020, type TL-318/U, 1 inch wide.

3.10.2 Vinyl. The vinyl-plastic tape shall Conform to PPP-T-66, 2 inches wide.

3.11 Banding.

3.11.1 Tool. The banding tool shall accommodate a 0.750-inch-wide band. The tool shall be designed to apply tension to the strapping band when in place on the hose and shall hold the tension while the banding buckle is being fastened. The tension shall be applied to the strapping band by a screw or other suitable methods l The tool shall not damage the hose while tension is applied to the band or while the buckles are being applied.

3.11.2 Band. The strapping band shall be corrosion-resistant steel. The Strapping band shall be 0.750-inch by 0.030 inch and shall be furnished in 100-foot rolls.

3.11.3 Buckles. The banding buckles shall be corrosion-resistant steel and of a width to accommodate a 0.750-inch-wide band.

3.12 Solvent. The solvent shall conform to P-D-680, type I. Solvent shall be furnished in metal screw-top cans conforming to PPP-C-96, type V, class 4, l-quart capacity. A Material Safety Data Sheet on the solvent shall be supplied in accordance with FED-STD-313 (see 6.5).

3.13 Screwdriver. The screwdriver shall conform to GGG-S-121, type I, class 5, style 1, design A.

3.14 Socket Wrench. The socket wrench shall conform to GGG-W-641, type II, class 2, style A. The nominal opening shall be 1.0625 inches.

3.3.5 Socket wrench handle. The socket wrench handle shall conformto GGG-W-641, type III, class 3, style A.

3.16 Rags. The rags shall conform to DDD-R-30, class A or B, color optional.

3.17 Grooved coupling ring. The grooved coupling ring shall conform to drawing 13222E9737.

3.18 Key, socket head screw. The socket head screw key NSN 5120-00-731-7439, shall be equal to (10001) P/N 1549785. The wrenching surface size shall be 0.375 inch nominal.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:15Z
Check the source to verify that this is the currentversion before use.

3.19 chest. All components of the repair kit shall be fitted in a steel chest not less than 0.0747 inch in nominal thickness. The chest shall have a hinged cover, fastening devices, and handles. Bins, cradles, or blocking shall be provided for components of the repair kit to prevent damage during shipment or handling. The chest shall not exceed 22 inches in height. A loading plan indicating the location of all items in the chest shall be provided. The loading plan shall be permanently attached to the inside of the cover.

3.20 Human factors engineering. The repair kit shall conform to human factors egineering design criteria as describe in MIL-STD-1472. Special design emphasis shall be given to general requirements (4), labeling (5.5), design for maintainability (5.9), and hazard and safety (5.13) of STD-1472, as applicable.

3 l 21 Treatment and Painting. The hose clamps and chest shall be cleaned, treated and painted in accordance with MIL-T-704, type F or G, as applicable. Unless otherwise specified (see 6.2), top coat color shall be sand 686, color number 33446 conforming to MIL-C-46168.

3.22 Marking. The repair kit shall be identified and shall have warning labels in accordance with MIL-STD-130. The warning shall state: “kit not to be used for repairing potable hoses”. Marking shall be applied to the outside of thee cover of the chest.

3.23 Workmanship. The quality of workmanship shall be such as to produce kits that are in accordance with the requirements of this specification and insure proper functioning of all parts.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor’s overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. Inspection requirements specified herein are classified as follows:

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:15Z
Check the source to verify that this is the current version before use.

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. Each kit shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each kit shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.5 Inspection Procedure.

4.5.1 Examination. The kits shall be examined as specified herein for the following major defects:

101. Dimensions not as specified.
102. Materials not as specified.
103. Materials not resistant to corrosion and deterioration, or treated to be resistant to corrosion and deterioration for the applicable storage and operating environments.
104. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.
105. Contrator does not have documentation available for identification of material, material finishes, or treatment.
106. Used, rebuilt or remanufactured components, pieces, or parts incorporated in the kit.
107. Conponents missing or not as specified. Each component missing or not as specified shall constitute one defect.
108 l Loading plan missing.
109. Components not located in chest in accordance with loading plan.
110. Human factors engineering not as specified.
111. Treatment and painting not as specified.
112. Color not as specified.
113. Identification marking not as specified.
114. Workmanship not as specified.
115. Material safety data sheet not supplied as required (see 3.6 and 3.12).

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 1.0 percent defective.

116. Materials or containers not as specified. Each incorrect material or container shall constitute one defect.
117. Components of the kit requiring a contact preservative not coated as specified for level A.
118. Land-sealing surface of grooved end fittings not completely covered with barrier material and tape as specified.
119. Application of barrier material and tape not in accordance with figure 2 as specified.
120. Chest lid not sealed with tape as specified for level A.
121. Marking missing, illegible, incorrect, or incomplete.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or level C, as specified (see 6.2).

5.1.1 Level A. Components of the kit requiring the application of a contact preservative in accordance with MIL-P-116 shall be coated with type P-1 or P-19 preservative. The preservative shall conform to the applicable specification listed in, and shall be applied in accordance with, MIL-P-116. The land-sealing surface of grooved end fittings shall be completely covered with a single wrap of barrier material conforming to MIL-B-121, type II, class 2 (see figure 2) . The wrap for land-sealing surface shall be flush with the end of the fitting and shall extend back beyond the groove not less than 0.25 inch. The wrap of the barrier material shall be covered with a single wrap of tape conforming to PPP-T-60 , type IV. The tape shall be of a width that will completely cover the barrier material and shall extend not less than 0.125 inch beyond the end of the fitting and extend back beyond the barrier material not less than 0.50 inch. The end of the tape extending beyond the end of the fitting, and the tape extending beyond the wrap shall be rolled in place against the end wall of the fitting and against the fitting (see figure 2). The components comprising the complete kit shall then be placed in the chest in accordance with the loading plan. After closure, all edges of the chest lid shall be sealed with tape conforming to PPP-T-60, type XV.

5.1.2 Level C. Components of each complete kit shall be preserved in a manner to assure adequate protection against deterioration from the supply source to the initial receiving activity. The preserved components shall then be positiond in the chest in accordance with the prescribed chest loading Land-sealing surfaces shall be protected as specified in 5.1.1.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2) .

5.2.1 Level A. Each chest containing the preserved kit components shall be packed in a close-fitting box conforming to PPP-B-601, overseas type, style optional. Box closure and strapping shall be in accordance with the appendix to the box specification, except that strapping shall be flat and the finish B.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Packing shall be as specified for level A except the boxes shall be domestic type, and the strapping may be finish A.

5.2.3 Level C. Each chest containing the preserved kit components shall be packed in a close-fitting shipping container in a manner to assure carrier acceptance and safe delivery to destination at the lowest freight rate. Container, as a minimum, shall comply with the rules of the applicable carrier.

5.3 Marking. In addition to any special marking required by the contract or purchase order (see 6.2) , all containers shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The kit is intended for use in making temporary and permanent repairs on the 4-inch lightweight, collapsible petroleum hoseline system. The kit is not intended for making repairs to potable water hoseline Systems.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition docments should specify the following:

a. Title, number, and date of this specification.
b. The frame required for submission of first article kit and number of kits required (see 3.2).
c. Color required when other than as specified (see 3.21) .
d. Level of preservation and packing required (see 5.1 and 5.2) .
e. Groove coupling class (see 3.5) .
f. Gasket grade for coupling (see 3.5.1) .
g. Any special markings (see 5.3) .

6.3 First article. When a first article inspection is required, the items should be a preproduction model. The first article should consist of one repair kit. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first article.

6.4 Information figure. Figure 1 shows a type of hose clamp which has been found acceptable; however, the figure is included for illustration only and is not intended to preclude the furnishing of other hose clamps which conform to this specification.

6.5 Material Safety Data Sheets. Contracting officers will identify those activities requiring copies of completed Material Safety Data Sheets prepared in accordance with FED-STD-313. The pertinent government roiling addresses for submission of data are listed in appendix B of FED-S-313.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

6.6 Subject term (key word) listings.

Hoseline
Repair kit

6.7 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army - ME

Review activity:
Army-SM
DIA- CS

Preparirq activity:
Amy-Me

Project 3835-A093

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:15Z
Check the source to verify that this is the current version before use.


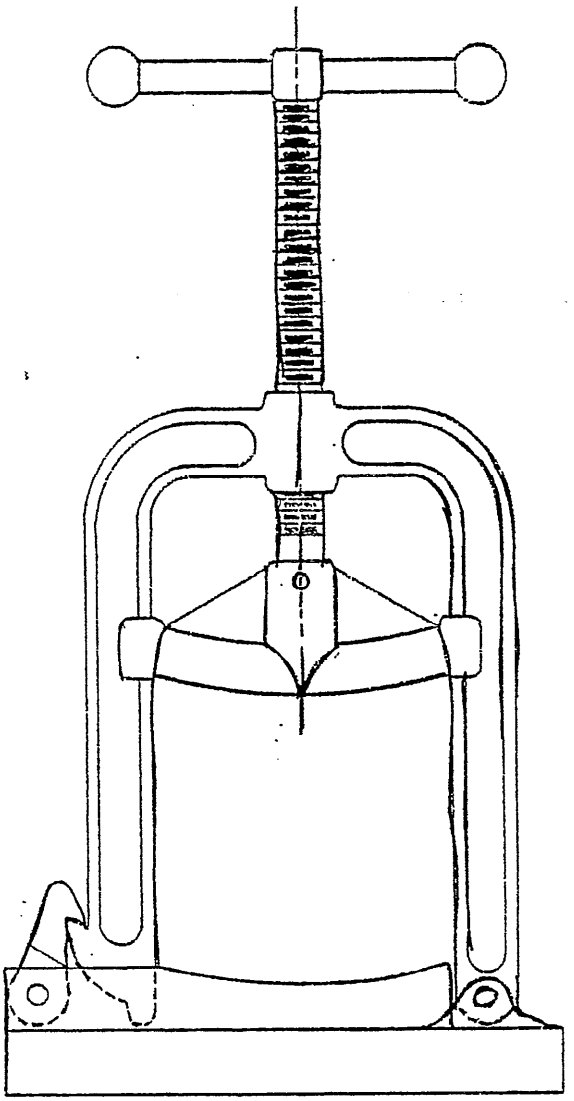


FIGURE 1. HOSE CLAMP.

X-2410

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

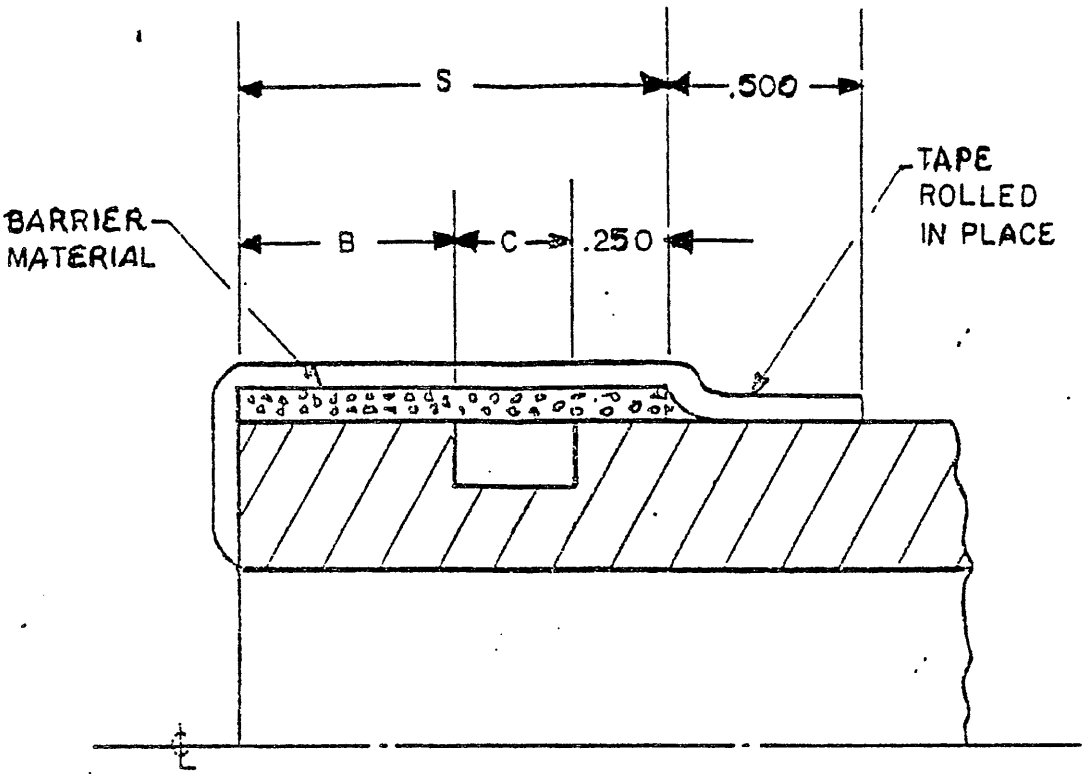

S ——— LAND SEALING SURFACE

B ——— LAND

C ——— GROOVE

FIGURE 2. Land sealing surface for grooved end pipe, tube end fittings.

X-449B

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-R-52343C(ME)	Repair Kit, Hoseline

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 1426 82 MAR PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20261022121:15Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

US ARMY BELVOIR RD&E Center
ATTN: STRBE-TSE
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:15Z
Check the source to verify that this is the current version before use.