MILITARY SPECIFICATION

REGULATOR, VOLTAGE: 10549008

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a 6- and 29-volt regulator~ part of Converter Assembly F10549O13 used in PP6324\TPM-22, part of Radar Test Set AN\TPM-22, and in Power Supply Subassembly PP4812\VPS-2, part of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel; Packaging and packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-C-46357	Computer, Gun **Direction: M18 Manufacturing Processes and Inspection of**

FSC : 1285

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	**Sampling Procedures and Tables for Inspection by Attributes**
MI L- STD-109	**Quality Assurance Terms and Definitions**
MIL-STD-81O	**Environmental Test Methods**

DRAWINGS

U.S. **ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND (ARRADCOM)**

F10549008 6- and 29-Volt Regulator

PACKAGING DATA SHEET

10549008 Packaging of 6- and 29-Volt Regulator

(Copies of specifications, standards, drawings, and packaging data sheets required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1. Fabrication. The 6- and 29-volt regulator shall be manufactured in accordance with Drawing F10549008 and drawings pertaining thereto.

3.2 General specifications. Where applicable, the 6- and 29-volt regulator shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

3.2.1 MIL-F-13926.

a. Order of precedence
b. **Dimensions and tolerances**
cm **Inorganic protective surface finishings**
d. **Part identification and marking**
e. **Workmanship**
f. **Soldering electrical connections**

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.2.2 MIL-C-46357.

a. Etched circuit assemblies
b. Wiring
c. Threaded fasteners
d. Marking
e. Finishes

3.3 Environmental service conditions.

3.3.1 Vibration. The 6- and 29-volt regulator shall be mounted on the vibration table in normal service position. The 6- and 29-volt regulator shall meet the requirements of 3.4 and 3.5 after being subjected to continuous vibration for 2 hours along each of three mutually perpendicular axes within the frequency range of 10 to 40 hertz (Hz) and a half amplitude excursion of 1/64 inch. The rate of change of frequency at each frequency range shall not exceed 1 Hz per second. Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock. The 6- and 29-volt regulator shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The shock impulses shall have an acceleration of 15 gravity units (G) and a pulse duration of 11 + 1 milliseconds (ms). The G value of each impulse shall be witin ± 10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5.5 ms.

3.3.3 Altitude.

3.3.3.1 Operating. The 6- and 29-volt regulator shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg).

3.3.3.2 Nonoperating. The 6- **and 29-volt regulator shall meet the requirements of 3.4 and 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 in. Hg).**

3.3.4 Temperature.

3.3.4.1 Operating. The 6- and 29-volt regulator shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40°F and +155°F. The adjusted output voltages shall be allowed to vary ± 5% at temperature extremes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

The nominal adjusted maximum currents shall be allowed to increase 5% of the specified maximum values at temperature extremes.

3.3.4.2 Nonoperating (storage) . The 6- and 29-volt regulator shall not suffer permanent damage when subjected to **not less than 4 hours at each temperature extreme of -65°F and +160°F and shall meet the requirements of 3.4 and 3.5 when returned to** room ambient.

3.3.5 Humidity (nonoperating) . The 6- and 29-volt regulator shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative himidity of 94 ± 4 percent for a period of not less than 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the 6- and 29-volt regulator.

3.5 **Performance. The 6- and 29-volt regulator shall ., produce results as specified in paragraph 3.5.1 and 3.5.2 when supplied with the following:**

44 + 9 volts direct current (Vdc), regulated to ± 0.5 percent between Pi-l, P1-2 and P1-9 (+) Al, and P1-3, P1-10 and P1-11 (-).

b. 11.5 + 2.5 Vdc, regulated to ± 0.5 percent between P1-7 and P1-8 (+Y and P1-14 and P1-15 (-).

23 ± 5 **Vdc,** regulated to ± 0.5 percent between PI-7 and P1-8 (+) and P1-6 (-).

d. **20 ± 10% kilohertz** (kHz), 90 + 5% volt (V) peak-to-peak square wave between P1-4 and P1-5 and between P1-12 and P1-13.

3.5.1 **Output terminals E71-E72.**

3.5.1.1 Output voltage level potentiometer R2. R2 shall control the level of output voltage between E71 (+) and E72 (-). The nominal output voltage shall be 29.30 ± 0.06 Vdc with a load current of 10.0 amperes direct current (Adc).

1/ The information in parentheses refers to polarity applied to this terminal. This notation shall be applied throughout this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3. 5.1.2 **Current limit potentiometer R17. R17 shall establish the point at which the current limit circuitry** becomes effective. With a short applied between E71 and E72, **maximum** current drain shall be controlled by R17 and associated circuitry and shall not exceed 16.0 Adc. The output shall automatically recover after removal of the short circuit.

3.5.1.3 Voltage regulation, line. Output voltage shall not vary more than + 0.30 V with an input voltage variation from 35 to 53 Vdc and a–constant load current of 10.0 Adc.

3.5.1.4 Voltage regulation, load. With a constant input voltage of 44 + 9 Vdc, the output voltage shall not vary more than ± 0.30 V when the output current is varied from 3.0 to 10.0 Adc.

3.5.1.5 Output ripple. Ripple shall not exceed 0.5 V peak-to-peak when the input voltage is 44.00 ± 0.44 Vdc and the load current is 10.0 Adc. Exclude high-frequency spikes which occur at approximately 25 usec. intervals.

3.5.2 Output terminals E73 - E74.

3.5.2.1 Output voltage level potentiometer R25. R25 shall control the level of output voltage between E73 (+) and E74 (-). The nominal output voltage shall be 6.50 ± 0.06 Vdc with a load current of 3.5 Adc.

3.5.2.2 Current limit potentiometer R40. R40 shall establish the point at which the current limit circuitry becomes effective; With a short applied between E73 and E74, maximum current drain shall be controlled by R40 and associated circuitry and shall not exceed 4.0 Adc. The output shall automatically recover after removal of the short circuit.

3.5.2.3 Voltage regulation, line. Output voltage shall not vary more than + 0.06 V with an input voltage variation from 9 to 14 Vdc, a bias voltage of 23 ± 5 Vdc, and a constant load current of 3.5 Adc.

3.5.2.4 Voltage regulation, load. With a constant input voltage of 11.5 ± 2.5 Vdc, the output voltage shall not vary more than ± 0.06 V when the output current is varied from 0.025 to 3.5 **Adc.**

3.5.2.5 Output ripple. Ripple shall not **exceed** 0.5 **V peak-**to-peak when the input voltage is 11.5o ± **0.12 Vdc, the bias** voltage is 23.00 ± 0.23 Vdc, and the load **current is 3.5 Adc.** Exclude high-frequency spikes which occur **at approximately 25** usec. intervals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.6 First Article Inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specifications where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) submission. The requirement for first article approval and the responsibility (Government or contractor) for first article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three 6- and 29-volt regulators manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor, prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for approval. The Government reserves the right to witness the contractor's inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.3 **Inspection provisions.**

4.3,1 Submission of product. Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 **Examination and tests.**

4.3.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provision (SQAP) listed in the technical data package (TDP). In the absence of SQAP'S, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in 4.3.2.3 and 4.4 herein. Examination and test for packaging and marking shall be in accordance with " MIL-P-14232 and Section 5 herein. The tabulated classification of defects in 4.3.2.3 and 4.4 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.3.2.3 Functional tests. The requirements and tests in Table I shall be inspected on a 100-percent basis. All examinations and tests shall be conducted at standard ambient temperatures (60°F to 90°F).

TABLE I. CLASSIFICATION OF DEFECTS
(loo percent inspection)

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
CRITICAL:	NONE		
MAJOR :			
101.	**Electrical**	3.4	4.6.2
102.	**Performance**	3.5	4.6.3
MINOR:	**NONE**		

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:21Z
Check the source to verify that this is the current version before use.

4.3.3 Acceptance and rejection. Rejected lots shall be screened for all defective characteristics. Removal or **correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-sTD-105.**

4.4 Special sampling. One 6- and 29-volt regulator shall be selected at random by a Government representative as a control sample from each 100 produced. The control sample shall meet the requirements and tests in Table II. Three -6 and 29-volt **regulators shall be selected at random by a Government representative as a control sample from each 50 produced or from each month's production, whichever** occurs first. The control samples shall meet the requirements and tests in Table 111.

TABLE II. SPECIAL SAMPLING

NO.	**CONTROL TEST**	**REQUIREMENT**	TEST PROCEDURES
301.	Fabrication	3.1	Applicable drawings - Visual
302.	General specifications	3.2	MIL-F-13926 & MIL-C-46357 - Visual

TABLE 111. SPECIAL SAMPLING, ENVIRONMENTAL

NO.	CONTROL TEST	REQUIREMENT	TEST PROCEDURE
303.	Vibration	3.3.1	4.6.1.1
304.	Shock	3.3.2	4.6.1.2
305.	Altitude	3.3.3	4.6.1.3
306.	Temperature	3.3.4	4.6.1.4
307.	Humidity (nonoperating)	3.3.5	4.6.1.5

4.4.1 Failure of **sample.** Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and a re-submitted sample has been approved (see 4.3.3).

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T20:21Z
Check the source to verify that this is the currentversion before use.

4.5.1 Government furnished inspection equipment. Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

4.5.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Test Methods and procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Test equipment. In conjunction with 4.5.2.2, the standard test equipment listed in Table IV shall be utilized in performing the applicable test of 4.6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE IV. TEST EQUIPMENT LIST

ITEM NUMBER	DESCRIPTION
1. Signal generator	Capable of producing a 20 ± 10% kHz, 90 ± 5% V peak-to-peak square wave.
2. Power supply	Dc, 9 to 53 V, 20 A, regulated to 0.5%.
3. Voltmeter	Dc, 0 to 30 V, 0.01% accuracy, 20,000 ohms/volt or greater.
4. Oscilloscope	Input sensitivity: 20 mV/cm. Input impedance: 1 megohm. Vertical passband: dc to 1 MHz. Horizontal deflection: 5us/cm.
5. Ammeter	Dc, 0 to 20 A, 1% accuracy.
6. Ammeter	Dc, 0 to 4 A, 1% accuracy. to 0.5%.
7. Power Supply	**Dc,** 18 to 28 V at 1 A, regulated to 0.5%.
8. Resistive load	**Variable 0 to** 10 ohms, 100W.
9. Resistive load	Variable 0 to 1 ohm, 10W.
10. **Resistive load**	**Variable 0 to 5** ohms, 500W.
11. Resistive load	Variable 0 to 1 ohm, 250W.
12. Resistive load	Fixed 270 ohms, l/2W, 5%.
13. Resistive load	**Variable 0 to 2** ohms, 50W.
14. Resistive load	Variable 0 to 1 ohm, 25W.

4.6 Test methods and procedures.

4.6.1 Environmental. Environmental tests shall be conducted in accordance with the general requirements and test methods of **MIL-STD-810 except as specified herein. Testing equipment** used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810. After

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

performing requirements of paragraphs 4.6.2 and 4.6.3 at room ambient conditions, nominal settings shall be established with no further adjustments at environmental extremes. Voltage and current specifications shall be allowed to degrade per 3.3.4.1.

4.6.1.1 Vibration. This test shall be performed as specified in Method 514, procedure VIII of MIL-STD-810 as modified by paragraph 3.3.1 herein. After vibration, the 6- and 29-volt regulator shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.1.

4.6.1.2 Shock. This test shall be performed as specified in Procedure method 516 of MIL-STD-810 except that shock pulses shall be 11.0 ms and 15 G. After the shock impulses, the 6- and 29-volt regulator shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.2.

4.6.1.3 Altitude (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 500 of **MIL-STD-8i0** except that-the operating altitude shall be limited to 10,000 feet (20.6 in. Hg). Operation of Step 4 shall be the performance tests specified in 4.6.3 herein. Nonoperating test of 40,000 feet (5.5 in. Hg) shall also be performed.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and nonoperating). This test shall be performed as specified in Procedure 1, Method 501 of MIL-sTD-81o. The temperature of Step 3 shall be maintained for not less than 4 hours. The temperature of Step 4 shall be +155°F. In Step 5, the temperature shall be maintained for 4 hours and the 6- and 29-volt regulator shall be tested in accordance with 4.6.2 and 4.6.3 during this time.

4.6.1.4.2 Low (operating and nonoperating) . This test shall be performed as specified in Procedure 1, Method 502 of MIL-STD-810. The temperature of Step 2 shall be -65°F maintained for not less than 4 hours. The temperature of Step 4 shall be -40°F. In Steps 5 and 7, the 6- and 29-volt regulator shall be tested in accordance with 4.6.2 and 4.6.3.

4.6.1.5 Humidity (nonoperating) . This test shall be performed in accordance with procedure II, Method 507 of MIL-STD-810. The 6- and 29-volt regulator shall be tested in accordance with 4.6.3.

4.6.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with 3.4.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.3 Performance. The selected 6- and 29-volt regulators shall be tested as follows:

4.6.3.1 Output terminals E71-E72. The following tests shall be performed with test equipment connected to the 6- and 29-volt regulator as shown in Figure 1.

4.6.3.1 1 Output voltage level potentiometer R2. Using Item 1, **apply a 20 + 10% kHz, 90 ± 5% volt peak-to-peak square wave to P1-4 and P1-5. Using Item 2, apply 44 + 9 V between P1-l, P1-2 and P1-9 (+) and P1-3, P1-10 and P1-1l (-). With switch S1 open, and** using Item 3, verify that the voltage between E71 (+) and E72 (-) can be adjusted to 29.30 + 0.06 Vdc with R2.

4.6.3.1.2 Current limit potentiometer R17. Perform the following steps in sequence:

a. Set up conditions specified in 4.6.3.1.1.

b. Adjust R2 for voltage indication of 29.30 ± 0.06 V.

c. Adjust R17 fully CCW.

d. **Close load switch S1 (See Figure 1).**

e. **Close short switch S2 (See Figure 1).**

f. **Adjust R17 CW until output current equals 16.0 Adc.**

g Open S2.

h. **Vary resistive load to obtain current indication of 10.0 Adc.**


i. Record voltmeter indication using Item 3.

¡ Close S2 momentarily, then open.

k. Using Item 3, verify that output automatically returns to within + 0.06 volts of level in “i” above.

4.6.3.1.3 Voltage regulation, line. With R2 and R17 adjusted as specified in 4.6.3.1.2, adjust resistive load, **Items** 10 and 11, for a current indication of lO.O Adc. Vary input dc, Item 2, from 35 to 53 Vdc. Using Item 3, verify that the output voltage does not vary more than + 0.30 Vdc.


Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:21Z
Check the source to verify that this is the current version before use.

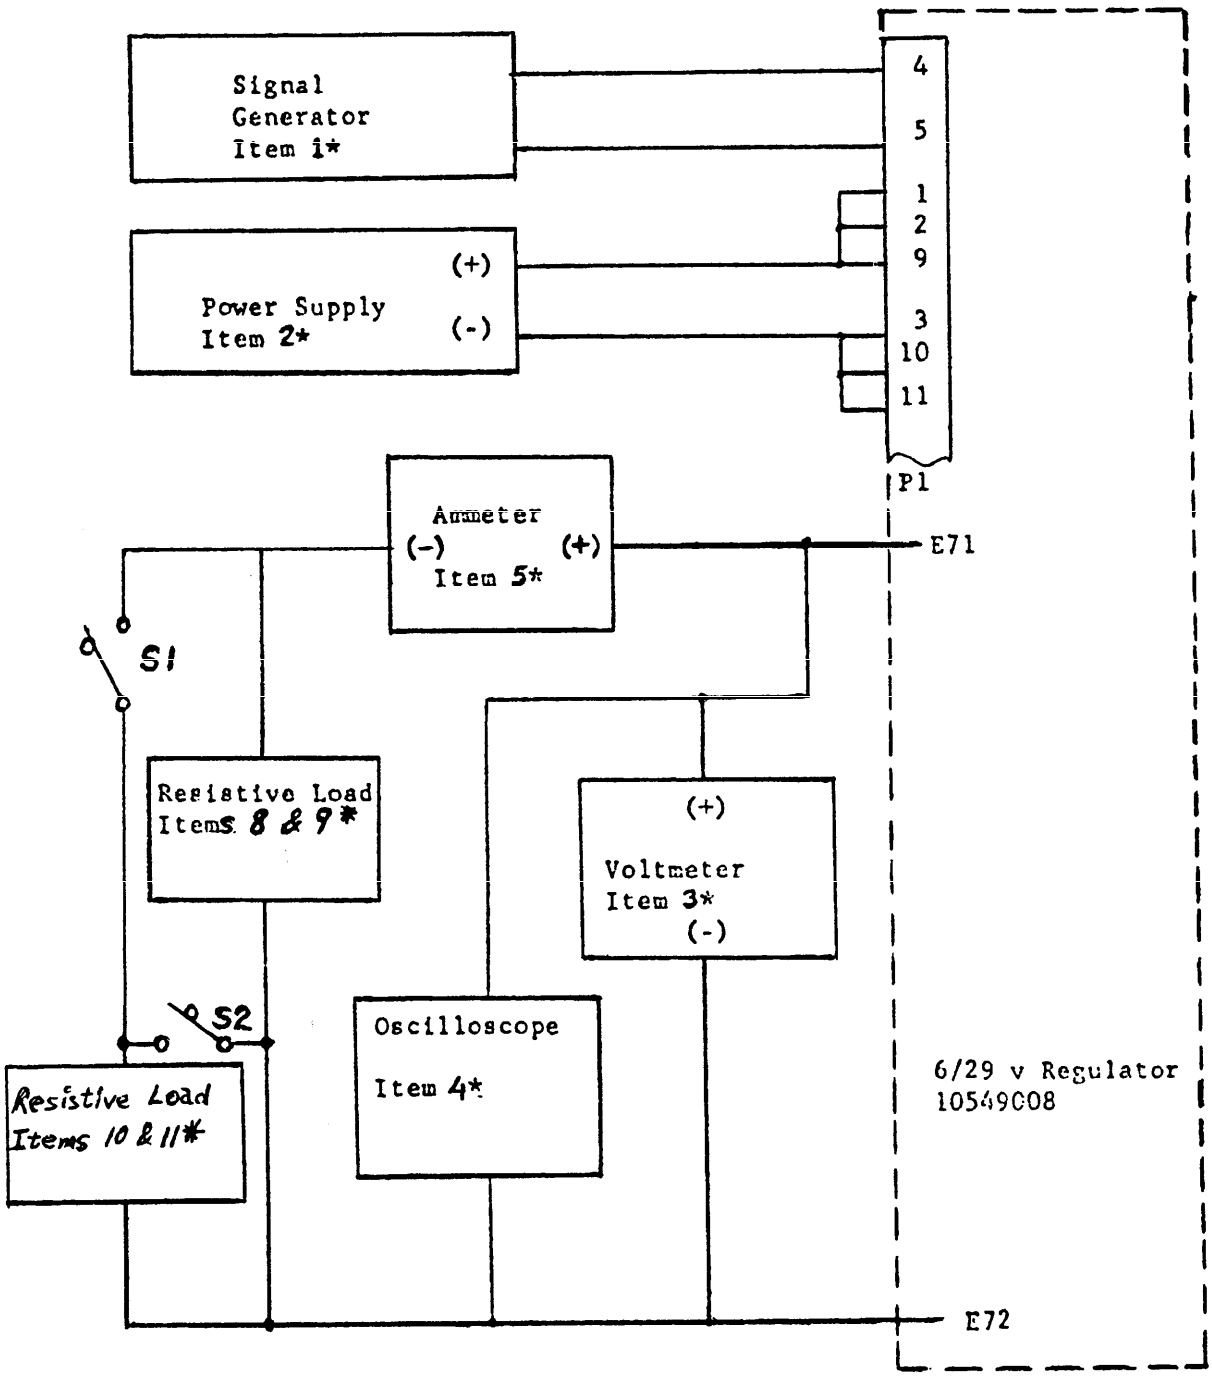

* Refer to 4.5.2.3

FIGURE 1. 6- AND 29-VOLT REGULATOR TEST SETUP FOR E71 AND E72.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:21Z
Check the source to verify that this is the current version before use.

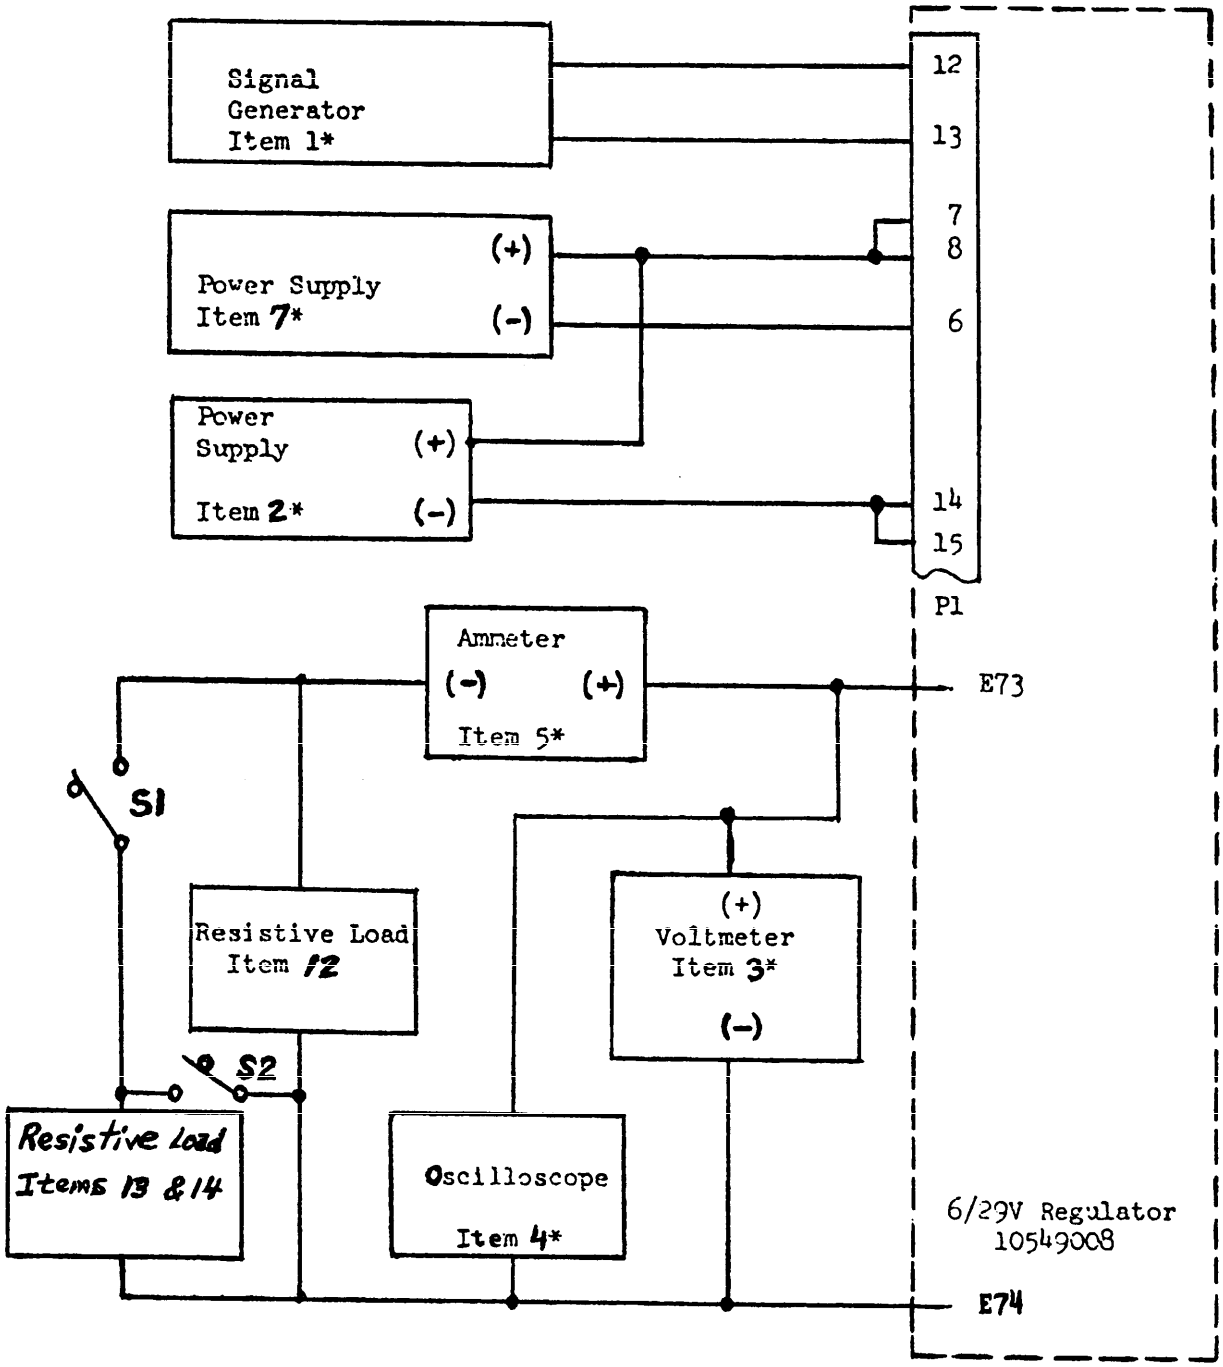

*Refer to 4.5.2.3

FIGURE 2. 6- AND 29-VOLT REGULATOR TEST SETUP FOR E73 AND E74.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.3.1.4 Voltage regulation, load. Set input voltage, Item 2, to 44 + 9 Vdc. With R2 and R17 adjusted as specified in 4.6.3.1.2, adjust resistive load, Items 8 and 9, for 3.OA with switch S1 open. Record the voltage indication using Item 3. Close switch S1 and vary the resistive load to obtain 10.OA. Using Item 3, verify that the output voltage does not vary more than ± 0.3 Vdc.

4.6.3.1.5 Output ripple. With the input voltage, Item 2, set to 44 ± 0.44 Vdc and with R2 and R17 adjusteal as specified in 4.6.3.1.2, adjust the resistive load for a current indication of 10.0 Adc. Using Item 4, verify that the ripple does not exceed 0.5 V peak-to-peak excluding high-frequency spikes which occur at approximately 25 usec. intervals.

4.6.3.2 Output terminals E73-E74 The following tests shall be performed with test equipment connected to the 6- and 29-volt regulater as shown in Figure 2.

4.6 .3.2.1 Output voltage level potentiometer R25. Using Item 1, apply a 20 ± 10% kHz, 90 ± 5% volt peak-to-peak square wave to P1-12 and P1-13. Using Item 7, apply 23 ± 5 Vdc between P1-7 and P1-8 (+) and P1-6 (-). Using Item 2, apply 11.5 ± 2.5 Vdc between P1-7 and P1-8 (+) and P1-14 and P1-15 (-). With switch S1 open, and using Item 3, verify that the voltage between E73 (+) and E74 (-) can be adjusted to 6.50 ± 0.06 V with R25.

4.6.3.2.2 Current limit potentiometer R40. perform the following steps in sequence:

a. Set up conditions specified in 4.6.3.2.1.

b. Adjust **R25** for voltage indication of 6.50 ± 0.06 Vdc .

c. Adjust R40 fully Ccw.

d. Close load switch S1. (See Figure 2) .

e. Close short Switch S2 (See Figure 2) .

f. Adjust R40 Cw **until** output current equals 4.0 Adc.

g* Open S2*

h. Vary resistive load to obtain **current** indication of 3*5 Adc

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

i. **Record voltmeter indication** using Item 3.

j. Close S2 momentarily, then open.

k. Using Item 3, verify that output automatically returns to within ± 0.06 volts of level in "i" above.

4.6.3.2.3 Voltage regulation, line. With R25 and R40 adjusted as specified in 4.6.3.2.2, adjust resistive load, Items 13 and 14, for a current indication of 3.5 Adc. Vary Item 2 from 9 to 14 Vdc. Using Item 3, verify that the output voltage does not vary more than ± 0.06 V.

4.6.3.2.4 Voltage regulatiton, load. Set input voltage, **Item 7, to 23 + 5 Vdc and Item 2 to 11.5 + 2.5 Vdc. With R25** and R40 adjusted as specified in 4.6.3.2.2, adjust resistive loads, Item 13 and 14, to maximum and open switch S1. Record the voltage indication using Item 3. Close switch S1 and vary the resistive load to obtain 3.5 Adc. Using Item 3, verify that the output voltage does not vary more than ± 0.06 **V.**

4.6.3.2.5 Output ripple. Set input voltage, Item 7, for 23 + 0.23 **Vdc and Item 2** for" ll.5 ± 0.12 Vdc. With R25 and R40 adjusted as specified in 4.6.3.2.2, adjust resistive load, Items 13 and 14, for a current indication of 3.5 Adc. Using Item 4, verify that the ripple does not exceed 0.5 V peak-to-peak excluding high-frequency spikes which occur at approximately 25 usec. intervals.

5. PrEPAraTION FOR DELIVERY

5.1 Packaging, packing, and marking. Packaging, packinq, and marking shall be in accordance with Packaging Data Sheet 10549008. The level of protection shall be as specified in the procurement document.

6. **NOTES .**

6.1 Intended use. The 6- and 29-volt regulator is used in Power Supply Subassembly F1054903-3, a part of Power Supply **PP48121vPS-2, part of Radar Set AN/VPS-2. The 6- and 29-volt regulator is** also used in the PP6324/TPM-22, part of Test Set AN/TPM-22. The 6- and 29-volt regulator provides the necessary voltages for functional operation of Radar Set AN/VPS-2 and provides the necessary test voltages in the AN/TPM-22 for functional checkout of Radar Set AN/VPS-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. procurement documents should specify the following:

a. **Title,** number, and date of this **specification.**

b. Applicable packaging data sheet **number (See 5.1).**

co Selection of applicable level of preservation packaging and packing.

d: Level of protection required.

e. Applicable stock number.

f. Requirement for first article submission.

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
ARMY-AR

Preparing Activity:
ARMY-AR

Project No. 1285-A483

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-R-50328B REGULATOR, VOLTAGE 10549008

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN: DRDAR-QAF
DOVER,NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.