NOT MEASUREMENT SENSITIVE


MIL-DTL-11132/11J
04 April 2022
SUPERSEDING
MIL-DTL-11132/11H
29 January 2018

DETAIL SPECIFICATION SHEET

# INSIGNIA, RANK, CADET, CAPTAIN, ROTC AND JROTC, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11132.

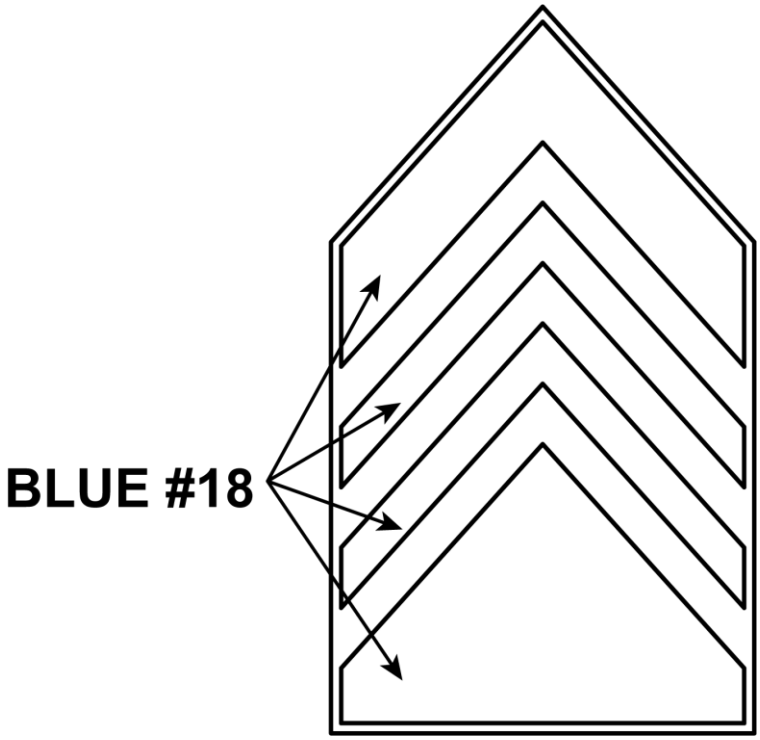


DASH NO.
-1: ROTC Regular Size
-2: ROTC Miniature Size
-3: JRTOC (see Note 2)

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

AMSC N/A

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:12Z
Check the source to verify that this is the current version before use.

FINISH: Epoxy resin (Stoning epoxy), Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT (Overall):
-1: 2-1/4 inches (REF)
-2, -3: 1-3/16 inches (REF)
WIDTH (Overall)
-1: 1-5/16 inches (REF)
-2, -3: 11/16 inch (REF)
THICKNESS (Overall):
-1, -2: 0.070 inch ± 0.010 inch
-3: 0.100 inch ± 0.010 inch (Including Plastic Back Plate)

EPOXY: Epoxy resin shall be applied to the insignia rank as indicated above, and shall match TIOH Hard Enamel Color Chip Number listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210).

| TIOH HARD ENAMEL COLOR CHIPS | |
|---|---|
| **COLOR** | **CHIP NUMBER** |
| Blue | #18 |

ATTACHING DEVICE:
The attaching device shall be a prong clutch type as follows.
1. -1 shall have three prongs and clutches. One prong shall be located on the vertical center line 3/16 inch ± 1/32 inch below the top of the insignia and one prong in each of the lower corners 3/16 inch ± 1/32 inch in from the sides and up from the bottom.

2. -2 and -3 shall have two prongs located on the vertical center line of the insignia, equidistant from each end and 3/4 inch ± 1/32 inch apart.

NOTES:
1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. -2 and -3 are identical with the exception of a plastic back plate which is added to designate JROTC.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:12Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2022-081)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:12Z
Check the source to verify that this is the current version before use.