MILITARY SPECIFICATION

STRAPS, SPLINT

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 Scope. This specification covers straps suitable for use with splints, and attachments for splints, which are to be used in the immobilization of fractures and treatment of injuries to the lower extremities of personnel.

1.2 Classification. Straps covered by this specification shall be of the following types and sizes, as specified (see 6.1):

Type I —Splint strap, leg traction.
Type II —Splint strap, leg traction, for use over winter footgear.
Type III—Splint strap, with buckle.
Size 1 - 36 inches.
Size 2 —72 inches.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	—Thread, Cotton.
CCC-T-191	—Textile Test Methods.
PPP-B-566	—Boxes, Folding, Paperboard.
PPP-B-585	—Boxes, Wood, Wirebound.
PPP-B-601	—Boxes, Wood, Cleated-Plywood.
PPP-B-621	—Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	—Box, Fiberboard.
PPP-B-676	—Boxes, Set-Up, Paperboard.

MILITARY

MIL-F-495	—Finish, Chemical, Black, for Copper Alloys.
MIL-W-530	—Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-B-543	—Buckles, Tongueless, and Web Strap.
MIL-T-3530	—Treatments, Mildew Resistant and water repellent for Thread and Twine.
MIL-L-10547	—Liners, Case Waterproof.

STANDARDS

FEDERAL

Fed. Std. No. 751—Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	—Marking for Shipment and Storage.

DRAWINGS

MILITARY MEDICAL SUPPLY AGENCY

10185	—Strap, Leg Traction (and Bill of Material).

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:00Z
Check the source to verify that this is the current version before use.

COLOR ASSOCIATION OF THE UNITED STATES, INC.
United States Army Standard Color Card for the Official Standardized Shades of Sewing Threads.

(Application for copies should be addressed to the Color Association of the United States Inc., 200 Madison Avenue, New York 16, N. Y.)

3. REQUIREMENTS

3.1 Materials. Except as herein specified, materials shall conform to the applicable portions of the specifications, standards, and drawing (with Bill of Material) listed in section 2, and shall be capable of meeting the requirements shown therein. When materials to be used are not specifically designated, those used shall be of the highest commercial quality, and entirely suitable for the purpose intended.

3.1.1 Type I, splint strap, leg traction.

3.1.1.1 *Webbing.* Webbing shall conform to Specification MIL-W-530, shall be type IIa, medium weight (soft texture), 1 inch wide, and shall conform to class 4 of the same specification, except that the maximum amount of copper-8-quinolinolate shall be 1.28 percent (see 4.4.1).

3.1.1.2 *Thread.* Except as specified herein, the thread shall conform to Specification V-T-276, and shall be type IIIB, heavy thread, glazed finish, 3-ply, ticket No. 10/3, as shown in table VI for needle thread, and type IIIA, heavy thread, soft finish, 3-ply, ticket No. 10/3, as shown in table V for bobbin thread. The thread shall be vat dyed olive drab shade S-1, conforming to U. S. Army Standard Color Card. All reference to "approved shade standard", "approved standard shade sample" and "approved standard shade" made in Specification V-T-276 shall not apply. Thread shall be treated for mildew-resistance in accordance with Specification MIL-T-3530, using type I, class 1 mildew inhibiting agent (see 4.4.2). The finished thread shall show fair colorfastness to laundering, chlorine bleaching, and weather. Paragraph titled: "Certification" in Specification V-T-276 shall not apply (see 4.1.2).

3.1.1.3 *Buckle.* The buckle shall conform to type III, style 3, construction A, class 3, steel, 1 inch size, as specified in Specification MIL-B-543, except that the buckle shall have a lustreless black chemical (oxidized) finish in accordance with Specification MIL-F-495.

3.1.1.4 *Swivel and collar.* The swivel and collar shall be fabricated from AISI C1010 cold-rolled carbon steel and shall have a lustreless black chemical (oxidized) finish in accordance with Specification MIL-F-495

3.1.2 Type II, splint strap, leg traction, for use over winter footgear.

3.1.2.1 *Webbing.* Webbing shall be as specified in 3.1.1.1, except that it shall be type IIb, 1 inch wide for the straps and 1½ inches wide for the buckle rests.

3.1.2.2 *Thread.* Thread shall be as specified in 3.1.1.2.

3.1.2.3 *Buckles.* The buckles shall be as specified in 3.1.1.3.

3.1.2.4 *Swivel and collar.* The material for the swivel and collar shall be as specified in 3.1.1.4.

3.1.3 Type III, splint strap, with buckle.

3.1.3.1 *Webbing.* Webbing shall be as specified in 3.1.1.1, except that it shall be type II, medium weight (hard texture), 1½ inches wide.

3.1.3.2 *Thread.* Thread shall be as specified in 3.1.1.2.

3.1.3.3 *Buckle.* Buckle shall be a 3-prong buckle with guard, fabricated of brass, and shall have a black chemical (oxidized) finish in accordance with Specification MIL-F-495.

3.2 Type I, splint strap, leg traction.

3.2.1 *Construction.* The type I splint strap shall be fabricated of material as specified in 3.1.1 and shall be constructed as shown in figure 1, except that as an alternate, the ends of the loop may be joined in such a manner that they are covered by the ends of either of the two straps and are secured by the stitching of that strap to the loop. The webbing shall be securely fastened by stitching to the buckle, swivel, and adjoining webbing as shown in the figure. Stitching shall be as specified in 3.5. The free ends of the straps

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:00Z
Check the source to verify that this is the current version before use.

shall have a diagonal cut as shown in figure 1 and shall be finished as specified in 3.6. The swivel and collar shall be assembled by peening as shown in figure 1, and after peening, the two parts shall rotate freely and shall allow easy insertion of webbing into each part. The peening shall be smooth, shall not result in sharp edges, and shall be of such strength as to withstand a straight pull of 150-pounds when tested as specified in 4.4.3.

3.3 Type II, splint strap, leg traction, for use over winter footgear.

3.3.1 *Construction.* The type II splint strap shall be fabricated of material as specified in 3.1.2 and shall be constructed as shown in Drawing 10185. The webbing shall be securely fastened to the buckle, swivel, and adjoining webbing as shown in the drawing. Stitching shall be as specified in 3.5. The free ends of the straps shall have a diagonal cut as shown in the drawing and shall be finished as specified in 3.6. The peening (assembly) and performance of the swivel and collar shall be as specified in 3.2.1.

3.4 Type III, splint strap, with buckle.

3.4.1 *Sizes.* The leg splint strap shall be of the following sizes (see 6.1).

3.4.1.1 *Size 1.* The finished size 1 splint strap shall be 1½ inches wide and 36 ± ¼ inches long, including attached buckle.

3.4.1.2 *Size 2.* The finished size 2 splint strap shall be 1½ inches wide and 72 ± ¼ inches long, including attached buckle.

3.4.2 *Construction.* Except for the finished length as specified above, the construction of both size 1 and 2 splint straps shall be identical. The splint straps shall be fabricated of material as specified in 3.1.3. The buckle shall be firmly secured to the strap by stitching in a manner as shown in figure 2. Stitching shall be as specified in 3.5. The free end of the strap shall have a diagonal cut as shown in figure 2 and shall be finished as specified in 3.6.

3.5 Stitching. All stitching shall be stitch type 301 in accordance with the requirements of Federal Standard 751. Twice shall be not less than 10 stitches per inch. All stitching shall be backstitched at the ends to prevent raveling.

3.6 Webbing vinyl-dip finish. All diagonally cut free ends of web straps shall be dipped in a vinyl resin for the entire length of the cut and shall be capable of passing the test specified in 4.4.1.3.

3.7 Identification marking. Straps shall be permanently and legibly marked with the manufacturer's name or registered trade-mark. This marking shall appear on the webbing.

3.8 Workmanship. Workmanship shall be first class throughout. Finished straps shall be free from defects which detract from their appearance or may impair their serviceability. All edges and corners of metal parts shall be rounded, ground smooth, or otherwise treated to eliminate burs and sharp or ragged edges. All welds shall be continuously even, smooth, and free from flaws. All exposed welds shall be ground smooth to eliminate traces of weld marks and shall be blended into the adjacent surfaces.

4. QUALITY ASSURANCE PROVISIONS

4.1 Supplier responsibilities for inspection. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection, as used in this specification, is defined as both examination (such as visual, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 *Certificates of quality.* When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:00Z
Check the source to verify that this is the current version before use.

4.1.3 Government furnished material shall not be sampled or tested unless specifically requested by the Government (see 6.1).

4.2 Sampling.

4.2.1 *For examination.* Sampling for examination shall be conducted in accordance with Standard MIL–STD–105.

4.2.2 *For tests.* Sampling for tests shall be conducted in accordance with Standard MIL–STD–105.

	Inspection level	AQL, percent defective	Minimum sample size
Component material testing	I-2	*	3

* Acceptance number shall be zero (0) for all sample sizes.

4.2.3 *Component materials.* Sufficient samples of the component materials shall be selected from each lot of material used in the manufacture of the straps to perform tests as required by the applicable subsidiary specifications or by tests specified herein. When sample size for component materials covered by the subsidiary specifications is not specified, the sample size for each test shall be as indicated in 4.2.2. The unit of product for testing shall be the quantity of material necessary to perform all required tests one time each, taking into consideration the fact that, where possible, the same material may be used to perform two or more tests. Lot sizes are expressed in multiples of the following:

Webbing.....Yards or fractions of a yard.
Thread.....Cone or spool.
Buckles.....Each.
Swivel and collar...Each (assembly).

4.3 Examination. The straps shall be examined to determine compliance with all requirements contained in this specification.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

4.4.1 *Webbing.* The webbing shall be tested in accordance with the test procedures of Specification MIL–W–530, except that the performance of the the tests for mildew-inhibitor content and mildew-resistance shall be conducted under the following conditions:

(a) If the material conforms to the requirements for mildew-inhibitor content, the mildew-resistance tests shall not be performed, and the material shall be considered as complying with mildew-resistance requirements.

(b) If the mildew-inhibitor content exceeds the maximum requirement, the material shall be rejected.

(c) If the mildew-inhibitor content is found to be below the minimum requirement, the material may be accepted with respect to mildew-resistance provided it passes the mildew-resistance test.

4.4.1.1 *Mildew-resistance.* The finished webbing shall be tested in accordance with method 4762 of Specification CCC–T–191. The leaching process shall be omitted.

4.4.1.2 *Water absorption.* The finished webbing shall be tested for water absorption by method 5500 as specified in the test section of Specification MIL–W–530, except that the size of the specimen and the size of the blotting paper shall conform to method 5502 of Specification CCC–T–191.

4.4.1.3 *Webbing vinyl-dip finish.* The vinyl resin on the diagonally cut free end of the straps (webbing) shall not become tacky after being conditioned for 4 hours at 180°F., shall not crack or peel off when bent 180° over a 4-inch mandrel at minus 60°F. (after being at this temperature for 1 hour), and shall not swell up or become gelatinous after being conditioned for 4 hours in an atmosphere of 100 percent relative humidity at 100°F. In addition, after being subjected to accelerated aging in accordance with method 5852 of Specification CCC–T–191, the vinyl-resin-dipped ends shall be capable of passing the tests described above.

4.4.2 *Thread.* The untreated thread shall be tested in accordance with the test procedures of Specification V–T–276 (see 3.1.1.2, 3.1.2.2, and 3.1.3.2). The treated thread shall be tested as specified in the test section of Specification MIL–T–3530.

4.4.2.1 *Colorfastness to laundering.* The finished thread shall be tested for colorfastness to laundering by method 4610 of Specification CCC–T–191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:00Z
Check the source to verify that this is the current version before use.

4.4.3 *Swivel and collar.* Using necessary adapters, the swivel and collar assembly shall be placed in a tensile testing machine and subjected to a pull of 150-pounds.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 *Unit of issue.* One (1) strap, as specified, constitutes one unit of issue.

5.1.2 *Quantities.* Packaging and packing quantities shall be as specified in table I.

TABLE I. *Packaging and packing quantities*

Type	Size	Number of units in unit package	Number of units in intermediate package	Number of units in exterior container
I	—	1	12	288
II	—	1	12	288
III	1	1	12	432
III	2	1	12	288

5.1.2.1 *Packing variation permitted.* If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.1.3 *Level A.*

5.1.3.1 *Unit package.* Each unit shall be neatly folded or rolled, and shall be wrapped in kraft paper of suitable weight. Wrapping shall be adequately secured to prevent accidental opening.

5.1.3.2 *Intermediate package.* The number of units specified in table I shall be packaged in a carton of appropriate size and design, constructed in accordance with Specification PPP-B-566 or PPP-B-676. Carton shall be secured to prevent accidental opening.

5.1.4 *Level C.* Units shall be packaged in standard commercial containers of the size and kind commonly used for the purpose which will afford the degree of protection required for shipment and use of the end product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 *Level A.*

5.2.1.1 *Exterior container.* Exterior container shall be designed for type 2 load, and constructed in accordance with Specification PPP-B-585, style 3, for class 3 use; PPP-B-601, table II, using type III, class 1 plywood; or PPP-B-621, table III.

5.2.1.1.1 *Case liner.* Each level A box shall be lined with a waterproof case liner conforming to Specification MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto.

5.2.1.1.2 *Strapping.* Strapping, when required, shall be in accordance with applicable box specification.

NOTE: Strapping will not be required for shipment forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2. *Level B.*

5.2.2.1 *Exterior container.* Exterior container shall be constructed in accordance with Specification PPP-B-621, table I, or PPP-B-636, type I, class 1, fabricated from not less than 275-pound test fiberboard.

5.2.3 *Level C.* The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 *Unit package.* Each unit package shall be marked with stock number, item identification, unit, quantity, and name of contractor.

5.3.2 *Intermediate package.* Each intermediate package shall be marked in accordance with section 5 of Standard MIL-STD-129.

5.3.3 *Exterior container.* Exterior container shall be marked in accordance with Standard MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:00Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) Type required (see 1.2).
(c) Size required for type III (see 1.2 and 3.4.1).
(d) When sampling or testing of Government supplied material is required (see 4.1.3).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Military requirements.

6.3 Transportation description. Transportation description applicable to this item is:

Straps, webbing, fitted with buckles, hooks or other fastenings
Carload minimum weight 20,000 pounds subject to Rule 34 of the Uniform Freight Classification
Truckload minimum weight 20,000 pounds per National Motor Freight Classification

6.4 Supersession data. This specification supersedes Interim Federal Specification GG-S-00620a (GSA-FSS), (in part), dated September 17, 1954, and Federal Specification GG-S-620 (in part), dated June 20, 1949.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—Army Medical Service
Navy—Bureau of Medicine and Surgery
Air Force

Preparing activity:
Navy—Bureau of Medicine and Surgery
(MMSA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:00Z
Check the source to verify that this is the current version before use.


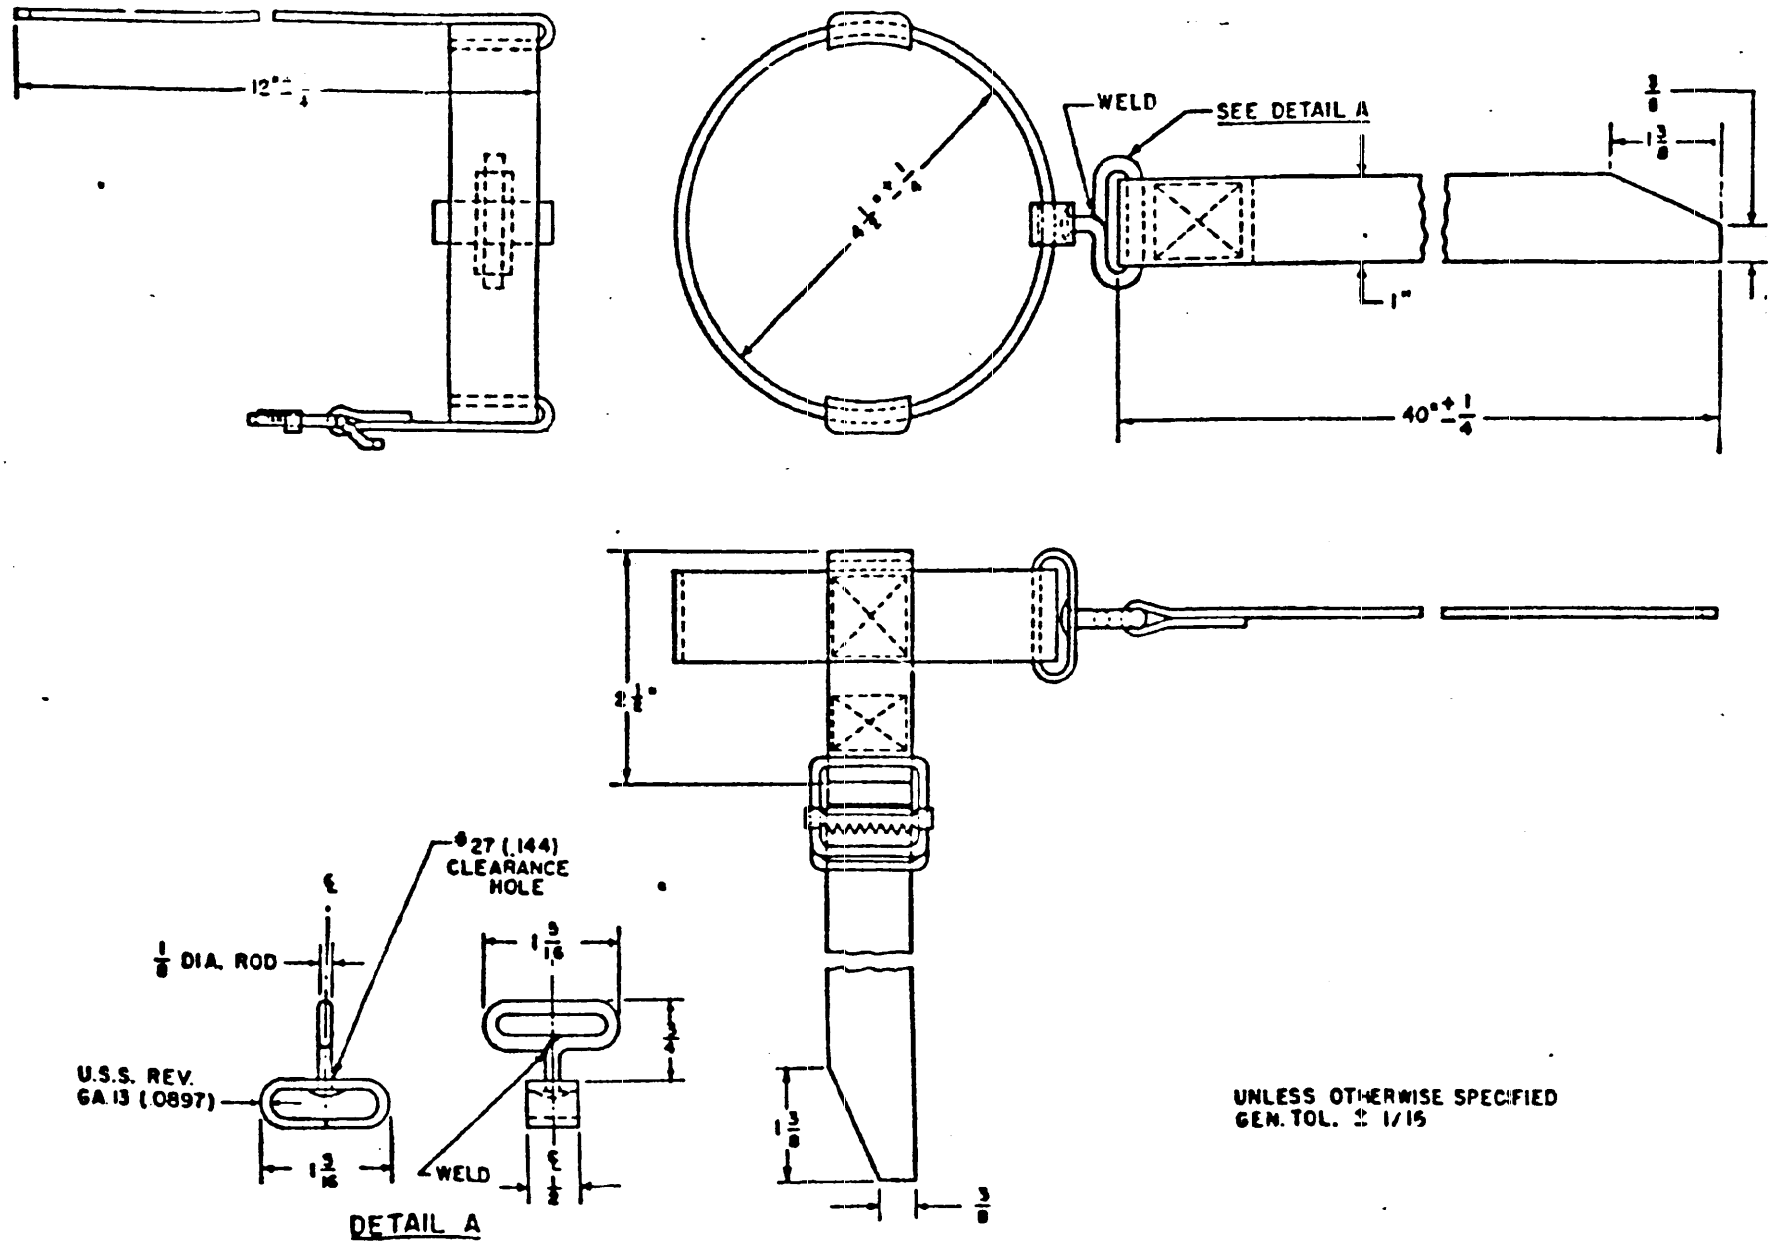


FIG. 1 – TYPE I, SPLINT STRAP, LEG TRACTION

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:00Z
Check the source to verify that this is the current version before use.

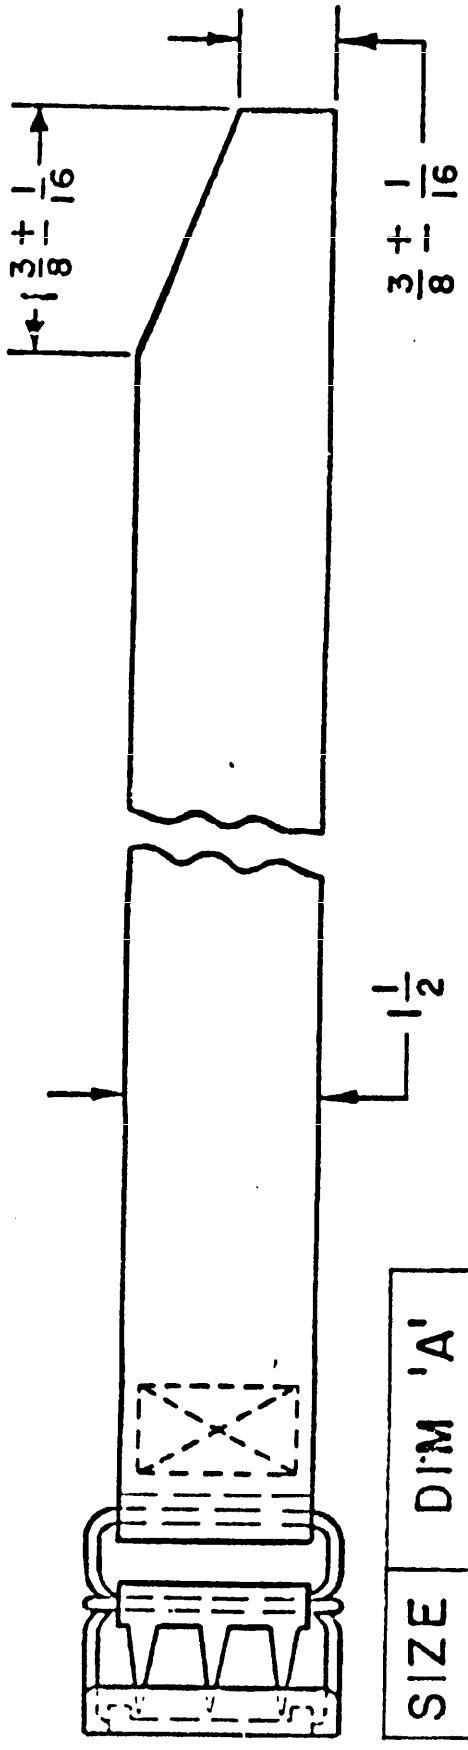

SIZE	DIM 'A'
1	36 +- 1/4
2	72 +- 1/4

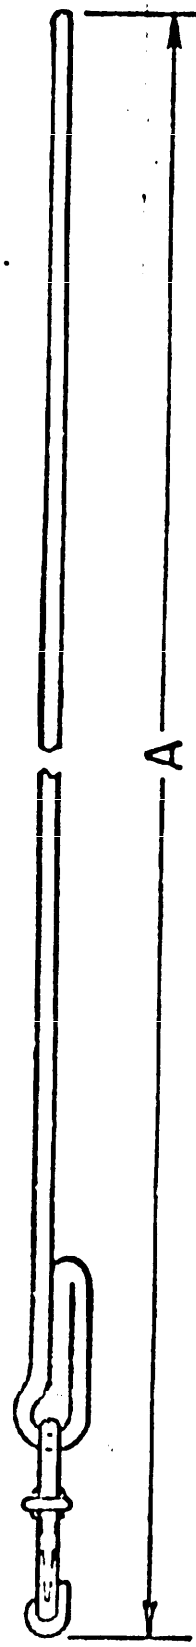


FIG. 2 - TYPE III, SPLINT STRAP WITH BUCKLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:00Z
Check the source to verify that this is the current version before use.