MILITARY SPECIFICATION

CAMOUFLAGE SCREENING SYSTEMS, MODULAR, LIGHTWEIGHT, SYNTHETIC-SNOW

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers snow camouflage screening systems, synthetic, modular, complete with one hexagon and one rhombus lightweight screen, one repair kit with case, quick-connect-disconnect devices and instruction sheets, all within a transport case.

1.2 Classification. The camouflage screens covered by this specification shall be of the following types, as specified (see 6.2):

Type I - Radar Transparent
Type II - Radar Scattering

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378 - Plastic Sheet and Strip, Thin Gauge, Polyolefin.

FSC 1080

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

L-P-393	- Plastic Molding Material, Polycarbonate, Injection and Extrusion.
V-T-285	- Thread, Polyester.
QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-W-4088	- Webbing, Textile, Woven Nylon.
MIL-C-20696	- Cloth, Coated, Nylon, Waterproof.
MIL-F-21840	- Fastener Tapes, Hook and Pile, Synthetic.
MIL-C-43256	- Cord, Polyester, Solid Braid.
MIL-C-43678	- Cord, Polyester, Diamond Braid.

STANDARDS

FEDERAL

FED. TEST METHOD STD. No. 141	- Paint, Varnish, Lacquer, and Related Materials; Methods of Inspection, Sampling, and Testing.
FED. TEST METHOD STD. No. 191	- Textile Test Methods.
FED. TEST METHOD STD. No. 406	- Plastics: Methods of Testing.
FED. STD. No. 595	- Colors.
FED. TEST METHOD STD. No. 601	- Rubber: Sampling and Testing.
FED. STD. No. 751	- Stitches, Seams, and Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MS3367	- Strap, Tiedown, Electrical Components, Adjustable, Self-Clinching, Plastic, Type I, Class 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

F13222E1455	- Pattern Areas for Rhombic, Snow, Camouflage Screen. *
F13222E1456	- Pattern Areas for Hexagon, Snow, Camouflage Screen. *

* See Figures 5 through 8 for reduced scale versions of these drawings.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 471	-	Test for Change in Properties of Elastomeric Vulcanizates Resulting from Immersion in Liquids.
D 1682	-	Tests for Break Load and Elongation of Textile Fabrics.
G 26	-	Recommended Practice for Operating Light and Water-Exposure Apparatus (Xenon-Arc Type) for Exposure of Nonmetallic materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN IRON AND STEEL INSTITUTE (AISI)

Steel Products Manual - Stainless and Heat Resisting Steels.

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Traffic Department, 1616 P Street, NW, Washington, DC 20036.)

3. REQUIREMENTS

3.1 Description. The camouflage screening system (hereinafter called "screen") shall be as shown on Figures 1 through 22 and as specified herein. The screen shall consist of one hexagon shaped screen and one rhombic shaped screen, each 4.9 meters per side. The screen shall consist of edge-reinforced polyester fiber nets of 2-1/4 inch ± 1/4 inch mesh, garnished with expanded incised camouflage cloth affixed to the net in color and texture patterns. The screen shall be equipped with quick-connect-disconnect (QCD) devices to allow multiple screen combinations. The screen shall be reversible, employing two different color patterns and shall be Type I, radar transparent, or Type II, radar scattering.

3.1.1 Assembly. The type screen specified shall consist of the following components and the assembly as manufactured shall weigh not more than 85 pounds:

(a) Screen, one each shape, i.e., one hexagon, one rhombic.
(b) Repair kit, one.
(c) Repair kit case, one.
(d) Lanyards, three (see 3.7.2).
(e) Transport case, one.
(f) Instructions for erecting screen (see 3.10).

3.1.2 Drawings. The drawings forming a part of this specification are and product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the screen. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.2 First article (preproduction model). The contractor shall furnish one or more screens (see 6.2) for examination and necessary samples as specified (see 6.2) for testing within the time frame specified to prove prior to starting production that his production methods will produce screens that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4: and, unless otherwise specified herein, all examination and tests shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examination and tests.

3.3 Initial production. When specified (see 6.2), the contractor shall furnish to the Government one or more complete screens and necessary samples for inspection as specified in 4.4.

3.4 Material. Material shall be as specified herein and as shown on applicable figures. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.4.1 Net twine. The net twine shall be a continuous multifilament polyester (polyethylene glycol terephthalate) material having a specific gravity within the range of 1.36 to 1.40. The twine denier size shall be either 1000 or 1100, 5 ply, 4.5 twist per inch $\pm$ 10 percent in singles and 3.75 twist per inch $\pm$ 10 percent in ply.

3.4.2 Polyester cord. The polyester cord shall be solid braided polyester cord and shall be 5/32 inch in diameter conforming to MIL-C-43256.

3.4.3 Polyester thread. Polyester thread shall conform to V-T-285, Type I, Class 1, Subclass B, Size FF, or Type II, Class 1, Subclass B, Size FF.

3.4.4 Vinyl-nylon cloth. Vinyl nylon cloth shall conform to MIL-C-20696, Type II, Class 2, except coating adhesion shall be 20 pounds minimum and stiffness shall be 30 cm at -50° F.

3.4.5 Base cloth. The base cloth shall be optional provided that the finished camouflage cloth meets the requirements specified herein.

3.4.6 Quick-connect-disconnect brackets and pins. The brackets and pins shall be polycarbonate resin conforming to L-P-393.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the currentversion before use.

3.4.7 Lanyard cord. The lanyard cord shall conform to MIL-C-43678.

3.4.8 Nylon webbing. Nylon webbing shall conform to MIL-W-4088, Type VIII, Class 2, color shall be natural white.

3.4.9 Fastener tape. Fastener tape shall conform to MIL-F-21840, Type II, 2-inch width.

3.5 Nets. The netting for the nets shall be fabricated of the polyester twine as specified in 3.4.1 and as shown in Figures 1 and 2. The netting shall have a square mesh size of 2.25 inches ± 1/4 inch firmly secured by knotting to prevent slippage. Nets shall be made from a single continuous width of netting with a maximum of two strips sewn together to form the required net width specified herein with polyester thread specified in 3.4.3. Hand knotting shall be allowable to form a continuous width of netting. The nets shall have a reinforcement cord as specified in 3.5.1, corner patches as specified in 3.5.2, and QCD brackets as specified in 3.5.3.

3.5.1 Edge-reinforcement cord. The edge-reinforcement cord shall be a polyester cord as specified in 3.4.2 and shall extend around the entire perimeter of the net as shown in Figures 1 and 2. The edge-reinforcement cord shall have no more than three splices. Splices shall be overlapped not less than 12 inches. The edge-reinforcement cord shall be sewn to each of the net's edge meshes, except that splices may be hand lashed to the net provided all other requirements and tests of this specification are met. Sewing methods using stitches shall not unravel or loosen more than one mesh length from a thread breaking point.

3.5.2 Corner patches. All corners of the nets shall be equipped with patches of coated nylon cloth as specified in 3.4.4. The corner patches shall be attached as shown in Figure 3 and sewn in place as specified in 3.5.4 with polyester thread as specified in 3.4.3.

3.5.3 Quick-connect-disconnect brackets (QCD). The edge-reinforcement cord of the nets shall be equipped with QCD brackets as specified in 3.4.6 as shown in Figures 1, 2, and 3.

3.5.4 Stitches and stitching. Stitches and stitching shall conform to FED. STD. No. 751, Type 301.

3.5.5 Treated nets. All nets shall be treated with stable dyes or pigmented coating compound. The treated net shall have a finish that is chemically stable against sunlight and accompanying ultraviolet radiation and insoluble in water and hydrocarbons. The weight increase of the treated net after thorough drying shall not exceed 40 percent of the untreated net.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.5.5.1 Weight increase after water immersion. The weight increase of the treated net mesh after immersion in distilled water for 24 hours at 73° F, plus or minus 2° F, shall not exceed 25 percent based on the weight of the treated net mesh before immersion.

3.5.5.2 Breaking strength. The breaking strength of the treated net mesh shall be not less than 50 pounds when tested in accordance with 4.6.2.1.3.

3.5.5.2.1 After accelerated weathering. The breaking strength of the treated net mesh after accelerated weathering for 300 hours shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.1.

3.5.5.2.2 After accelerated aging. The breaking strength of the treated net mesh after accelerated aging for 150 hours at 175° F, plus or minus 2° F, shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.2.

3.5.5.2.3 After water immersion. The breaking strength of the treated net mesh after immersion in water for 24 hours at 160° F, plus or minus 2° F, shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.3.

3.5.5.2.4 After petroleum immersion. The breaking strength of the treated net mesh after immersion in Medium No. 5 for 2 hours at 73° F, plus or minus 2° F, as described in FED. TEST METHOD STD. No. 601, Method 6001, shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.4.

3.5.5.2.5 After salt fog exposure. The breaking strength of the treated net mesh after being subjected to 300 hours of 5 percent solution salt spray (fog) exposure shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.5.

3.5.5.3 Stiffness. The stiffness of the treated net at minus 40° F shall be not greater than 10 when tested in accordance with 4.6.2.1.4.

3.5.5.4 Solubility. The compound used in coloring the net shall not be soluble in water and show no discoloration of the water after being immersed in distilled water for 24 hours at 160° F, plus or minus 10° F.

3.5.5.5 Flame resistance. The treated net mesh shall be self-extinguishing and after-flame shall be not more than 8 seconds. After-glow shall be not more than 15 seconds after the flame is extinguished or the twine ceases to burn.

3.5.5.6 Fungus resistance. The treated net mesh shall not support fungus growth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.5.5.7 Color. The color for the materials used for fabrication of the snow net and the net finish specified in 3.5.5 shall be in accordance with FED. STD. No. 595, Color No. 37875.

3.6 Camouflage cloth. The basic nets shall be garnished with camouflage cloth. The camouflage cloth shall be base cloth as specified in 3.4.5 with color compounds applied as specified in 3.6.3. The camouflage cloth shall be incised as shown in Figure 4, stretched to 85 percent coverage, and affixed to the treated basic net in color and pattern areas as illustrated in Figures 5 through 8 or Drawings F13222E1455 and F13222E1456. The percent coverage in the ratio of the non-expanded area before attachment to the area of the screen covered after attachment.

$$100 \times \frac{\text{Non-Expanded camouflage cloth}}{\text{Expanded camouflage cloth attached to net}} = \text{percent coverage}$$

Open areas between patterns shall not exceed 81 square inches for any one hole. The total open area in the hexagon screen shall not exceed 243 square inches and 81 square inches in the rhombic screen. The camouflage cloth shall be processed to produce two basic types of garnish: Type I - radar transparent, and Type II - radar scattering.

3.6.1 Radar transparent cloth. The radar transparent cloth shall be produced by bonding (see 3.6.2.2) a continuous film or film layers of color compound (see 3.6.3) in the prescribed colors to each side of the base cloth material.

3.6.2 Radar scattering cloth. The radar scattering cloth shall be produced with an intermediate step in which electrically conductive elements as specified in 3.6.2.1 shall be uniformly dispersed in random orientation onto the base cloth. The electrically conductive elements shall be firmly affixed thereto, with a bonding compound as specified in 3.6.2.2 which will be compatible with the color compound to be applied as specified in 3.6.3.

3.6.2.1 Conductive elements. The conductive elements shall be produced from stainless steel conforming to AISI Type 304 and shall have a nominal diameter of 8 microns and a nominal length of 0.170 or 0.300 inches. The one-way transmission of flat stock color-coated cloth shall be a maximum of 25 percent. Measurements shall be made at X band (approximately 10 GHz) and averaged over a monitored area of not greater than 100 square feet of camouflage cloth. The measurements shall be made using a six-horn configuration depicted on Figure 22.

3.6.2.2 Bonding compound. The bonding compound shall be compatible with the color compounds with respect to adhesion and chemical stability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.6.3 Color compounds. The color compounds used to produce colors shall impart to the camouflage cloth of both types the required spectral reflectance properties in the visible (380 to 700 nanometers), ultraviolet (350 to 360 nanometers), and near infrared (700 to 900 nanometers) spectrums. The color compounds shall be formulated with commercially available pigments or dyestuffs. The color compounds shall be applied to each side of the base cloth as specified in Table I. Color compounds used shall not produce skin irritation or other effects deleterious to health of personnel under the proposed condition of use. The color compound shall be a continuous film or film layers so as to seal the cloth and provide a matte finish. Surface interruptions on the colorcoated cloth shall be limited to 1/8 inch in width, a maximum total length of 24 inches in any one pattern, and no more than 30 percent of the patterns on a screen may contain such wrinkles.

TABLE I. Color Requirements

Color	Trichromatic Coefficients x	y	Y
Snow			
1. Forest green	0.330	0.355	0.058-0.072
2. Tan	0.388	0.370	0.210-0.230
3. White	0.310	0.315	0.85 or above *

* Value shall not be less than 0.75 at 350, 355 and 360.
Note: Color difference tolerances are shown in Figures 9 through 11.

3.6.4 Finished camouflage cloth. The finished camouflage cloth shall be the base cloth with color compounds applied (radar transparent, Type I) or the base cloth rendered radar scattering with color compounds applied (Type II). The finished Type I camouflage cloth and the finished Type II camouflage cloth shall weigh not more than 8.5 ounces per square yard each.

3.6.4.1 After water immersion. The weight increase after water immersion in distilled water for 24 hours at 73° F, plus or minus 2° F, shall not exceed 20 percent based on the weight of the unimmersed finished cloth.

3.6.4.2 Stiffness. The stiffness of the finished cloth shall be not greater than 10 centimeters (cm) at room temperature and 20 cm at -40° F when tested in accordance with 4.6.2.2.2.

3.6.4.3 Tackiness. Folds of the finished camouflage cloth shall not adhere to each other.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.6.4.4 Solubility. The compound used in coating the cloth shall be insoluble in water. No discoloration of the water shall be noted when the finish cloth is tested for solubility (see 4.6.2.2.4).

3.6.4.5 Breaking strength. The breaking strength of the finished camouflage cloth shall be not less than 40 pounds for the machine direction and 20 pounds for the transverse direction. The breaking strengths of the camouflage cloth for the exposure test shall be as specified in 3.6.4.5.1 through 3.6.4.5.7. The tests shall be for both the machine and transverse directions.

3.6.4.5.1 After accelerated weathering. The breaking strength of the finished camouflage cloth after being subjected to 300 hours accelerated weathering shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.2 After accelerated aging. After accelerated aging for 10 days at 175° F, plus or minus 5° F, the breaking strength of the finished camouflage cloth shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.3 After accelerated fading. After exposure to 140 hours of accelerated fading the breaking strength of the finished camouflage cloth shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.4 After water immersion. After a 24-hour immersion exposure in distilled water at 73° F, plus or minus 2° F, the strength of the finished camouflage cloth shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.5 After petroleum immersion. The breaking strength of the finished camouflage cloth after immersion in Medium No. 5 for 2 hours at 73° F, plus or minus 2° F, as described in FED. TEST METHOD STD. No. 601, Method 6001, shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.6 After salt fog exposure. The breaking strength of the finished camouflage cloth after being subjected to 300 hours of 5 percent solution salt spray (fog) exposure shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.7 After humidity. The breaking strength of the finished camouflage cloth after being subjected for 14 days to a temperature of 120° F, plus or minus 5° F, and 95 percent humidity as described in FED. TEST METHOD STD. No. 141, Method 6201, shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.6.4.6 Flame resistance. When tested as specified in 4.6.2.2.6, the average char length of the finished cloth shall not exceed 7 inches and the afterglow shall be not more than 5 seconds.

3.6.4.7 Color. The color of the finished camouflage cloth shall be such that a plot of the trichromatic coefficients (x and y coordinates) shall fall within the applicable 2.0 NBS ellipse of Figures 9 through 11, and the apparent reflectance (Y) shall fall within the applicable tolerances specified in Figures 9 through 11. After environmental exposure (see 4.6.2.2.7.1 through 4.6.2.2.7.5), a plot of the trichromatic coefficients shall fall within the applicable 2.25 NBS ellipse of Figures 9 through 11, and the apparent reflectance shall fall within the applicable tolerances specified in Figures 9 through 11.

3.6.4.8 Crocking. The finished camouflage cloth shall be good for wet and fair for dry as defined in FED. TEST METHOD STD. No. 191, Method 5651.

3.6.4.9 Specular gloss. The finished camouflage cloths shall have a specular gloss of not more than 1.0 gloss unit at 85 degrees, and 2.0 gloss units at 60 degrees for color numbers 1 and 2 of Table I and 2.5 gloss units for color number 3.

3.6.4.10 Spectral reflectance values. Separate samples of finished camouflage cloth before exposure, after accelerated weathering, after accelerated fading, after salt fog exposure, after fungus resistance exposure, and after humidity shall have reflectance values within the limits shown in Table II.

TABLE II. Color Reflectance in the Red and Infrared Spectral Regions

Color	Infrared Reflectance 1/ Range 2/	
	Percent	
Snow	(max)	(min)
1. Forest green	35.0	25.0
2. Tan	55.0	35.0
3. White	—	85.0

1/ IR reflectance range to Ba SO_4 or freshly smoked MgO.
2/ See Table V for wavelength definition.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

3.6.4.11 Fungus resistance. The finished camouflage cloth shall not support fungus growth.

3.6.4.12 Tear strength. The tear strength of the finished camouflage cloth shall be not less than 6 pounds in the transverse direction.

3.6.5 Method of attachment. The incised camouflage cloth shall be attached to the treated nets with 5056-H18 aluminum rings having a nominal diameter wire of 0.062 inch. The expanded incised camouflage cloth shall be firmly attached at an average of one attachment every 6-3/4 inches for interior spacing and an average of 4-3/4 inches for edge spacing. The camouflage cloth shall be affixed to the net so as to extend beyond the edge-reinforcement cord a distance varying at random up to 3 inches. The attachment shall be located between knotted intersections on the net mesh and slippage shall be provided between the netting and the attachment to accommodate bias stretching.

3.7 Quick-connect-disconnect (QCD) devices.

3.7.1 Brackets and pins. The brackets and pins shall be fabricated from the material specified in 3.4.6 and as shown in Figures 12 and 13. The brackets and pins shall be ultraviolet light stabilized.

3.7.2 Lanyards. The lanyard cord shall be fabricated from the material specified in 3.4.7 and as shown in Figure 14, except the picks per inch shall be 4.0 to 5.0, the minimum breaking strength shall be 750 pounds, and the elongation shall be no more than 15 percent at a 500-pound load. Ends shall be fused to prevent unraveling. The lanyard shall be continuous for the length specified and shall have 25 pins installed and located as shown in Figure 14.

3.7.3 Color. Color for the lanyards, brackets, and pins for snow shall conform to FED. STD. No. 595, Color No. 37875.

3.8 Cases. The transport case and the repair kit case shall be fabricated from the material specified in 3.4.4 and as shown in Figures 15 and 16.

3.8.1 Stitches and seams. Unless otherwise specified herein, stitches shall conform to FED. STD. No. 751, Type 301, 6 to 8 stitches per inch and seams shall be as shown in Figures 15 and 16.

3.8.2 Color. Unless otherwise specified herein, the color or the materials used for fabrication of the transport case and repair kit case for the snow screen shall conform to FED. STD. No. 595, Color No. 37875.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:11Z
Check the source to verify that this is the current version before use.

3.9 Repair kit. Each camouflage screen shall be furnished with a repair kit packed in the repair kit case specified in 3.8. The repair kit shall contain the following items:

Item	Quantity	Reference
16 feet of edge-reinforcement cord	1	3.5.1
5 foot length of twine	12	3.4.1
Plastic straps	200	3.9.1
Pins	30	3.7
Brackets	30	3.7
Lanyard	1	3.7
1 square meter of garnished net [1]	1	3.5
Camouflage cloth [2]	1	3.6
Repair instruction sheet	1	3.10

1. Cloth shall be white/white with incising as shown in Figure 4.

2. 18 square feet of white/white.
   9 square feet of tan/white.
   9 square feet of forest green/white.
   Cloth shall be Figure 4 incising.
   Cloth shall be provided in pieces no larger than 3 square feet or smaller than 1.5 square feet per piece.

3.9.1 Straps. Plastic straps used in the repair kit shall conform to MS3367-5-9.

3.10 Technical manual. The Government-furnished (see 6.6) Technical Manual TM 5-1080-200-10 & P, shall be packed in the screen case as specified in 5.1.1.

3.11 Identification marking. The completed garnished camouflage screen and carrying case shall be identified in accordance with MIL-STD-130. Identification tags shall be of a vinyl-nylon cloth as specified in 3.4.4. A tag shall be sewn to every other corner of a screen by wrapping an edge of the tag over the edge cord of the screen in such a manner that the stitching shall sew two thicknesses of the tag material around the edge cord. Identification tags for Type I screens shall be in accordance with Figure 21 and, for Type II screens, identification tags shall be in accordance with Figure 20. The identification tag shall be black ink lettering. The nomenclature shall read "Camouflage Screening System-Snow" with the type of screen specified in bold type followed in smaller type with other information required by MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.12 Workmanship. The finished screen and cases shall be clean and free from all foreign matter and shall be free from broken meshes and untied mesh connections. Patterns shall not be overstretched and stressed on netting. The QCD devices shall be smoothly finished and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Initial production inspection (see 4.4).
(c) Quality conformance inspection (see 4.5).
(d) Inspection comparison (see 4.7).
(e) Inspection of packaging (see 4.8).

4.3 Preproduction inspection.

4.3.1 Examination. The screen shall be examined as specified in 4.6.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The screen shall be subjected to the tests marked "X" in Column 2 of Table IV. Samples for test for the net and finished cloth shall be representative of materials used to fabricate the screen. Unless otherwise indicated, test results shall be based upon the average of five specimens. Failure of any test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.4 Initial production inspection. When specified (see 3.3), one or more initial production screens or samples of screen component materials will be selected at random by the Government from the screens being produced by production tooling and will be examined as specified in 4.6.1 and subjected to the tests marked "X" in Column 3 of Table IV to determine conformance to the requirements of this specification. The inspection will be performed by the Government at a site selected by the Government. Acceptance of an initial production screen shall not exclude the remaining screens from the quality conformance inspection and acceptance provisions specified in Section 4. In addition to any test specified as part of the initial production test, the Government reserves the right to conduct any and all other tests contained in this specification as part of the initial production test and failure of such additional tests shall have the same effect as failure of those tests specified as initial production tests.

4.4.1 Inspection failure. Failure of an initial production screen or samples of screen component materials to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for rejection of the initial production screen(s) and shall be cause for refusal by the Government to continue acceptance of production screens until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiences. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on screens previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all screens accepted prior to the completion of initial production inspections are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Sampling.

4.5.1.1 Unit of product. For the purpose of sampling for examination, a unit of product shall be one complete screen of the type, as specified.

4.5.1.1.1 For examination. Sampling shall be in accordance with MIL-STD-105, Inspection Level S-4.

4.5.1.2 For tests.

4.5.1.2.1 Sampling for nets, Plan A. Samples of netting sufficient for testing shall be furnished from no more than 100,000 square yards of net.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.1.2.1.1 Sampling for nets, Plan B. In addition to sampling specified in 4.5.1.2.1, one unit out of every 20,000 units shall be tested as specified in 4.5.3.1.2.

4.5.1.2.2 Sampling for finished cloth.

4.5.1.2.2.1 Sampling for finished cloth, Plan A. Samples of finished cloth sufficient for testing shall be furnished from no more than 50,000 square yards for each color of finished cloth.

4.5.1.2.2.2 Sampling for finished cloth, Plan B. In addition to sampling specified in 4.5.1.2.2.1, one unit out of every 20,000 units shall be tested as specified in 4.5.3.2.2.

4.5.2 Examination. Samples selected in accordance with 4.5.1.1.1 shall be examined for the defects listed in 4.6.1. AQL shall be 4.0 percent defective.

4.5.2.1 Sampling for aluminum fasteners. Samples of aluminum fasteners shall be 200 for a hexagon screen and 100 for a diamond screen. Nonconformance of more than 10 percent shall be cause for rejection.

4.5.3 Tests.

4.5.3.1 Nets.

4.5.3.1.1 Nets, Plan A. Samples selected in accordance with 4.5.1.2.1 shall be subjected to the tests marked "X" in Column 4 of Table IV. Failure of any test shall be cause for rejection of the represented nets.

4.5.3.1.2 Nets, Plan B. Samples selected in accordance with 4.5.1.2.1.1 shall be tested as specified 4.6.2.1.

4.5.3.2 Finished cloth.

4.5.3.2.1 Finished cloth, Plan A. Samples selected in accordance with 4.5.1.2.2.1 shall be subjected to the tests marked "X" in Column 4 of Table IV. Failure of any test shall be cause for rejection of the represented finished cloth.

4.5.3.2.2 Finished cloth, Plan B. Samples selected in accordance with 4.5.1.2.2.2 shall be tested as specified in 4.6.2.2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

4.6 Inspection procedures.

4.6.1 Examination. The screen shall be examined as specified herein for the following defects:

Major

101. Materials not as specified.
102. Components missing, not as specified, or damaged.
103. Dimensions not as specified.
104. Colors not as specified.
105. Color-texture patterns for camouflage screen not as specified.
106. Color uniformity not as specified.
107. Color migration from side to side.
108. Mesh size not as specified.
109. Fabrication of edge-reinforcement not as specified.
110. Attachments not as specified.
111. Holes in screen larger than specified.
112. Incising not as specified.
113. Repair kit not as specified.
114. Severed strand of edge cord.
115. Delamination of the color compounds from the base cloth.
116. Incorrect assembly.
117. Stitching not as specified.
118. Missing or malformed aluminum ring attachments.
119. Surface interruptions larger than specified or more than specified.

Minor

201. Corner location patches not as specified.
202. Net incorrectly folded.
203. Identification marking missing, incorrect or illegible.
204. Workmanship not as specified.

4.6.2 Tests. Unless otherwise specified herein, test results shall be based on the average of five samples or specimens.

4.6.2.1 Treated nets.

4.6.2.1.1 Weight increase. Weight increase of the treated net mesh shall be determined in accordance with FED. TEST METHOD STD. No. 191, Method 5041 except specimens shall be 1 square yard of net. Nonconformance to 3.5.5 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TABLE IV. Test Schedule

Type of inspection						
Inspection Sequence	Preproduction	Initial Production	Quality Conformance	Test	Test Paragraph	Requirement Paragraph
1	2	3	4	5	6	7
A.				Treated Nets		
1.	X	-	-	Weight increase.	4.6.2.1.1	3.5.5
2.	X	X	X	Weight increase after water immersion.	4.6.2.1.2	3.5.5.1
3.	X	X	X	Breaking strength.	4.6.2.1.3	3.5.5.2
4.	X	-	-	After accelerated weathering.	4.6.2.1.3.1	3.5.5.2.1
5.	X	-	-	After accelerated aging.	4.6.2.1.3.2	3.5.5.2.2
6.	X	-	-	After water immersion.	4.6.2.1.3.3	3.5.5.2.3
7.	X	-	-	After petroleum immersion.	4.6.2.1.3.4	3.5.5.2.4
8.	X	-	-	After salt fog exposure.	4.6.2.1.3.5	3.5.5.2.5
9.	X	X	-	Stiffness.	4.6.2.1.4	3.5.5.3
10.	X	X	-	Solubility.	4.6.2.1.5	3.5.5.4
11.	X	X	-	Flame resistance.	4.6.2.1.6	3.5.5.5
12.	X	X	-	Fungus resistance.	4.6.2.1.7	3.5.5.6
B.				Finished Cloth		
1.	X	-	-	Weight increase after processing.	4.6.2.2.1.1	3.6.4
2.	X	X	X	Weight increase after water immersion.	4.6.2.2.1.2	3.6.4.1
3.	X	X	-	Stiffness.	4.6.2.2.2	3.6.4.2
4.	X	X	-	Tackiness.	4.6.2.2.3	3.6.4.3
5.	X	X	-	Solubility.	4.6.2.2.4	3.6.4.4
6.	X	X	X	Breaking strength.	4.6.2.2.5	3.6.4.5
7.	X	-	-	After accelerated weathering.	4.6.2.2.5.1	3.6.4.5.1
8.	X	-	-	After accelerated aging.	4.6.2.2.5.2	3.6.4.5.2
9.	X	-	-	After accelerated fading.	4.6.2.2.5.3	3.6.4.5.3
10.	X	-	-	After water immersion.	4.6.2.2.5.4	3.6.4.5.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

TABLE IV. Test Schedule (Cont'd)

1	2	3	4	5	6	7
11.	X	-	-	After petroleum immersion.	4.6.2.2.5.5	3.6.4.5.5
12.	X	-	-	After salt fog.	4.6.2.2.5.6	3.6.4.5.6
13.	X	-	-	After humidity.	-	3.6.4.5.7
14.	X	X	X	Flame resistance.	4.6.2.2.6.1	3.6.4.6
15.	X	-	-	After accelerated weathering.	4.6.2.2.6.2	3.6.4.6
16.	X	-	-	After accelerated fading.	4.6.2.2.6.3	3.6.4.6
17.	X	-	-	After leaching.	4.6.2.2.6.4	3.6.4.6
18.	X	X	X	Color.	4.6.2.2.7	3.6.4.7
19.	X	-	-	After accelerated weathering.	4.6.2.2.7.1	3.6.4.7
20.	X	-	-	After accelerated fading.	4.6.2.2.7.2	3.6.4.7
21.	X	-	-	After humidity.	4.6.2.2.7.3	3.6.4.7
22.	X	-	-	After salt fog.	4.6.2.2.7.4	3.6.4.7
23.	X	-	-	Fungus resistance.	4.6.2.2.7.5	3.6.4.7
24.	X	X	-	Crocking.	4.6.2.2.8	3.6.4.8
25.	X	X	X	Specular gloss.	4.6.2.2.9	3.6.4.9
26.	X	X	X	Spectral reflectance.	4.6.2.2.10	3.6.4.10
27.	X	-	-	After accelerated weathering.	4.6.2.2.10.4	3.6.4.10
28.	X	-	-	After accelerated fading.	4.6.2.2.10.5	3.6.4.10
29.	X	-	-	After salt fog.	4.6.2.2.10.6	3.6.4.10
30.	X	-	-	After fungus resistance.	4.6.2.2.10.7	3.6.4.10
31.	X	-	-	After humidity.	-	3.6.4.10
32.	X	X	-	Fungus resistance.	4.6.2.2.11	3.6.4.11
33.	X	X	X	Tear strength.	4.6.2.2.12	3.6.4.12
34.	X	-	X	Radar properties (Type II cloth).	4.6.2.2.13	3.6.2.1

4.6.2.1.2 Weight increase after water immersion. Weight increase of the treated net mesh after immersion in water shall be determined in accordance with ASTM Test Method D 471 except the specimens shall not be dipped into acetone. The cut ends of the specimens shall be sealed. Three specimens,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

each approximately 2-1/2 inches x 2-1/2 inches, shall be tested for weight increase after the treated net has been immersed in a container of distilled water for 24 hours at 73° F, plus or minus 2° F. Nonconformance to 3.5.5.1 shall constitute failure of this test.

4.6.2.1.3 Breaking strength. The breaking strength of the treated net mesh shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5102, with modifications as specified herein. The test specimens shall consist of one finished square mesh complete with four knots and cut from the net with a minimum of 1/2-inch extra twine past the knots. The specimen holding device as shown in Figure 19 shall consist of either rods or hooks of 5/16-inch diameter and of sufficient length to avoid slippage of the net mesh while testing. The rods or hooks shall have round and smooth surfaces. The gage length shall be 3 inches at the start of the test. The test specimen shall be placed on the rods or hooks as shown in Figure 19. Nonconformance to 3.5.5.2 shall constitute failure of this test.

4.6.2.1.3.1 After accelerated weathering. The treated net shall be conditioned in accordance with ASTM G 26 and tested as specified in 4.6.2.1.3. Nonconformance to 3.5.5.2.1 shall constitute failure of this test.

4.6.2.1.3.2 After accelerated aging. The treated net shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5851, and 4.6.2.1.3. Nonconformance to 3.5.5.2.2 shall constitute failure of this test.

4.6.2.1.3.3 After water immersion. The treated net mesh shall be immersed in distilled water for 24 hours at 160° F, plus or minus 2° F, and tested as specified in 4.6.2.1.3. Nonconformance to 3.5.5.2.3 shall constitute failure of this test.

4.6.2.1.3.4 After petroleum immersion. The treated net shall be tested in accordance wtih FED. TEST METHOD STD. No. 601, Method 6001 and 4.6.2.1.3. Nonconformance to 3.5.5.2.4 shall constitute failure of this test.

4.6.2.1.3.5 After salt fog exposure. The treated net mesh shall be tested in accordance wtih FED. TEST METHOD STD. No. 141, Method 6061, and 4.6.2.1.3. Nonconformance to 3.5.5.2.5 shall constitute failure of this test.

4.6.2.1.4 Stiffness. The stiffness of a sample piece of treated twine shall be tested in accordance with the test method specified in 4.6.2.1.4.1. Specimens shall be tested at standard conditions and after exposure for 94 hours, plus or minus 1 hour, in a chamber maintained at minus 40° F, plus or minus 2° F. Nonconformance to 3.5.5.3 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2.1.4.1 Torsional stiffness ratio.

4.6.2.1.4.1.1 Test specimens. Test specimens shall be 2-inch samples of treated twine.

4.6.2.1.4.1.2 Test apparatus. The test apparatus shall be a Gehman torsional tester conforming to FED. TEST METHOD STD. No. 601, Method 5011, except that only the torsion apparatus, the stand, and a suitable bracket to hold the lower clamp are required. A beryllium-copper-type tension wire of appropriate torsion constant shall be used.

4.6.2.1.4.1.3 Test procedure. The test procedure shall be as follows:

(a) With the specimen and the test apparatus at 73° F, plus or minus 5° F, the lower end of the specimen shall be secured in the rigidly mounted clamps of the test apparatus and the upper end shall be secured in the upper pinch clamp attached to the lower end of the torsional wire.
(b) The pointer shall be adjusted to the zero position by rotating the protractor scale. The torsional head shall be turned 180 degrees, and the pointer reading shall be recorded after a period of 10 seconds.
(c) After conducting the tests specified in (a) and (b), the specimen shall be placed in a chamber with an atmosphere of air or a mixture of air and carbon dioxide at minus 40° F, plus or minus 2° F, for 94 hours, plus or minus 1 hour. The torsional apparatus and tongs for handling specimens shall be conditioned in the chamber for not less than 2 hours before use.
(d) The tests specified in (a) and (b) shall be repeated while specimens and apparatus are still in the conditioning chamber at minus 40° F, plus or minus 2° F.

4.6.2.1.4.1.4 Calculations. The tests shall be conducted on three specimens and the results shall be averaged. The torsional stiffness ratio at minus 40° F shall be calculated by means of the following formula:

$$\text{Torsional Stiffness Ratio at } -40^\circ \text{ F} = \frac{\text{Torsional Stiffness Factor at } -40^\circ \text{ F}}{\text{Torsional Stiffness Factor at } 73^\circ \text{ F}}$$

$$\text{Where Torsional Stiffness Factor} = \frac{180 \text{ degrees} - \text{angle of twist of specimen}}{\text{angle of twist of specimen}}$$

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2.1.5 Solubility. A 6-inch square specimen of the finished net shall be immersed for 24 hours in a 400 cubic centimeter glass beaker filled with distilled water at a temperature of 160° F, plus or minus 10° F. Nonconformance to 3.5.5.4 shall constitute failure of this test.

4.6.2.1.6 Flame resistance. The flame resistance of the finished treated net mesh twine shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5903, except specimen shall be one length of net twine and knots sufficient to test in specified apparatus. Nonconformance to 3.5.5.5 shall constitute failure of this test.

4.6.2.1.7 Fungus resistance. The treated net mesh shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5750, except that the test organism shall be aspergillus niger ATCC No. 6275 or QM 458 (see 6.5). Failure to conform to 3.5.5.6 shall constitute failure of this test.

4.6.2.2 Finished cloth.

4.6.2.2.1 Weight increase.

4.6.2.2.1.1 Weight increase after processing. Weight increase of the finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5041. Three specimens for each test, each 2 inches square, shall be used. Nonconformance to 3.6.4 shall constitute failure of this test.

4.6.2.2.1.2 Weight after water immersion. Weight of the finished cloth after immersion in water shall be determined in accordance with ASTM D 471, except the specimens shall not be dipped into acetone. Ten specimens, each 2 inches square, shall be tested for weight increase after the finished cloth has been immersed in a container of distilled water for 24 hours at 73° F, plus or minus 2° F. Nonconformance to 3.6.4.1 shall constitute failure of this test.

4.6.2.2.2 Stiffness. The stiffness of the finished cloth shall be tested in accordance wtih FED. TEST METHOD STD. No. 191, Method 5204. Specimens shall be tested after exposure for 94 hours, plus or minus 1 hour, in a chamber at minus 40° F. For finished cloth manufactured with polyvinyl chloride plastisol materials, the minus 40° F exposure time may be reduced to 2 hours minimum. Nonconformance to 3.6.4.2 shall constitute failure of this test.

4.6.2.2.3 Tackiness. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 406, Method 1131. A specimen of finished cloth, 2 x 6 inches, shall be conditioned for 3 hours at 100° F, plus or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

minus 5° F, and 95 to 100 percent relative humidity. The cloth shall be folded and a pressure of 2 pounds per square inch shall be applied for a period of 4 hours at 180° F, plus or minus 5° F. Nonconformance to 3.6.4.3 shall constitute failure of this test.

4.6.2.2.4 Solubility. A 2- x 6-inch specimen of the finished cloth shall be immersed for 24 hours in a 400 cubic centimeter glass beaker filled with distilled water at a temperature of 70° F, plus or minus 10° F. Nonconformance to 3.6.4.4 shall constitute failure of this test.

4.6.2.2.5 Breaking strength. The breaking strength of the finished cloth shall be tested in accordance with ASTM D 1682, Grab Method. Nonconformance to 3.6.4.5 shall constitute failure of this test.

4.6.2.2.5.1 After accelerated weathering. The finished cloth shall be conditioned in accordance with ASTM G 26. Nonconformance to 3.6.4.5.1 shall constitute failure of this test.

4.6.2.2.5.2 After accelerated aging. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5851. Nonconformance to 3.6.4.5.2 shall constitute failure of this test.

4.6.2.2.5.3 After accelerated fading. The finished cloth shall be tested in accordance wtih FED. TEST METHOD STD. No. 191, Method 5660. Nonconformance to 3.6.4.5.3 shall constitute failure of this test.

4.6.2.2.5.4 After water immersion. The finished cloth shall be immersed in distilled water for 24 hours at 73° F, plus or minus 2° F, and tested as specified in 4.6.2.2.5. Nonconformance to 3.6.4.5.4 shall constitute failure of this test.

4.6.2.2.5.5 After petroleum immersion. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 601, Method 6001. Nonconformance to 3.6.4.5.5 shall constitute failure of this test.

4.6.2.2.5.6 After salt fog. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6061, 5-percent salt solution. Nonconformance to 3.6.4.5.6 shall constitute failure of this test.

4.6.2.2.5.7 After humidity. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6201. Nonconformance to 3.6.4.5.7 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2.2.6 Flame resistance. The flame resistance of the finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5903. Specimens shall be fabricated from each sampling for finished cloth for each color represented. Specimens of each color shall be selected from different rolls of cloth when applicable. Nonconformance to 3.6.4.6 of two or more specimens of the same color, or of the average values obtained shall constitute failure of the test.

4.6.2.2.6.1 Finished cloth, initially. The finished cloth shall be tested in accordance with 4.6.2.2.6. Nonconformance to 3.6.4.6 shall constitute failure of this test.

4.6.2.2.6.2 After accelerated weathering. The finished cloth shall be tested in accordance with ASTM G 26 for 300 hours and as specified in 4.6.2.2.6. Nonconformance to 3.6.4.6 shall constitute failure of this test.

4.6.2.2.6.3 After accelerated fading. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5660 and as specified in 4.6.2.2.6. Nonconformance to 3.6.4.6 shall constitute failure of this test.

4.6.2.2.6.4 After leaching. The finished cloth shall be tested by placing the specimens in 450 ml to 500 ml of distilled water for 24 hours at a temperature of 120° F, plus or minus 5° F. After leaching, the specimens shall be dried at room temperature for 8 hours and then conditioned at 120° F for 40 hours. The specimens shall then be tested in accordance with 4.6.2.2.6. Nonconformance to 3.6.4.6 shall constitute failure of this test.

4.6.2.2.7 Color. The finished cloth shall be tested for color in accordance with FED. TEST METHOD STD. No. 141, Method 4251, using Standard Illuminant C. For the color test, the average of the measurements for six samples shall be used, the average of which shall meet requirements indicated in Figures 9 through 11. However, two of the six samples may fall within 2.25 NBS units from the center value. Nonconformance to 3.6.4.7, Table I, and Figures 9 through 11 shall constitute failure of this test.

4.6.2.2.7.1 After accelerated weathering. The finished cloth shall be tested in accordance with ASTM G 26 for 300 hours and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.7.2 After accelerated fading. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5660, for 150 hours and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2.2.7.3 After humidity. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6201, for 14 days at 120° F, plus or minus 5° F, and not less than 95 percent humidity, and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.7.4 After salt fog. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6061, using a 5-percent salt solution for 300 hours and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.7.5 After fungus resistance. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5750, except that the test organism shall be aspergillus niger ATCC No. 6275 or QM 458 (see 6.5), and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.8 Crocking. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5651 wet and dry, Method B, requirement of good for wet and fair for dry. Nonconformance to 3.6.4.8 shall constitute failure of this test.

4.6.2.2.9 Specular gloss. The specular gloss of the finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Methods 6101 and 6103. Two measurements for each requirement shall be made oriented 90 degrees to each other and averaged. Nonconformance to 3.6.4.9 shall constitute failure of this test.

4.6.2.2.10 Spectral reflectance. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6241 or 6242. The ordinates to be used shall be those given in Table V.

4.6.2.2.10.1 Spectrophotometer method. If Method 6241 is used, red and infrared reflectance values shall be obtained by averaging the reflectance percentage measured at wavelength ordinates given in Table V.

4.6.2.2.10.2 Reflectometer method. If Method 6242 is used, a Wratton No. 88 or 89B filter and calibrated neutral standards shall be used with the instrument.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the currentversion before use.

TABLE V. Selected Ordinates for Determining Infrared Values from Spectrophotometric Curves

Ordinates Infrared Region (Nanometers)	
714.0	793.0
725.0	797.0
730.0	802.0
737.0	807.0
742.0	811.0
747.0	816.0
751.0	821.0
756.0	826.0
760.0	831.0
764.0	836.0
769.0	842.0
773.0	848.0
777.0	855.0
783.0	862.0
787.0	873.0

4.6.2.2.10.3 Report of results. Two determinations shall be made on each sample: One determination of the sample shall be made; and one determination of the sample shall be made again with the sample rotated 90 degrees in position. For each sample, the average of the two determinations shall be reported.

4.6.2.2.10.4 After accelerated weathering. The finished cloth shall be tested in accordance with ASTM G 26 for 300 hours and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.10.5 After accelerated fading. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5660 for 150 hours and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.10.6 After salt fog. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6061, using a 5-percent salt solution for 300 hours and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.2.2.10.7 After fungus resistance. The finished cloth shall be tested in accordance wtih FED. TEST METHOD STD. No. 191, Method 5750, except that the test organism shall be aspergillus niger ATCC No. 6275 or QM 458 (see 6.5) and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.10.8 After humidity. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6201 for 14 days at 120° F, plus or minus 5° F, and 95 percent humidity, and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.11 Fungus resistance. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5750, except that the test organism shall be aspergillus niger ATCC No. 6275 or QM 458 (see 6.5). Nonconformance to 3.6.4.11 shall constitute failure of this test.

4.6.2.2.12 Tear strength. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5136, trapezoid tear. Nonconformance to 3.6.4.12 shall constitute failure of this test.

4.6.2.2.13 Radar properties for cloth. The finished cloth, Type II, shall be 100 percent tested. Nonconformance of more than 5 percent of a roll of the material to meet the requirements of 3.6.2.1 shall constitute failure of the test and all defective cloth above 5 percent shall be removed. No more than 7000 square yards of material shall constitute a roll.

4.7 Inspection comparison. The Government may select screens and samples of screen component materials at any time during the contract production period and subject these samples to the examination specified in 4.6.1 and the tests marked "X" in Column 3 of Table IV to determine conformance to the requirements of this specification. The inspection will be performed by the Government, at a site selected by the Government, on units selected at random from those which have been accepted by the Government and will not include the previously inspected preproduction model and initial production screens. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.7.1 Inspection failure. Failure of an inspection comparison screen or sample of screen component materials to meet any requirement specified herein during and as a result of the examination and tests specified in 4.7 shall be cause for rejection of the inspection comparison screen(s) and shall be cause for refusal by the Government to continue acceptance of production screens until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on screens previously accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all screens accepted prior to the completion of inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.8 Inspection of packaging.

4.8.1 Quality conformance inspection of pack.

4.8.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.8.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.8.1.3 Examination. Samples selected in accordance with 4.8.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

120.	Components not contained within the cases as specified for Level A, B, or Commercial.
121.	Screens not folded as specified for Level A, B, or Commercial.
122.	Transport case with all components inclosed not sealed in a bag as specified for Level A or B.
123.	Box not as specified for Level A or B.
124.	Box closure not as specified for Level A or B.
125.	Quantities packed together not as specified for Level A.
126.	Pallet not as specified for Level A.
127.	Strapping not as specified for Level A.
128.	Strapping not applied as specified for Level A.
129.	Edge protectors not applied as specified for Level A.
130.	Marking missing, illegible, incorrect, or incomplete for Level A, B, or Commercial.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A, B, or Commercial, as specified (see 6.2).

5.1.1 Level A. The repair kit components shall be placed in the repair kit case. Each screen shall be folded as shown in Figure 17 or 18. The repair kit case, folded screen, Government-furnished technical manual, and all other components required for one complete screening system shall be placed in the transport case. Each transport case shall be placed in a polyethylene bag fabricated from material conforming to L-P-378, Type I, Class I, Grade C, Finish I, film thickness 0.006 inch. The bag shall be tightly compressed around the transport case by vacuum, and the bag closed by heat sealing. The bag containing the screening system shall then be placed in a close-fitting box (approximately 48 inches x 24 inches x 8 inches) conforming to PPP-B-636, V3s, Style FTC-L. The box shall be closed and sealed as specified for Method V in the appendix to the box specification

5.1.2 Level B. Each complete screening system shall be preserved as specified in 5.1.1, except the box shall conform to PPP-B-636, Type CF, Class Domestic, Variety SW, Grade 275, Style FTC-L. Box closure shall be in accordance with the appendix to the box specification.

5.1.3 Commercial. The repair kit components shall be placed in the repair kit case. Each screen shall be folded as shown in Figure 17 or 18. The repair kit case, folded screen, and all other components required for one complete screening system shall be placed in the transport case. The transport case shall be protected in a manner to prevent deterioration and damage from the contractor to the initial destination.

5.2 Packing. Packing shall be Level A or Commercial, as specified (see 6.2).

5.2.1 Level A. Five screening systems, preserved as specified in 5.1, shall be packed together on a commercial-type, wooden expendable pallet. The pallet shall be constructed with top and bottom deck boards and in a manner so that the strapping, when applied for securing the load, shall not be subject to damage from skidding or forklift handling. The pallet length and width shall be approximately the same as the dimensions of the box containing the screening system. The boxes shall be secured to the pallet with three straps conforming to QQ-S-781, Type I or IV, regular duty, Size 1/2 inch with a minimum thickness of 0.015 inch; and, unless otherwise specified herein, shall be Finish B. When specified (see 6.2), Finish A strapping shall be used. Style of seals shall be optional. One strap shal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

be applied lengthwise and two straps girthwise. The lengthwise strap shall be placed in the center and the girthwise strap shall be placed approximately 10 inches from the parallel box edge. Fiberboard edge protectors shall be placed between the box edge and the strap.

5.2.2 Commercial. Screening systems, preserved as specified in 5.1, shall be packed in a manner to assure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking.

5.3.1 Military. Marking for military levels of protection shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking for commercial packaging shall reflect as a minimum, the item name, National Stock Number, quantity, contract or purchase order number, and appropriate address markings. The marking shall be applied with a waterproof material, be legible, and shall provide a definite contrast.

6. NOTES

6.1 Intended use. The camouflage screening system is intended for use as temporary or semipermanent concealment of various types of tactical equipment and field installations from hostile, visual, radar, and infrared observations.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) When the Government will conduct any or all of the preproduction model examination and tests. When the Government will conduct some but not all of the preproduction examination and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).
(d) Time frame required for submission of preproduction model and number of screens required (see 3.2).
(e) Necessary samples required (see 3.2 and 4.3.2).
(f) When initial production testing is required and number of complete screens to be furnished (see 3.3).
(g) Degree of preservation and packaging required (see 5.1 and 5.2).
(h) When other than Finish B strapping is required (see 5.2.1).
(i) When Government-furnished property is required (see 3.10).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

6.3 Preproduction model. Any changes or deviations of production screens from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish screens conforming to this specification.

6.4 Government tooling. Information concerning Government tooling may be obtained by contacting the Commander, US Army Mobility Equipment Research and Development Command, ATTN: DRDME-MB, Fort Belvoir, VA 22060.

6.5 Fungus. Cultures of the organism used in the fungus resistance test specified in 4.6.2.1.7, 4.6.2.2.7.5, 4.6.2.2.10.7, and 4.6.2.2.11 may be obtained from the Department of Botany, ATTN: Dr. Emmory G. Simmons, University of Massachusetts, Amherst, MA 01002.


6.6 Government-furnished property. The contracting officer should arrange to furnish the property specified in 3.10.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 1080-A050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

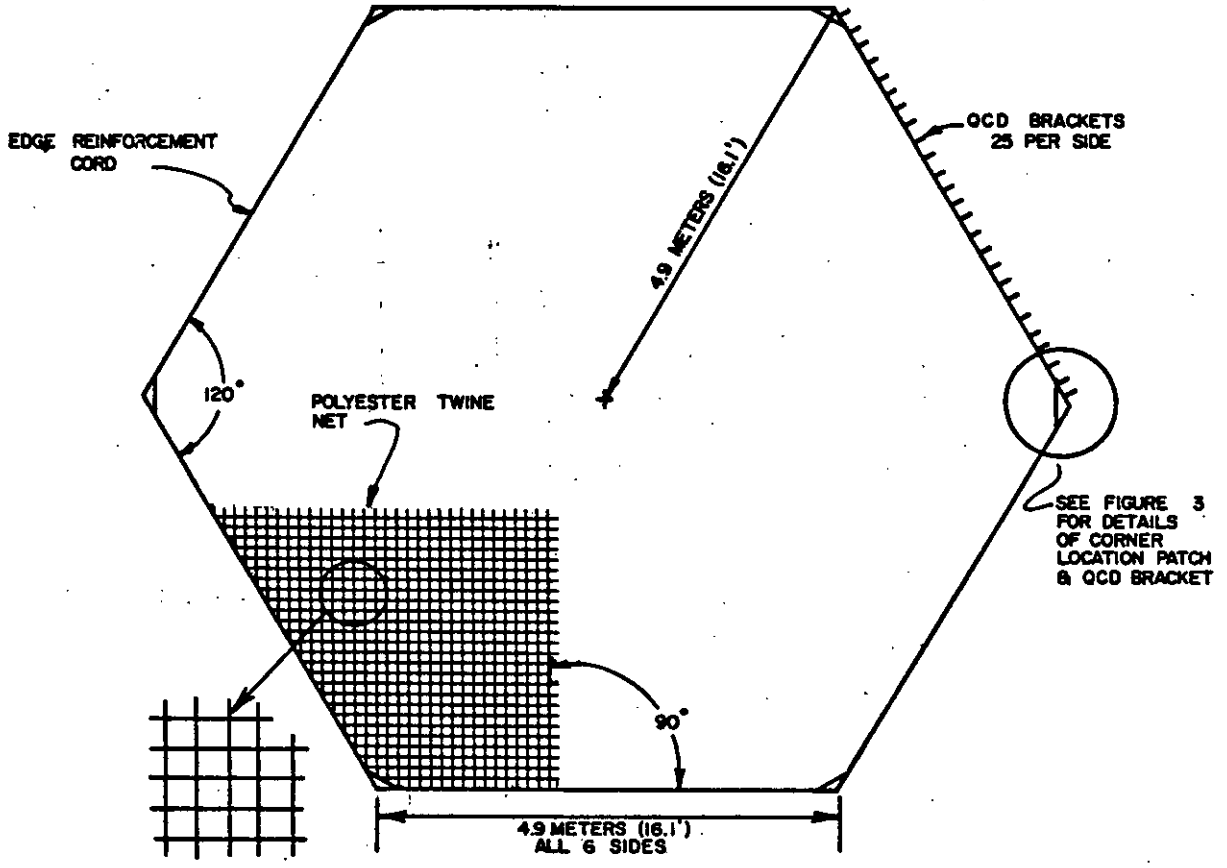


NOTE: DIMENSIONAL TOLERANCE SHALL BE ± 2% PER SIDE WHEN A SIDE IS MEASURED UNDER 20 lbs TENSION.

FIGURE 1. HEXAGON NET

X-2561

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

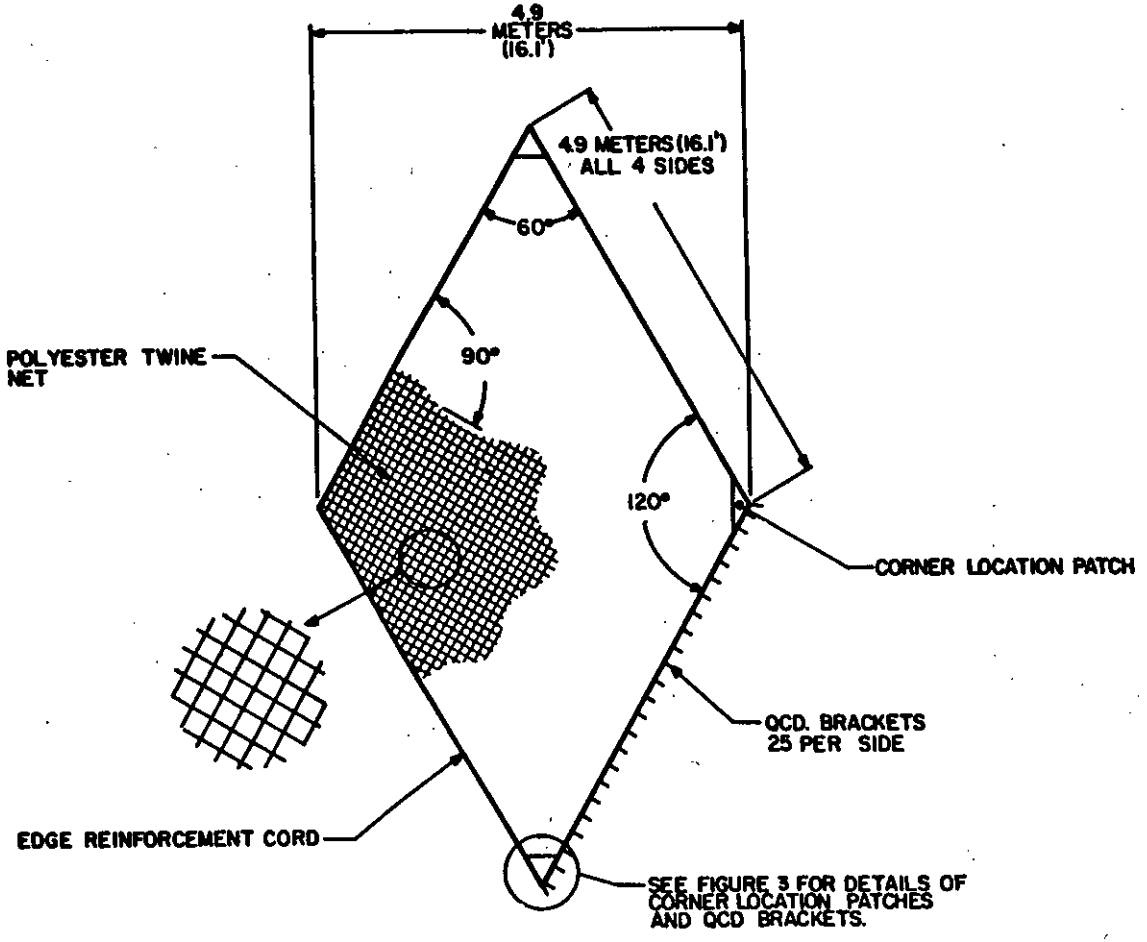


NOTE:
DIMENSIONAL TOLERANCE SHALL BE ± 2% PER SIDE WHEN A SIDE IS MEASURED UNDER 20 LBS. TENSION.


FIGURE 2. Rhombic net.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20 04:11Z
Check the source to verify that this is the current version before use.

X-2562 A

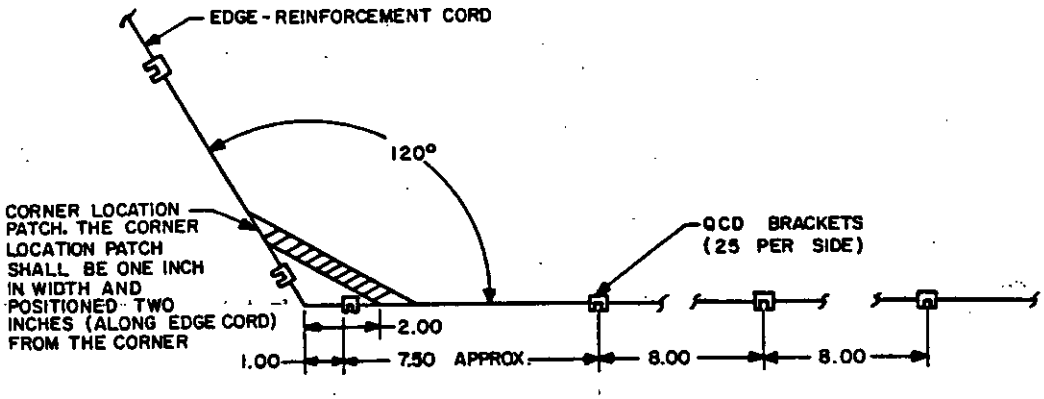

120° CORNER DETAIL

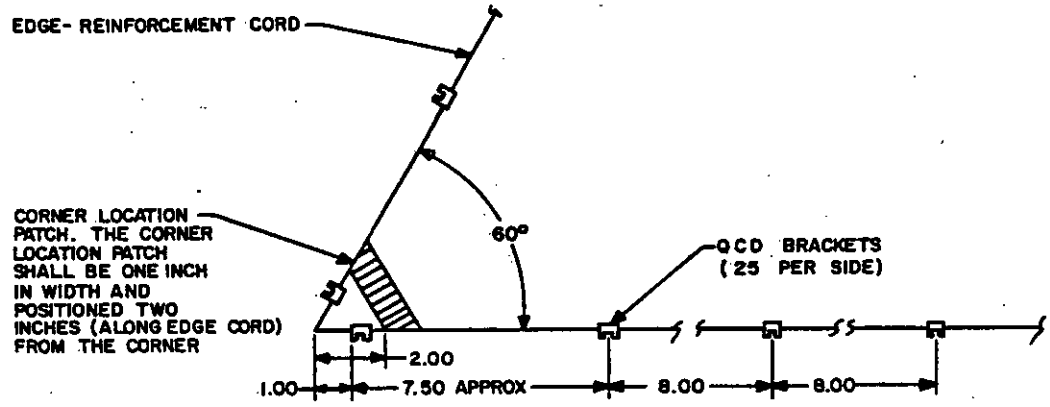

60° CORNER DETAIL

NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. TOLERANCE: ±.25
3. TOLERANCE ON DIMENSIONS LOCATING QCD BRACKETS APPLY AT THE TIME OF ATTACHMENT OF BRACKETS TO THE NET

FIGURE 3. DETAIL CORNER LOCATION PATCH AND Q.C.D. BRACKETS

X-2563B

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

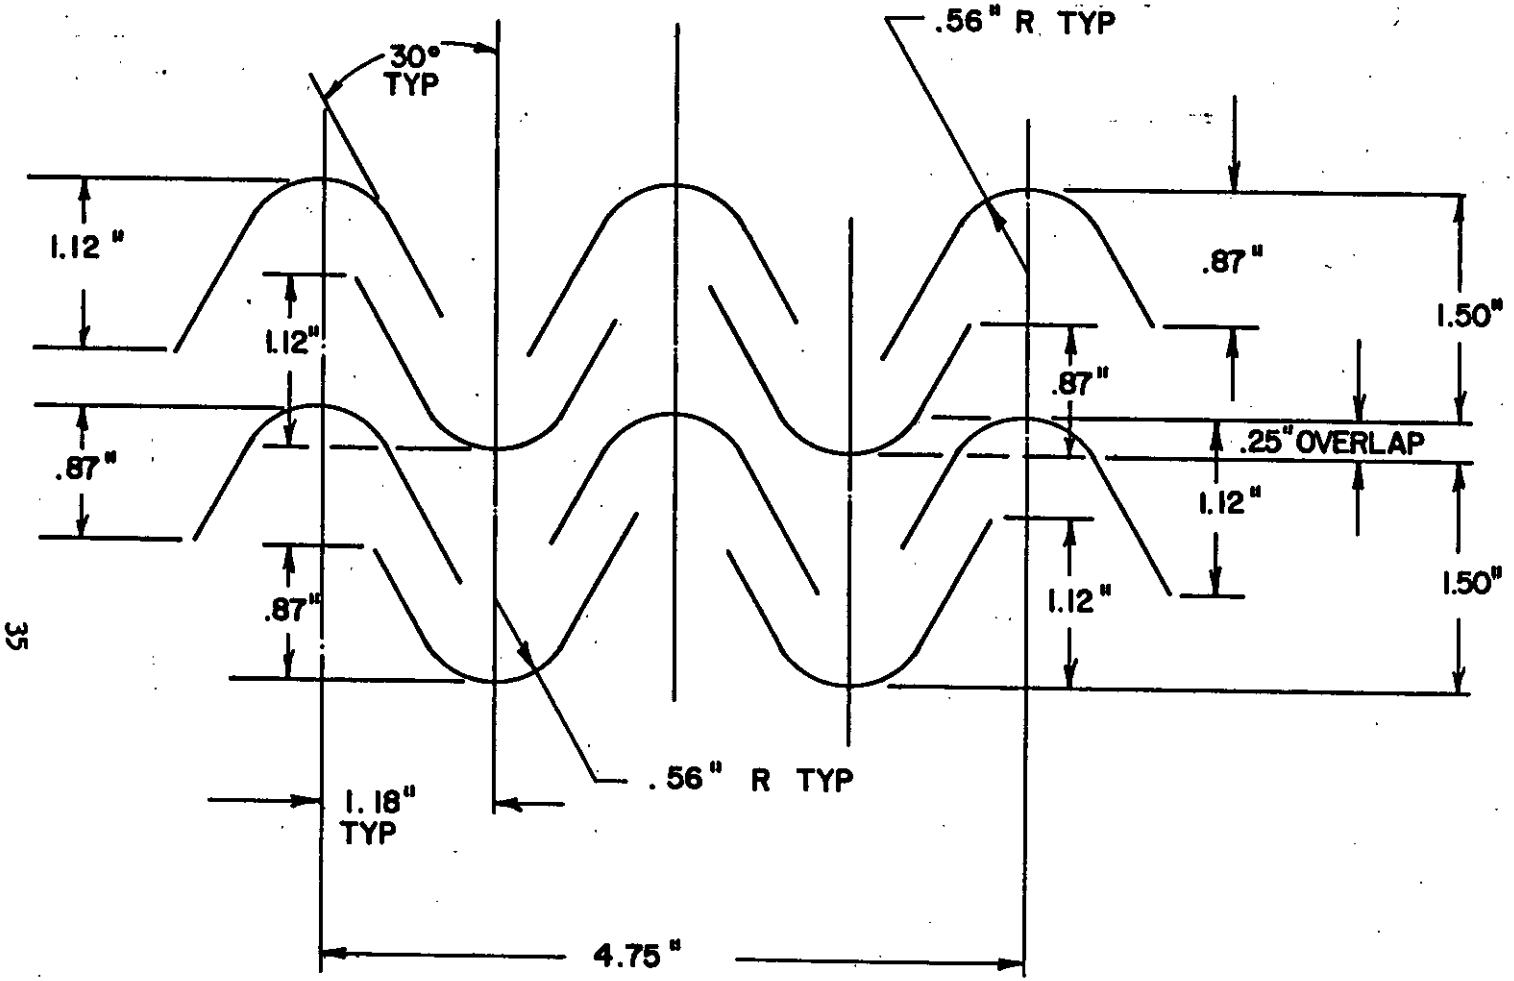


FIGURE 4. INCISING PATTERN

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T04:13:12
Check the source to verify that this is the current version before use.

X-2564

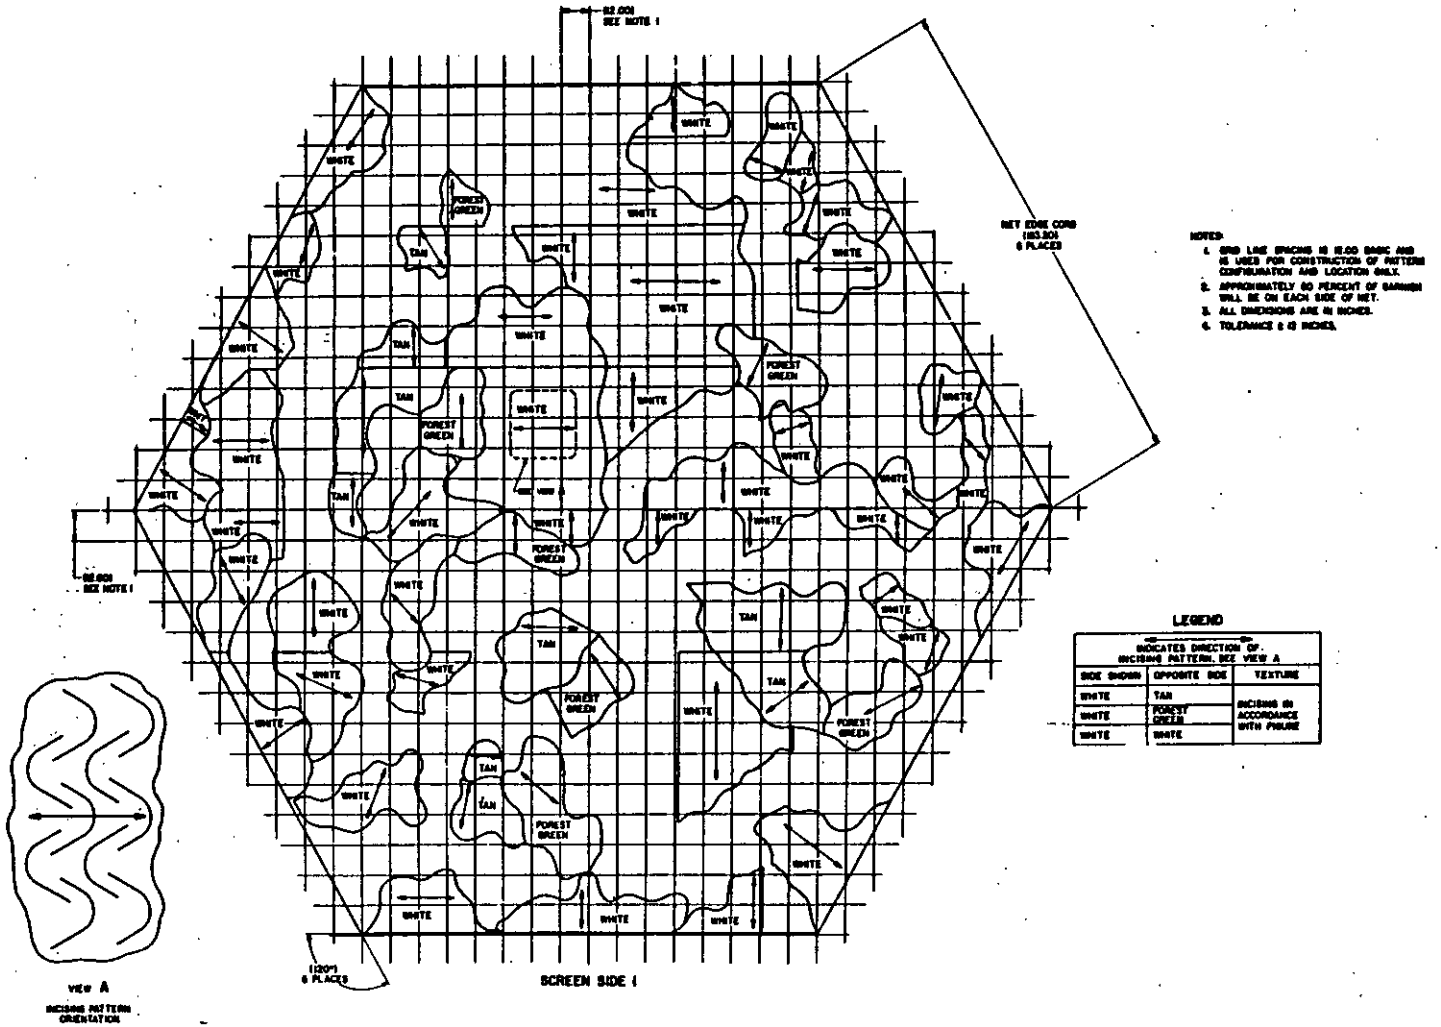


FIGURE 5. Camouflage hexagon screen snow color/texture pattern areas.

X-3949A

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]
Check the source to verify that this is the current version before use.

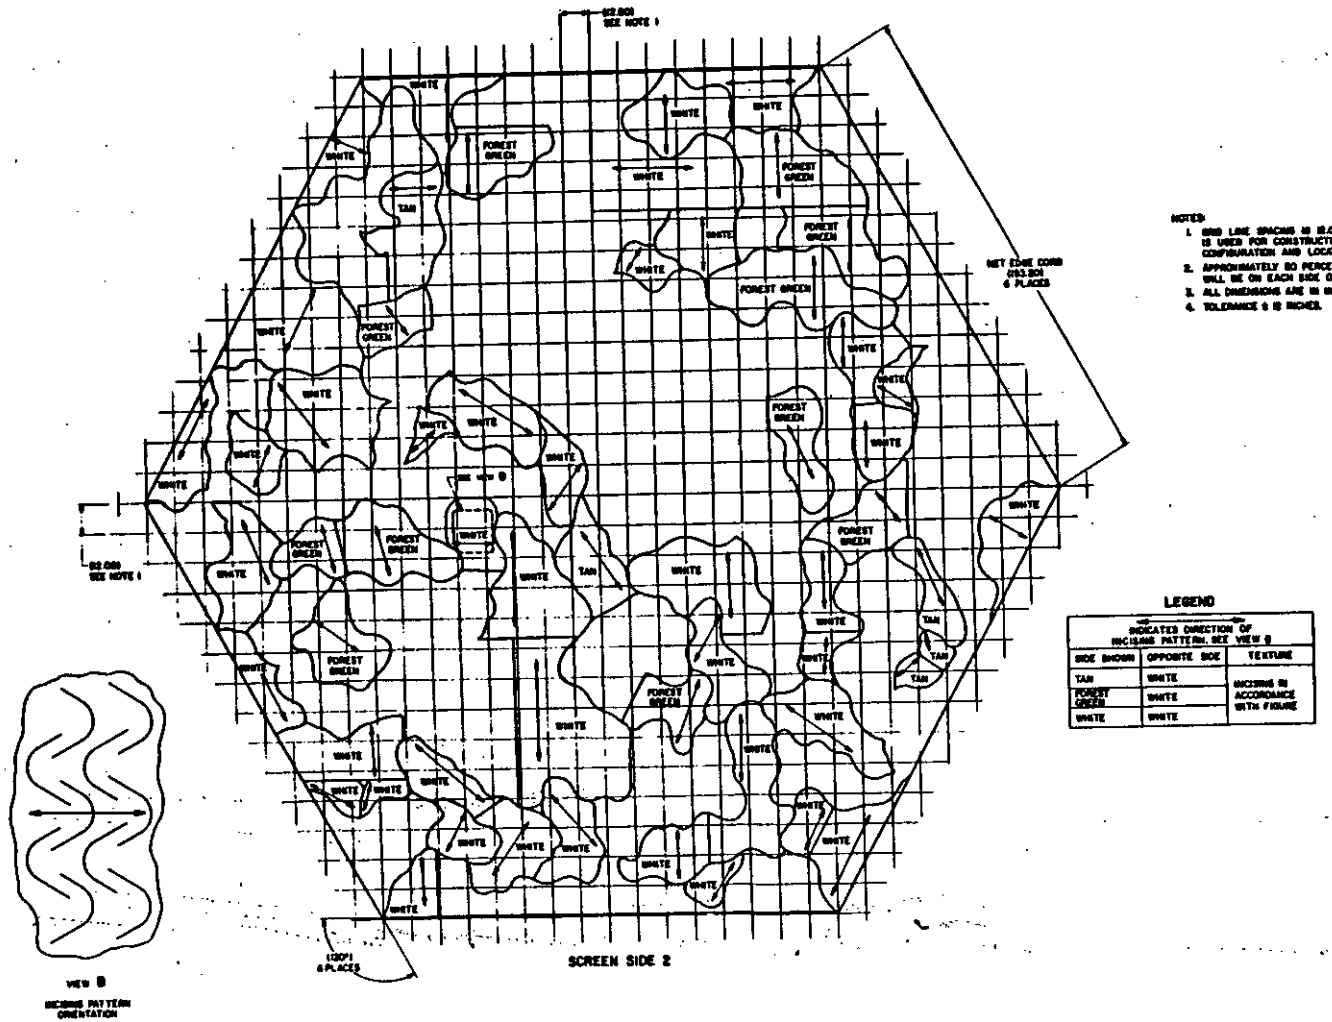


FIGURE 6. Camouflage hexagon screen snow color/texture pattern areas.

Source: https://assist.dla.mil - Downloaded: 2025-08-08 01:01:22
Check the source to verify that this is the current version before use.

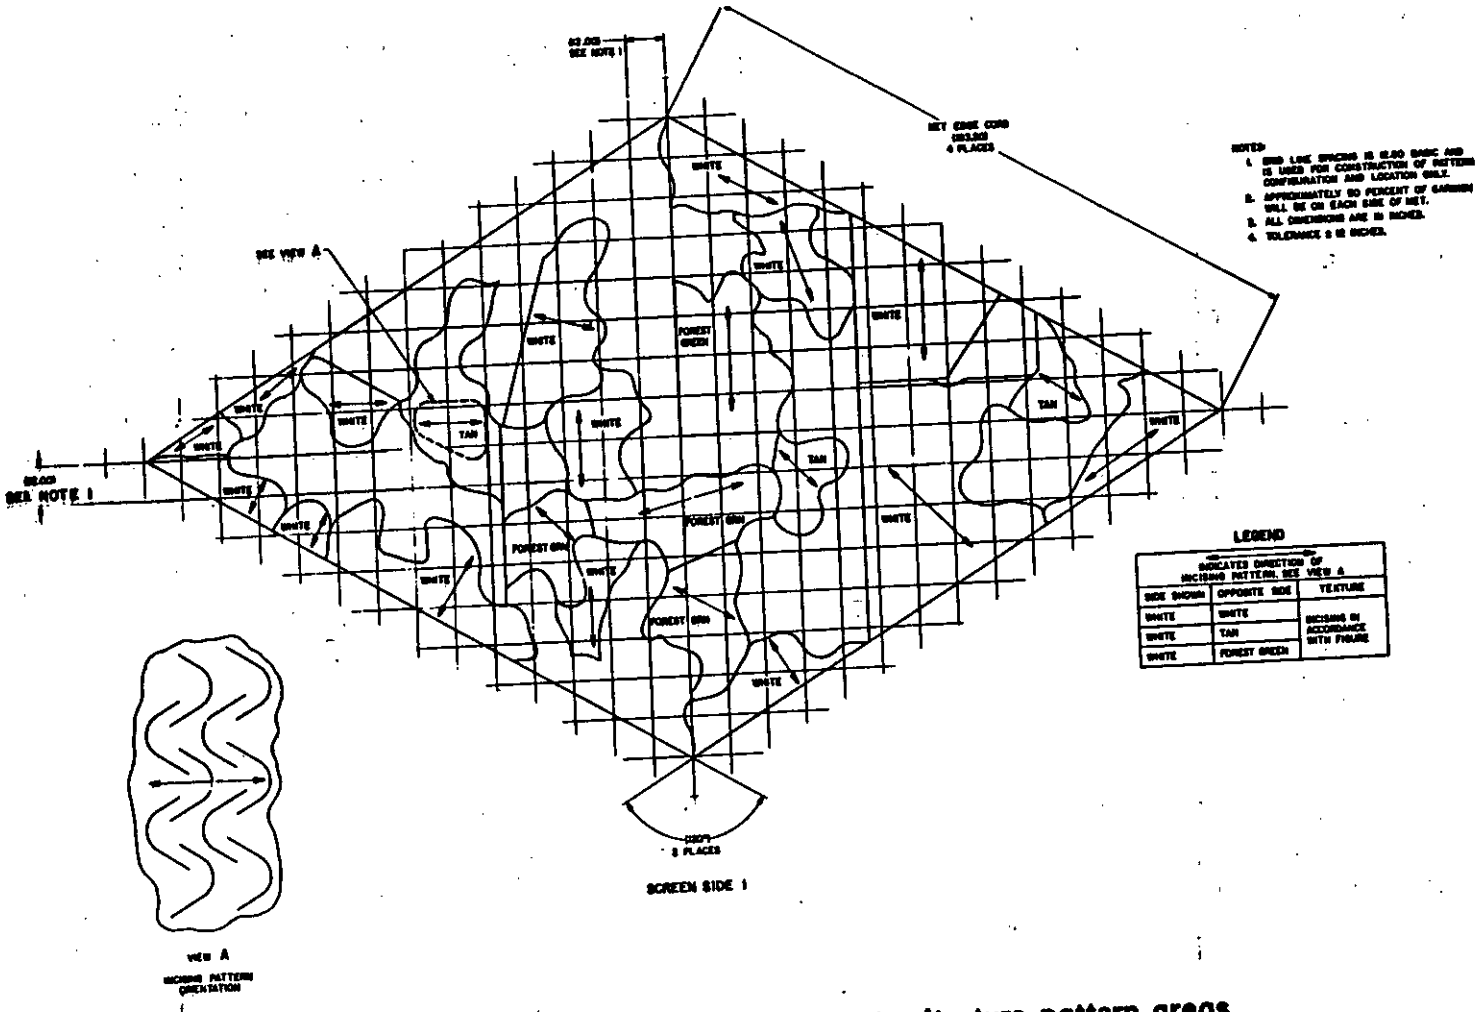


FIGURE 7. Camouflage rhombic screen snow color/texture pattern areas.

X-3951A

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T04:11Z
Check the source to verify that this is the current version before use.


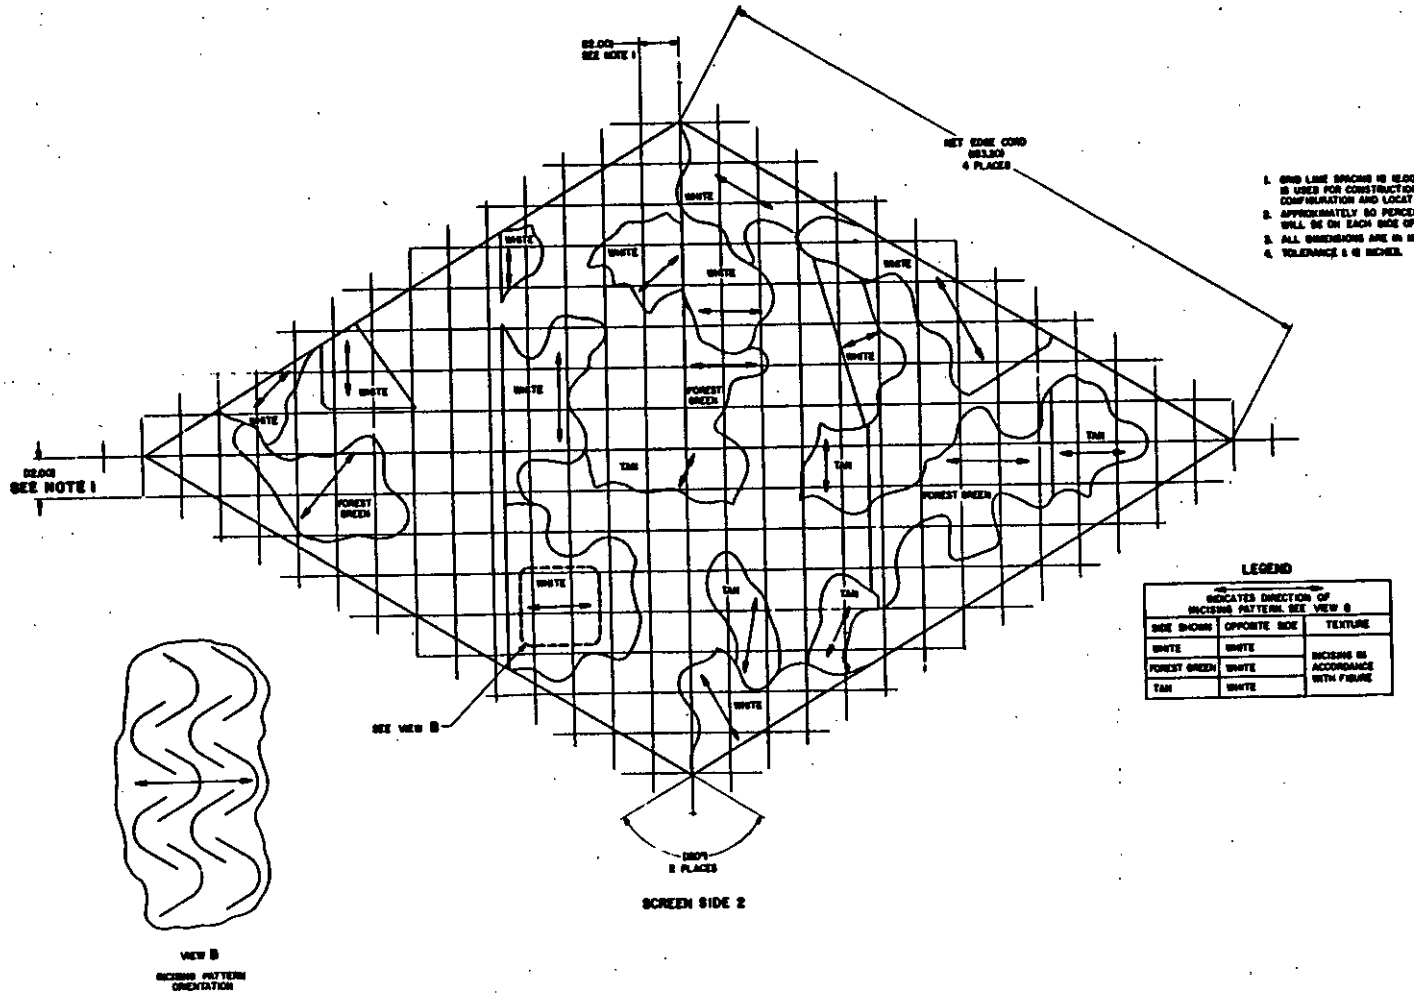


FIGURE 8. Camouflage rhombic screen snow color/texture pattern areas.

Source: https://assist.dla.mil -- Downloaded: 2025-12-26T04:14:12
Check the source to verify that this is the current version before use.

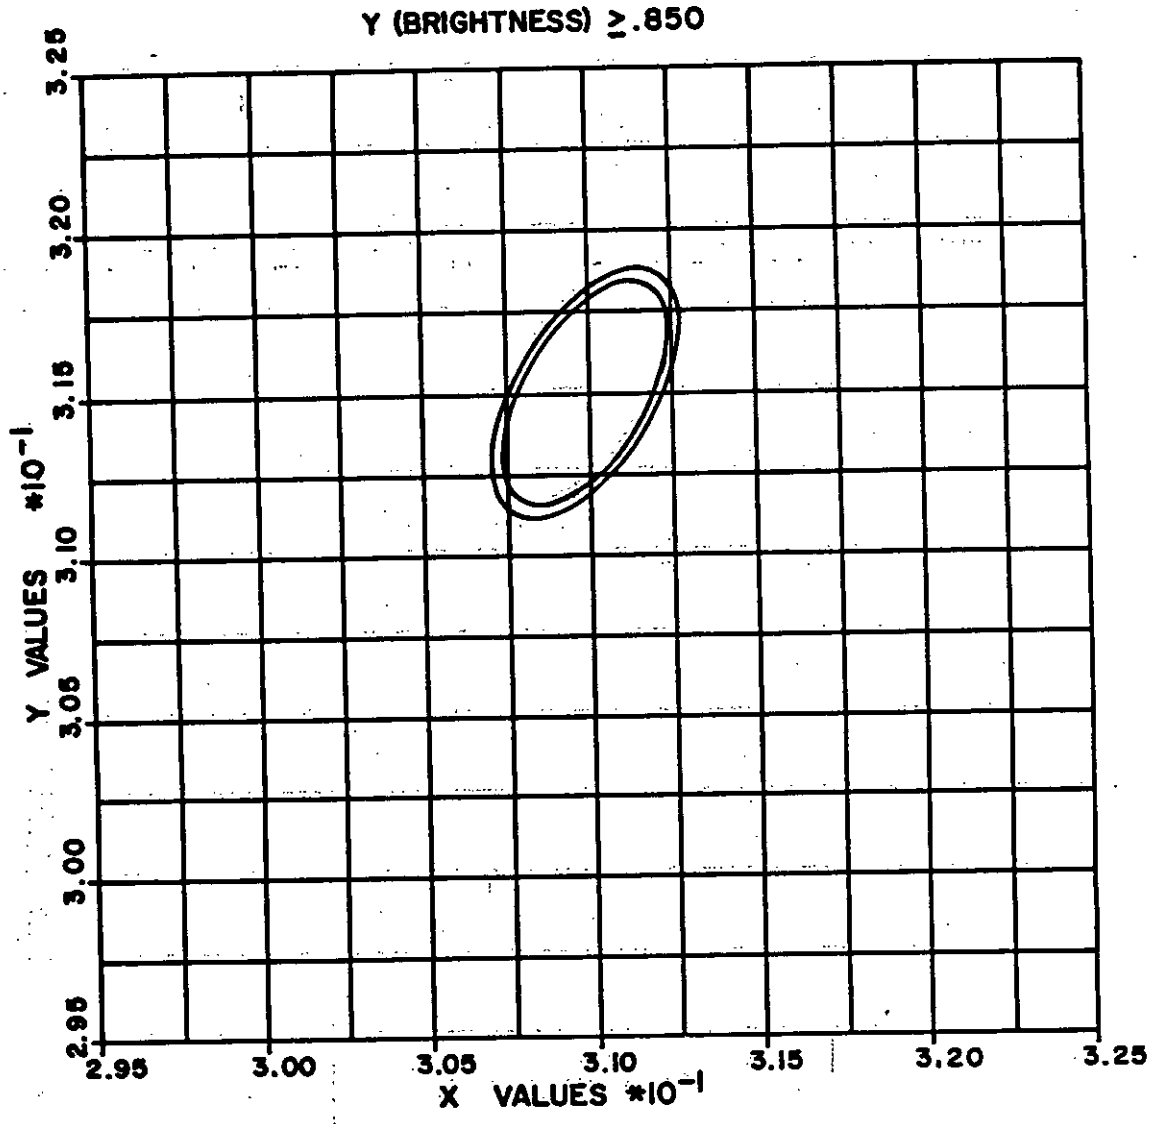


NOTE:
COLOR ELLIPSES ARE 2.0 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 9. Chromaticity diagram for camouflage cloth color-white (snow).

X-3953A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

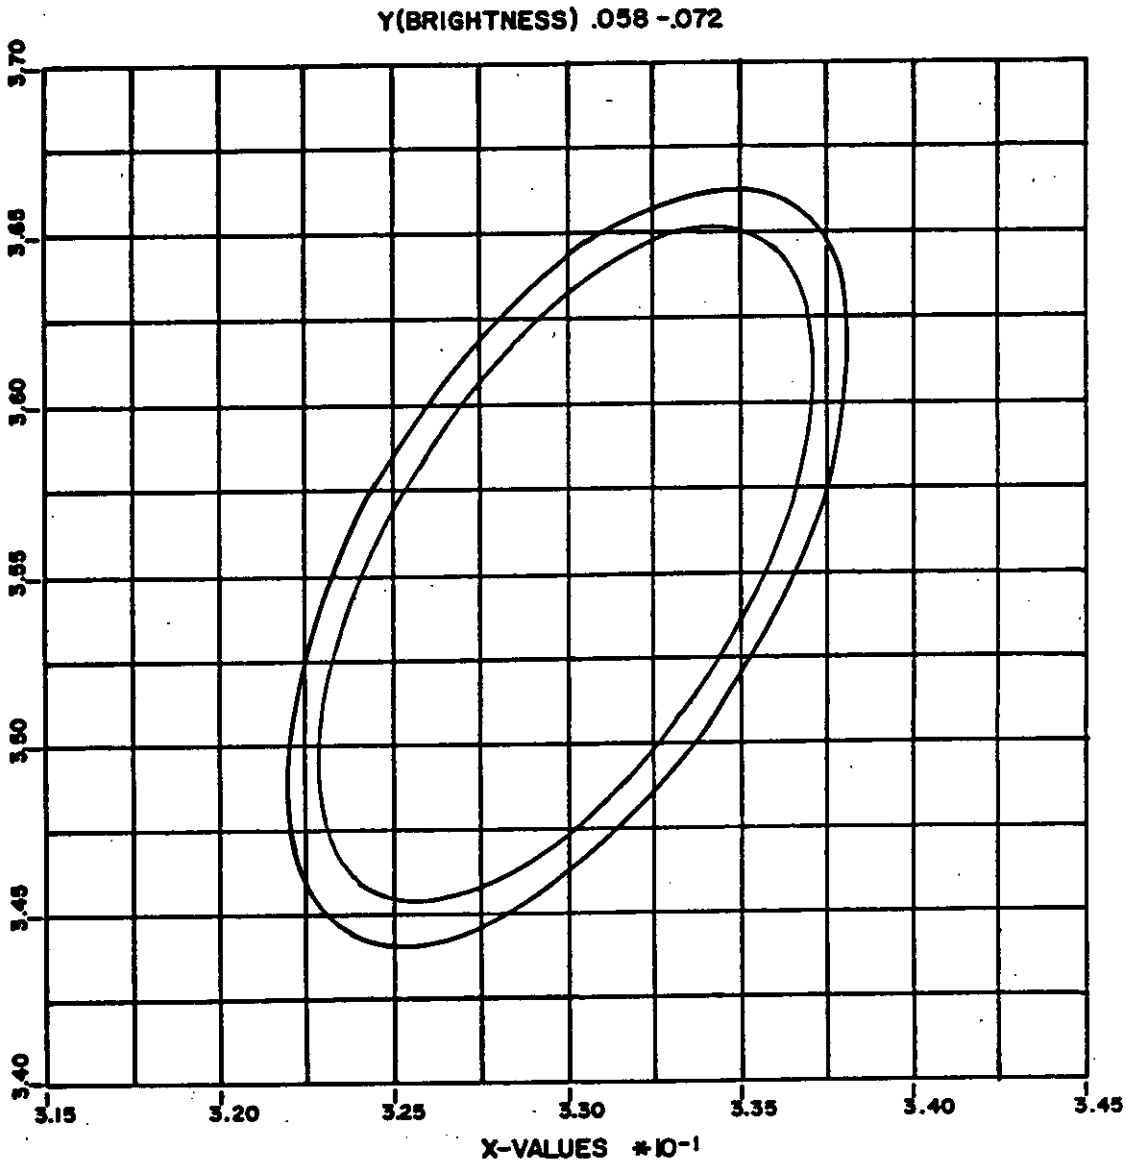


NOTES:
1. COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.
2. AFTER ENVIRONMENTAL EXPOSURE ALLOWABLE Y(BRIGHTNESS) IS .058-.074.

FIGURE 10. Chromaticity diagram for camouflage cloth color-forest green (snow).

X-2570(


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

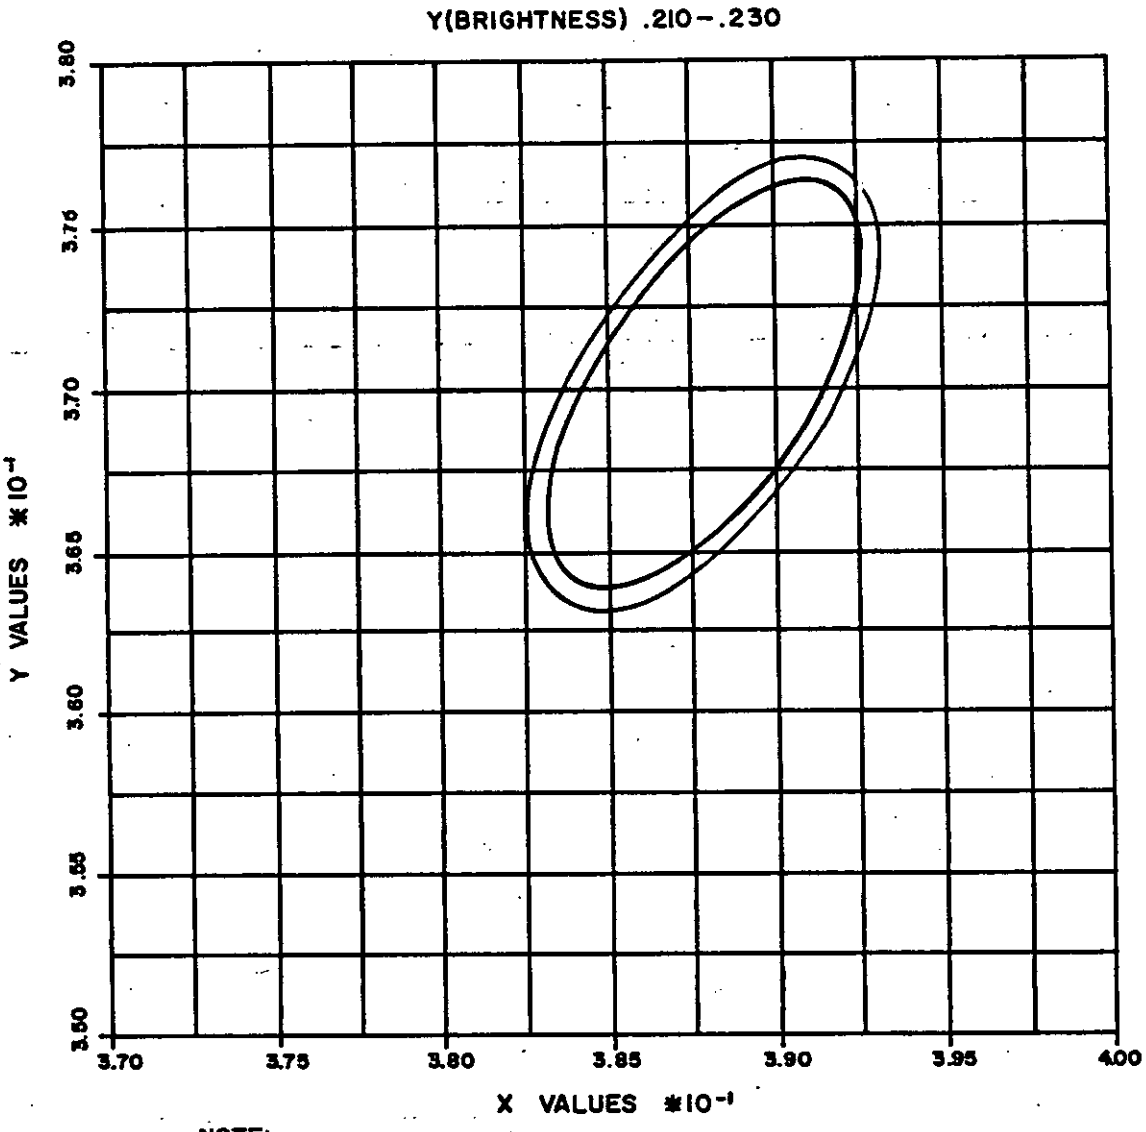

NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 11. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH COLOR-TAN (SNOW)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

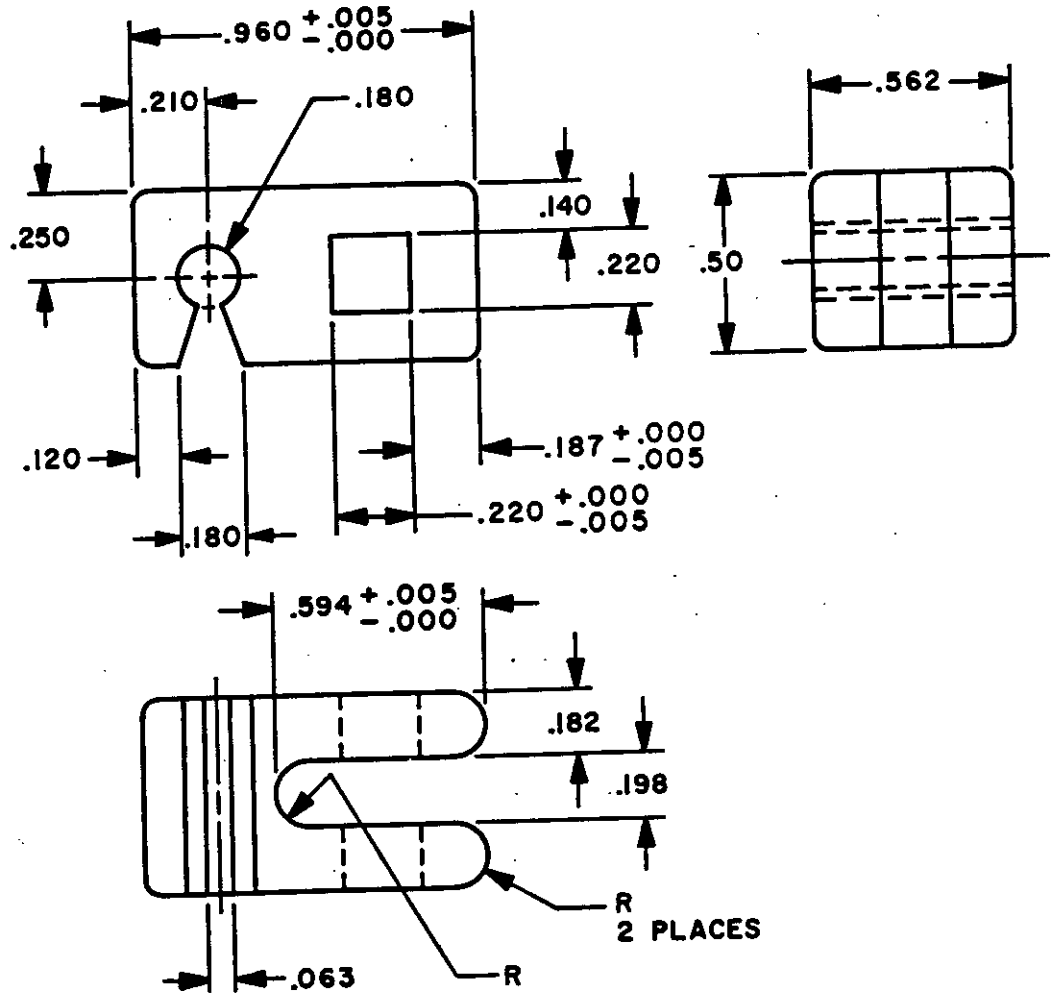


NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. TOLERANCES:
   3 PLACE DECIMALS ±.005
   2 PLACE DECIMALS ±.01
3. BREAK SHARP EDGES.

FIGURE 12. BRACKET

X-3954

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

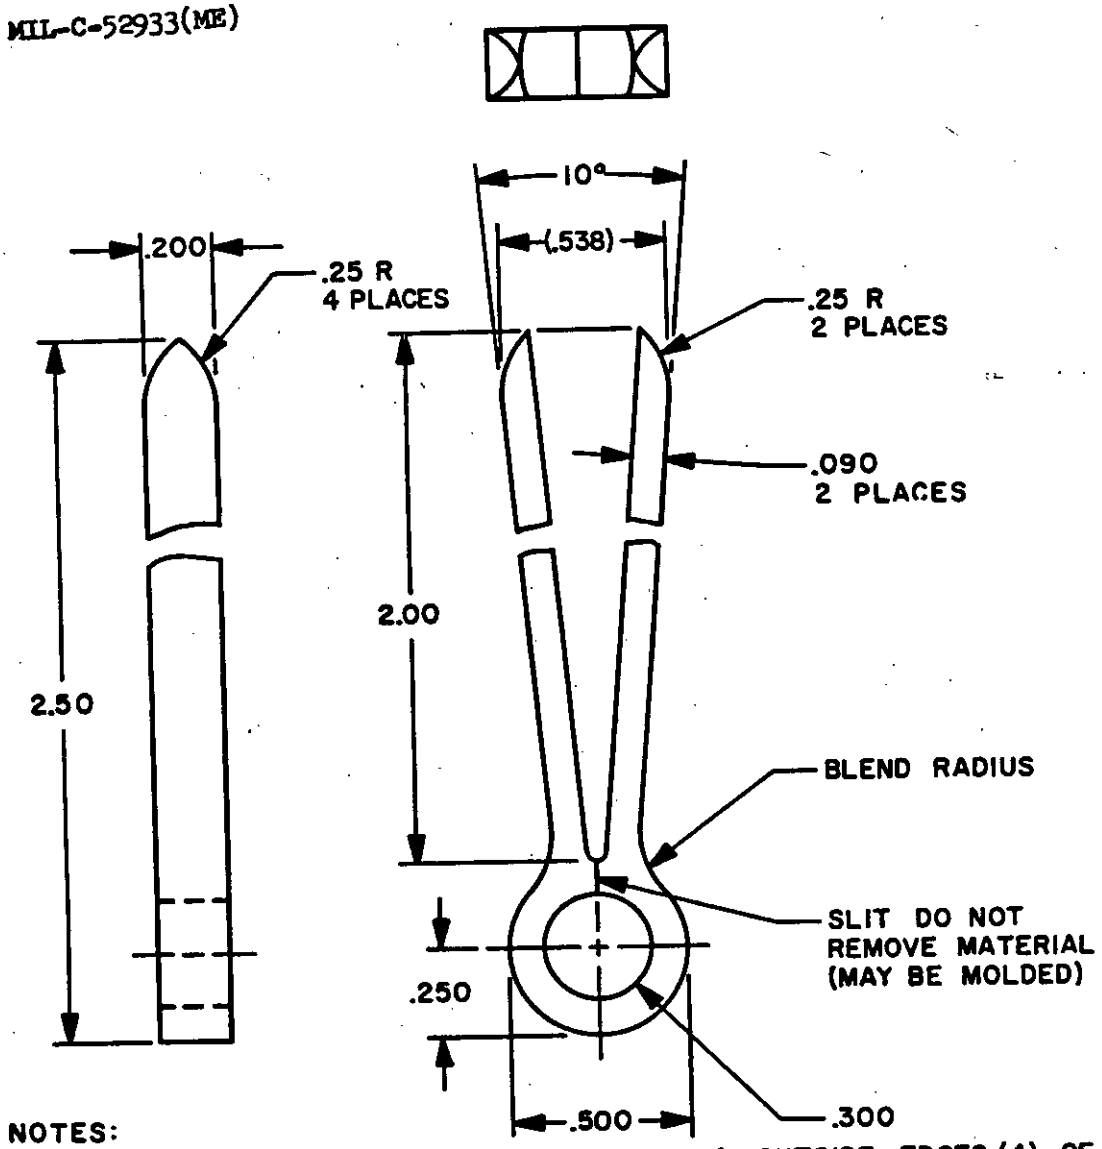


NOTES:


1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. TOLERANCES: ANGLES ±2°
   3 PLACE DECIMALS ±.010
   2 PLACE DECIMALS ±.02
3. BREAK SHARP EDGES.
4. OUTSIDE EDGES (4) OF PIN PRONGS TO BE RADIUSED .031 INCH.

FIGURE 13. PIN

X-3955

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:11Z
Check the source to verify that this is the current version before use.

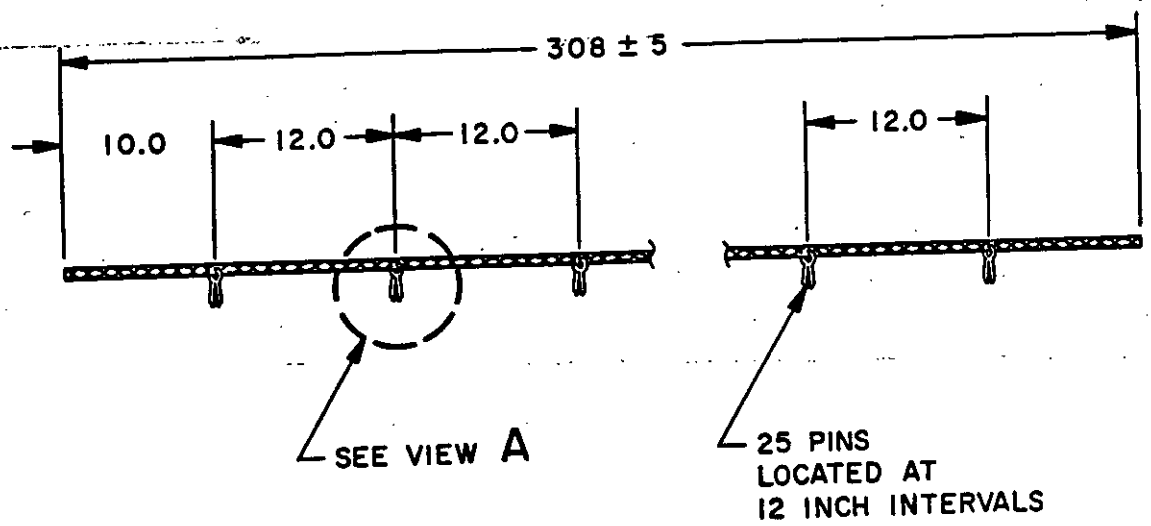

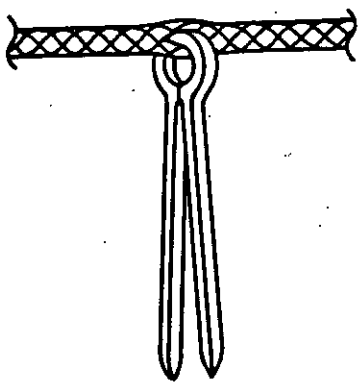

VIEW A


NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. UNSPECIFIED TOLERANCE: ±.5

FIGURE 14. LANYARD WITH PIN LOCATION

X- 395

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

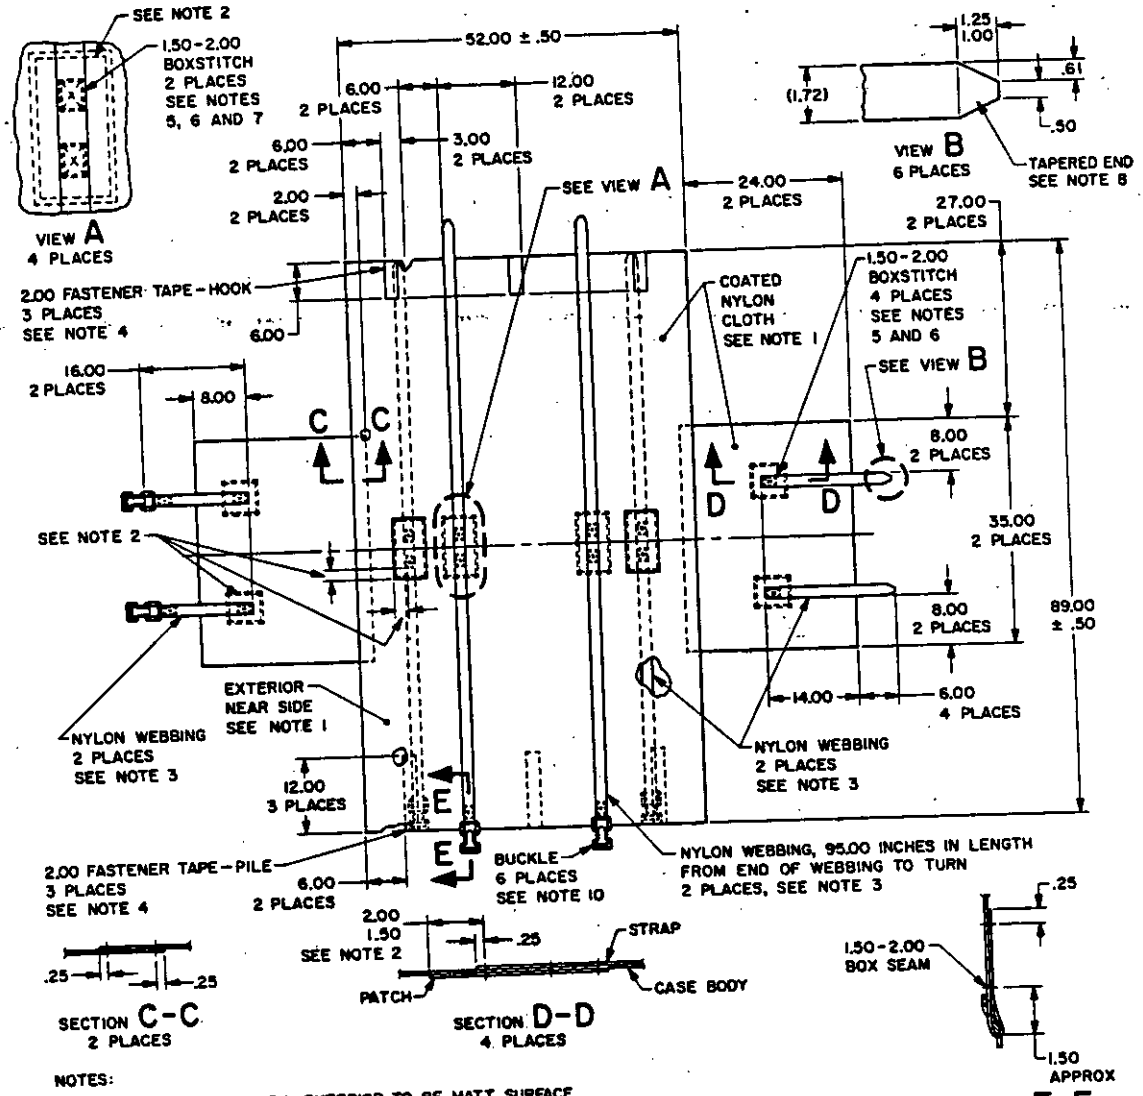


NOTES:

1. COATED NYLON CLOTH, EXTERIOR TO BE MATT SURFACE.
2. ALL STRAP STITCHING SHALL BE PATCHED USING COATED NYLON CLOTH. PATCH SHALL EXTEND 1.50-2.00 BEYOND BOX STITCHING AND BE STITCHED TO THE CASE IN ACCORDANCE WITH NOTES 5, 6 AND 7.
3. NYLON WEBBING SHALL CONFORM TO MIL-W-4088, TYPE VIII.
4. FASTENER TAPE (HOOK AND PILE) SHALL CONFORM TO MIL-F-21840, TYPE II, 2.00 WIDE.
5. POLYESTER THREAD SHALL CONFORM TO V-T-285, TYPE I, CLASS 1, SIZE FF, OR TYPE II, CLASS 1, SIZE FF, NONWICKING.
6. STITCHES AND STITCHING SHALL CONFORM TO FED-STD-751, TYPE 301, 6-8 STITCHES PER INCH.
7. ALL STITCH MARGINS .12 ± .06 INCH UNLESS OTHERWISE SPECIFIED.
8. ALL NYLON WEB EDGES TO BE HEAT SEALED AND TAPERED ENDS HARDENED USING CLEAR DRYING RESIN.
9. BOX STITCHING MAY BE 1.75 X 1.75-2.00
10. BUCKLE, 1 3/4 SIZE, NORTH AND JUDD PART NO. 3105 OR EQUAL.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
TOLERANCES:
.25 TO 2.00 ± .12
2.00 TO 10.00 ± .25
OVER 10.00 ± .38

FIGURE 15. SCREEN CASE X-3957

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

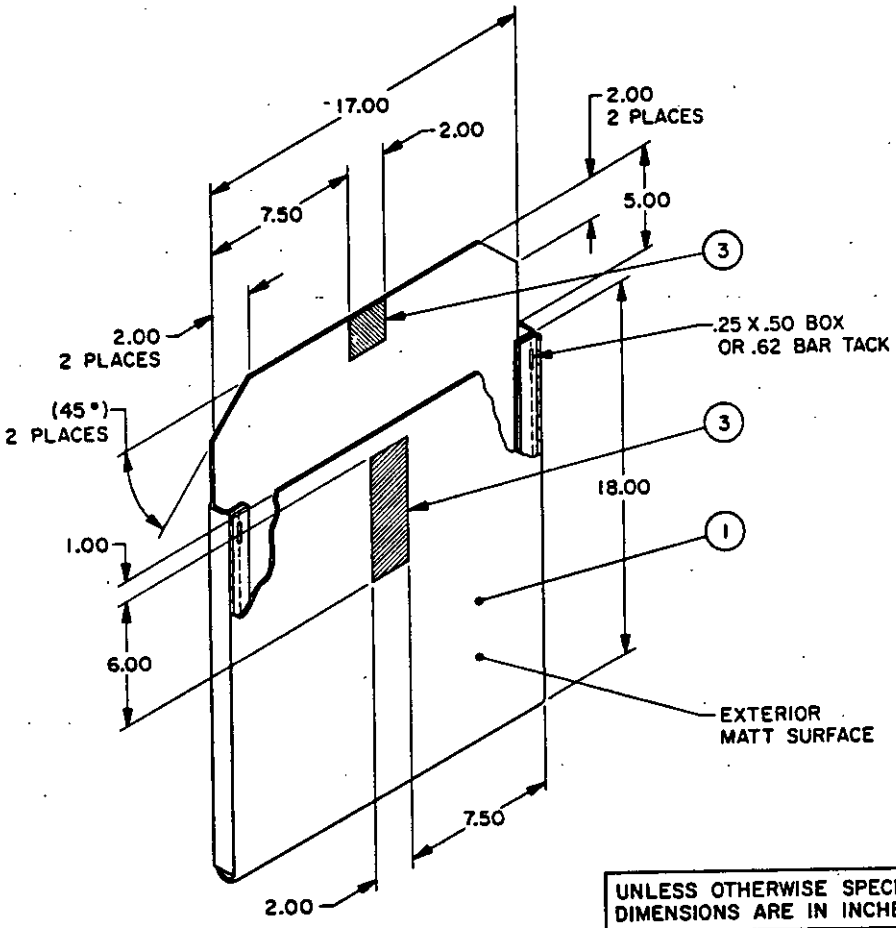

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
TOLERANCES: .25 TO 2.00 ± .12 2.00 TO 10.00 ± .25 OVER 10.00 ± .38

NOTES:

1. COATED NYLON CLOTH. FABRICATE USING POLYESTER THREAD, CONFORMING TO V-T-285, TYPE I CLASS 1, SIZE FF, OR TYPE II, CLASS 1, SIZE FF, NONWICKING.
2. STITCH MARGINS FOR FASTENERS ARE .12±.06 AND FOR CLOSING SEAM TO BE .38±.06
3. FASTENER TAPE (HOOK AND PILE) SHALL CONFORM TO MIL-F-21840, TYPE II, 2.00 INCH WIDTH.
4. STITCHES AND STITCHING SHALL CONFORM TO FED-STD-751, TYPE 301, 6-8 STITCHES PER INCH.

FIGURE 16. REPAIR KIT CASE X-3958

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

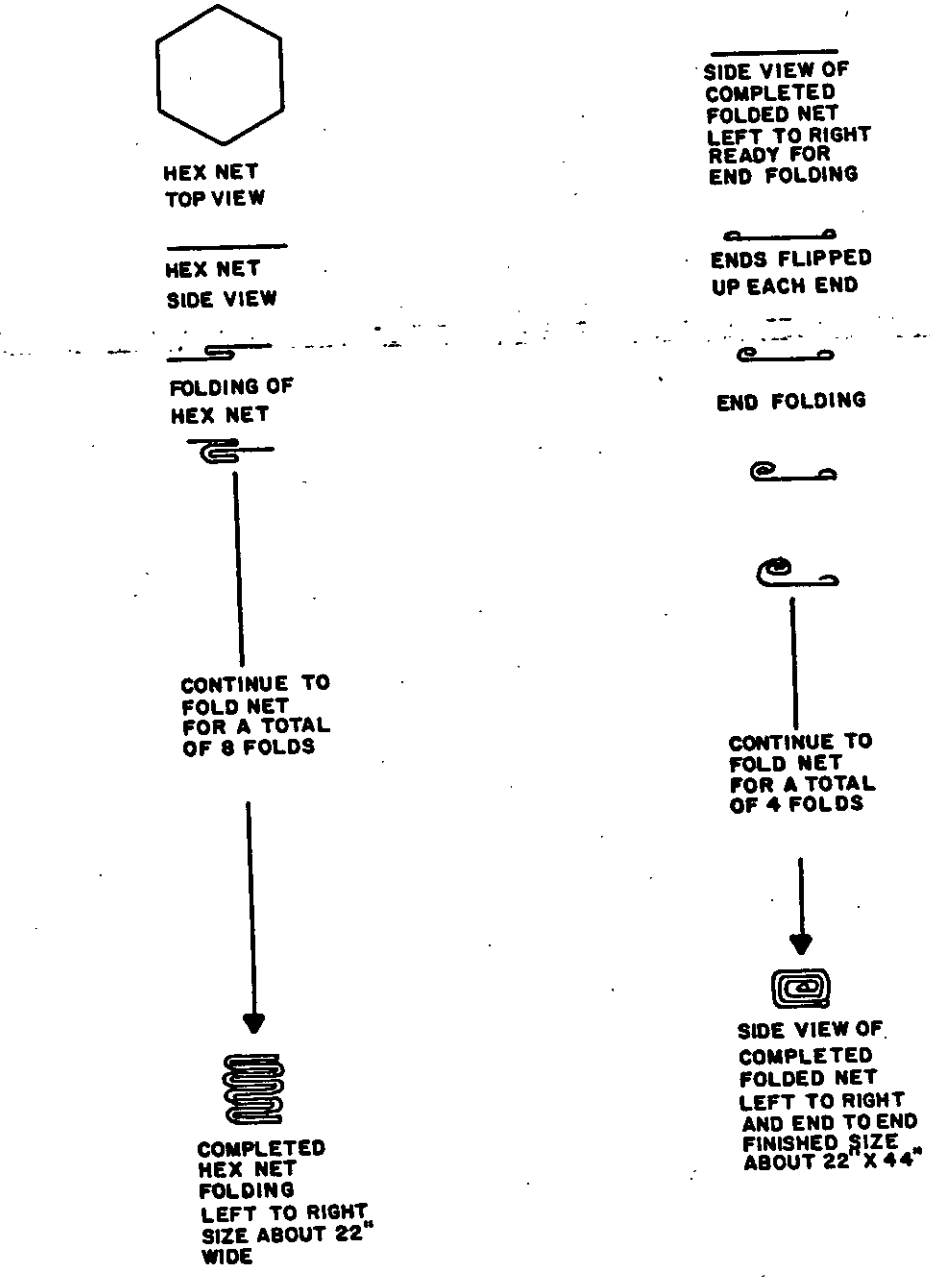


FIGURE 17. METHOD FOR FOLDING HEXAGON SCREEN FOR PACKAGING.

X-3116

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.


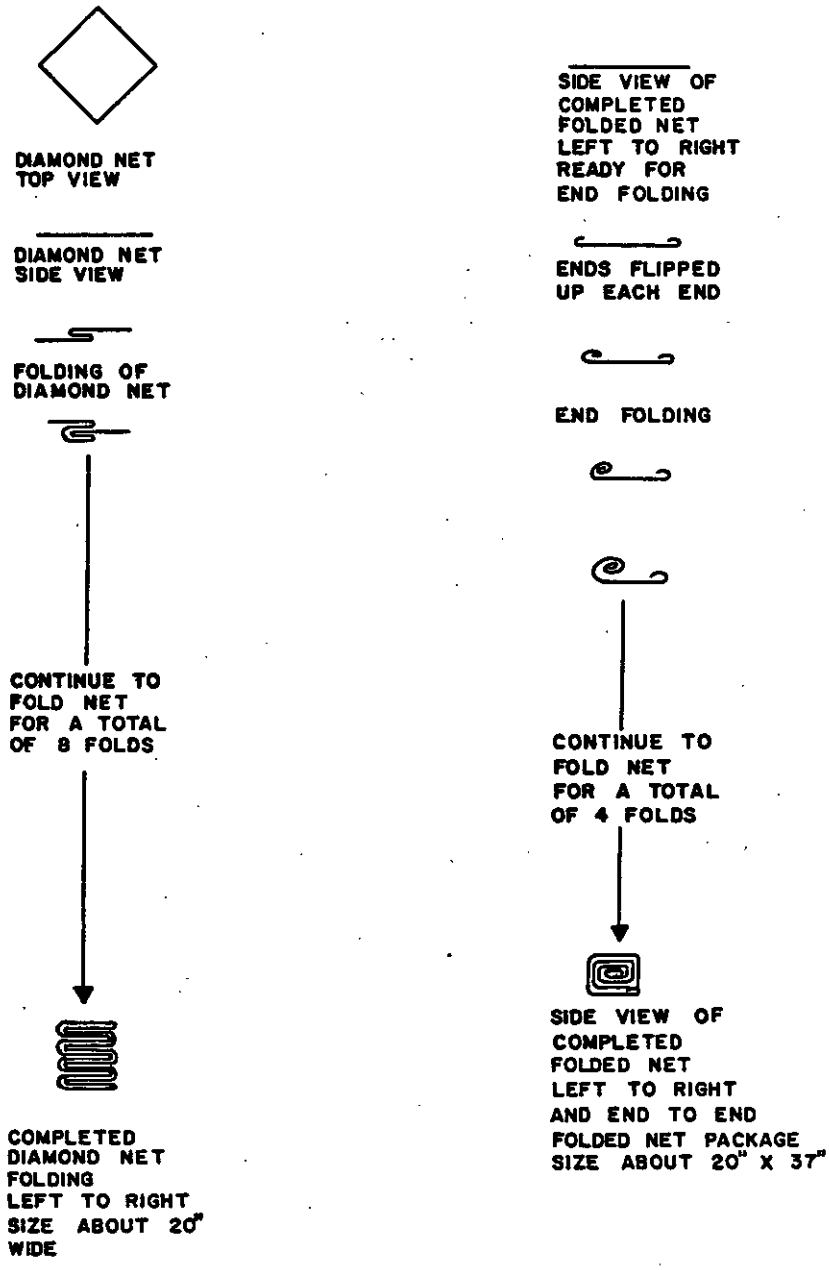


FIGURE 18. METHOD FOR FOLDING RHOMBIC SCREEN FOR PACKAGING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

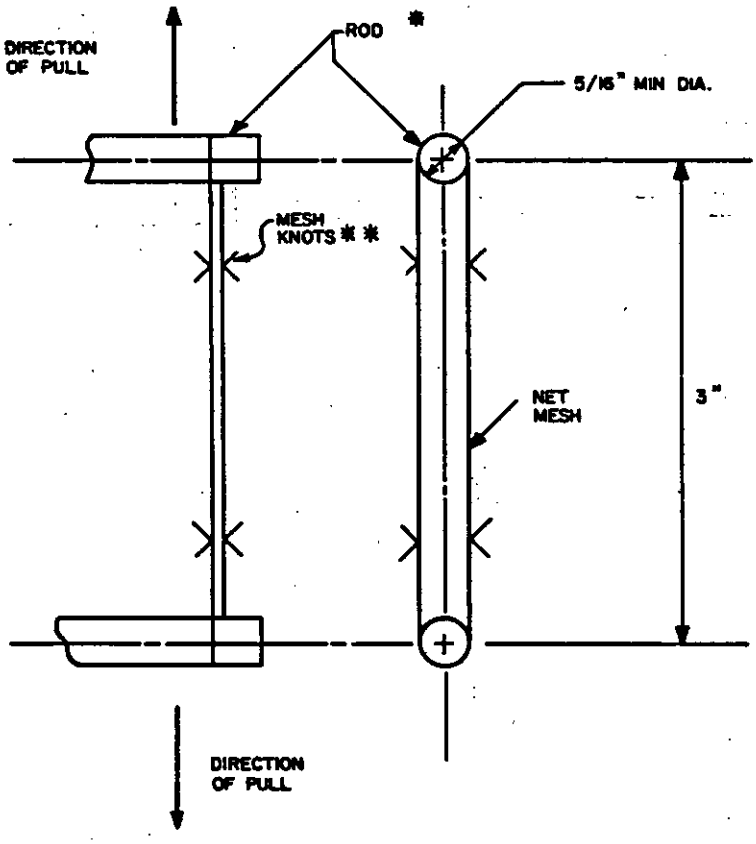


* HOOK (S) OF SAME DIAMETER ARE ACCEPTABLE IN LIEU OF RODS AS SHOWN.

* * LOCATION OF KNOTS OF NET MESH TO BE AS SHOWN ABOVE DURING THE MESH BREAKING TEST.

FIGURE 19. MESH BREAKING STRENGTH - TEST SPECIMEN SETUP

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

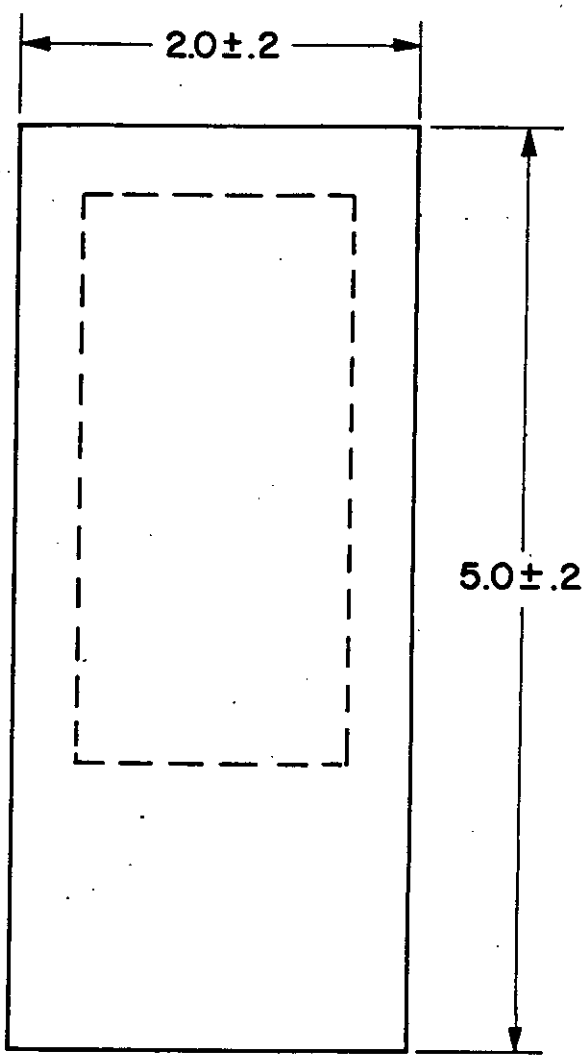


NOTE:
ALL DIMENSIONS IN INCHES

FIGURE 20.

IDENTIFICATION TAG FOR TYPE II SCREEN

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

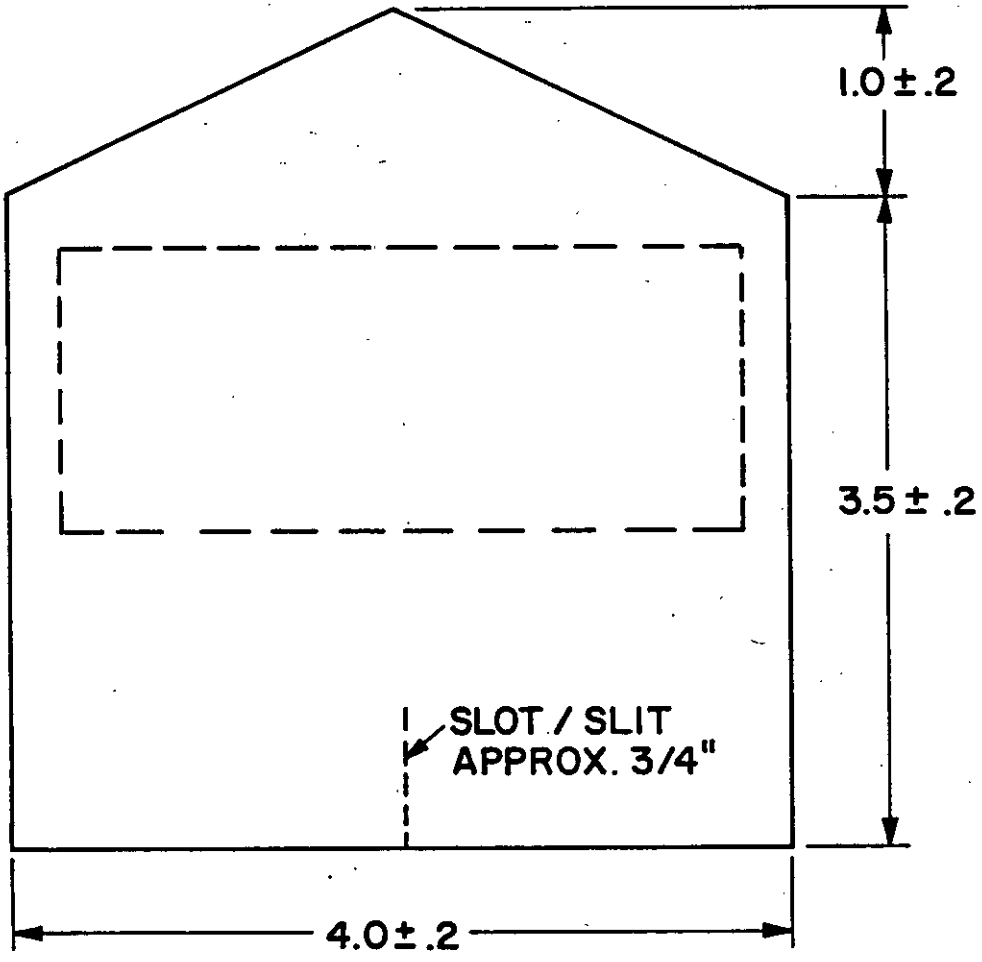


NOTE:
ALL DIMENSIONS IN INCHES

FIGURE 21

IDENTIFICATION TAG FOR TYPE I SCREEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

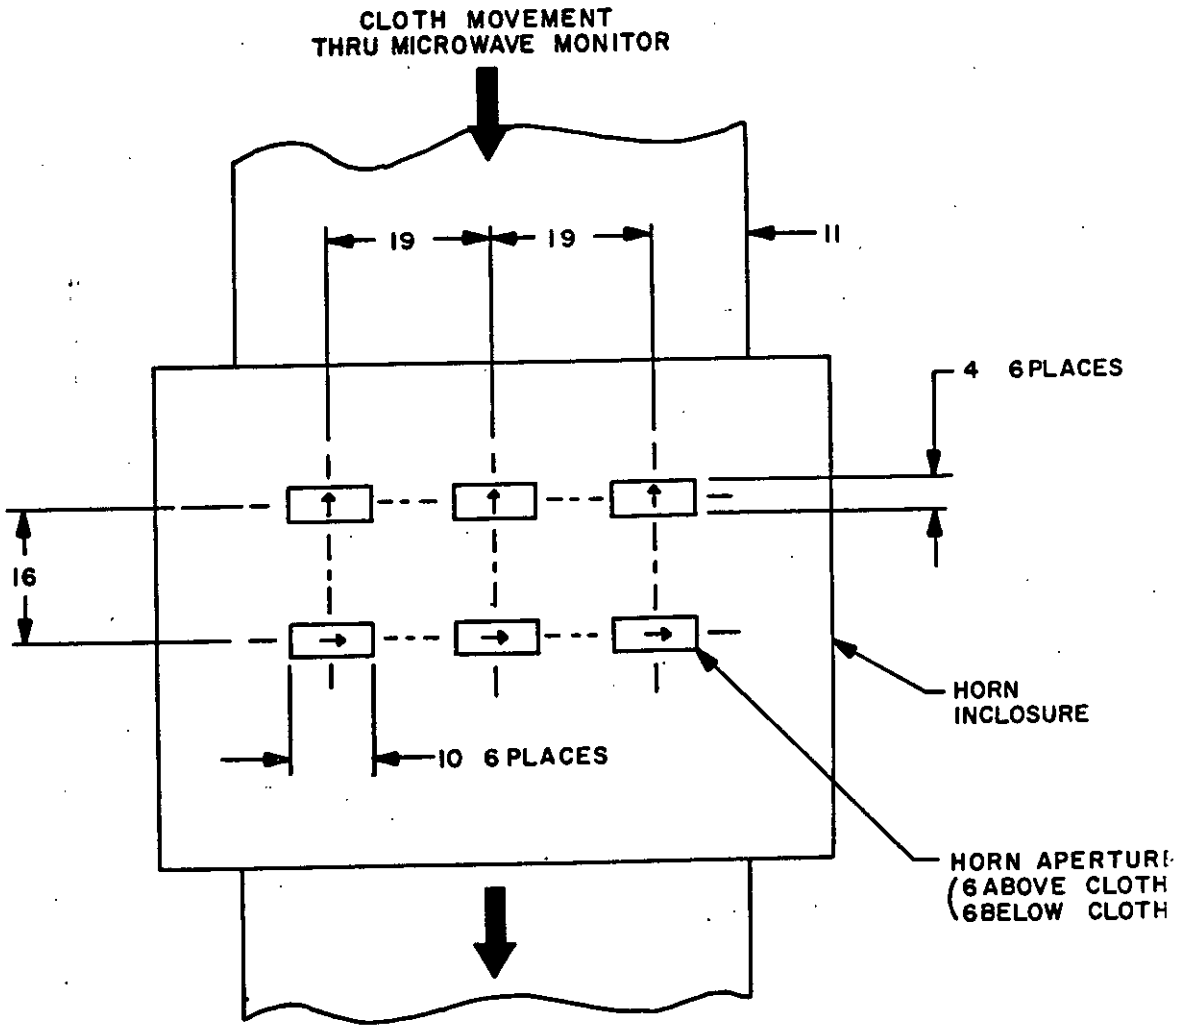

NOTE:
1. HORN POLARIZATION DENOTED BY DIRECTION OF ARROWS.
2. ALL DIMENSIONS ARE IN INCHES.
3. APPROXIMATE LOCATION OF HORNS.

FIGURE 22. APERTURE CONFIGURATION FOR MICROWAVE MONITOR.

X-3118

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research & Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.