MIL-T-52957A
19 July 1984
SUPERSEDING
MIL-T-52957
10 August 1978

MILITARY SPECIFICATION

TEST SET, POWER SUPPLY, FOR POSITION AND AZIMUTH DETERMINING SYSTEM: AN/USM-428

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the test equipment required to maintain the power supply of the Position and Azimuth Determining System (PADS), AN/USQ-70.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6675

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-P-11268	- Parts, Materials, and Processes Used In Electronic Communication Equipment.
MIL-G-20241	- Gasket Material, Wool Felt, Impregnated, Adhesive, Pressure-Sensitive.
MIL-P-26514	- Polyurethane Foam, Rigid or Plastic, For Packaging.
MIL-S-81733	- Sealing and Coating Compound, Corrosion Inhibitive.

STANDARDS

FEDERAL

FED-STD-101	- Test Procedures, For Packaging, Materials.

MILITARY

MIL-STD-129	- Marking For Shipment and Storage.
MIL-STD-454	- Standard General Requirements For Electronic Equipment.
MIL-STD-781	- Reliability Design Qualification And Production Acceptance Tests: Exponential Distribution.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing with Appropriate Test Methods.

2.1.2 Government drawings. The following Government drawing forms a part of this specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

TA13222E2900	- Test Set, Power Supply, Position and Azimuth Determining System: AN/USM-428

(Copies of specifications, standards and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of solicitation for bid or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951 Standard Practice for COMMERCIAL PACKAGING

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Description. The Power Supply Test Set (hereinafter called PSTS) for the PADS shall be in accordance with Top Assembly TA13222E2900 and as specified herein. The PSTS shall be used to test the PADS power supply and computer power supply, shall diagnose malfunctions, shall evaluate signals from the power supplies against established tolerances and standards, shall contain fail safe circuitry throughout, and shall contain built-in-test equipment to verify proper operation and locate malfunctions of the tester.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the PSTS. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or designated representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Materials, processes, and parts. Materials, processes, and parts shall be as specified herein and on the applicable drawings. Materials, processes, and parts not specified shall be selected by the contractor in accordance with MIL-P-11268 and shall be subject to all provisions of this specification (see 6.6).

3.3.1 Material deterioration and control. The PSTS shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environment to which the item may be exposed.

3.3.1.1 Dissimilar metals. Dissimilar metals, as defined in MIL-STD-889, shall be electrically insulated from one another to prevent galvanic corrosion. Insulation may be provided by an insulating barrier such as a corrosion inhibiting sealant conforming to MIL-S-81733 or chromate tape conforming to MIL-G-20241. Protection against any galvanic corrosion could also be obtained by exclusion of the electrolyte if feasible.

3.3.1.2 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and sub-components, and shall make information available upon request to the contracting officer or designated representative.

3.4 Reliability. The PSTS shall demonstrate a Mean-Time-Between-Failure (MTBF) of 300 hours and the lower test MTBF shall be 150 hours when tested as specified in 4.5.2.3.

3.5 Maintainability.

3.5.1 Maintenance support. Assemblages or support elements such as technical manuals, repair parts, or special tools (see 6.4 and 6.5), shall be adequate to perform the intended function of assisting or conducting maintenance operations when tested as specified in 4.5.2.4.

3.5.2 Maintenance ratio. The PSTS shall have a maintenance ratio of not more than 0.20. Maintenance ratio is defined as the ratio of the total active maintenance manhours required (scheduled and unscheduled) to the total operating time. Normal before-and-after operation checks are excluded. A maintenance schedule shall be furnished prior to the start of any testing.

3.6 Safety. The PSTS shall conform to the safety objectives of MIL-STD-454, Requirements 1 and 8. Positive means shall be provided to prevent the inadvertent reversing or mismating of electrical connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

3.7 Environmental. The PSTS shall operate as specified herein without mechanical or electrical failures, or performance degradation when subjected to shock, vibration, temperature, humidity, and altitude as specified herein (see 4.5.2.5).

3.7.1 Operating temperature. The operating temperature range of the PSTS shall be plus 32 degree F (0 degree C) to plus 125 degree F (plus 52 degree C). The operating altitudes shall be minus 500 feet to plus 5,000 feet above sea level.

3.7.2 Storage (in transit cases). The storage temperature range of the PSTS shall be minus 50 degree F (minus 45 degree C) to plus 160 degree F (plus 71 degrees C) with humidity to 100 percent. The storage altitude shall be minus 500 feet to plus 50,000 feet above sea level.

3.8 Transit cases. Transit cases shall be in accordance with the applicable drawings and as specified herein. Each case shall be provided with automatic pressure relief valve.

3.8.1 Exposure. When tested in accordance with 4.5.2.6.1, the transit cases shall show no evidence of delaminated or ruptured seals, cracked or broken welds which impair structural integrity or permit water leakage, or malfunctioning latches, carrying devices and pressure relief valves. Any dents or warpage sustained by a transit case shall not impair opening and closing the case without mechanical assist.

3.8.2 Drop test. The transit cases shall be subjected to the free fall drop test specified in 4.5.2.6.2. The cases shall show no evidence of delaminated or ruptured seals, cracked or broken welds which impair structural integrity or permit water leakage, or malfunctioning latches, carrying devices, and pressure relief valves. Any dents or warpage sustained by a case shall not impair opening or closing the case without mechanical assist.

3.8.3 Leakage. The transit cases shall not permit gross leakage when tested as specified in 4.5.2.6.3.

3.9 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Interchangeable parts are defined as two or more like parts possessing such functional and physical characteristics as to be equivalent in performance and durability, and capable of being exchanged one for the other without alteration on the parts themselves or of adjoining parts, except for adjustment, and without selection for fit or performance.

3.10 Treating and painting. The portions of the PSTS normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, Type G, color forest green.

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:11Z
Check the source to verify that this is the current version before use.

3.11 Marking, identification and instruction. Marking shall be in accordance with MIL-STD-454, Requirement 67.

3.12 Workmanship. Workmanship shall be in accordance with MIL-STD-454, Requirement 9.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.1.2 Dissassembly inspection. Failure of any examination or test by any first article shall be cause for dissassembly, in the presence of a Government representative, of the first article to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances and workmanship. Parts not complying with such requirements shall be rejected and shall be cause for rejection of the first article. Reassembly with replacement parts and retesting shall be the responsibility of the contractor.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

c. Inspection of packaging (see 4.6).

4.3 First article inspection.

4.3.1 Examination. The first article PSTS shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection or for performing the disassembly inspection specified in 4.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.3.2 Tests. The first article PSTS shall be subjected to the tests marked "X" in column 1 of table I. Failure of any test shall be cause for rejection or for performing the disassembly inspection specified in 4.1.2.

4.3.3 Inspection. When specified (6.2), one or more first article PSTS will be selected at random by the Government from the PSTS being produced by production tooling and will be examined as specified in 4.5.1 and subjected to the tests marked "X" in column 2 of table I to determine conformance to the requirements of this specification. The inspection will be performed by the Government at a site selected by the Government. Acceptance of a first article PSTS shall not exclude the remaining PSTS from the quality conformance inspection and acceptance provisions specified in Section 4. In addition to any test specified as part of the first article test, the Government reserves the right to conduct any or all other tests contained in this specification as part of the first article test, and failure of such additional tests shall have the same effect as failure of those tests specified as first article tests.

4.3.4 Inspection failure. Failure of the first article PSTS to meet any requirement specified herein during and as a result of the examination and tests specified in 4.3 shall be cause for rejection of the first article PSTS and shall be cause for refusal by the Government to continue acceptance of production PSTS until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor.

4.4 Quality conformance inspection.

4.4.1 Examination. Each PSTS shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each PSTS shall be subjected to the tests marked "X" in column 3 of table I. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The PSTS shall be examined as specified herein for the following defects:

101. Dimensions not as specified.
102. Components missing or not as specified.
103. Materials not as specified.
104. Materials are not resistant to corrosion and deterioration or treated to be resistant to corrosion and deterioration for the applicable and operating environments.
105. Dissimilar metals as defined in MIL-STD-889 are not effectively insulated from each other.
106. Contractor does not have documentation available for identification of material, material finishes or treatment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:11Z
Check the source to verify that this is the current version before use.

107. Assembly incomplete or incorrect.
108. Safety devices missing or not as specified.
109. Treatment and painting not as specified.
110. Identification marking not as specified.
111. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Test conditions. Unless otherwise specified in a test, tests shall be performed at the climatic conditions existing at the place of the test. The PSTS shall operate as specified herein without maintenance other than the contractor's recommended normal scheduled maintenance as established by a maintenance schedule prepared and submitted by the contractor prior to the test. Prior to testing, each PSTS shall be subjected to a burn-in which shall consist of repeated applications of temperature, vibration, and ON-OFF cycles as indicated in figure 1. If a PSTS fails during burn-in, it shall be repaired and the burn-in continued until not less than 48 operating hours have been accumulated with the last two cycles failure free. Units for testing shall be selected from those units having completed the burn-in conditioning.

4.5.2.2 Test schedule.

Table I. Test schedule.

First article	Inspection comparison	Quality conformance	Test	Test paragraph	Requirement paragraph
1	2	3	4	5	6
X	X	-	Reliability	4.5.2.3	3.4
-	X	-	Maintainability	4.5.2.4	3.5
X	X	X	Burn-in	4.5.2.1	Test condition
X	X	X	Functional	4.5.2.5.1	3.7
X	X	-	Low Temperature	4.5.2.5.2	3.7
X	X	-	High Temperature	4.5.2.5.3	3.7
X	X	-	Altitude	4.5.2.5.4	3.7
X	X	-	Shock	4.5.2.5.5	3.7
X	X	-	Vibration	4.5.2.5.6	3.7
X	X	-	Humidity	4.5.2.5.7	3.7
X	X	-	Transit Cases	4.5.2.6	3.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.2.3 Reliability. Using the MTBF specified in 3.4, the PSTS shall be tested as specified herein with "accept" and "reject" criteria in accordance with MIL-STD-781, Test plan XX. Continue testing until either an "accept" or "reject" decision is reached. A failure is defined as any malfunction which connot be corrected within 15 minutes by adjustment, repair, or replacement to the using element, and is a malfunction which causes one or more of the following:

a. Failure to commence operation, cessation of operation, or degradation of performance below designated levels.

b. Damage to the system if operation is continued.

c. Personnel safety hazards.

4.5.2.3.1 Test procedure. The desired operational mode is actual use of the PSTS in testing, diagnosing, and repairing power supplies. When the equipment is not in actual use, operation shall be simulated by operating in the self test mode. All controls and operational-use connectors shall be exercised not less than every 8 operating hours. During simulated operation, the imput power voltages shall be-sequenced between nominal, high, and low voltage limits for equal time at each level. Nonconformance to 3.4 shall constitute failure of this test.

4.5.2.4 Maintainability.

4.5.2.4.1 Maintenance support. Maintenance operations required during first article testing shall be accomplished to determine conformance to 3.5.1. Failure of the support elements to maintain the PADS as specified shall constitute failure of this test. Errors or inadequacies in the manuals shall not be considered in assessing the maintenance ratio or the MTBF.

4.5.2.4.2 Maintenance ratio. The maintenance ratio shall be computed during first article testing. Nonconformance to 3.5.2 shall constitute failure of this test.

4.5.2.5 Environmental. Environmental inspection shall be performed in the order specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

Table II. Environmental inspection.

Inspection	Number of Units		
	If One Unit	If Two	
		Unit 1	Unit 2
Temperature			
Low	1	1	
High	2	2	
Altitude	3	3	
Humidity	4	4	
Vibration	5		1
Shock	6		2

4.5.2.5.1 Functional. Prior to and after each environmental test, the PSTS shall be operated to simulate normal operational modes, including operation of all switches, controls, input and output devices, displays and indicators. The PSTS performance shall be monitored using system displays as much as possible. The PSTS shall be operated with the input supply voltage at the nominal level, lowest limit, and highest limit. Failure to meet specified values for any monitored parameter, any erroneous reading, or malfunction shall constitute failure of this test. Should the pre- and post-functional test meet specifications from one environmental test to the next, the post-functional test may serve as the pre-functional test for the next environmental test.

4.5.2.5.2 Low temperature. The PSTS shall be subjected to the low temperature test specified in MIL-STD-810, Method 502, Procedure 1. The temperature shall be plus 32 degree F (0 degree C) for operating, and minus 50 degree F (minus 45 degree C) for storage. The operating test times shall be not less than 6 hours; the storage test time shall be 24 hours. Nonconformance to 3.7 or failure to meet the failure criteria of 4.5.2.5.1 shall constitute failure of this test.

4.5.2.5.3 High temperature. The PSTS shall be subjected to the high temperature test specified in MIL-STD-810, Method 501, Procedure I. The temperature shall be plus 125 degree F (plus 51 degree C) for operating, and plus 160 degree F (plus 71 degree C) for storage. The operating test time shall be not less than 6 hours; the storage test shall be 48 hours. Nonconformance to 3.7 or failure to meet the failure criteria of 4.5.2.5.1 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.5.2.5.4 Altitude. The PSTS shall be subjected to the altitude test specified in MIL-STD-810, Method 500, Procedure I. The operating altitude shall be 5,000 feet; the storage altitude shall be 50,000 feet with the PSTS in the transit cases. Nonconformance to 3.7 or failure to meet the failure criteria of 4.5.2.5.1 shall constitute failure of this test.

4.5.2.5.5 Shock. The PSTS shall be tested in accordance with MIL-STD-810, Method 516, Procedure I; the shock pulse shall have a half sine shape, 15g peak value and 11 msec duration. Nonconformance to 3.7 or failure to meet the failure criteria of 4.5.2.5.1 shall constitute failure of this test.

4.5.2.5.6 Vibration. The PSTS in transit cases shall be tested in accordance with MIL-STD-810, Method 514, Procedure XI. Nonconformance to 3.7 or failure to meet the failure criteria of 4.5.2.5.1 shall constitute failure of this test.

4.5.2.5.7 Humidity. The PSTS shall be tested in accordance with MIL-STD-810, Method 507, Procedure II. The equipment shall be operated between hours of 24 and 30 of the cycle. The PSTS may be closed in its transit cases when not in operation. Nonconformance to 3.7 or failure to meet the failure criteria of 4.5.2.5.1 shall constitute failure of this test.

4.5.2.6 Transit cases.

4.5.2.6.1 Exposure. After each environmental test involving a PSTS transit case (see 4.5.2.5.2, 4.5.2.5.3, 4.5.2.5.4, 4.5.2.5.5, 4.5.2.5.6 and 4.5.2.5.7), the case shall be opened and closed not less than three times. Nonconformance to 3.8.1 shall constitute failure of this test.

4.5.2.6.2 Drop test. The transit cases shall be tested in accordance with FED-STD-101, Method 5007, Procedure F, with exceptions as indicated herein. Dummy loads shall be substituted to simulate actual contents in weight, shape, and position in case. Packing and special conditioning of the test specimens shall not be permitted. All transit cases shall be dropped on a rigid surface sufficient to absorb the shock without displacement. Determination of height of free-fall drops shall be in accordance with FED-STD-101, Method 5007, Table I, Level A. After drop testing, each case shall be opened and closed not less than three times. Nonconformance to 3.8.2 shall constitute failure of this test.

4.5.2.6.3 Leakage. The transit cases shall be tested in accordance with MIL-STD-810, Method 512, Procedure 1. Nonconformance to 3.8.3 shall constitute failure of this test. When applicable, the tests specified in 4.5.2.6.1 and 4.5.2.6.2 shall procede the leakage test specified herein.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

4.6.1.2 Examination. Each pack shall be examined for the following defects. Presence of any defect shall be cause for delaying shipment until defects are corrected.

No.	Defect	A	B	Comm.
112.	Transit cases not desiccated, closed and latched as specified.	5.1.1		
113.	Fiberboard box not as specified.	5.1.1		
114.	Cushioning not as specified.	5.1.1		
115.	Preservation not as specified.			5.1.2
116.	Shipping container not as specified.	5.2.1	5.2.2	5.2.3
117.	Box closure not as specified.	5.2.1	5.2.2	
118.	Blocking and bracing not as specified.	5.2.1	5.2.2	5.2.3
119.	Marking not as specified.	5.3.1	5.3.1	5.3.2

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. The PSTS shall be placed in the transit case(s) provided. Desiccant shall be placed in each case in accordance with MIL-P-116, method II. The cases shall be closed and latched. Each case shall then be placed in a fiberboard box and cushioned to prevent damage. Boxes shall be in accordance with PPP-B-636, class weather-resistant, and cushioning shall meet the requirements of MIL-P-26514, type I, class 2, 2lb/ft^3 density, 2 inches thick.

5.1.2 Commercial. The PSTS shall be secured in the transit case(s) provided and preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, level B, or commercial as specified (see 6.2).

5.2.1 Level A. Each complete PSTS, preserved as specified in 5.1, shall be placed in a box conforming to PPP-601, overseas type or PPP-B-621, class 2, and shall be positioned within the box in a manner to create the least amount of cube. Box closure shall be as specified in the applicable box specification except that the strapping shall be flat and the finish shall be B. Blocking and bracing shall be in accordance with MIL-STD-1186.

5.2.2 Level B. Each complete PSTS shall be packed as specified in 5.2.1 for level A except that box shall be domestic type or class and that strapping shall be finish A or B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial. Each complete PSTS, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking.

5.3.1 Level A and level B. Levels A and B marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Commercial marking shall be in accordance with the supplementary requirements of ASTM D 3951. Additionally, the cube and gross weight shall be marked on each shipping container.

6. NOTES

6.1 Intended use. The power supply test set is intended for use in the testing of the power supply for the Position and Azimuth Determining System (PADS) as a diagnostic tool for general support maintenance.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. When a first article is required for inspection and approval, and numbers of PSTS required (see 3.2).

c. When the Government will conduct any or all of the first article examination and tests. When the Government will conduct some but not all of the first article examination and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).

d. Degree of preservation and packing required (see 5.1 and 5.2).

6.3 First article. When a first article inspection is required, the item will be tested and should be a first article PSTS. The first article should consist of one or more PSTS. The contracting officer should include specific instruction in acquisition documents regarding arrangements for examinations, tests and approval of the first article.

6.4 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional material, illustrated parts lists, and contractor's maintenance and operational manual to be furnished with each PSTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

6.5 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary, including any special tools, and instructions on shipment of PSTS.

6.6 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

Custodians:
Army - ME

User activities:
Navy - MC, AS

Review activity:
DLA - GS

Preparing activity:
Army - ME

Project 6675-0777

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

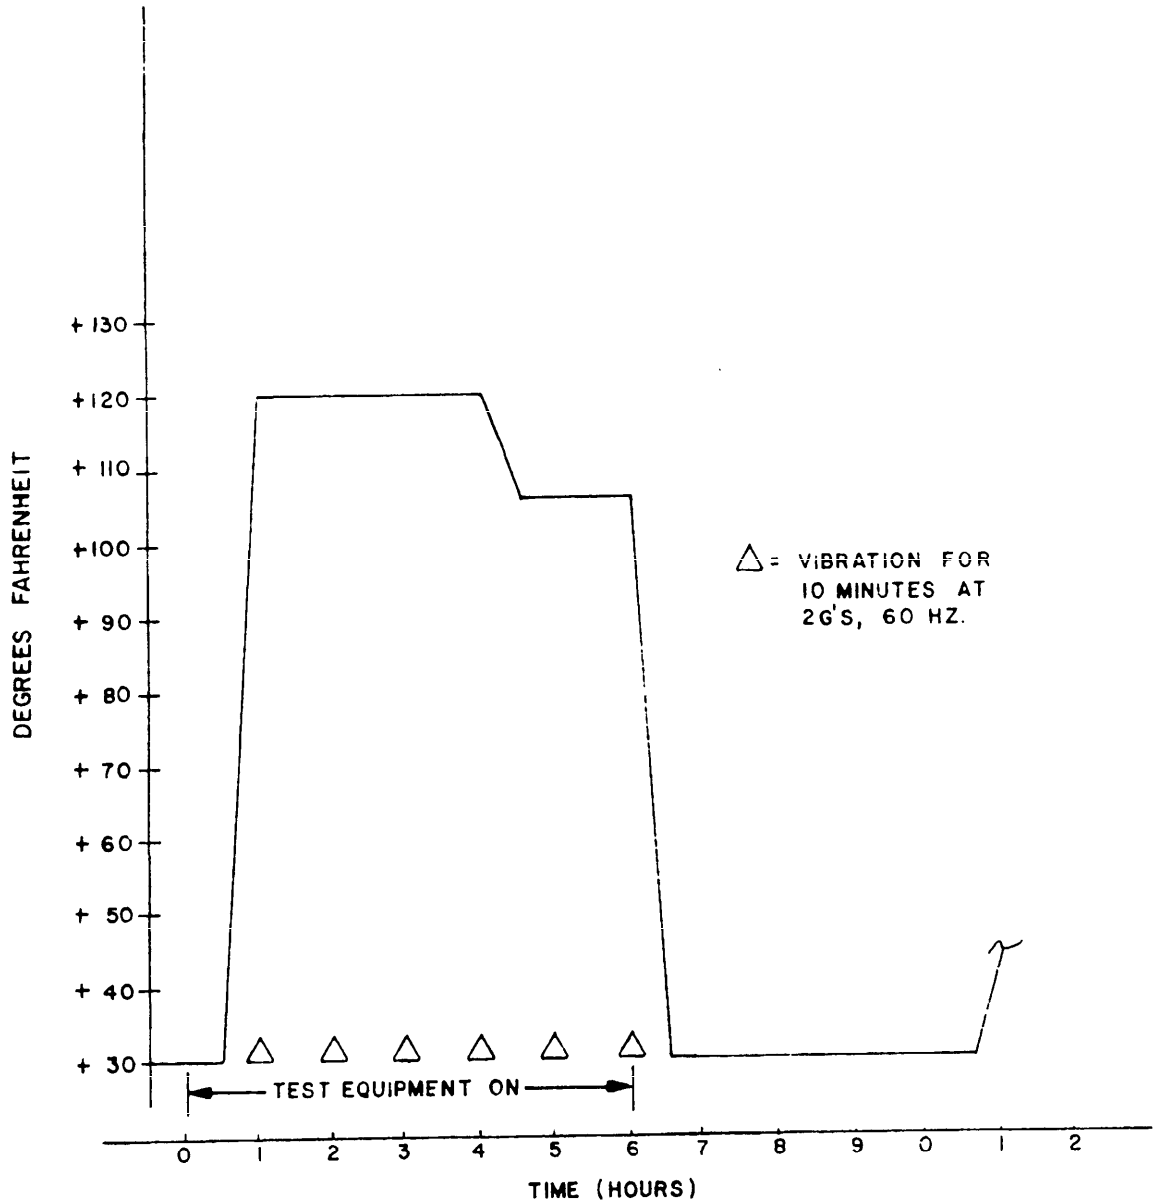


FIGURE 1. Burn-in cycle.

X-3405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-T-52957A	Test Set, Power Supply, for Position and Azimuth Determining System: AN/USM-428

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* -- Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* -- Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* -- Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R&D Center
ATTN: STRBE-DS
Ft. Belvoir, VA 22060-5166

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:11Z
Check the source to verify that this is the current version before use.