MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, BIPOLAR, SCHOTTKY TTL, MULTIPLE NOR GATES, MONOLITHIC SILICON

This amendment forms a part of MIL-M-38510/73A, dated 7 September 1983 and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* Title: Delete and substitute as shown above.

* 1.2.3, add the following case outline:

"2 C-2 (20-terminal, .350" x .350") square chip carrier package
X C-2A (20-terminal, .350" x .350") square chip carrier package"

1.3, Junction temperature (T_J), delete and substitute:

"Junction temperature (T_J) - - - - - - - - - +175°C 2/"

1.3, Thermal resistance, junction-to-case (θ_{JC}), delete and substitute the following:

"Thermal resistance, junction-to-case (θ_{JC}):
Cases A, B, C, D, X, and 2 - - - - - - - - - - (See MIL-M-38510, appendix C)"

* After footnote 1/, add:

"2/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening condition per method 5004 of MIL-STD-883."

* Distribution statement: Add as shown at bottom of this page.

PAGE 2

3.2.3, delete and substitute:

"3.2.3 Schematic circuits. Schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in the specification and shall be submitted to the qualifying activity and agent activity (DESC-ECS) as a prerequisite for qualification. All qualified manufacturer's schematics shall be maintained by the agent activity and will be available upon request."

* The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
5	5
6	6

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:11Z
Check the source to verify that this is the current version before use.

PAGE 3

TABLE I, Low-level output voltage test, Min column: Delete "0.2" and substitute "---".

TABLE I: Delete "High-level supply current per gate" and substitute "High-level supply current".

TABLE I: Delete "Low-level supply current per gate" and substitute "Low-level supply current".

PAGE 4

* TABLE II: Delete " Interim electrical parameters (pre burn-in) (method 5004)" and substitute "Interim electrical parameters (method 5004)".

* TABLE II, Group A test requirements, Class B devices: Add "10, 11".

* TABLE II, Additional electrical subgroups for group C periodic inspections: Delete in its entirety.

3.6, delete and substitute:

"3.6 Marking. Marking shall be in accordance with MIL-M-38510."

PAGE 9

* TABLE III, device type 01, terminal designations, delete and substitute the following:

"

Cases														
X,2 1/	2	3	4	6	8	9	10	12	13	14	16	18	19	20
A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Test no.	1Y	1A	1B	2Y	2A	2B	GND	3A	3B	3Y	4A	4B	4Y	V_{CC}

"

TABLE III, test numbers 5 through 12, Min limits column: Delete "0.2 and dittos".

PAGE 10

* TABLE III, device type 01, terminal designations, delete and substitute the following:

"

Cases														
2 1/	2	3	4	6	8	9	10	12	13	14	16	18	19	20
A,B,C,D	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Test No.	1Y	1A	1B	2Y	2A	2B	GND	3A	3B	3Y	4A	4B	4Y	V_{CC}

"

* After table III, add footnote 1/ as follows:

"1/ Pins not designated are NC."

PAGE 11

6.1: Delete in its entirety.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:11Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH, TD
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5962-1060)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:11Z
Check the source to verify that this is the current version before use.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510 and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, 7, and 8 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical parameters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test (method 1005 of MIL-STD-883) conditions, or equivalent.

(1) Test condition D or E, using the circuit shown on figure 3, or equivalent.

(2) T_A = +125°C minimum.

(3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.


4.5 Methods of inspection. Methods of inspection shall be specified as follows:

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:11Z
Check the source to verify that this is the current version before use.

Device type 01

Cases A, B, C and D

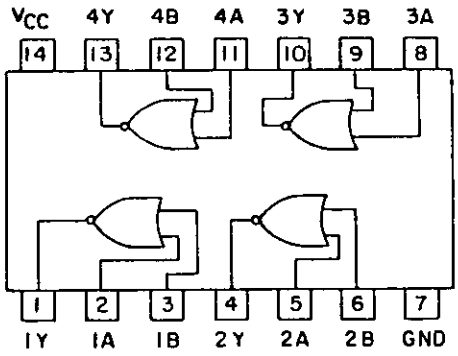

Cases 2 and X

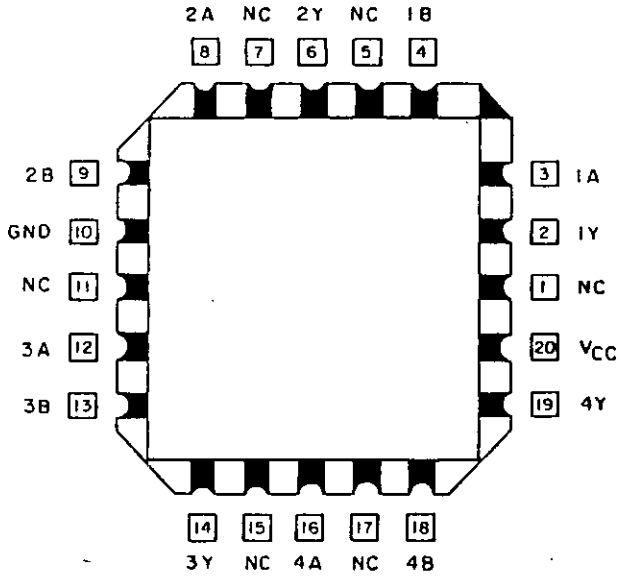


FIGURE 1. Logic diagram and terminal connections (top view).

Truth table each gate		
Input		Output
A	B	Y
H	X	L
X	H	L
L	L	H

X = Irrelevant
Positive logic: $Y = \overline{A + B}$

FIGURE 2. Truth table and logic equation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:11Z
Check the source to verify that this is the current version before use.