MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, SCHOTTKY TTL DECODERS,
MONOLITHIC SILICON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, Schottky TTL, decoder microcircuits. Two product assurance classes and a choice of case outlines and lead finishes are provided and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510, and as specified herein.

1.2.1 Device types. The device types shall be as follows:

Device type	Circuit
01	Single 3 to 8 line decoder
02	Dual 2 to 4 line decoder

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outlines. The case outlines shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
E	D-2 (16-lead, 1/4" x 7/8"), dual-in-line package
F	F-5 (16-lead, 1/4" x 3/8"), flat package

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V dc to 7.0 V dc
Input voltage range	-1.2 V dc at -18 mA to 5.5 V dc
Storage temperature range	-65°C to +150°C
Maximum power dissipation (P_D) 1/	
Device type 01	333 mW
Device type 02	405 mW
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case (θ_{JC})	
Cases E and F	(See MIL-M-38510, appendix C)
Junction temperature (T_J) 2/	+175°C

1/ Must withstand the added P_D due to short circuit test (e.g., I_{OS}).

2/ Maximum junction temperature shall not be exceeded except for allowable short duration burn-in screening conditions per method 5004 of MIL-STD-883.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

1.4 Recommended operating conditions.

Supply voltage (V_{CC})	4.5 V dc minimum to 5.5 V dc maximum
Minimum high-level input voltage (V_{IH})	2.0 V dc
Maximum low-level input voltage (V_{IL}) 3/	0.8 V dc
Case operating tempeature range (T_C)	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Logic diagram. The logic diagram shall be as specified on figure 2.

3.2.3 Truth tables. The truth tables shall be as specified on figure 3.

3.2.4 Schematic circuits. The schematic circuits shall be submitted to the preparing activity prior to inclusion of a manufacturer's device in this specification and shall be submitted to the qualifying activity as a prerequisite for qualification. All qualified manufacturers' schematics shall be maintained and available upon request.

3.2.5 Case outlines. The case outlines shall be as specified in 1.2.3.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.4).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3/ V_{IL} = 0.7 V at +125°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55°C \le T_C \le +125°C$	Device type	Limits Min	Limits Max	Units
High level output voltage	V_{OH}	V_{CC} = 4.5 V, V_{IH} = 2.0 V, V_{IL} = 0.8 V, I_{OH} = 1.0 mA, T_C = +125°C, V_{IL} = 0.7 V	01,02	2.5		V
Low level output voltage	V_{OL}	V_{CC} = 4.5 V, V_{IH} = 2.0 V, V_{IL} = 0.8 V, I_{OL} = 20 mA, T_C = +125°C, V_{IL} = 0.7 V	01,02		0.5 1/	V
Input clamp voltage	V_{IC}	V_{CC} = 4.5 V, I_{IN} = -18 mA T_C = +25°C	01,02		-1.2	V
High level input current, all inputs	I_{IH1}	V_{CC} = 5.5 V, V_{IN} = 2.7 V	01,02		50	µA
High level input current, all inputs	I_{IH2}	V_{CC} = 5.5 V, V_{IN} = 5.5 V	01,02		1.0	mA
Low level input current, all inputs	I_{IL}	V_{CC} = 5.5 V, V_{IN} = 0.5 V	01,02	-1.0	-2.0	mA
Short-circuit output current	I_{OS}	V_{CC} = 5.5 V 2/	01,02	-40	-100	mA
Supply current	I_{CC}	V_{CC} = 5.5 V	01,02		74 90	mA mA
Propagation delay time, low-to-high level through 2 levels of logic (binary select to output)	t_{PLH1}	V_{CC} = 5.0 V, C_L = 50 pF, R_L = 280Ω	01 02	2 2	12 13	ns ns
Propagation delay time, high-to-low level through 2 levels of logic (binary select to output)	t_{PHL1}		01 02	2 2	16 19	ns ns
Propagation delay time, low-to-high level through 3 levels of logic (binary select to output)	t_{PLH2}		01 02	2 2	17 18	ns ns
Propagation delay time, high-to-low level through 3 levels of logic (binary select to output)	t_{PHL2}		01 02	2 2	16 17	ns ns

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions $-55°C \leq T_C \leq +125°C$	Device type	Limits Min	Limits Max	Units
Propagation delay time low-to-high level through 3 levels of logic (enable to output)	t_{PLH3}	V_{CC} = 5.0 V, C_L = 50 pF, R_L = 280Ω	01	2	16	ns
Propagation delay time high-to-low level through 3 levels of logic (enable to output)	t_{PHL3}		01	2	16	ns
Propagation delay time low-to-high level through 2 levels of logic G2A to output	t_{PLH4}		01	2	12	ns
Propagation delay time high-to-low level through 2 levels of logic G2A to output	t_{PHL4}		01	2	16	ns
Propagation delay time low-to-high level through 2 levels of logic G2B to output	t_{PLH5}		01	2	12	ns
Propagation delay time high-to-low level through 2 levels of logic G2B to output	t_{PHL5}		01	2	16	ns
Propagation delay time low-to-high level through 2 levels of logic (enable to output)	t_{PLH6}		02	2	12	ns
Propagation delay time high-to-low level through 2 levels of logic (enable to output)	t_{PHL6}		02	2	15	ns

1/ T_C = +125°C, $V_{OL(max)}$ = 0.45 V.

2/ Not more than one output should be shorted at a time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

3.5 Electrical test requirements. The electrical test requirements for each device class shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)	
	Class S devices	Class B devices
Interim electrical parameters (pre burn-in) (method 5004)	1	1
Final electrical test parameters (method 5004)	1*,2,3,7, 9,10,11	1*,2,3,7, 9
Group A test requirements (method 5005)	1,2,3,7,8, 9,10,11	1,2,3,7,9, 10,11
Group B test requirements (method 5005) subgroup 5	1,2,3,7,8, 9,10,11	N/A
Group C end-point electrical parameters (method 5005)	N/A	1,2,3
Additional electrical subgroups for group C periodic inspections	N/A	None
Group D end-point electrical parameters (method 5005)	1,2,3	1,2,3

*PDA applies to subgroup 1 (see 4.2c).

3.7 Marking. Marking shall be in accordance with MIL-M-38510.

3.8 Microcircuit group assignment. The devices covered by this specification shall be in microcircuit group number 11 (see MIL-M-38510, appendix E).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to qualification and quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).

(1) Test condition D using the circuit shown on figure 4, or equivalent.

(2) T_A = +125°C minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) shall be as specified in MIL-M-38510.

Source: https://assist.dla.mil -- Downloaded: 202640-21T13:13Z
Check the source to verify that this is the current version before use.

4.3 Qualification inspection. Qualification inspection shall be in accordance with MIL-M-38510. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510 and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Electrical test requirements shall be as specified in table II herein.

b. Subgroups 4, 5, and 6 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical parameters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test (method 1005 of MIL-STD-883) conditions, or equivalent:

(1) Test condition D, using the circuit shown on figure 4, or equivalent.

(2) T_A = +125°C minimum.

(3) Test duration: 1,000 hours, except as permitted by appendix B of MIL-M-38510, and method 1005 of MIL-STD-883.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883. End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows.

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for the packaging of microcircuits shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this specification are intended for use for original equipment applications and logistics support of existing equipment.

6.2 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

c. Requirements for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to the contracting activity in addition to notification to the qualifying activity, if applicable.

e. Requirements for failure analysis (including required test condition of method 5003 MIL-STD-883), corrective action and reporting of results, if applicable.

f. Requirements for product assurance options.

g. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements will not apply to direct purchase by or direct shipment to the Government.

h. Requirements for "JAN" marking.

6.3 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND - - - - - - - - - - - - - - - Ground zero voltage potential.
V_{IN} - - - - - - - - - - - - - - - Voltage level at an input terminal.
V_{IC} - - - - - - - - - - - - - - - Input clamp voltage.
I_{IN} - - - - - - - - - - - - - - - Current flowing into an input terminal.

6.4 Logistic support. Lead materials and finishes (see 3.3), are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2), lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.5 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types of MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device types	Generic-industry types
01	54S138
02	54S139

6.6 Manufacturers' designators. Manufacturers' circuits which form a part of this specification are designated with an "X" as shown in table IV herein.


TABLE IV. Manufacturers' designation.

Device type	Circuits		
	A	C	E
	Texas Instruments	National Semiconductor corporation	Fairchild Semiconductor
01	X	X	X
02		X	X

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:13Z
Check the source to verify that this is the current version before use.

Device type 01

Cases E or F

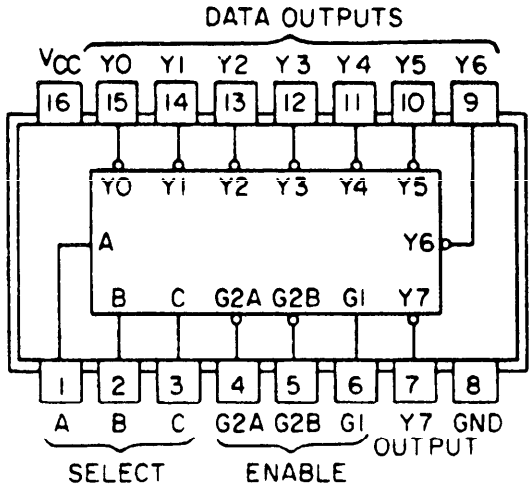

Device type 02

Cases E or F

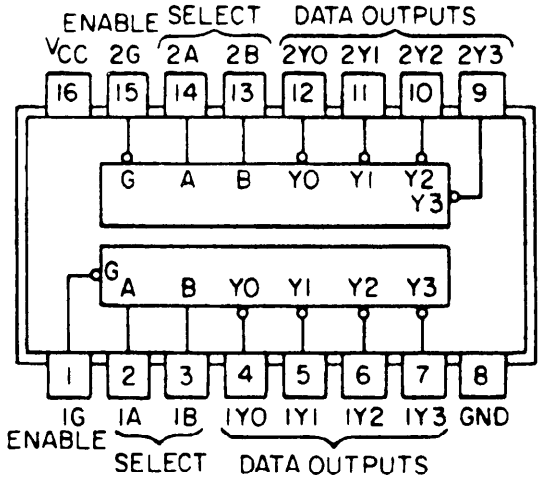


FIGURE 1. Terminal connections (top view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

Device type 01

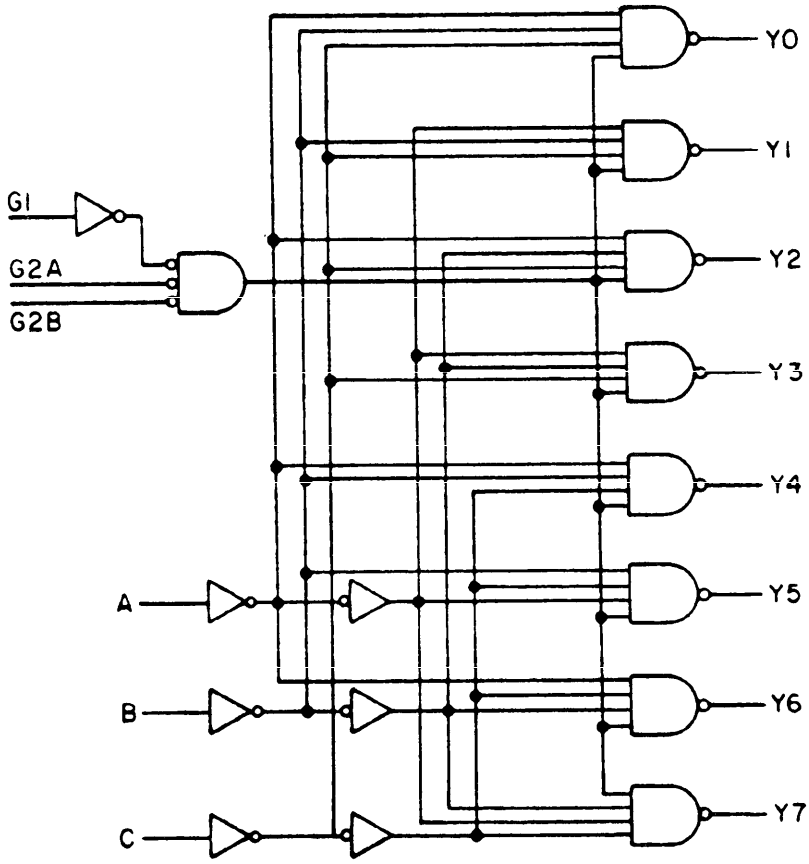


FIGURE 2. Logic diagrams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

Device type 02

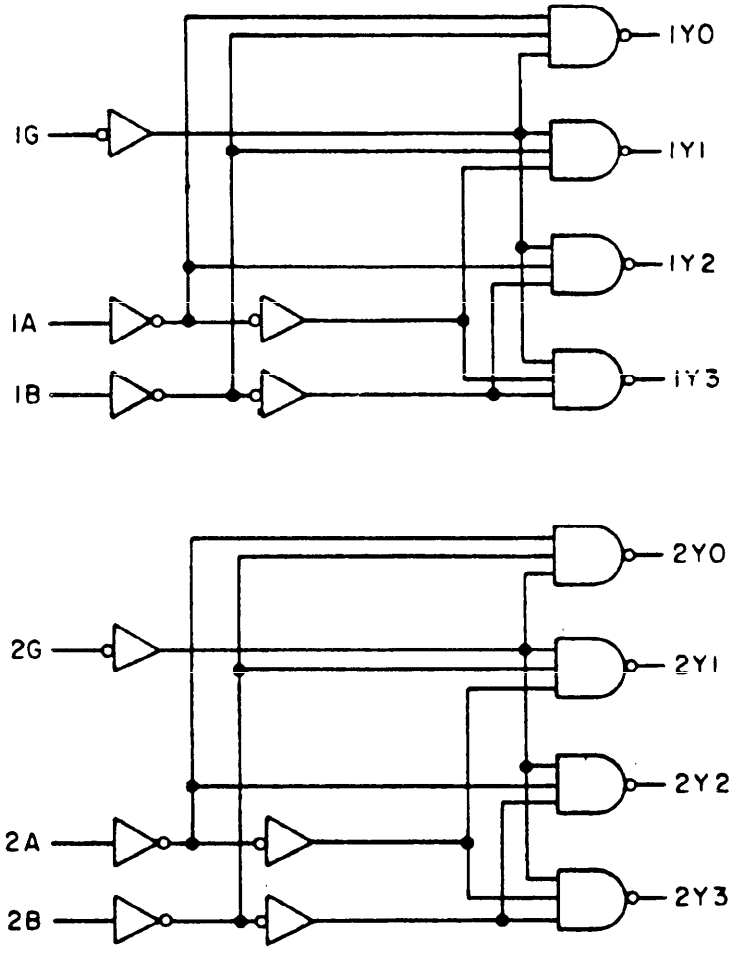


FIGURE 2. Logic diagrams - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

Device type 01

Inputs					Outputs							
Enable		Select										
G1	G2*	C	B	A	Y0	Y1	Y2	Y3	Y4	Y5	Y6	Y7
X	H	X	X	X	H	H	H	H	H	H	H	H
L	X	X	X	X	H	H	H	H	H	H	H	H
H	L	L	L	L	L	H	H	H	H	H	H	H
H	L	L	L	H	H	L	H	H	H	H	H	H
H	L	L	H	L	H	H	L	H	H	H	H	H
H	L	L	H	H	H	H	H	L	H	H	H	H
H	L	H	L	L	H	H	H	H	L	H	H	H
H	L	H	L	H	H	H	H	H	H	L	H	H
H	L	H	H	L	H	H	H	H	H	H	L	H
H	L	H	H	H	H	H	H	H	H	H	H	L

*G2 = G2A + G2B

H = high level, L = low level, X = irrelevant.

Device type 02


Inputs			Outputs			
Enable	Select					
G	B	A	Y0	Y1	Y2	Y3
H	X	X	H	H	H	H
L	L	L	L	H	H	H
L	L	H	H	L	H	H
L	H	L	H	H	L	H
L	H	H	H	H	H	L

H = high level, L = low level, X = irrelevant

FIGURE 3. Truth tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

Device type 01

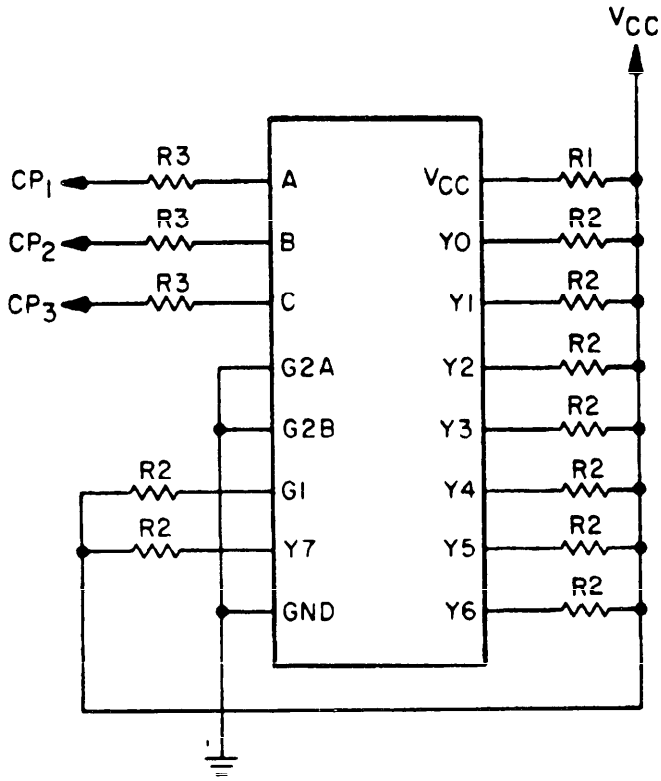

NOTES:
1. R1 = 10Ω maximum.
   R2 = 270Ω ±5%.
   R3 = 27Ω maximum.
2. V_{CC} should be a minimum of 5.0 V at the input to the device V_{CC} terminal.
3. Timing waveforms as follows:
   CP_1 duty cycle = 50% ±15%;
   V_{IL} = -0.5 V minimum to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.


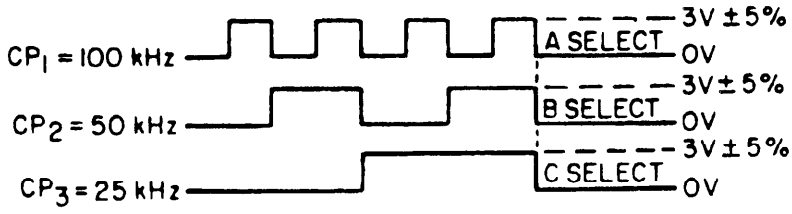


FIGURE 4. Burn-in and life test circuits.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

Device type 02

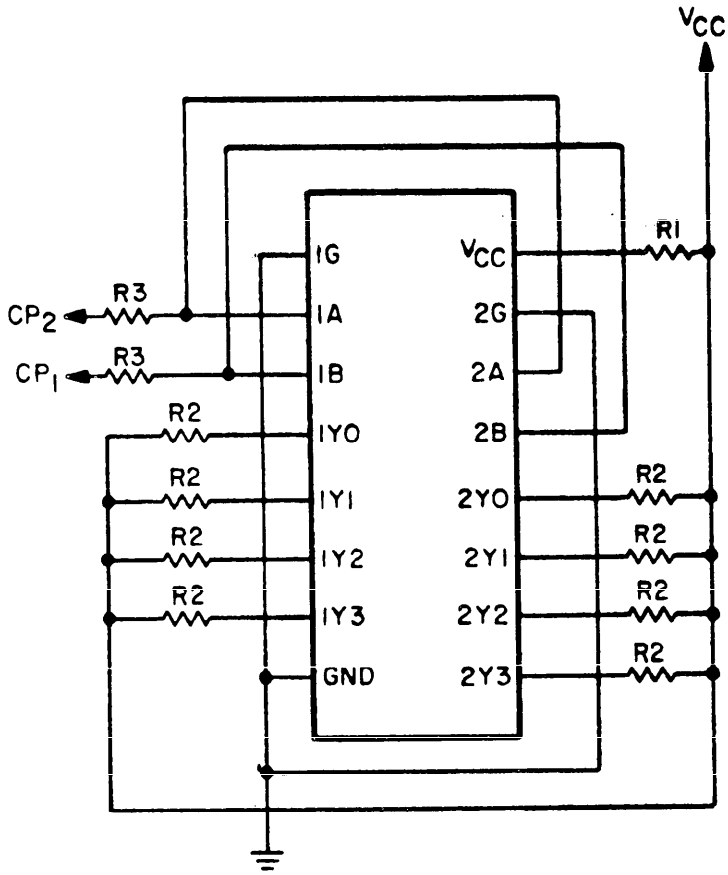

NOTES:
1. R1 = 10Ω maximum.
   R2 = 270Ω ±5%.
   R3 = 27Ω maximum.
2. V_{CC} shall be high enough to insure that 5.0 V minimum is present at V_{CC} device terminal.
3. Timing waveform as follows:
   CP_1 duty cycle = 50% ±15%;
   V_{IL} = -0.5 V minimum to 0.8 V maximum; V_{IH} = 2.0 V minimum to 5.5 V maximum.



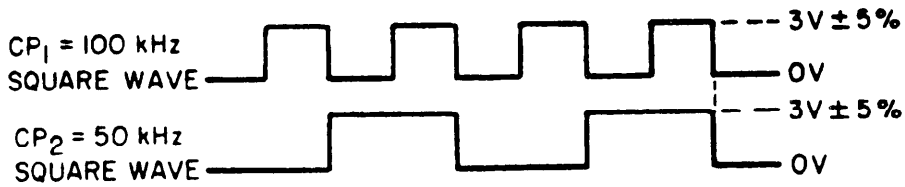


FIGURE 4. Burn-in and life test circuits - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

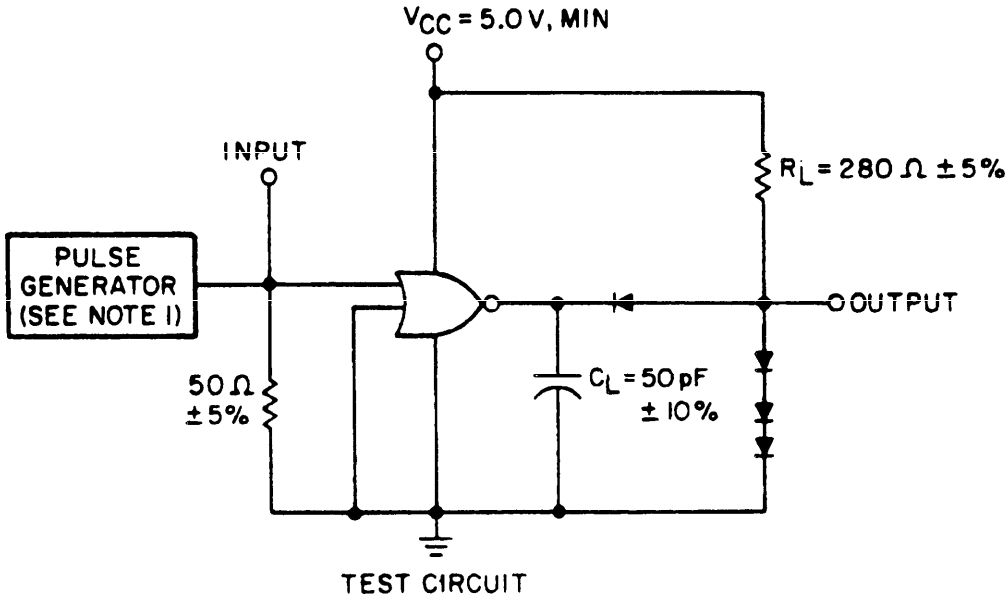

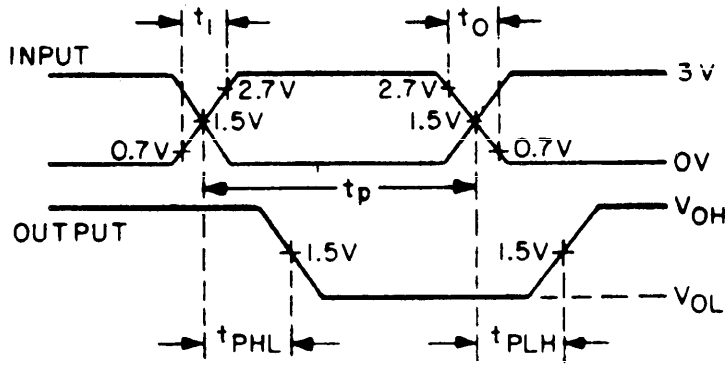

NOTES:
1. Pulse generator has the following characteristics: $t_1 = t_0 < 2.5$ ns, t_p = 200 ns, $Z_{OUT} \approx 50\Omega$.
2. C_L = 50 pF ±10%, including scope probe, wiring, and stray capacitance, without package in test fixture.
3. Voltage measurements are to be made with respect to network ground terminal.
4. All diodes are 1N3064, or equivalent.

FIGURE 5. Switching time test circuit and waveforms for device types 01 and 02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be H $\geq$ 2.0 V, or L $\leq$ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E,F Test no.	1 A	2 B	3 C	4 G2A	5 G2B	6 G1	7 Y7	8 GND	9 Y6	10 Y5	11 Y4	12 Y3	13 Y2	14 Y1	15 Y0	16 V_{CC}	Measured terminal	Test limits Min	Test limits Max	Unit
1 T_C = +25°C	V_{OH}	3006	1						.8 V		GND							-1 mA	4.5 V	Y0	2.5		V
		"	2						"		"							"	"	Y1	"		"
		"	3						"		"							"	"	Y2	"		"
		"	4						"		"				-1 mA			"	"	Y3	"		"
		"	5						"		"				"			"	"	Y4	"		"
		"	6						"		"				"			"	"	Y5	"		"
		"	7						"		"				"			"	"	Y6	"		"
		"	8						"	-1 mA	"	-1 mA	-1 mA	-1 mA	"	-1 mA	-1 mA	"	"	Y7	"		"
	V_{OL}	3007	9	.8 V	.8 V	.8 V	.8 V	.8 V	2.0 V									20 mA	"	Y0		0.5	"
		"	10	2.0 V	.8 V	2.0 V	"	"	"									"	"	Y1		"	"
		"	11	.8 V	2.0 V	2.0 V	"	"	"									"	"	Y2		"	"
		"	12	2.0 V	2.0 V	"	"	"	"						20 mA			"	"	Y3		"	"
		"	13	.8 V	.8 V	"	"	"	"						"	20 mA		"	"	Y4		"	"
		"	14	2.0 V	.8 V	"	"	"	"						"	"	20 mA	"	"	Y5		"	"
		"	15	.8 V	2.0 V	"	"	"	"						"	"	"	"	"	Y6		"	"
		"	16	2.0 V	2.0 V	"	"	"	"	20 mA	"	20 mA	20 mA	20 mA	"	"	"	"	"	Y7		"	"
	V_{IC}		17	-18 mA															"	A		-1.2	"
			18		-18 mA														"	B		"	"
			19			-18 mA													"	C		"	"
			20				-18 mA												"	G2A		"	"
			21					-18 mA											"	G2B		"	"
			22						-18 mA										"	G1		"	"
	I_{IL}	3009	23	0.5 V															5.5 V	A	-1.0	-2.0	mA
		"	24		0.5 V														"	B	"	"	"
		"	25			0.5 V													"	C	"	"	"
		"	26				0.5 V												"	G2A	"	"	"
		"	27					0.5 V											"	G2B	"	"	"
		"	28						0.5 V										"	G1	"	"	"
	I_{IH1}	3010	29	2.7 V															"	A		50	µA
		"	30		2.7 V														"	B		"	"
		"	31			2.7 V													"	C		"	"
		"	32				2.7 V												"	G2A		"	"
		"	33					2.7 V											"	G2B		"	"
		"	34						2.7 V										"	G1		"	"
	I_{IH2}	"	35	5.5 V															"	A		1.0	mA
		"	36		5.5 V														"	B		"	"
		"	37			5.5 V													"	C		"	"
		"	38				5.5 V												"	G2A		"	"
		"	39					5.5 V											"	G2B		"	"
		"	40						5.5 V										"	G1		"	"
	I_{OS}	3011	41				5.5 V	5.5 V										GND	"	Y0	-40	-100	"
		"	42				"	"										"	"	Y1	"	"	"
		"	43				"	"										"	"	Y2	"	"	"
		"	44				"	"										"	"	Y3	"	"	"
		"	45				"	"										"	"	Y4	"	"	"
		"	46				"	"										"	"	Y5	"	"	"
		"	47				"	"										"	"	Y6	"	"	"
		"	48				"	"		GND		GND	GND	GND	GND	GND	GND	"	"	Y7	"	"	"
	I_{CC}	3005	49	GND	GND	GND	GND	GND	GND		"								"	V_{CC}		74	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be H ≥ 2.0 V, or L ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E,F Test no.	1 A	2 B	3 C	4 G2A	5 G2B	6 G1	7 Y7	8 GND	9 Y6	10 Y5	11 Y4	12 Y3	13 Y2	14 Y1	15 Y0	16 V_{CC}	Measured terminal	Test Limits Min	Test Limits Max	Unit
2 T_C = +125°C	Same tests, terminal conditions, and limits as for subgroup 1, except delete V_{IC} tests. $V_{OL(max)}$ = 0.45 V, V_{IL} = 0.7 V																					
3 T_C = -55°C	Same tests, terminal conditions, and limits as for subgroup 1, except delete V_{IC} tests.																					
7 1/ T_C = +25°C	Truth table tests	3014	50	A	A	A	A	A	A	H	GND	H	H	H	H	H	H	H	5.0 V	2/			
		"	51	B	A	A	"	"	"	"	"	"	"	"	"	"	"	"	"				
		"	52	"	B	A	"	"	"	"	"	"	"	"	"	"	"	"	"				
		"	53	"	"	B	"	"	"	"	"	"	"	"	"	"	"	"	"				
		"	54	"	"	"	B	"	"	"	"	"	"	"	"	"	"	"	"				
		"	55	"	"	"	A	B	"	"	"	"	"	"	"	"	"	"	"				
		"	56	"	"	"	A	B	B	"	"	"	"	"	"	"	"	"	"				
		"	57	"	"	"	B	A	B	"	"	"	"	"	"	"	"	"	"				
		"	58	"	"	"	"	B	B	"	"	"	"	"	"	"	"	"	"				
		"	59	"	"	"	"	"	A	"	"	"	"	"	"	"	"	L	"				
		"	60	A	"	"	"	"	"	"	"	"	"	"	"	"	L	H	"				
		"	61	B	A	"	"	"	"	"	"	"	"	"	"	L	H	"	"				
		"	62	A	A	"	"	"	"	"	"	"	"	"	L	H	"	"	"				
		"	63	B	B	A	"	"	"	"	"	"	"	L	H	"	"	"	"				
		"	64	A	B	"	"	"	"	"	"	"	L	H	"	"	"	"	"				
		"	65	B	A	"	"	"	"	"	"	L	H	"	"	"	"	"	"				
		"	66	A	A	"	"	"	"	L	"	H	H	"	"	"	"	"	"				
8	Same tests and terminal conditions as subgroup 7, except T_C = -55°C, T_C = +125°C, and delete V_{IC} tests.																					
9 T_C = +25°C	t_{PLH1}	3003 (Fig. 5)	67	IN	GND	GND	GND	GND	5.0 V		GND					OUT		OUT	5.0 V	A to Y0	2	12	ns
		"	68	"	5.0 V	GND	"	"	"		"			OUT					"	A to Y2	"	"	"
		"	69	"	GND	5.0 V	"	"	"		"								"	A to Y4	"	"	"
		"	70	"	5.0 V	5.0 V	"	"	"		"	OUT							"	A to Y6	"	"	"
		"	71	GND	IN	GND	"	"	"		"							OUT	"	B to Y0	"	"	"
		"	72	5.0 V	"	GND	"	"	"		"			OUT			OUT		"	B to Y1	"	"	"
		"	73	GND	"	5.0 V	"	"	"		"								"	B to Y4	"	"	"
		"	74	5.0 V	"	5.0 V	"	"	"		"		OUT						"	B to Y5	"	"	"
		"	75	GND	GND	IN	"	"	"		"							OUT	"	C to Y0	"	"	"
		"	76	5.0 V	GND	"	"	"	"		"						OUT		"	C to Y1	"	"	"
		"	77	GND	5.0 V	"	"	"	"		"					OUT			"	C to Y2	"	"	"
		"	78	5.0 V	5.0 V	"	"	"	"		"				OUT				"	C to Y3	"	"	"
	t_{PHL1}	"	79	IN	GND	GND	"	"	"		"							OUT	"	A to Y0	"	16	"
		"	80	IN	5.0 V	GND	"	"	"		"					OUT			"	A to Y2	"	"	"
		"	81	IN	GND	5.0 V	"	"	"		"			OUT					"	A to Y4	"	"	"
		"	82	IN	5.0 V	5.0 V	"	"	"		"	OUT							"	A to Y6	"	"	"
		"	83	GND	IN	GND	"	"	"		"							OUT	"	B to Y0	"	"	"
		"	84	5.0 V	"	GND	"	"	"		"			OUT			OUT		"	B to Y1	"	"	"
		"	85	GND	"	5.0 V	"	"	"		"								"	B to Y4	"	"	"
		"	86	5.0 V	"	5.0 V	"	"	"		"		OUT						"	B to Y5	"	"	"
		"	87	GND	GND	IN	"	"	"		"							OUT	"	C to Y0	"	"	"
		"	88	5.0 V	GND	"	"	"	"		"						OUT		"	C to Y1	"	"	"
		"	89	GND	5.0 V	"	"	"	"		"					OUT			"	C to Y2	"	"	"
		"	90	5.0 V	5.0 V	"	"	"	"		"				OUT				"	C to Y3	"	"	"
	t_{PLH2}	"	91	IN	GND	GND	"	"	"		"						OUT		"	A to Y1	"	17	"
		"	92	"	5.0 V	GND	"	"	"		"				OUT				"	A to Y3	"	"	"
		"	93	"	GND	5.0 V	"	"	"		"		OUT						"	A to Y5	"	"	"
		"	94	"	5.0 V	5.0 V	"	"	"	OUT	"								"	A to Y7	"	"	"
		"	95	GND	IN	GND	"	"	"		"					OUT			"	B to Y2	"	"	"
		"	96	5.0 V	"	GND	"	"	"		"				OUT				"	B to Y3	"	"	"
		"	97	GND	"	5.0 V	"	"	"		"	OUT							"	B to Y6	"	"	"
		"	98	5.0 V	"	5.0 V	"	"	"	OUT	"								"	B to Y7	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be H ≥ 2.0 V, or L ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E,F Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Test limits Min	Test limits Max	Unit
				A	B	C	G2A	G2B	G1	Y7	GND	Y6	Y5	Y4	Y3	Y2	Y1	YO	V_{CC}				
9 T_C = +25°C	t_{PLH2}	3003 (Fig. 5)	99	GND	GND	IN	GND	GND	5.0 V		GND			OUT					5.0 V	C to Y4	2	17	ns
		"	100	5.0 V	GND	"	"	"	"		"		OUT						"	C to Y5	"	"	"
		"	101	GND	5.0 V	"	"	"	"		"	OUT							"	C to Y6	"	"	"
		"	102	5.0 V	5.0 V	"	"	"	"	OUT	"								"	C to Y7	"	"	"
	t_{PHL2}	"	103	IN	GND	GND	"	"	"		"				OUT		OUT		"	A to Y1	"	16	"
		"	104	"	5.0 V	GND	"	"	"		"		OUT						"	A to Y3	"	"	"
		"	105	"	GND	5.0 V	"	"	"		"								"	A to Y5	"	"	"
		"	106	"	5.0 V	5.0 V	"	"	"	OUT	"					OUT			"	A to Y7	"	"	"
		"	107	GND	IN	GND	"	"	"		"				OUT				"	B to Y2	"	"	"
		"	108	5.0 V	"	GND	"	"	"		"								"	B to Y3	"	"	"
		"	109	GND	"	5.0 V	"	"	"		"	OUT							"	B to Y6	"	"	"
		"	110	5.0 V	"	5.0 V	"	"	"	OUT	"								"	B to Y7	"	"	"
		"	111	GND	GND	IN	"	"	"		"			OUT					"	C to Y4	"	"	"
		"	112	5.0 V	GND	"	"	"	"		"		OUT						"	C to Y5	"	"	"
		"	113	GND	5.0 V	"	"	"	"		"	OUT							"	C to Y6	"	"	"
		"	114	5.0 V	5.0 V	"	"	"	"	OUT	"								"	C to Y7	"	"	"
	t_{PLH3}	"	115	GND	GND	GND	"	"	IN		"							OUT	"	G1 to YO	"	"	"
		"	116	5.0 V	GND	"	"	"	"		"						OUT		"	G1 to Y1	"	"	"
		"	117	GND	5.0 V	"	"	"	"		"					OUT			"	G1 to Y2	"	"	"
		"	118	5.0 V	5.0 V	"	"	"	"		"				OUT				"	G1 to Y3	"	"	"
		"	119	GND	GND	5.0 V	"	"	"		"			OUT					"	G1 to Y4	"	"	"
		"	120	5.0 V	GND	"	"	"	"		"		OUT						"	G1 to Y5	"	"	"
		"	121	GND	5.0 V	"	"	"	"		"	OUT							"	G1 to Y6	"	"	"
		"	122	5.0 V	5.0 V	"	"	"	"	OUT	"								"	G1 to Y7	"	"	"
	t_{PHL3}	"	123	GND	GND	GND	"	"	"		"							OUT	"	G1 to YO	"	"	"
		"	124	5.0 V	GND	"	"	"	"		"						OUT		"	G1 to Y1	"	"	"
		"	125	GND	5.0 V	"	"	"	"		"					OUT			"	G1 to Y2	"	"	"
		"	126	5.0 V	5.0 V	"	"	"	"		"				OUT				"	G1 to Y3	"	"	"
		"	127	GND	GND	5.0 V	"	"	"		"			OUT					"	G1 to Y4	"	"	"
		"	128	5.0 V	GND	"	"	"	"		"		OUT						"	G1 to Y5	"	"	"
		"	129	GND	5.0 V	"	"	"	"		"	OUT							"	G1 to Y6	"	"	"
		"	130	5.0 V	5.0 V	"	"	"	"	OUT	"								"	G1 to Y7	"	"	"
	t_{PLH4}	"	131	GND	GND	GND	IN	"	5.0 V		"							OUT	"	G2A to YO	"	12	"
		"	132	5.0 V	GND	"	"	"	"		"						OUT		"	G2A to Y1	"	"	"
		"	133	GND	5.0 V	"	"	"	"		"					OUT			"	G2A to Y2	"	"	"
		"	134	5.0 V	5.0 V	"	"	"	"		"				OUT				"	G2A to Y3	"	"	"
		"	135	GND	GND	5.0 V	"	"	"		"			OUT					"	G2A to Y4	"	"	"
		"	136	5.0 V	GND	"	"	"	"		"		OUT						"	G2A to Y5	"	"	"
		"	137	GND	5.0 V	"	"	"	"		"	(OUT							"	G2A to Y6	"	"	"
		"	138	5.0 V	5.0 V	"	"	"	"	OUT	"								"	G2A to Y7	"	"	"
	t_{PHL4}	"	139	GND	GND	GND	"	"	"		"							OUT	"	G2A to YO	"	16	"
		"	140	5.0 V	GND	"	"	"	"		"						OUT		"	G2A to Y1	"	"	"
		"	141	GND	5.0 V	"	"	"	"		"					OUT			"	G2A to Y2	"	"	"
		"	142	5.0 V	5.0 V	"	"	"	"		"				OUT				"	G2A to Y3	"	"	"
		"	143	GND	GND	5.0 V	"	"	"		"			OUT					"	G2A to Y4	"	"	"
		"	144	5.0 V	GND	"	"	"	"		"		OUT						"	G2A to Y5	"	"	"
		"	145	GND	5.0 V	"	"	"	"		"	(OUT							"	G2A to Y6	"	"	"
		"	146	5.0 V	5.0 V	"	"	"	"	OUT	"								"	G2A to Y7	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be H $\geq$ 2.0 V, or L $\leq$ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E,F Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Test limits Min	Test limits Max	Unit
				A	B	C	G2A	G2B	G1	Y7	GND	Y6	Y5	Y4	Y3	Y2	Y1	YO	V_{CC}				
9 T_C = +25°C	t_{PLH5}	3003 (Fig. 5)	147	GND	GND	GND	GND	IN	5.0 V		GND						OUT	OUT	5.0 V	G2B to YO	2	12	ns
		"	148	5.0 V	GND	"	"	"	"		"								"	G2B to Y1	"	"	"
		"	149	GND	5.0 V	"	"	"	"		"					OUT			"	G2B to Y2	"	"	"
		"	150	5.0 V	5.0 V	"	"	"	"		"				OUT				"	G2B to Y3	"	"	"
		"	151	GND	GND	5.0 V	"	"	"		"			OUT					"	G2B to Y4	"	"	"
		"	152	5.0 V	GND	"	"	"	"		"		OUT						"	G2B to Y5	"	"	"
		"	153	GND	5.0 V	"	"	"	"		"	OUT							"	G2B to Y6	"	"	"
		"	154	5.0 V	5.0 V	"	"	"	"	OUT	"								"	G2B to Y7	"	"	"
	t_{PHL5}	"	155	GND	GND	GND	"	"	"		"							CUT	"	G2B to YO	"	16	"
		"	156	5.0 V	GND	"	"	"	"		"						OUT		"	G2B to Y1	"	"	"
		"	157	GND	5.0 V	"	"	"	"		"					OUT			"	G2B to Y2	"	"	"
		"	158	5.0 V	5.0 V	"	"	"	"		"				OUT				"	G2B to Y3	"	"	"
		"	159	GND	GND	5.0 V	"	"	"		"			OUT					"	G2B to Y4	"	"	"
		"	160	5.0 V	GND	"	"	"	"		"		OUT						"	G2B to Y5	"	"	"
		"	161	GND	5.0 V	"	"	"	"		"	OUT							"	G2B to Y6	"	"	"
		"	162	5.0 V	5.0 V	"	"	"	"	OUT	"								"	G2B to Y7	"	"	"
10	Same as subgroup 9 except t_{PLH1} = 18, t_{PHL1} = 24, t_{PLH2} = 25, t_{PHL2} = 24, T_C = +125°C (Max) t_{PLH3} = 24, t_{PHL3} = 24, t_{PLH4} = 18, t_{PHL4} = 24, t_{PLH5} = 18, t_{PHL5} = 24																						
11	Same as subgroup 10 except T_C = -55°C																						

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be H ≥ 2.0 V, or L ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E,F Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	Measured terminal	Test limits Min	Test limits Max	Unit
				1G	1A	1B	1Y0	1Y1	1Y2	1Y3	GND	2Y3	2Y2	2Y1	2Y0	2B	2A	2G	V_{CC}				
1 T_C = +25°C	V_{OH}	3006	1	2.0 V					-1.0 mA	-1.0 mA	GND								4.5 V	1Y3	2.5		V
			2	"				-1.0 mA			"								"	1Y2	"		"
			3	"							"								"	1Y1	"		"
			4				-1.0 mA				"	-1.0 mA							"	1Y0	"		"
			5								"		-1.0 mA					2.0 V	"	2Y3	"		"
			6								"			-1.0 mA				"	"	2Y2	"		"
			7								"							"	"	2Y1	"		"
			8								"							"	"	2Y0	"		"
	V_{OL}	3007	9	.8 V	2.0 V	2.0 V			20 mA	20 mA	"					2.0 V	2.0 V	.8 V	"	1Y3		0.5	"
		"	10	"	.8 V	2.0 V					"					2.0 V	.8 V	"	"	1Y2		"	"
		"	11	"	2.0 V	.8 V		20 mA			"					.8 V	2.0 V	"	"	1Y1		"	"
		"	12	"	.8 V	.8 V	20 mA				"	20 mA				.8 V	.8 V	"	"	1Y0		"	"
		"	13								"		20 mA							2Y3			
		"	14								"			20 mA						2Y2			
		"	15								"				20 mA					2Y1			
		"	16								"									2Y0			
	V_{IC}		17	-18 mA							"								"	1G		-1.2	"
			18		-18 mA						"								"	1A		"	"
			19			-18 mA					"								"	1B		"	"
			20								"					-18 mA			"	2B		"	"
			21								"						-18 mA		"	2A		"	"
			22								"							-18 mA	"	2G		"	"
	I_{IL}	3009	23	0.5 V							"								5.5 V	1G	-1.0	-2.0	mA
		"	24		0.5 V						"								"	1A	"	"	"
		"	25			0.5 V					"					0.5 V			"	1B	"	"	"
		"	26								"						0.5 V		"	2B	"	"	"
		"	27								"							0.5 V	"	2A	"	"	"
		"	28								"								"	2G	"	"	"
	I_{IH1}	3010	29	2.7 V							"								"	1G		50	µA
		"	30		2.7 V						"								"	1A		"	"
		"	31			2.7 V					"								"	1B		"	"
		"	32								"					2.7 V			"	2B		"	"
		"	33								"						2.7 V		"	2A		"	"
		"	34								"							2.7 V	"	2G		"	"
	I_{IH2}	"	35	5.5 V							"								"	1G		1.0	mA
		"	36		5.5 V						"								"	1A		"	"
		"	37			5.5 V					"								"	1B		"	"
		"	38								"					5.5 V			"	2B		"	"
		"	39								"						5.5 V		"	2A		"	"
		"	40								"							5.5 V	"	2G		"	"
	I_{OS}	3011	41	5.5 V			GND				"								"	1Y0	-40	-100	"
		"	42	"				GND			"								"	1Y1	"	"	"
		"	43	"					GND		"								"	1Y2	"	"	"
		"	44							GND	"								"	1Y3	"	"	"
		"	45								"	GND							"	2Y3	"	"	"
		"	46								"		GND						"	2Y2	"	"	"
		"	47								"			GND				5.5 V	"	2Y1	"	"	"
		"	48								"				GND			"	"	2Y0	"	"	"
	I_{CC}	3005	49	GND	GND	GND					"					GND	GND	GND	"	V_{CC}	---	90	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be H ≥ 2.0 V, or L ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E,F Test no.	1 1G	2 1A	3 1B	4 1Y0	5 1Y1	6 1Y2	7 1Y3	8 GND	9 2Y3	10 2Y2	11 2Y1	12 2Y0	13 2B	14 2A	15 2G	16 V_{CC}	Measured terminal	Test limits Min	Test limits Max	Unit
2 T_C = +125°C	Same tests, terminal conditions, and limits as for subgroup 1, except delete V_{IC} tests. $V_{OL(max)}$ = 0.45 V, V_{IL} = 0.7 V																						
3 T_C = -55°C	Same tests, terminal conditions, and limits as for subgroup 1, except delete V_{IC} tests.																						
7 1/ T_C = +25°C	Truth table tests	3014	50	A	A	A	H	H	H	H	GND	H	H	H	H	A	A	A	5.0 V		2/			
		"	51	"	B	A	"	"	"	"	"	"	"	"	"	B	B	"	"					
		"	52	"	A	B	"	"	"	"	"	"	"	"	"	"	A	"	"					
		"	53	"	B	"	"	"	"	"	"	"	"	"	"	"	B	"	"					
		"	54	B	B	"	L	"	"	"	"	"	"	"	L	"	B	B	"					
		"	55	"	A	"	H	L	"	"	"	"	"	L	H	"	A	"	"					
		"	56	"	B	A	"	H	L	"	"	"	L	H	"	A	B	"	"					
		"	57	"	A	A	"	H	H	L	"	L	H	H	"	A	A	"	"					
8	Same tests and terminal conditions as subgroup 7, except T_C = -55°C, T_C = +125°C, and delete V_{IC} tests.																						
9 T_C = +25°C	t_{PLH1}	3003 (Fig. 5)	58	GND	IN	GND	OUT		OUT		GND								5.0 V	1A to 1Y0	2	13	ns
		"	59	"	IN	5.0 V					"								"	1A to 1Y2	"	"	"
		"	60	"	GND	IN	OUT				"								"	1B to 1Y0	"	"	"
		"	61	"	5.0 V	IN		OUT			"								"	1B to 1Y1	"	"	"
		"	62								"				OUT	GND	IN	GND	"	2A to 2Y0	"	"	"
		"	63								"		OUT			5.0 V	IN		"	2A to 2Y2	"	"	"
		"	64								"				OUT	IN	GND		"	2B to 2Y0	"	"	"
		"	65								"			OUT		IN	5.0 V		"	2B to 2Y1	"	"	"
	t_{PHL1}	"	66	GND	IN	GND	OUT				"								"	1A to 1Y0	"	19	"
		"	67	"	IN	5.0 V			OUT		"								"	1A to 1Y2	"	"	"
		"	68	"	GND	IN	OUT				"								"	1B to 1Y0	"	"	"
		"	69	"	5.0 V	IN		OUT			"								"	1B to 1Y1	"	"	"
		"	70								"				OUT	GND	IN	GND	"	2A to 2Y0	"	"	"
		"	71								"		OUT			5.0 V	IN		"	2A to 2Y2	"	"	"
		"	72								"				OUT	IN	GND		"	2B to 2Y0	"	"	"
		"	73								"			OUT		IN	5.0 V		"	2B to 2Y1	"	"	"
	t_{PLH2}	"	74	GND	IN	GND		OUT		OUT	"								"	1A to 1Y1	"	18	"
		"	75	"	IN	5.0 V			OUT		"								"	1A to 1Y3	"	"	"
		"	76	"	GND	IN				OUT	"								"	1B to 1Y2	"	"	"
		"	77	"	5.0 V	IN					"								"	1B to 1Y3	"	"	"
		"	78								"				OUT	GND	IN	GND	"	2A to 2Y1	"	"	"
		"	79								"	OUT				5.0 V	IN		"	2A to 2Y3	"	"	"
		"	80								"		OUT			IN	GND		"	2B to 2Y2	"	"	"
		"	81								"	OUT				IN	5.0 V		"	2B to 2Y3	"	"	"
	t_{PHL2}	"	82	GND	IN	GND		OUT		OUT	"								"	1A to 1Y1	"	17	"
		"	83	"	IN	5.0 V			OUT		"								"	1A to 1Y3	"	"	"
		"	84	"	GND	IN				OUT	"								"	1B to 1Y2	"	"	"
		"	85	"	5.0 V	IN					"								"	1B to 1Y3	"	"	"
		"	86								"				OUT	GND	IN	GND	"	2A to 2Y1	"	"	"
		"	87								"	OUT				5.0 V	IN		"	2A to 2Y3	"	"	"
		"	88								"		OUT			IN	GND		"	2B to 2Y2	"	"	"
		"	89								"	OUT				IN	5.0 V		"	2B to 2Y3	"	"	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:13Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be H ≥ 2.0 V, or L ≤ 0.8 V, or open).

Subgroup	Symbol	MIL-STD-883 method	Cases E,F Test no.	1 1G	2 1A	3 1B	4 1Y0	5 1Y1	6 1Y2	7 1Y3	8 GND	9 2Y3	10 2Y2	11 2Y1	12 2Y0	13 2B	14 2A	15 2G	16 V_{CC}	Measured terminal	Test limits Min	Test limits Max	Unit
9 T_C = +25°C	t_{PLH6}	3003 (Fig. 5)	90	IN	GND	GND	OUT				GND								5.0 V	1G to 1Y0	2	12	ns
			91	"	5.0 V	GND		OUT			"								"	1G to 1Y1	"	"	"
			92	"	GND	5.0 V			OUT		"								"	1G to 1Y2	"	"	"
			93	"	5.0 V	5.0 V				OUT	"								"	1G to 1Y3	"	"	"
			94								"			OUT	GND	GND	IN		"	2G to 2Y0	"	"	"
			95								"				GND	5.0 V	"		"	2G to 2Y1	"	"	"
			96								"		OUT		5.0 V	GND	"		"	2G to 2Y2	"	"	"
			97								"	OUT			5.0 V	5.0 V	"		"	2G to 2Y3	"	"	"
	t_{PHL6}	"	98	IN	GND	GND	OUT				"								5.0 V	1G to 1Y0	"	15	"
		"	99	"	5.0 V	GND		OUT			"								"	1G to 1Y1	"	"	"
		"	100	"	GND	5.0 V			OUT		"								"	1G to 1Y2	"	"	"
		"	101	"	5.0 V	5.0 V				OUT	"								"	1G to 1Y3	"	"	"
		"	102								"			OUT	GND	GND	IN		"	2G to 2Y0	"	"	"
		"	103								"				GND	5.0 V	"		"	2G to 2Y1	"	"	"
		"	104								"		OUT		5.0 V	GND	"		"	2G to 2Y2	"	"	"
		"	105								"	OUT			5.0 V	5.0 V	"		"	2G to 2Y3	"	"	"
10	Same as subgroup 9 except t_{PLH1} = 19, t_{PHL1} = 27, t_{PLH2} = 26, t_{PHL2} = 25, t_{PLH6} = 18, t_{PHL6} = 22, T_C = +125°C (Max)																						
11	Same as subgroup 10 except T_C = -55°C																						

1/ Inputs: A = 2.8 volts minimum and B = .4 volt maximum.

2/ Outputs: H > 1.5 V
L < 1.5 V

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:13Z
Check the source to verify that this is the current version before use.

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - SH, OS, TD
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5962-0702)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

Rome Air Development Center
Griffiss AFB, NY 13441

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:13Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/77A	Microcircuits, Digital, Schottky TTL Decoders, Monolithic Silicon

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:13Z
Check the source to verify that this is the current version before use.