MILITARY SPECIFICATION

ADAPTER, REVERSIBLE, QUICK-FIT, 1-3/4 INCH

1. SCOPE

1.1 This specification covers a quick fit reversible adapter.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ—A—250/8	Aluminum Alloy, 5052, Plate and Sheet
TT—E—529	Enamel, Alkyd, Semigloss
TT—P—666	Primer Coating, Zinc Yellow (Zinc Chromate), for Aluminum Surfaces
PPP—B—636	Box, Fiberboard
PPP—F—320	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grades) and Cut Shapes

MILITARY

MIL—E—480	Enamel, Baking, Phenol or Urea Formaldehyde
MIL—C—5541	Chemical Films and Chemical Film Materials for Aluminum and Aluminum Alloys

STANDARDS

MILITARY

MIL—STD—105	Sampling Procedures and Tables for Inspection by Attributes
MIL—STD—129	Marking for Shipment and Storage
MIL—STD—147	Palletized and Containerized Unit Loads 40 Inch x 48 Inch Pallets, Skids, Runners, or Pallet Type Base

DRAWING

ARMY NATICK LABORATORIES

4—1—452	Adapter, Reversible, Quick Fit, 250 lbs.—1¾ Inch; Assembly Complete.

(Miniature copy of Drawing 4—1—452 identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawing required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Ill. 60606.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Ill. 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), before production is commenced, a sample adapter covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials. The material shall be as specified herein and as shown on Drawing 4–1–452.

3.2.1 *Primer.* Primer shall conform to TT–P–666.

3.2.2 *Enamel.* Enamel shall conform to type I or II or MIL–E–480 or class A or B of TT–E–529. The color shall be black.

3.3 Construction. The construction of the adapters shall conform to the design, shape and dimensions shown on Drawing 4–1–452 and as specified herein. The friction grip, after assembly to the frame, shall move freely by hand without binding.

3.3.1 *Proof load.* The adapters shall withstand a minimum proof load of 250 pounds. There shall be no distortion of the frame or friction grip when tested as specified in 4.4.1.

3.4 Finish.

3.4.1 *Surface treatment.* All surfaces of the adapter shall be given a chemical treatment conforming to class 2 of MIL–C–5541.

3.4.2 *Priming.* After the surface treatment specified in 3.4.1, the adapter shall be given a coat of primer specified in 3.2.1.

3.4.3 *Enameling.* After priming specified in 3.4.2, the adapter shall be given a coat of enamel specified in 3.2.2.

3.5 Marking for identification. Adapters shall be marked with the manufacturer's identification and Drawing No. 4–1–452 in the location as shown on the drawing.

3.6 Workmanship. All surfaces shall be free of burrs, fins, rough spots, sharp edges and cracks. The enameling coating shall level out to a dry uniform thickness without orange peel, wrinkles, drops, streaks or areas of no film.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection. When a preproduction sample is required, it shall be examined for the defects specified in table II, dimensions specified, and tested as specified in 4.4.1. Any visual defect, any dimension not meeting specified requirements, or failure to meet the test requirements, shall be cause for rejection of the preproduction sample.

4.3 Inspection. Sampling for inspection shall be performed in accordance with the provisions set forth in MIL–STD–105, except where otherwise indicated.

4.3.1 *Component and material inspection.* In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 *Process examination.* Examination shall be conducted to see that accomplishment of specified requirements are in conformance to table I. Wherever nonconformance is noted, correction shall be made to the affected items and process.

TABLE I. *Process examination*

Requirement	Requirement paragraph
Chemical treatment	3.4.1
Priming	3.4.2

4.3.3 *End item inspection.* The lot shall be all the adapters offered for inspection at one time. The sample unit for this examination shall be one adapter.

4.3.3.1 *Visual examination.* Examination shall be made of the adapters for defects listed in table II. The inspection level shall be II with an acceptable quality level (AQL) of 4.0 for major defects, and 10.0 for total defects, expressed in terms of defects per hundred units.

TABLE II. *Classification of defects*

Examine	Defect	Classification Major	Classification Minor
Finish (general)	Not finished	X	
	Color not as specified	X	
	Area of no film		X
	Finish not free of wrinkles, orange peel, drops or streaks		X
Construction and workmanship	Sharp edges, burrs, fins, rough spots or cracks	X	
	Friction grip binds and does not move freely on frame	X	
Identification Marking	Missing, incomplete, illegible or incorrect		X

4.3.3.2 *Dimensional examination.* Examination shall be made of adapters for compliance with dimensions specified. Any dimension that is not within the specified tolerance shall be classified as a defect. The inspection level shall be S–2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.4 *End item testing.* The adapters shall be tested as specified in 4.4.1. The inspection level shall be S–2 with an AQL of 2.5, expressed in terms of defects per hundred units. The requirements shall be one determination per sample unit and the results shall be reported as pass or fail.

4.3.5 *Examination of preparation for delivery.* An examination shall be made to determine that the packaging, packing and marking are in compliance with section 5 of this specification. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all the containers offered for inspection at one time. The inspection level shall be S–2 and the AQL shall be 2.5, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

TABLE III. *Examination of preparation for delivery*

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as twine or cord, adhesive, loose flaps, loose strapping or tape banding.
Content (interior and exterior)	Number is more or less than required.

4.3.6 *Examination of shipping containers.* When shipping containers are required to be in accordance with PPP–B–636, examination for defects in closure, waterproofing and strapping shall be in accordance with that specification.

4.3.7 *Examination of palletization.* An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be scored as specified in table IV. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S–1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE IV. *Examination of palletization*

Examination	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Not as specified Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limit
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application

4.4 Test.

4.4.1 *Proof load test.* The adapters shall be subjected to the proof load as shown on Drawing 4–1–452, at a loading rate not to exceed 500 pounds per minute until the proof load specified in 3.3.1 is reached. Any sample failing to meet the load requirements specified in 3.3.1 shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.* Unless otherwise specified (see 6.2), three hundred adapters shall be packaged in a snug fitting fiberboard box conforming to style RSC, type CF or SF, class domestic, grade 200 of PPP–B–636. Each box shall be agitated from time to time to assure a compact and well filled box. Closure shall be in accordance with the appendix of the box specification.

5.1.2 *Level C.* Adapters shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Level A.* Unless otherwise specified (see 6.2), adapters packaged as specified in 5.1, shall be packed in the snug fitting fiberboard shipping container conforming to style FTC, V2s of PPP–B–636.

Each shipping container shall be closed and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

5.2.2 *Level B.* Unless otherwise specified (see 6.2), adapters, packaged as specified in 5.1, shall be packed in a snug fitting fiberboard shipping container conforming to style FTC, type CF, class domestic, variety DW, grade 350 of PPP–B–636. Each shipping container shall be closed and reinforced with flat strapping or tape banding in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP—B—636 and closed in accordance with the appendix thereto. The shipping container material may also be grade V4s of PPP—F—320.

5.2.3 *Level C.* Adapters, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Palletization. Unless otherwise specified (see 6.2), adapters packed as specified shall be palletized in accordance with load type I of MIL—STD—147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL—STD—147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL—STD—147, the pallet pattern intended to be used shall be submitted to and approved by the contracting officer prior to its use.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers and palletized unit loads shall be marked in accordance with MIL—STD—129.

6. NOTES

6.1 Intended use. This specification covers adapters intended to be used on individual load carrying equipment.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) First article. Whether preproduction sample is to be furnished (see 3.1).

(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(d) When weather-resistant fiberboard boxes are required for level B shipment (see 5.2.2.1).

(e) When palletization is not required (see 5.3).

Custodian:
Army — GL


Preparing activity:
Army — GL

Project No. 5340—A012


* U.S. GOVERNMENT PRINTING OFFICE: 1969—393-479—(55)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

REVISIONS						
SYM	DWG NO.	DR	CK	DESCRIPTION	DATE	APPR

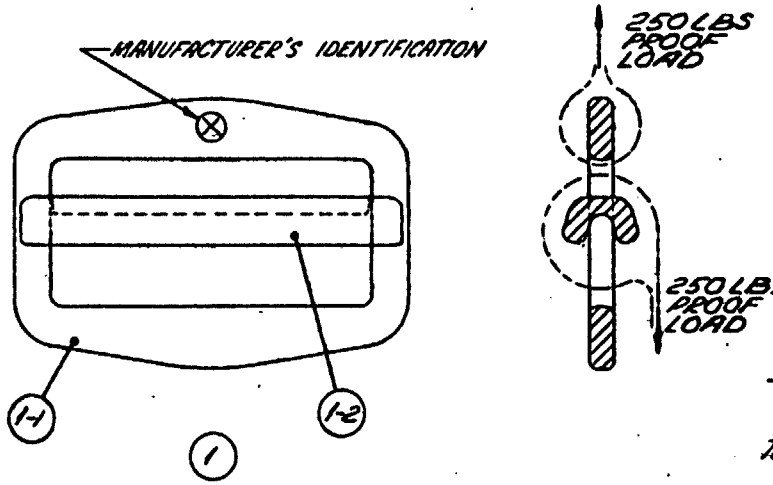


(1)

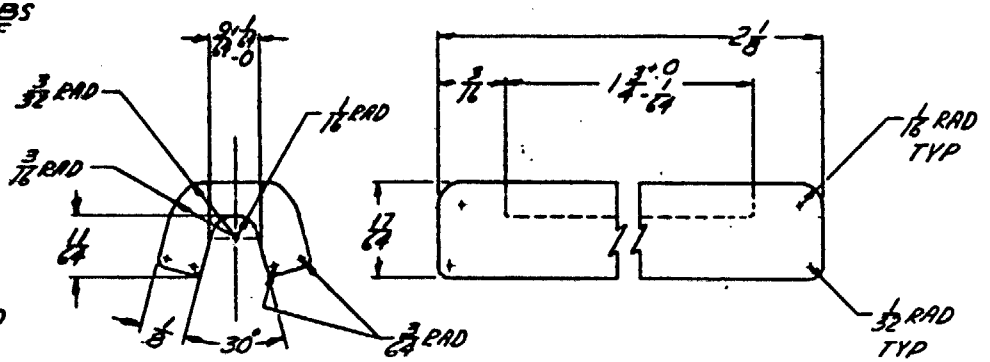

(1-2)

SCALE: 4/1

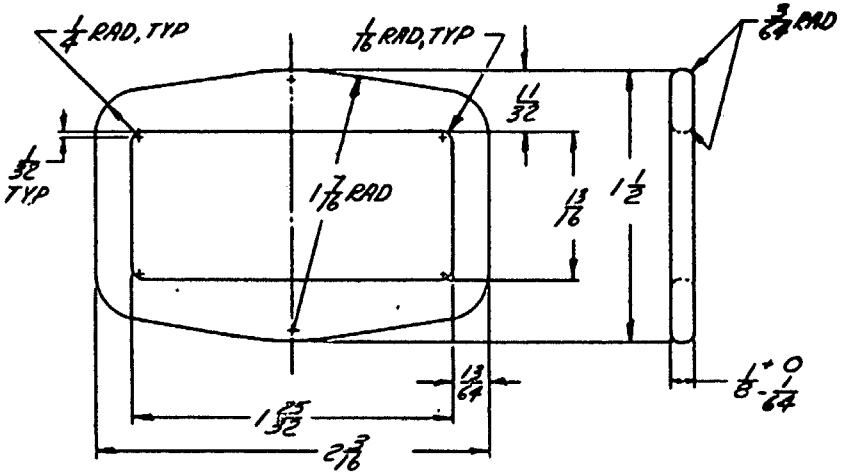

(1-1)

ITEM NO.	DESCRIPTION	NO. REQD	MATERIAL	MATL SPEC	DWG NO.
1-2	FRICTION GRIP	1	AL, 5052-0	QQ-A-250/8	4-1-452
1-1	FRAME	1	AL, 5052-0	QQ-A-250/8	4-1-452
1	ADAPTER ASSEMBLY	1			4-1-452

ITEM LIST

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. FABRICATING TOLERANCES FRACTIONS ±1/64, DECIMALS —, ANGLES ±2°

THIS FIGURE IS A MINIATURE COPY OF ARMY NATICK LABORATORIES DRAWING NUMBER 4-1-452, REVISION NUMBER ——, DATED (BLANK), THIS COPY IS FOR INFORMATION ONLY; THE DRAWING REFERENCED IN PARAGRAPH 2.1 GOVERNS.

FIGURE – 1

ADAPTER, REVERSIBLE, QUICK FIT, 250 LBS - 1 3/4 INCH; ASSEMBLY COMPLETE

MIL-A-43671 (GL)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Adapter, Reversible, Quick Fit, 1-3/4 Inch MIL-A-43671 (GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.