MIL-B-43645A(GL)

16 March 1976

SUPERSEDING
MIL-B-43645(GL)
29 May 1969

MILITARY SPECIFICATION

BOX, FIBERBOARD, LEAFLET DISSEMINATOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements of a fiberboard box used to disseminate leaflets.

1.2 Classification. The box shall be of one type, class, grade, and size.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-638	-	Boxes, Caps, Liners and Sleeves, Fiberboard, Knocked-Down, Flat; Packing Of.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock, (Container Grade), and Cut Shapes.

STANDARD

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.

FSC 8115

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 Fiberboard. Fiberboard for the box blank shall conform to type CF, class domestic, variety SW, grade 200, B flute, of PPP-F-320.

3.1.2 Metal fasteners. Metal fasteners used to secure the four manufacturer's joints shall be either steel staples or steel stitching wire having a commercially applied coating or plating such as zinc (galvanized) or copper wash. The steel staples or stitching wire shall be either 0.103 inch wide by 0.020 inch thick or the size known commercially as 0.103 inch wide by 0.017 inch thick. The 0.103 inch by 0.020 inch fastener shall have a width tolerance of plus 0.001 inch, minus 0.005 inch and a thickness tolerance of plus unlimited, minus 0.001 inch. The 0.103 inch by 0.017 inch fastener shall have a minimum width of 0.098 inch and a minimum thickness of 0.016 inch. The arced section, after forming shall have a minimum width of 0.090 inch and a minimum thickness of 0.024 inch. The crown length after forming shall be not less than 3/8 inch nor more than 5/8 inch.

3.2 Design and construction. The design and construction shall be in accordance with figure 1 with 4 manufacturer's joints. The 4 inch flaps of the bottom-side blank shall be inside the box but not secured to the end blank.

3.2.1 Dimensions. The inside dimensions of the assembled box shall be 25 inches in length, 17 inches in width and 12 inches in depth. The blank dimensions shall be as shown on figure 1. A tolerance of $\pm$ 1/8 inch shall be permitted in each overall dimension of the box.

3.3 Marking. There shall be no markings of any kind on these boxes.

3.4 Workmanship. Box blanks shall be uniformly cut and scored (creased). The score lines shall be such as not to split the outer ply when forming the box. Score line shall be straight and of a width and depth that is compatible to the thickness of the fiberboard. Fasteners shall be uniform and tight. Side flaps covering the vent holes shall be free to move. Slots in the top flap of the assembled box shall be in line with each other so that a strap 2 inches wide and 1/2 inch thick may be threaded through the opening.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:55Z
Check the source to verify that this is the current version before use.

specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.2.2 Inspection of the end item. The inspection lot shall consist of all knocked-down boxes offered for inspection at one time.

4.2.2.1 Visual examination. The boxes shall be examined for the defects in table I. The acceptable quality level (AQL) shall be 4.0 expressed in terms of defects per hundred units. The inspection level shall be S-2. The sample unit shall be one box blank, with manufacturer's joints secured.

TABLE I. Examination of end item

Examine	Defect
Design and construction	Design not as shown. Slit not in center of slots. Number of vents not as shown. Four inch side flaps not free to move when box is assembled. Number of fasteners not as specified.
Workmanship	Edges of blanks uneven or crushed. Edges of slots and vents uneven or crushed. Score lines uneven or split the outer ply. Fasteners not uniform or tight. Flap over vent holes not free to move. Line slots not in alignment when assembled. Any marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

4.2.2.2 Dimensional examination. The boxes shall be examined for compliance with dimensions specified, the vents and line slots of the size shown on figure 1 and located as shown on figure 1. Any dimension that is not within the specified tolerance shall be a defect. The sample unit for this examination shall be one complete box. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 4.0 expressed in terms of defects per hundred units.

4.2.3 Packaging inspection. Packaging and marking shall be inspected in accordance with the quality assurance provisions in PPP-B-638.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Levels A, B, and C. Boxes shall be packed in accordance with the applicable requirements of PPP-B-638.

5.2 Marking. In addition to any special marking required by the contract or order, shipment shall be marked in accordance with the applicable requirements of PPP-B-638.

6. NOTES

6.1 Intended use. Fiberboard boxes covered by this specification are intended for use as an air drop disseminator of leaflets.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of the applicable level of packing (see 5.1).

Custodian:


Army - GL

Preparing activity:

Army - GL

Project No. 8115-A391

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

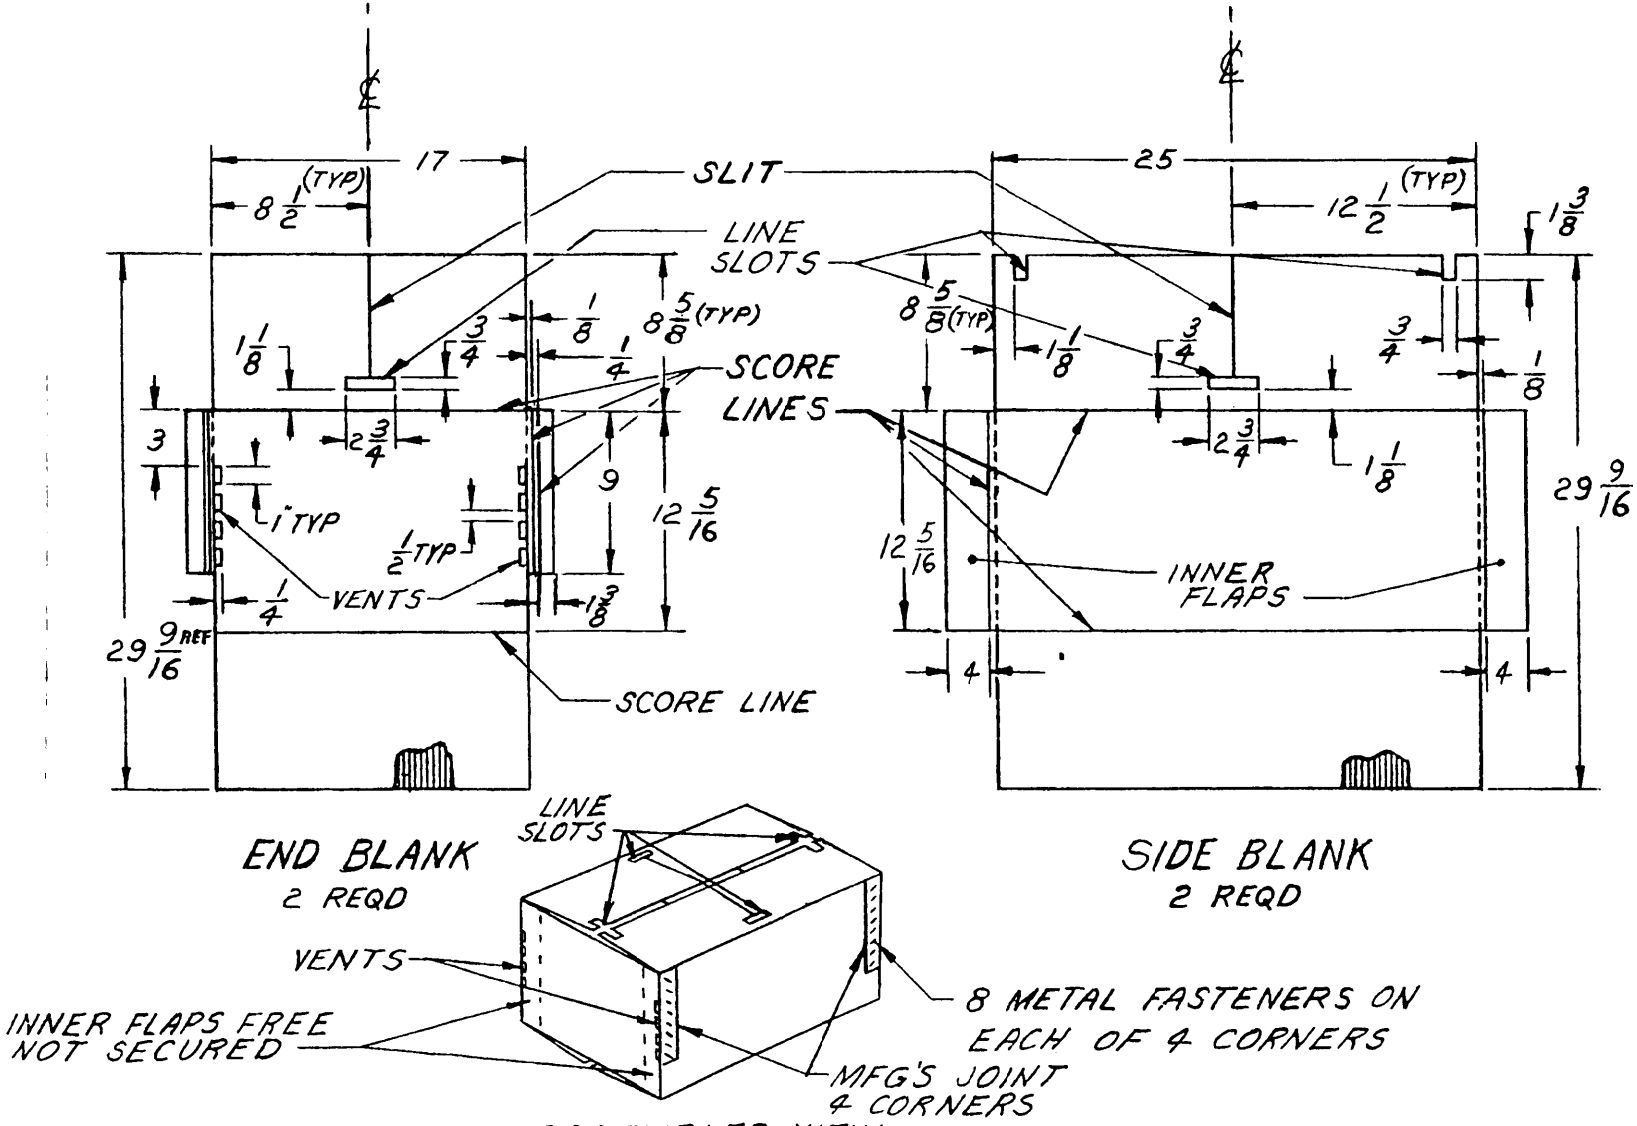

NOTE:- DIMENSIONS CITED ARE TO BE USED AS A GUIDE ONLY- ACTUAL BOX SIZE IS 25 X 17 X 12 I.D. ± 1/8 OVERALL

FIG. 1 - BOX; FIBERBOARD LEAFLET DISSEMINATOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
Box, Fiberboard, Leaflet Disseminator MIL-B-43645A(GL)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US Army Natick Research & Development Command
Natick, MA 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-TDS

Commander
US Army Natick Research & Development Command
ATTN: DRXNM-TDS
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.