MIL-C-43647(GL)

18 June 1969

MILITARY SPECIFICATION

CASES, INDIVIDUAL, SURVIVAL KIT, ARMY

1. SCOPE

1.1 This specification covers three types of survival kit cases.

1.2 Classification.- Cases shall be of the following types, as specified (see 6.2):

Type I - Case, Outer, Hot and Cold Climate Survival Kits

Type II - Case, Outer, Over Water Survival Kit

Type III - Case, Inner, Survival Kits, Individual, Army

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

UU-P-268 - Paper, Kraft, Untreated, Wrapping

PPP-B-601 - Boxes, Wood, Cleated-Plywood

PPP-B-636 - Box, Fiberboard

PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes

MILITARY

MIL-P-10547 - Liners, Case and Sheet, Overwrap; Water-Vaporproof- or Waterproof, Flexible

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD- 29	- Marking For Shipment and Storage
MIL-STD-147	- Palletized and Containerized Unit Loads 40" x 48" 4 Way (Partial) Pallet Skids, Runners, or Pallet-Type Base

DRAWINGS

US ARMY NATICK LABORATORIES

11-1-188	- Case, Survival Kit, Individual, Over Water, Army, Outer; Assembly and Details
11-1-190	- Case, Survival Kit, Individual, Hot or Cold, Army, Outer; Assembly and Details
11-1-192	- Case, Survival Kit, Individual, Inner, Army; Assembly and Details

(Miniature copies of the above listed drawings, identified as figures 1 through 3, are attached for information only.)

(Copies of specifications, standards, publications and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

NATIONAL CLASSIFICATION BOARD
National Motor Freight Classification

(Application for copies shall be addressed to the National Classification Board, 1616 P Street, N. W., Washington, D. C. 20036).

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Ill., 60606).

3. REQUIREMENTS

3.1 First article.- Unless otherwise specified (see 6.2), prior to starting production, the supplier shall submit to or make ready for the contracting officer or his authorized representative one or more samples of the finished item for inspection as specified in paragraph 4.2 of this specification. The preproduction sample shall be manufactured in the same facilities and by the production tools and methods to be used for manufacture of the production items. The approval of the preproduction sample authorizes the supplier to commence production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification.

3.2 Materials.- Materials shall conform to requirements specified on the applicable drawings and subsidiary specifications, standards and drawings applicable thereto.

3.3 Construction.- Construction details shall conform to the applicable drawings and subsidiary specifications, standards and drawings referenced thereon and as specified herein.

3.3.1 Stitching.- Stitching defects, such as skipped or broken stitches and runoffs shall be overstitched not less than 1 inch past ends of defect in accordance with the required stitch pattern. Except as otherwise specified in 3.3.1.1 for automatic machinery, ends of stitching shall be backstitched 1/2 inch minimum except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching and the lock will be embedded in the materials sewn. All thread ends shall be trimmed.

3.3.1.1 Automatic machinery.- Automatic machines may be used to generate any of the stitch patterns specified on the drawings, provided all stitching and thread requirements are met. Ends of stitching shall be secured with a minimum of three tying and overlapping or back stitches.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:55Z
Check the source to verify that this is the current version before use.

3.3.1.2 Grommet setting.- The hole for the grommet shall be smaller than the grommet barrel. The grommet shall be set by forcing the barrel through the hole and clinching securely without cutting the material.

3.3.1.3 Marking for identification.- Each type I and II case shall be marked for identification. The marking shall conform to type IV, class 9 label of DDD-L-20. Data, location and character sizes shall be as specified on the applicable drawings.

3.4 Workmanship.- The workmanship shall conform to the quality established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Sampling for inspection.- Sampling for inspection shall be in accordance with MIL-STD-105.

4.1.1.1 Classification of inspection.- Inspection shall be classified as follows:

a. Inspection of first article
b. Inspection of materials and components
c. Inspection of end item
d. Inspection of preparation for delivery

4.2 Inspections.-

4.2.1 First article inspection.- When required (see 6.2), inspection of the preproduction sample or samples shall be made of a completely fabricated item for all provisions of this document applicable to end item inspection.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the current version before use.

4.2.2 Components and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this document or applicable purchase document.

4.2.2.1 In-process inspection.- Inspection shall be made at appropriate stages of fabrication and assembly to determine conformance to the requirements of this document. The Government reserves the right to exclude from consideration for acceptance any component or materials for which in-process inspection has indicated nonconformance.

4.2.3 Inspection of end item and preparation for delivery.- Lots shall be expressed in units of cases, containers or palletized loads as applicable. Inspection shall be classified as follows:

a. Examination of end item for visual characteristics
b. Examination of end item dimension
c. Examination of packaging, packing and marking
d. Examination of palletization

4.2.3.1 Inspection levels and acceptable quality levels (AQL's).- Inspection levels and AQL's, expressed in defects per 100 units, shall be as follows:

	Inspection levels	AQL's
For Examination in 4.2.3.2	II	2.5 Major 10.0 Total
For Examination in 4.2.3.3	S-2	6.5
For Examination in 4.2.3.4	S-2	4.0
For Examination in 4.2.3.5	S-1	6.5

4.2.3.2 Examination of visual end item characteristics.- The sample unit for this examination shall be one case. Characteristics to be examined and the defects applicable thereto shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Cloth, webbing and tape (as applicable)	Any component not type, class, grade, size or color specified	X	
	Any spot or stain visible after assembly, not removable without damaging fabric or finish	X	
	Any spot or stain visible after assembly, removable without damaging fabric or finish		X
Thread	Not type or size specified	X	
	Not color specified		X
Assembly	Any component missing or not assembled as specified, not otherwise classified herein	X	
Construction and workmanship			
Seams and stitching:			
Open seams	One inch or more	X	
	Less than one inch		X
	NOTE: One or more broken or two or more continuous skipped or run-off stitches constitute an open seam. A double stitched seam is considered open when one or both sides of the seam are open.		

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Seams and stitching (cont'd)			
Raw edges	More than 3/4 inch when securely caught in stitching.		X
	NOTE: To be scored only when edge is required to be turned under and stitched. Raw edges not securely caught in stitching shall be classified as open seams.		
Run-offs (See open seams)			
Type	Seam or stitch type not as specified	X	
Tension	Loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in excessive puckering of fabric at seams	X	
Stitches per inch	One stitch less than minimum specified		X
	Two or more stitches less than minimum specified	X	
	One or more stitches in excess of maximum specified		X
	NOTE: To be scored only when the condition exists on the major portion of the seam.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Thread breaks and skipped stitches	Overstitched less than 1 inch		X
	NOTE: Thread breaks not lockstitched shall be classified as open seams		
Stitching margins, gage on double needle stitching	Under or over specified width by more than 1/16 inch		X
Stitching ends	Not secured as specified		X
General	Mends, darns or patches	X	
	Needle chews	X	
	Bartacks not as specified		X
	Turned under ends of tape not securely caught in stitching		X
	Any required row of stitching missing except on cross box stitching	X	
	Boxstitching:		
	- one row of stitching missing		X
	- two or more rows of stitching missing	X	
	Exposed ends of webbing not seared as specified		X
	Thread ends not trimmed		X
Slide fasteners, snaps, adapter buckle, and grommet (as applicable)	Not type, size or material specified	X	
	Broken or malformed, failing to serve intended purpose, corroded area, burr or sharp edge	X	
	Finish omitted or not type specified:		
	- on brass components		X
	- on steel components	X	
	Slider jams, or fails to interlock chain, tapes improperly applied, causing bulging or failure of fastener to effect a smooth and secure closure	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Grommet	Clinched excessively tight, cutting fabric	X	
	Insecurely clinched, e.g., can be turned by hand		X
Identification marking	Omitted, incomplete, illegible, misplaced or otherwise not as specified		X

4.2.3.3 Examination of end item dimensions.- Inspection shall be made to determine conformance to the dimensions and tolerances specified on the applicable drawing that are susceptible to inspection after fabrication. Any deviation from specified dimensions shall constitute a defect.

4.2.3.4 Examination of packaging, packing and marking.- An examination shall be made to determine compliance with the applicable packaging, packing and marking requirements. The sample unit for this examination shall be one shipping container fully prepared for delivery except that it need not be sealed. Characteristics to be examined and the defects applicable thereto shall be as specified below. Examination for closure defects shall be made of shipping containers fully prepared for delivery.

Examine	Defect
Marking (interior package, shipping container)	Omitted, incorrect, not legible; of improper size, location, sequence or method of application
Materials	Any component missing, damaged, defective or not as specified
Workmanship	Improper closure of container, loose strapping, inadequate nailing or stapling; bulging or distortion of container
Contents	Number per container not as specified

4.2.3.5 Examination for palletization.- An examination shall be made to determine that the palletization requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Not as specified Pallet pattern not as specified Interlocking of load not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted, incorrect; illegible; of improper size, location, sequence or method of application

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each case, with the slide fastener closed and the sides gusseted, shall be laid out flat to measure approximately 16 by 16 inches. Prior to the foregoing operation, each type II case shall have the attached 15-foot tape neatly folded and secured within the case. The snap hooks attached to each type III case shall be placed on top of the case. Ten cases of one type only shall be evenly stacked, alternately reversed top to bottom, to form a bundle. The bundle shall be securely cross-tied with cotton tape or twine. The top type III case in each bundle shall be placed with the snap hooks facing the bottom of the bundle.

5.1.2 Level C.- Cases shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Forty cases of one type only, packaged as specified in 5.1, shall be packed in a shipping container conforming to style RSC-L, grade V2s of PPP-B-636; or overseas type, style A or J, type 2 load of PPP-B-601, as specified (see 6.2). The plywood panels for each PPP-B-601 container shall be surface treated with a water repellant wood preservative as specified in the container specification. The inside of each

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the currentversion before use.

fiberboard container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c, of PPP-F-320. Level A packages shall be packed flat two in length, one in width, and two in depth within a shipping container. Inside dimensions of each shipping container shall approximate 32-1/2 inches in length, 16-1/2 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each fiberboard container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each fiberboard container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636. Each wood container shall be waterproofed with a sealed case liner conforming to type I or II, grade C of MIL-L-10547; and closed and reinforced in accordance with the appendix of PPP-B-601.

5.2.2 Level B.- Forty cases of one type only, packaged as specified in 5.1, shall be packed in a shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to class domestic, variety DW, grade 275 of PPP-B-636. Level A packages shall be packed flat two in length, one in width, and two in depth within a shipping container. Inside dimensions of each shipping container shall approximate 32-1/2 inches in length, 16-1/2 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C.- Cases, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Classification Rules or National Motor Freight Rules as applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:55Z
Check the source to verify that this is the current version before use.

5.3 Palletization.- Unless otherwise specified (see 6.2), cases of one type only, packed as specified in 5.2 shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, interior packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129. Each interior package shall have attached a manila colored paper shipping tag for the identification information.

6. NOTES

6.1 Intended use.- The cases covered by this specification are used as containers for survival kit components that comprise hot, cold, and over water kits used by Army aviators.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Type of case being procured.
c. Whether first article is required, and if required, how many samples (see 3.1).
d. Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
e. Type of shipping container desired for level A packing (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is not required (see 5.3).

Custodian:

Army - GL

Review activities:


Army - AV, MD

Preparing activity:


Army - GL

Project No. 8465-A386


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.

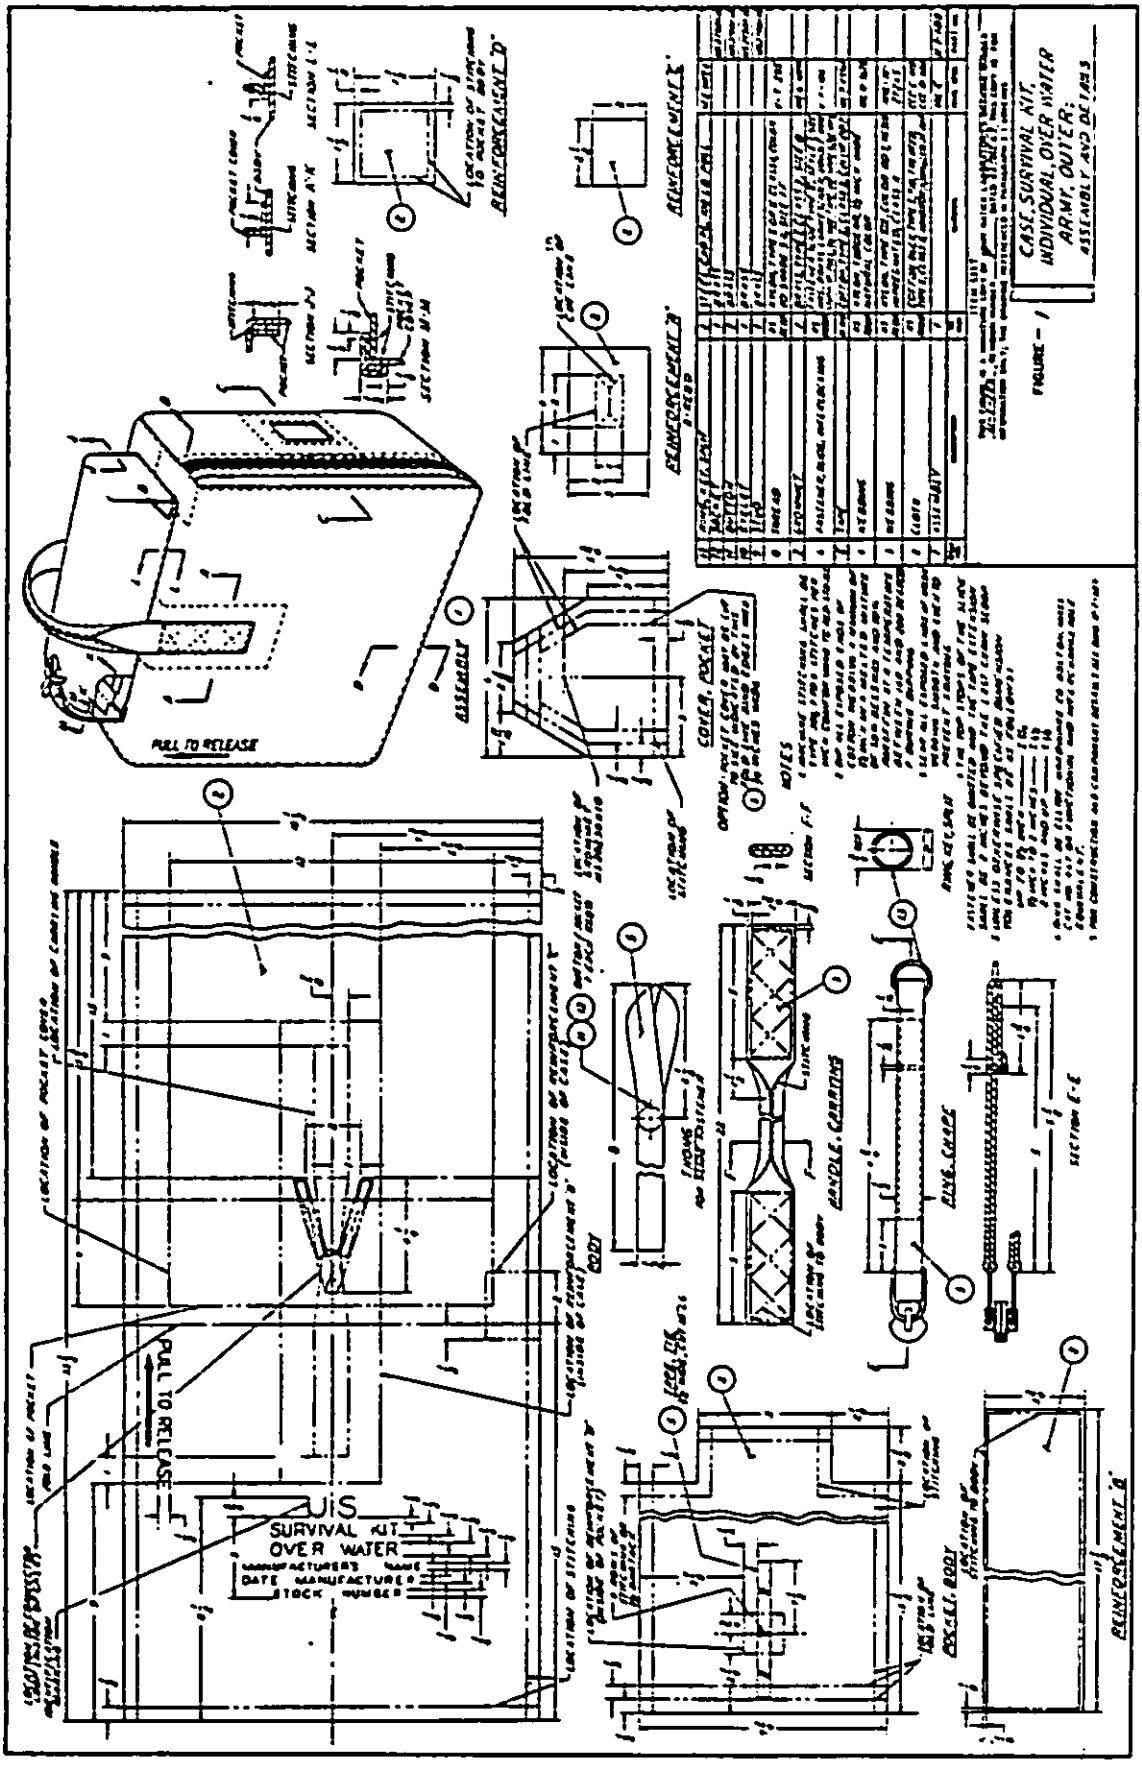


Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the current version before use.

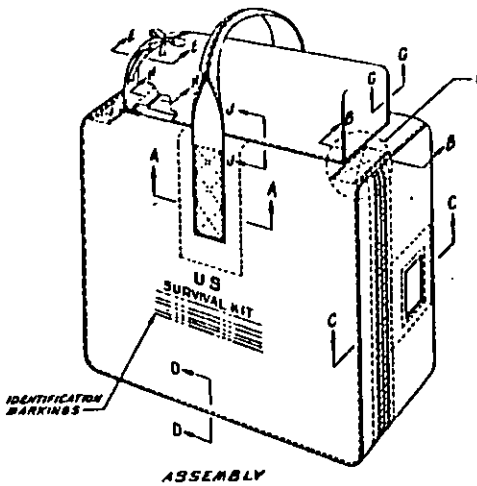

ASSEMBLY

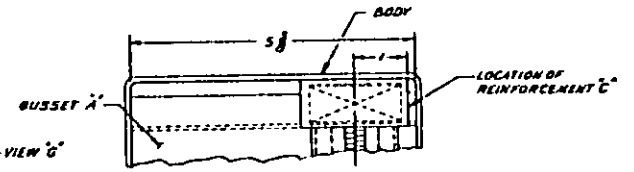


VIEW "G"
(INSIDE SHOWN)

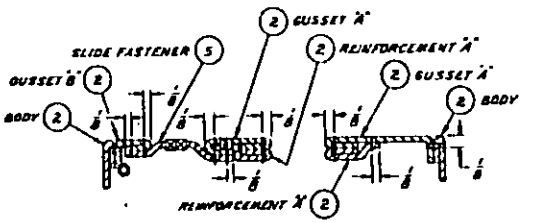


SECTION C-C

NOTES:

1. MACHINE STITCHING WITH SIZE FF THREAD SMALL AS TYPE 301, 7 TO 9 STITCHES PER INCH CONFORMING TO FED STD NO 751
2. DIP ALL EXPOSED ENDS OF COTTON WEBBING A MAXIMUM OF 1/8 INCH IN A MELTED MIXTURE OF 50% BEESWAX AND 50% PARAFFIN AT A TEMPERATURE BETWEEN 180 AND 200 FAHRENHEIT DURING DIPPING.
3. SEAR ALL EXPOSED ENDS OF (6) ON WEBBING SMOOTH AND EVEN TO PREVENT FRAYING
4. UNLESS OTHERWISE SPECIFIED, DIMENSION TOLERANCES SHALL BE AS FOLLOWS:
   - UP TO 1/8" — ± 1/64
   - 1/8" TO 2" — ± 1/32
   - 2" AND OVER — ± 1/16
5. FOR COMPONENTS AND CONSTRUCTION DETAILS SEE MIL-B-1-151 AND B-1-1765



SECTION A-A




SECTION D-D




SECTION F-F




SECTION H-H

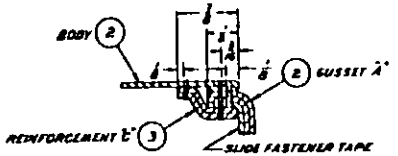


SECTION B-B



SECTION E-E



SECTION G-G



SECTION J-J

ITEM NO.	DESCRIPTION	QTY.	MATERIAL	MIL. SPEC.	FED. STK. NO.
7	THREAD		NYLON TYPE 3 OR 8, CLASS 5 COLOR OD SHADE 5-1 SIZE FF	V-T-295	
6	GROMMET	1	BRASS TYPE I, CLASS 1, SIZE 0	MIL-G-3881	
5	SLIDE FASTENER	1	TYPE I, STYLE 2, SIZE NO. 5 OR 11 WIDTH AS 5 OR 11 SINGLE WIRE STITCHING WITH NYLON CLAD WIRE OF GRADE 5 SINGLE WIRE STITCHING FOR ALL 5.0" STOP SHALL BE SOLDERING TYPE	V-F-106	
4	TAPE	1	COTTON, TYPE I, CLASS 1, COLOR NO. 7		
3	WEBBING	AS REQD	NYLON TYPE III, COLOR 501 OR 504 IMPREGNATED, CLASS 4	MIL-W-3386	
2	CLOTH	AS REQD	COTTON DUCK TYPE I OR III SIZE 10 OZ STEEL TYPE I, CLASS 1 FINISH (A) OR (B), COLOR NO. 7	CCC-C-419 CCC-C-596	
1	ASSEMBLY	1			8-1-1761


ITEM LIST

THIS ITEM IS A MINIATURE COPY OF DRAWING NUMBER 8-1-1761 DATED 31 JULY 1951 AND IS FOR INFORMATION ONLY; FOR ORDERING REFERENCE IS MADE IN PARAGRAPH 2.1 ABOVE.

FIGURE — 2

CASE, SURVIVAL KIT, OUTER HOT AND COLD CLIMATE ASSEMBLY AND SECTIONS

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:55Z
Check the source to verify that this is the current version before use.

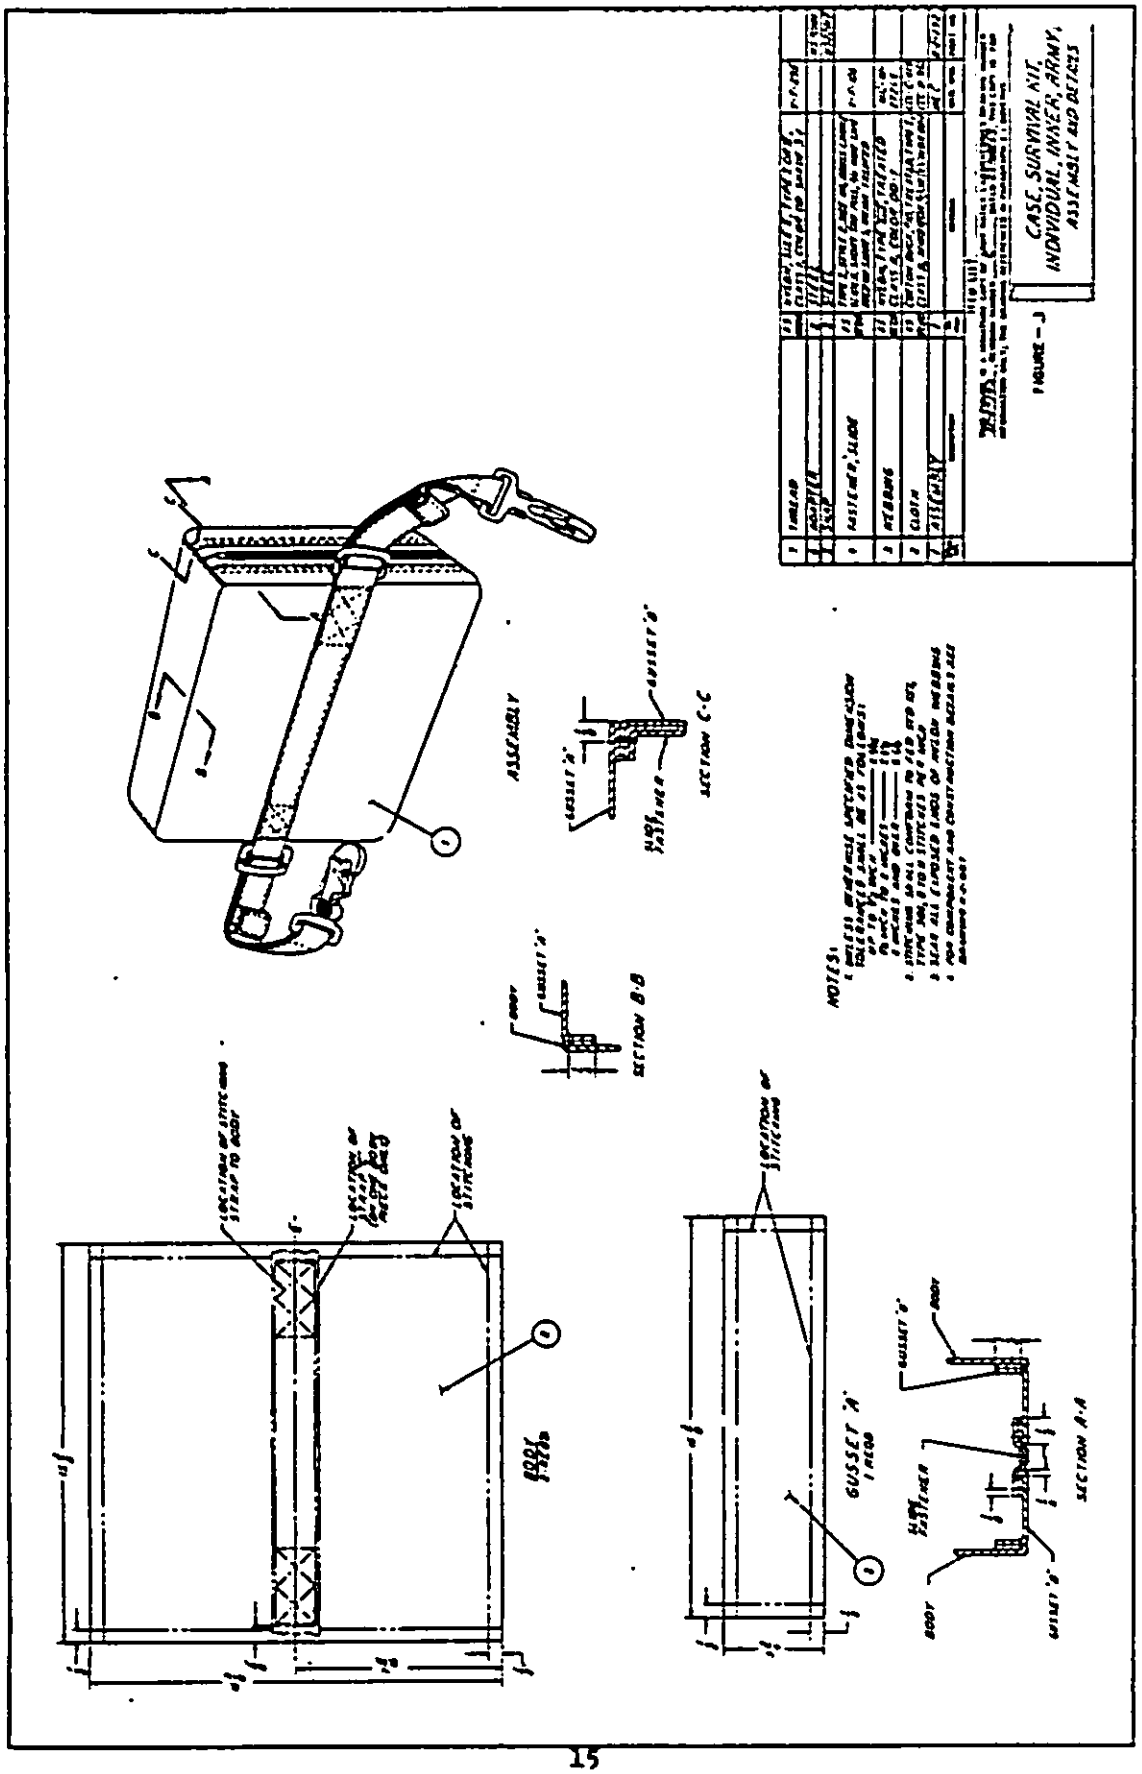

Source: https://assist.dla.mil -- Downloaded: 2026~~10~~-21T21:55Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:55Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:55Z
Check the source to verify that this is the current version before use.