MIL-L-43672C
19 September 1983
SUPERSEDING
MIL-L-43672B
10 November 1976

MILITARY SPECIFICATION

LINER, SNOW CAMOUFLAGE TROUSERS: WHITE ARCTIC, M-65

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a trouser liner made from quilted polyester batting material.

1.2 Classification. The liner shall be of one type in the following sizes (see 6.2):

Schedule of Sizes

Short and Regular	Long
X-Small	X-Small
Small	Small
Medium	Medium
Large	Large
X-Large	X-Large

2. APPLICABLE DOCUMENTS

* 2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research and Development Laboratories, Natick, MA 01760, by using the self-addressed standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
JJ-W-155	-	Webbing, Textile (Cotton, Elastic)
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-508	-	Cloth, Oxford, Nylon, 3 Ounce
MIL-B-41826	-	Batting, Synthetic Fibers; Polyester (Quilted and Unquilted)
MIL-T-43548	-	Thread, Polyester, Cotton-Covered and Rayon-Covered

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

THE COLOR ASSOCIATION OF THE UNITED STATES INC.

Standard Color Card of America

(Application for copies should be addressed to the Color Association of the United States Inc., 24 East 38th Street, New York, NY 10016.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from the document may appear in the sample, in which case this document shall govern.

3.2 Materials (see 6.4).

3.2.1 Basic material. The basic material shall be a quilted polyester batting, conforming to type IV, class 3, style a, of MIL-B-41826.

3.2.2 Waistband and binding. The material for waistband, side opening facings, and bias binding shall be nylon oxford cloth, natural in color, conforming to type I, class 2 of MIL-C-508.

3.2.3 Labels. Each liner shall have an identification label, a size label, and an instruction label conforming to DDD-L-20. The labels shall show fastness to laundering.

3.2.3.1 Identification label. The identification label shall conform to type VI, class 1.

3.2.3.2 Size label. The size label shall conform to type VI, class 2, and contain the following information for each respective size.

X-Small-Short and Regular	X-Small-Long
Waist: Below 27 inches	Waist: Below 27 inches
Inseam: Up to 32-1/2 inches	Inseam: Over 32-1/2 inches
Stock No.	Stock No.
NATO Size: 6783/5869	NATO Size: 8390/5869

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

Small-Short and Regular	Small-Long
Waist: From 27 to 31 inches	Waist: From 27 to 31 inches
Inseam: Up to 32-1/2 inches	Inseam: Over 32-1/2 inches
Stock No.	Stock No.
NATO Size: 6783/6979	NATO Size: 8390/6979
Medium-Short and Regular	Medium-Long
Waist: From 31 to 35 inches	Waist: From 31 to 35 inches
Inseam: Up to 32-1/2 inches	Inseam: Over 32-1/2 inches
Stock No.	Stock No.
NATO Size: 6783/7989	NATO Size: 8390/7989
Large-Short Regular	Large-Long
Waist: From 35 to 39 inches	Waist: From 35 to 39 inches
Inseam: Up to 32-1/2 inches	Inseam: Over 32-1/2 inches
Stock No.	Stock No.
NATO Size: 6783/8999	NATO Size: 8390/8999
X-Large-Short and Regular	X-Large-Long
Waist: From 39 to 43 inches	Waist: From 39 to 43 inches
Inseam: Up to 32-1/2 inches	Inseam: Over 32-1/2 inches
Stock No.	Stock No.
NATO Size: 6783/9909	NATO Size: 8390/9909

* 3.2.3.3 Instruction label. The instruction label shall conform to type VI, class 3, and shall contain the following information:

LINER, COLD WEATHER TROUSERS, FIELD

1. Button into trousers for extra warmth.
2. Dry liner and trousers separately when damp or wet.
3. Avoid contact with heated stoves, open fires or other heat sources; fabric may fuse.
4. Wash by hand or machine in warm water with mild soap or detergent, rinse thoroughly, and drip dry or machine dry.

DO NOT DRY CLEAN.

DO NOT REMOVE THIS LABEL

* 3.2.3.4 Combination size and identification label. The identification label (class 1) and the size label (class 2) may be combined into one label conforming to type VI, classes 1 and 2 combined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

* 3.2.3.5 Combination size, identification and instruction label. The identification label (class 1), size label (class 2) and instruction label (class 3) may be combined in one label conforming to class 14. The coating requirements shall conform to class 3 label.

3.2.4 Thread. The thread shall be polyester cotton-covered and rayon-covered conforming to MIL-T-43548 ticket number 30, 2 or 3 ply or 50, 2 or 3 ply for stitching and seaming, 70-2 ply for overedging, and 30, 2 or 3 ply for buttonholes and button sewing. The color shall be white.

3.2.5 Gimp. The cotton gimp for reinforcing buttonholes shall be size No. 8, natural or bleached, conforming to type I or II of V-T-280.

3.2.6 Buttons. The buttons shall be type II, class D, style 26, 30-line of V-B-871. The buttons shall be DOD button shade White BA, C.A. 62031, and have a dull finish.

* 3.2.7 Elastic. The elastic for the waistband shall be type I, bleached or unbleached, class 6 of JJ-W-155.

3.3 Design. The design of the liner shall be a button in liner (see figure 1).

3.4 Patterns. Standard patterns to be used to cut working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a seam allowance of 1/2 inch for all seams (to finish 3/8 inch wide).

3.4.1 Pattern parts. The component parts shall be cut from the materials specified below in accordance with pattern parts indicated in table I.

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Basic material	Front	2
	Back	2

* 3.5 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from this document appear in figure 1, this document shall govern.

* 3.5.1 Stitches, seams, and stitching. All stitches, seams and stitching shall conform to FED-STD-751. The type of seam, stitching and stitches per inch shall be as specified in table I. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams occur. When two or

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

more methods of seams or stitches are given for the same operation, any one may be used. Where stitch type 401 is used, the looper (underthread) may be on the outside or inside of the liner. The reverse side of the seam type LSbm-3 (overedge side) shall be on the outside of the liner. The side of the liner worn nearest the body shall be considered the inside.

* 3.5.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/4 inch except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewed.

* 3.5.1.1.1 Repairs of type 301 stitching.

3.5.1.1.1.1 Quilted batting stitching. Broken stitches of the quilting pattern may be repaired by stitching back of each end of break not less than 1 inch.

3.5.1.1.1.2 Liner fabrication stitching.

a. When thread breaks or bobbin run-outs occur during stitching, except prestitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Except for prestitching, thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

* 3.5.1.2 Type 401, 503, 504, 515, 516, 517, 518, and 519 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.5.1.1.1.2a. and 3.5.1.1.1.2b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

* 3.5.4 Buttonholes. The buttonholes shall be eyelet-end-taper-bar-type worked over gimp (see 3.2.5) with not less than four tacking stitches at bar end, not counting cross over stitch. The finished cut length shall be 3/4 to 7/8 inch. The buttonholes shall be clean cut with the stitching securely caught in the fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

3.6 Manufacturing operations requirements. The liner shall be manufactured in accordance with operations specified in table II. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching may be used providing the threads are removed or are not visible on the finished liner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the liner in strict accordance with patterns furnished, which show size, directional lines and notches for proper assembly of all parts. The directional lines shall be in the warp direction. b. Cut the nylon oxford for waist lining and side opening facings in the warp direction and of sufficient length and width to conform to the requirements specified in operations 10 and 11. c. Cut the nylon oxford for the binding on the bias in sufficient width to conform to the requirements specified in operation 7. d. Pre-cut elastic for waistband as follows: Size — Length — Cut part X-small — Front 2-1/4" — 2 Back 7-3/4" — 1 Small — Front 3-1/4" — 2 Back 9-3/4" — 1 Regular — Front 4-1/4" — 2 Back 11-3/4" — 1 Large — Front 5-1/4" — 2 Back 13-3/4" — 1 X-Large — Front 6-1/4" — 2 Back 15-3/4" — 1 NOTE: Care shall be exercised when cutting the basic material and handling the cut parts as the quilting stitches have a tendency to run back.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.2.2 shall be removed from production and replaced with non-defective and properly matched components.						
3.	Component marking. Mark all components of the liner to insure a uniform size throughout the liner. Any method of marking may be used except: a. Metal fastening devices. b. Sew on type tickets. c. Adhesive type tickets which leave traces of adhesive on the material upon removal of the ticket.						
4.	Labels.						
	a. Sew instructions, size and identification labels (on all four sides not more than 3/16 inch from edges) to inside center (1 inch off center tolerance) of right back as follows: 1. Size label - top edge 2-1/2 to 3 inches below top edge of waist. 2. Identification label - may abut or be caught in bottom line of stitching of size label.	301	LSbj-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labels. (cont'd)						
	3. Instruction label - may abut or be caught in bottom line of stitching of the identification label.						
	4. Combination label (when applicable) - shall be positioned and stitched as in (1) above.						
5.	Join crotch seam, seat seam, and inseams.						
	Finished appearance. The overedge stitched edges shall finish on the outside of the liner. The bight of overedge stitching shall be 3/16 to 1/4 inch gage.						
	a. Join crotch seams and seat seams by overedge stitching and seaming the raw edge together in one operation, respectively.	515 or 516 or 519	LSbm-3(a)	10-14	50 (chain stitching)	70	
					70 (overedge stitching)	70	
		or 517 or 518	LSbm-3(a)	10-14	50 (lock stitching)	50	
					70 (overedge stitching)	70	
	b. Fold pleats on leg inseam as indicated by marks on pattern and join inseams by overedge stitching and seaming the raw edges together in on continuous operation. The fold of pleat shall be toward the bottom on inside of liner.	515 or 516 or 519	LSbm-3(a)	10-14	50 (chain stitching)	70	
					70 (overedge	70	
		517 or 518	LSbm-3(a)	10-14	50 (lock stitching)	50	
					70 (overedge stitching)	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

MIL-L-43672C

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Join crotch seam, seat seam, and inseam. (cont'd)						
	c. For stitch types 515, 516 or 519 turn seam allowance to one side and raise stitch 3/16 to 1/4 inch from folded edges.	301 or 401	LSbm-3(b)	10-14	50 50	50 70	
6.	Overedge stitch raw edges.						
	Overedge stitch raw edges around leg bottoms, waist, fly opening and side openings.	501 or 504	EFd-1	8-10	70	70	
7.	Bind fly opening and bottom of legs.						
	Finished appearance. The fly opening and leg bottom binding shall finish 3/8 to 5/8 inch wide with no raw edges.						
	a. Bind overedge stitched edges of fly opening and leg bottoms with the raw edges of binding turned in and caught in the stitching, and the raw ends starting and finishing at top edges of waist and outside edges of leg bottoms.	301	BSc-1	10-14	50	50	
8.	Attach back buttonhole reinforcements, (as indicated on patterns).						
	a. Place a small square of nylon oxford cloth (large enough to carry the buttonhole yet small enough so the excess will not roll) on the inside of back liner marked for the two center button holes and stitch on all four sides.	301		10-14	50	50	
	b. Stitch two center buttonholes as marked, thru reinforcements.	Buttonhole		52-56 per buttonhole including back	30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Attach waistband elastic (front and back).						
	a. Turn ends of elastic 3/8 inch, position as marked on patterns, and stitch across twice, 1/8 inch from edge.	301		10-14	50	50	
10.	Attach waistband linings (front and back).						
	Finished appearance. The waistband lining shall finish [illegible] to 2-1/4 inches in width on the inside and [illegible] to 5/8 inch in width on the outside of lining. Ends of back waistband lining shall finish [illegible] with side openings. Ends of front waistband linings shall finish even with side openings and extend both sides of fly opening 2-3/4 to 3 inches in length to be turned to the outside.						
	a. Turn in bottom edge of lining and stitch to the inside of liner 1/16 to 1/8 inch from folded edge. The line of stitching shall continue the length of the lining.	301 or 401	LSd-1 and EFa-1	10-14	50	50	
	b. Turn top edge of lining to the outside of liner and, with the raw edge turned in, single stitch 1/16 to 1/8 inch from folded edge. The line of stitching shall continue the length of the lining.	301 or 401	SS1-1 and EFb-1	10-14	50 50	50 70	
	- or -						
	c. Seam bottom edge of lining to the outside of liner, turn and raise stitch 1/16 to 1/8 inch from turned edge, with the stitching continued the length of the lining.	301 or 401	LSbk-2 and EFa-1	10-14	50 50	50 70	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Attach waistband linings (fronts and back. (cont'd)						
	d. Turn top edge of lining to the inside of liner and with the raw edge turned in, single stitch 1/16 to 1/8 inch from turned edge. The line of stitching shall continue the length of the lining.	301 or 401	LSd-1 and EFa-1	10-14	50 50	50 70	
	- or -						
	e. Attach lining to liner in one operation using a double needle machine 1-1/2 to 1-3/4 inches gage, with the lines of stitching continuing the length of the lining.	301 or 401	SS1-1 and LSd-1 and EFa-1 and EFb-1	10-14	50 50	70 70	
	f. Fold extended ends of waist lining to the outside of liner and with the raw ends turned in, single stitch 1/16 to 1/8 inch from all edges.	301 or 401	SSa-1 and OSf-1 and LSd-1	10-14	50 50	50 70	
11.	Attach side opening facings.						
	Finished appearance. The facings for the front side openings shall finish 2-1/8 inches in width to both the inside and outside of liner. Back side opening facings shall finish 1 inch in width to both the inside and outside of liner. All raw edges shall be turned to the inside of facings.						
	a. Stitch right side of facings to inside of liner with edge of liner at half width point of facing and continue the length of the liner including pleats as indicated on patterns.	301 or 401	LSd-1 EFa-1	10-14	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach side opening facings. (cont'd)						
	b. Turn facing to the outside of liner and turning raw edges under stitch 1/16 to 1/8 inch from folded edge across ends and length of facing in one continuous stitching tacking both ends 1/2 inch.	301 or 401	SSI-1 EFb-1	10-14	50 50	50 70	
12.	Make buttonholes.						
	a. Make four more vertical buttonholes in waistband, as indicated by marks on pattern, with the inside edges of eyelets 1/2 to 3/4 inch from top edge of waist. Purling shall be on the inside of liner.	Buttonhole		52-56 per buttonhole including tack	30	30	
	b. Make horizontal buttonholes on front liner at waistband side openings, leg bottom side openings and right side of fly opening, centered on waistband, with the inside edge of eyelet 1/2 to 3/8 inch from front and side openings. Evenly space four horizontal buttonholes down front side facings between top and bottom buttonhole. Purling shall be on the inside of the liner.	Buttonhole		52-56 per buttonhole including tack	30	30	
13.	Attach button.						
	a. Sew a 30-line button to left front fly opening positioned 1 to 1-1/4 inches from finished front edge and centered (1/4 inch tolerance) on waistband. Measurements to be taken from center of button.	301 or 101		14-16 per button 14-16 per button	30 30	30	
	b. Sew 30-line buttons to outside of back side facings matching them to buttonholes on front side facings and 3/4 inches from finished edge and thru all plies.	301 or 101		14-16 per button	30 30	30	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

NO.	* TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Clean liner.						
	a. Trim and remove all thread ends.						
	b. Remove all spots, stains and size markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

* 3.7 Finished measurements. The finished liners shall conform to the measurements for each respective size, as shown in table III. Measurements shall be taken after the liner has been smoothed flat (applying slight tension) along the dimension to be measured. During the measurement, however, no tension whatsoever shall be applied to the end item.

TABLE III. Finished measurements

Size	1/2 waist 1/	Inseam Short and Regular 2/	Inseam Long 2/
	Inches	Inches	Inches
X-Small	17	23	27-1/4
Small	19	23	27-1/4
Medium	21	23	27-1/4
Large	23	23	27-1/4
X-Large	24	23	27-1/4
Tolerance	± 1	± 3/4	± 1

* 1/ Measurement taken with the waist buttoned, and the liner laid flat and smooth with elastic relaxed. Measure across front from side edge to side edge on center of waistband.

2/ Measure along inside seam of liner from end of crotch to bottom of leg.

3.8 Workmanship. The finished liner shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Components and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

* 4.2.2 End item visual examination. The end item shall be examined for the defects listed in table IV. The lot size shall be expressed in units of liners. The sample unit shall be one liner. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects, 15.0 for major and minor A combined defects, and 40.0 for total (major, minor A, and minor B combined) defects.

TABLE IV. End item visual examination

Defects	Classification Major	Minor A	Minor B
Material defects and damages			
a. Any hole, cut, tear, needle chew, smash, multiple float in any ply	X		
b. Darn or mend in any ply		X	
c. Exposed drill hole in any ply			X
d. One or more rows of stitching omitted in quilting	X		
e. More than 1-1/2 inches of broken or missing stitches in the quilting			X
f. Thick or thin places in the quilting	X		
Cleanness			
a. Any spot or stain		X	
b. Thread ends not trimmed or loose threads not removed on major portion of liner			X
c. One or more size markings not removed			X
Components and assembly			
a. Any component part or required operation omitted (unless otherwise classified herein)	X		
b. Any operation not performed as specified (unless otherwise classified herein)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
Cutting			
Any component part not cut in conformance with directional lines or specification requirements	X		
Seams and stitching			
a. Accuracy of seaming:			
1. Any seam twisted, puckered or pleated		X	
NOTE: Nylon fabric has a tendency to pucker at joining seams and stitchings. The puckering when not so excessive as to seriously affect appearance shall not be classified as a defect.			
2. Part of liner caught in any unrelated operation or stitching	X		
3. Any end of seam or stitching produced with 301 stitch type, when not caught in other seams or stitching, backstitched less than 1/4 inch		X	
4. Stitching overlapping ends of thread break(s) less than 1/2 inch, or broken ends of quilting stitching stitched back of break less than 1 inch			X
5. Various shades of thread used on outside of same liner		X	
6. Any end of continuous line of stitching not overlapped or overlapped less than 1/2 inch			X
b. Gage of stitching (raised, edge or double stitching):			
1. Beyond range of width specified or varies more than 1/16 inch when no range is specified			X
2. Irregular, i.e., unevenly gaged or various stitchings not uniform (to be scored only when the condition exists on major portion of seam)			X
c. Open seams:			
- up to 1/4 inch inclusive			X
- more than 1/4 inch to 1 inch inclusive		X	
- more than 1 inch	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur. On double stitched seams, a seam is classified as open when either one side or both sides of seams are open.			
d. Raw edges (excluding overedge stitching):			
- up to 1/4 inch inclusive			X
- more than 1/4 inch to 1 inch inclusive		X	
- more than 1 inch	X		
Any raw edge caused by omission of overedge stitching for a distance of 3 inches or more		X	
NOTE: Raw edges are classified as such when they occur at places where edge is required to be turned under. Raw edges not securely caught in stitching shall be classified as open seams.			
e. Run-offs:			
1. Joining seams - when resulting in an open seam, use "Open seam" classification			
2. Edge or raised stitching (when not resulting in an open seam):			
- 1/4 inch up to 1/2 inch inclusive			X
- more than 1/2 inch		X	
f. Seam and stitch type:			
1. Not specified seam or stitch type		X	
2. Overedge stitched edge on joining seams not finishing on the outside of liner		X	
g. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
2. Loose tension on raised or edge stitching		X	
3. Tight tension, i.e., stitches break when normal strain is applied to seam or stitching	X		
NOTE: Puckering is evidence of tight tension. When puckering is evident, the seam shall be tested by exerting pull in the lengthwise direction of seam.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
h. Stitches per inch (cm.) (to be scored only when the condition exists on the major portion of seam):			
1. Less than minimum specified (except overedge stitching):			
- one or two stitches			X
- three stitches		X	
- four or more stitches	X		
2. One or more stitches less than minimum specified on overedge stitching			X
3. One or more stitches more than specified			X
i. Stitches skipped or broken on edge or raised stitching when seam is seamed, turned and stitched:			
- 1/4 inch up to 1/2 inch inclusive			X
- more than 1/2 inch		X	
Buttonhole (construction)			
a. Stitching not caught in fabric causing stitching to pull away from fabric	X		
b. Wrong type, incomplete stitching or uncut buttonholes		X	
c. One or more broken or skipped stitches in buttonhole			X
d. Gimp omitted in one or more buttonholes			X
e. Cut length less than 3/4 inch or more than 7/8 inch			X
f. Less than 4 tacking stitches at bar end, not counting cross over stitch		X	
g. One or more omitted or added	X		
Front or side openings			
Openings uneven in length by:			
- 1/4 inch up to 3/8 inch inclusive			X
- more than 3/8 inch		X	
Binding			
a. Binding not caught to fabric, i.e., can be easily pulled away from edge of opening	X		
b. Binding short, causing excessive puckers or pleats		X	
c. Binding less than 3/8 inch or more than 5/8 inch in width			X
d. Raw edges of binding at bottom of legs not turned under or not turned to the outside of liner			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
Waist lining			
a. Construction:			
1. Twisted		X	
2. Width on inside of liner less than 2 inches or more than 2-1/4 inches			X
3. Width on outside of liner less than 1/2 inch or more than 5/8 inch			X
4. Irregular in width by more than 1/4 inch			X
5. Extended ends not turned to outside of liner		X	
Side facings			
a. Width of facing not as specified			X
b. Irregular in width by more than 1/4 inch			X
c. Raw edges or edges not caught in stitching		X	
Pleats			
Folds not toward the bottoms on inside of liner			X
Inseams			
Ends not staggered more than 3/8 inch (center to center)			X
Buttons			
a. Missing, loose or broken		X	
b. Wrong size, type or color		X	
c. Waistband buttons less than 1 inch or more than 1-1/4 inches from finished edge of right front; or off center on waist lining by more than 1/4 inch (measured from center to button)			X
d. Buttons and buttonholes out of alignment causing noticeable bulge when liner is buttoned			X
Position of horizontal buttonhole			
a. Inside edge of eyelet not required measurement from finished edge of right front and front side openings.			X
b. Off center on waist lining by more than 1/4 inch			X
c. Purling not finishing on the outside of liner			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

Defects	Classification Major	Minor A	Minor B
Vertical buttonholes at waist			
a. Purling not finishing toward the body			X
b. Inside edge of eyelets less than 1/2 inch or more than 3/4 inch from top edge of waist			X
Labels (size, identification, instruction or combination, when applicable)			
a. Size, instruction or combination (when applicable) labels missing, incorrect or illegible	X		
b. Identification label missing, incorrect or illegible		X	
c. Off center on right back by more than 1 inch (as worn)			X
d. Not stitched on all sides or not positioned as specified			X

* 4.2.3 End item dimensional examination. The end item shall be examined for conformance to the dimensions specified in table IV. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of liners. The sample unit shall be one liner. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.2.4 Examination of packaging requirements. An examination shall be made to determine that the preservation, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged or not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling or improper taping Bulged or distorted container
Content	Number of bundles is more or less than required Number of liners per bundle is more or less than required 1/

1/ For this defect, one bundle from each container in the sample shall be examined.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each buttoned liner shall be laid flat and then folded in half along the length with the crotch piece inside the fold. The liner shall be folded from the leg bottom up toward the waistband to an overall length of approximately 23 inches. Five folded liners of one size only shall be neatly stacked in a bundle with waistbands alternated end for end, and securely tied with cotton tape or twine approximately four inches in from each end.

* 5.1.2 Commercial. Liners shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Fifteen liners of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A bundles shall be packed flat three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 16 inches in width, and 16-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each fiberboard container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except the inspection shall be in accordance with 4.2.4. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B packing. Fifteen liners of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A bundles shall be packed flat three in depth within a shipping container. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 16 inches in width and 16-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4. Toward the end of the contract or purchase order, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification except that the inspection shall be in accordance with 4.2.4.

* 5.2.3 Commercial packing. Liners shall be preserved in accordance with ASTM D 3951.

* 5.3 Marking. In addition to any special marking required by the contract or purchase order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable. Each interior package shall have attached a manila color paper shipping tag for the identification marking.

5.3.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSN's" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The liner is intended for use by male military personnel of the Department of Defense, to be worn as an inner garment of the cold-dry uniform with the Trousers, Snow Camouflage, White, Arctic, M-65 as the outer garment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number and date of this document.
b. Size(s) required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample. For access to sample of the end item, address the contracting activity issuing the invitation for bids.

* 6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document. (see 3.3).

6.5 Changes from previous issue. The margins of this document are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - NU

Review activities:

Army - MD
DLA - CT

User activities:

Navy - MC, YD

Preparing activity:

Army - GL

Project No. 8415-0149

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

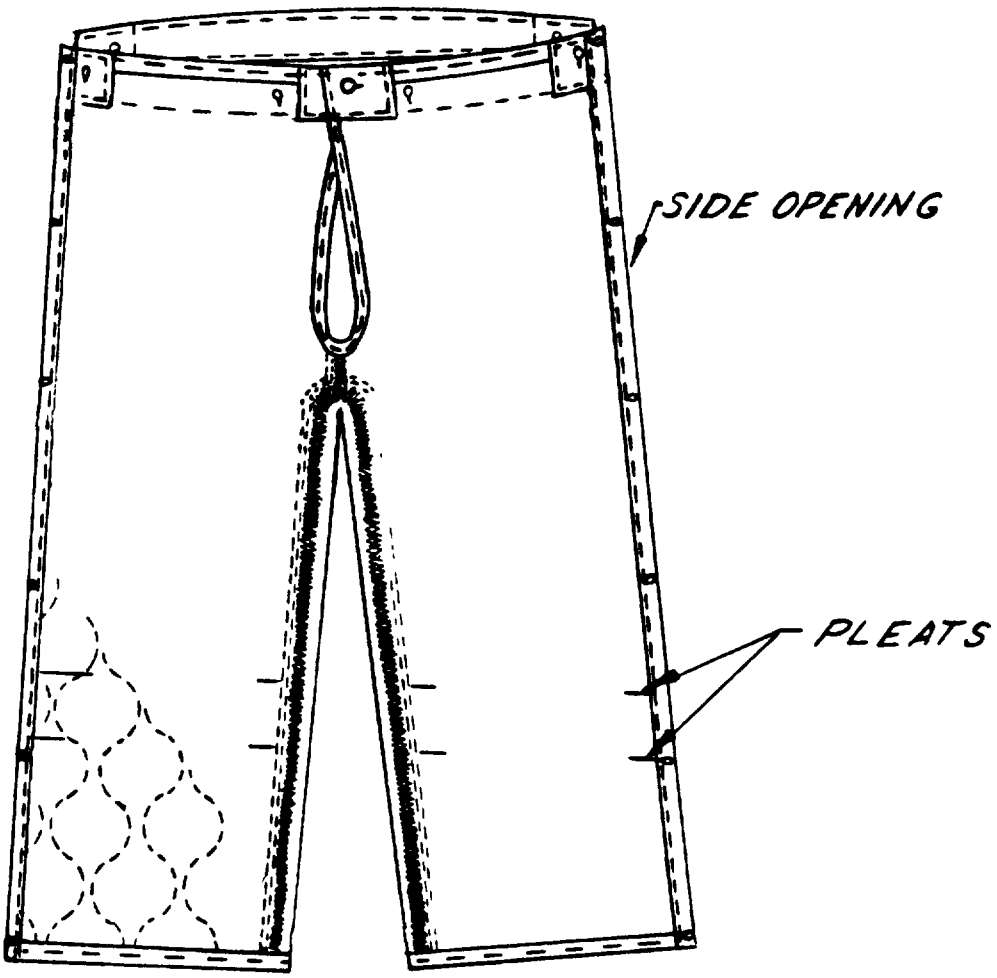


FIGURE 1 LINER, SNOW CAMOUFLAGE, TROUSERS, WHITE, ARCTIC, M-65

2-1-678

☆U S GOVERNMENT PRINTING OFFICE 1983—605-034/4860

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Laboratories
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRDNA-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Laboratories
ATTN: DRDNA-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-L-43672C	Liner, Snow Camouflage Trousers: White Arctic, M-65

3a. NAME OF SUBMITTING ORGANIZATION

b ADDRESS *(Street, City, State, ZIP Code)*

4 TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil – Downloaded: 2026-10-21T21:58Z
Check the source to verify that this is the current version before use.