MILITARY SPECIFICATION

PANS, FRANKFURTER ROLLS; AND PANS, SANDWICH ROLLS

1. SCOPE

1.1 Scope.- This specification covers pans for baking frankfurter rolls and sandwich rolls.

1.2 Classification.- The pans shall be of the following types as specified (see 6.2).

Type I	-	Frankfurter roll pan
Type II	-	Sandwich roll pan
Class A	-	Tin plated carbon steel
Class B	-	Aluminized steel

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-T-425	-	Tinplate (Hot Dip and Electrolytic)
QQ-W-461	-	Wire, Steel, Carbon, (Round, Bare and Coated)
PPP-B-636	-	Box, Fiberboard
PPP-F-320	-	Fiberboard; Corrugated and Solid Sheet Stock (Container Grade) and Cut Shapes

MILITARY

MIL-S-4174	-	Steel Sheet and Strip, Flat, Aluminum Coated, Low Carbon
MIL-G-51145	-	Glazing Compound, Baking Pan

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" Pallets, Skids, Runners, or Pallet-Type Base

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

DEPARTMENT OF HEALTH, EDUCATION AND WELFARE, FOOD AND DRUG ADMINISTRATION

Federal Food, Drug and Cosmetics Act

Food Additive Amendment, for Contact with Food

(Application for copies should be addressed to the Department of Health, Education and Welfare, Food and Drug Administration, 330 Independence Ave., S.W., Washington, D.C. 20204.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, ATTN: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

(Technical society and technical association specifications and standards are generally available from libraries. They are also distributed among technical groups and using Federal Agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the currentversion before use.

3. REQUIREMENTS

3.1 First article.- Unless otherwise specified (see 6.2), before production is commenced two sample pans of the same type and class shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable requirements of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Standard product.- The pans delivered under this specification shall be the manufacturer's current commercial products except for any changes required to comply with this specification.

3.3 Standards compliance.- The materials used in the pans shall conform to the applicable requirements of the Federal Food, Drug and Cosmetics Act. Food Additive Amendment, for Contact with Food.

3.3.1 Certification.- Prior to the approval of the preproduction sample, or if none is submitted, prior to the approval of the first shipment, the supplier shall furnish the contracting officer or his authorized representative a certified statement that the materials used in the pans he proposes to supply under this specification comply with the applicable requirements of the Federal Food, Drug and Cosmetics Act, Food Additive Amendment, for Contact with Food.

3.4 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for his pans, provided the completed pans comply with all provisions of this specification.

3.4.1 Tinplate.- Tinplate shall conform to either type I, grade 3, class A, bright finish or to type I, grade 4, class 25, dull-matte or bright finish of QQ-T-425.

3.4.2 Steel sheet or strip, aluminum coated.- Aluminum coated steel sheet or strip shall conform to type I, grade A of MIL-S-4174.

3.4.3 Glazing compound.- Glazing compound shall conform to the requirements of MIL-G-51145.

3.4.4 Carbon steel wire.- Carbon steel wire shall conform to steel number 1010, 1015, or 1020, finish 3, of QQ-W-461 with a diameter not thinner than No. 5 wire gauge (0.2070 inch nominal).

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:59Z
Check the source to verify that this is the currentversion before use.

3.5 Design and construction.- The pans shall be type I or II and class A or B as shown in 1.2 and shall consist of a one piece seamless pan body and a rim reinforcing wire rolled into the top edge of the pan body to form a continuous reinforcing bead around the top edge of the pan. Pans of one type shall nest within each other without binding when tested as specified in 4.4.1. The areas beween the moulds shall be flat. The pans shall be similar to figure 1. Figure 1 is illustrative only, except for dimensions and number and arrangement of moulds, and is not intended to preclude procurement of pans otherwise meeting all specification requirements.

3.5.1 Class A pans.- The class A pans shall be fabricated of the tin plate specified in 3.4.1 with a thickness of not less than 22 gauge (0.0299 inch nominal) and of the carbon steel wire specified in 3.4.4.

3.5.2 Class B pans.- The class B pans shall be fabricated of the aluminum coated steel sheet or strip specified in 3.4.2 with a thickness of not less than 22 gauge (0.0299 inch nominal) and of the carbon steel wire specified in 3.4.4.

3.6 Marking for identification.- Each pan shall be marked with the manufacturer's name, tradename, or trademark of such known character easily identified with the manufacturer. Marking shall be applied in accordance with the applicable requirements of MIL-STD-130.

3.7 Finish.- When specified (see 6.2), the pans shall be glazed with the glazing compound specified in 3.4.3. Unglazed pans shall be finished in accordance with the manufacturer's standard commercial practice.

3.8 Workmanship.- The finished pans shall be clean and free of imbedded foreign matter, rust, sharp or rough edges or corners, dents, burrs, slivers, die marks, buckles, deformities, fractures, punctures, scale and pitting. Glazed pans shall be uniformly coated over all areas.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

4.2 First article inspection.- When preproduction samples are required, they shall be examined for the defects listed in table I, dimensions specified, and tested as specified in 4.4.1. The presence of any visual defect, any dimension not within the specified requirements, or failure to pass the test shall be cause for rejection of the preproduction samples.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, standards, and drawings unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item inspection.- The lot shall comsist of all pans of one type and class offered for inspection at one time. The sample unit shall be one completely fabricated pan.

4.3.2.1 Visual inspection.- Inspection shall be made of the pans for the defects listed in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of Defects

Examine	Defect	Classification Major	Minor
Finish	Dirty, scratches, imbedded foreign matter, rust, die marks, scale, pitting		X
Glazing (when specified)	Missing, incomplete coverage	X	
Construction and Workmanship	Bodies not seamless construction	X	
	Wire bead loose	X	
	Wire bead not continuous around entire top edge of pan	X	
	Areas between mould's not flat	X	
Marking	Missing, not legible		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the currentversion before use.

4.3.2.2 Dimensional inspection.- An inspection shall be made to determine compliance with dimensions specified. Any nonconformance shall be considered a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.2.3 Testing of the end item.- The end item shall be tested as specified in 4.4.1. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3 Standards compliance.- Proof of compliance with the requirements of 3.3 shall be made available to the Government representative.

4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The lot shall be the number of shipping containers offered for inspection at one time. The sample unit shall be one container fully prepared for delivery. The inspection level shall be S-2 with an AQL of 6.5, expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking (exterior)	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application
Materials	Component missing, damaged, or otherwise defective
Content	Number per carton is more or less than required

4.3.4.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and strapping shall be in accordance with PPP-B-636.

4.4 Tests.- When both type I and type II pans are specified, the tests specified in 4.4.1 shall be performed on both types of pans.

4.4.1 Nesting and binding.- Place one pan on a hard level surface. Place a second pan of the same type in the nesting position in the first pan. Examine the pans for evidence of improper nesting to determine compliance with the nesting requirements of 3.5. Reverse the positions of the pans and apply a weight of not less than 120 pounds, evenly distributed, to the top pan and let the weighted pan remain in the nested position for not less than 10 minutes.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.

Remove the weight from the top pan. Remove the top pan from the bottom pan by lifting straight up without touching the bottom pan. Observe the bottom pan while lifting for any evidence of binding or sticking to determine compliance with the non-binding requirement of 3.5. Any evidence of improper nesting or of sticking or binding shall constitute failure of this test.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Pans of one type and class shall be nested in stacks of twelve, separated by sheets of kraft paper having a minimum basis weight of 30 pounds (24 by 36-500).

5.1.2 Level C.- The pans shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Twelve pans of one type and class only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Twelve pans of one type and class only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2) the shipping container shall be V3c or V3s, fabricated and closed in accordance with PPP-B-636. The shipping container material may also be grade V4s of PPP-F-320.

5.2.3 Level C.- Pans, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the currentversion before use.

5.3 Palletization.- Unless otherwise specified (see 6.2), pans packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The pans covered by this specification are for baking frankfurter rolls and sandwich rolls and are intended for use either in manual baking or with automatic baking systems. The class A pans are intended for general use by the Armed Forces. The class B pans are intended for use in areas where extreme corrosion conditions prevail.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and class pan required (see 1.2).
(c) First article.- When a preproduction sample is not required (see 3.1).
(d) When glazing is required (see 3.7).
(e) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(f) When weather-resistant class fiberboard shipping containers are required for level B shipment (see 5.2.2.1).
(g) When palletization is not required (see 5.3).

Custodian:

Army - GL

Review activity:


Army - MD

Preparing activity:

Army - GL

Project No. 7330-A394


Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.

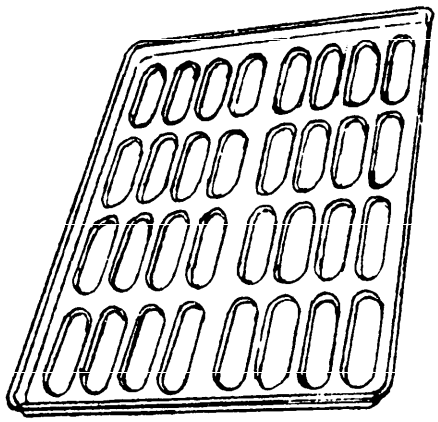

TYPE I, FRANKFURTER ROLL PAN

NUMBER AND ARRANGEMENT OF MOULDS AND DIMENSIONS IN INCHES

TOP OVERALL ± 1/8	NUMBER AND ARRANGEMENT OF MOULDS	OVERALL DEPTH OF PAN ± 1/16	MOULD DIMENSIONS ± 1/16		
			TOP INSIDE	BOTTOM INSIDE	DEPTH
19 1/2 X 28 3/4	32-IN 8 CLUSTERS OF 4 EACH CLUSTER	1 3/8	6 X 2 1/16	5 1/2 X 1 1/2	3/8

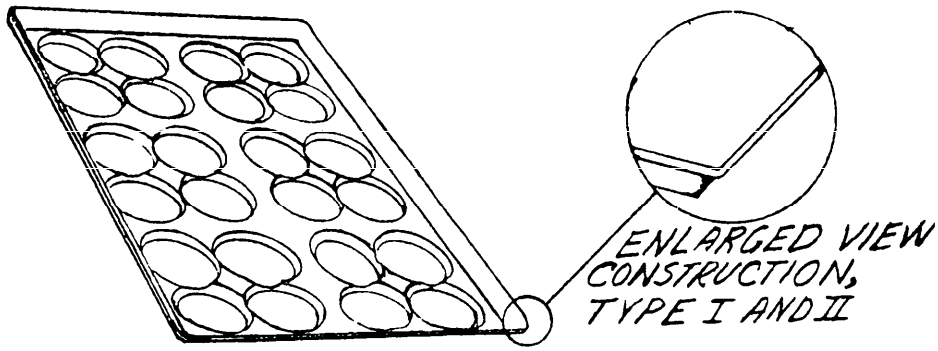

TYPE II, SANDWICH ROLL PAN

NUMBER AND ARRANGEMENT OF MOULDS AND DIMENSIONS IN INCHES

TOP OVERALL ± 1/8	NUMBER AND ARRANGEMENT OF MOULDS	OVERALL DEPTH OF PAN ± 1/16	MOULD DIMENSION ± 1/16		
			TOP INSIDE	BOTTOM INSIDE	DEPTH
17 5/8 X 25 5/8	24-IN 6 CLUSTERS OF 4 EACH CLUSTERS	1 7/10	3 3/4 DIA	3 5/16 DIA	3/8

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Pans, Frankfurter Rolls; and Pans, Sandwich Rolls MIL-P-43670(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:59Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:59Z
Check the source to verify that this is the current version before use.