MILITARY SPECIFICATION

STOPPER, INFLATING TUBE, PNEUMATIC MATTRESS

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for one type of stopper (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-636	- Box, Fiberboard.
PPP-B-665	- Boxes; Paperboard, Metal Stayed (Including Stay Material).
PPP-B-676	- Boxes, Setup.
PPP-F-320	- Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes
PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

MILITARY

MIL-R-3065	- Rubber, Fabricated Products.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:57Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" X 48" Pallets, Skids, Runners, or Pallet-Type Base.
MIL-STD-417 - Rubber Compositions, Vulcanized General Purpose, Solid (Symbols and Tests).

DRAWINGS

U. S. Army Natick Laboratories

2-3-99 - Mattress, Pneumatic; Inflating Tube and Stopper.

(Figure 1 is a miniature reproduction of the referenced drawing and is attached for information only.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Classification

Issued by National Motor Freight Traffic Association, Inc., Agent

(Application for copies should be addressed to American Trucking Associations, ATTN: Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036).

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee Agent, Room 202, Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606).

3. REQUIREMENTS

3.1 First article.- When specified (see 6.2), before production is commenced, two stoppers from each mold cavity shall be submitted to the contracting officer or his authorized representative for inspection as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of the responsibility for compliance with all provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:57Z
Check the source to verify that this is the current version before use.

3.2 Material.-

3.2.1 Stopper.- The stopper shall be made of black rubber material meeting the requirements of type, class, grade and suffix letters RS615A of MIL-R-3065 and MIL-STD-417.

3.3 Design and dimension.- The design and dimensions of the stopper shall be as shown in Drawing 2-3-99.

3.4 Workmanship.- The finished stopper shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When specified (see 6.2), samples submitted in accordance with 3.1 shall be inspected for all provisions of this specification applicable to end product examination and tests.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Inspection of the end item.-

4.3.1.1 Examination of the end item.- The end item shall be examined for the defects set forth in 4.3.1.1.1 and 4.3.1.1.2. The lot size shall be expressed in units of one stopper. The inspection levels and acceptable quality levels (AQLs) shall be as specified in 4.3.1.1.3.

4.3.1.1.1 Visual examination.- The sample unit shall be one stopper.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:57Z
Check the source to verify that this is the current version before use.

Defect
Color not black.
Torn, cracked, mutilated or distorted.
Tie hole missing or torn through.
Tie hole not punched out cleanly.
Any hole other than tie hole.
Not specified design.
Wall thickness of stopper uneven.
Excess flash or poor trim.
Tie hole tapered.
Dirty stained or soiled.

4.3.1.1.2 Dimensional examination.- The stoppers shall be examined for defects in dimensions. Any dimension that is not within the established tolerance (see Drawing 2-3-99) shall be classified a defect. The sample unit shall be one stopper.

4.3.1.1.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing and markings comply with the requirements of section 5 of this specification. The sample unit for this examination shall be one shipping container fully prepared for delivery except that it shall not be palletized and need not be sealed. Shipping containers fully prepared for delivery that have not been palletized shall be examined for defects of closure. Inspection levels and AQLs shall be as specified in 4.3.1.1.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any nonconforming component; component missing, damaged, or otherwise defective affecting serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:57Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulged or distorted container.
Contents	Number of items per package is more or less than required. 1/ Number of intermediate packages is more or less than required. Not packaged as specified.

1/ For this defect, one package from each container in the sample shall be examined.

4.3.1.1.4 Examination for palletization.- An examination shall be made to determine that the palletization requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level and AQL shall be as specified in 4.3.1.1.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.

4.3.1.1.5 Inspection levels and AQLs.- The inspection levels for determining sample size and the AQLs expressed in defects per one hundred units, shall be as follows:

Examination paragraph	Inspection level	AQL
4.3.1.1.1	II	4.0
4.3.1.1.2	S-2	4.0
4.3.1.1.3	S-2	2.5
4.3.1.1.4	S-1	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:57Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.- One hundred stoppers shall be packaged in a folding paperboard box conforming to variety 1, group I, style II, type A or B, class a of PPP-B-566; a metal stayed paperboard box conforming to style c of PPP-B-665; a setup paperboard box conforming to type I, variety 1, class c, style 3 or 4 of PPP-B-676; or a fiberboard box conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 175 of PPP-B-636. Inside dimensions of each box shall approximate 6-3/4 inches in length, 6-1/2 inches in width, and 4 inches in depth. Approximate dimensions are furnished as a guide only. Each box shall be secured with minimum 2 inch width gummed paper tape conforming to type III, grade B of PPP-T-45.

5.1.2 Level C.- Stoppers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- Eighteen hundred stoppers, packaged as specified in 5.1, shall be packed in a shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A packages shall be packed flat three in length, two in width, and three in depth within the shipping container. Inside dimensions of each shipping container shall approximate 21-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each fiberboard container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636.

5.2.2 Level B.- Eighteen hundred stoppers, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A packages shall be packed flat three in length, two in width, and three in depth within the shipping container. Inside dimensions of each shipping container shall approximate 21-1/2 inches in length, 14 inches in width, and 13-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification. The shipping container material may also be grade V4s of PPP-F-320.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:57Z
Check the source to verify that this is the current version before use.

5.2.3 Level C.- Stoppers packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Palletization.- Unless otherwise specified (see 6.2), stoppers, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking.- In addition to any special marking required by the contract or order, interior packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The stopper is intended for use in the inflating tube of the pneumatic mattress (MIL-M-10747).

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) First article.- When preproduction sample is required (see 3.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
(e) When palletization is not required (see 5.3).

Custodians:

Army - GL
Navy - SA
Air Force - 82

Preparing activity:

Army - GL

Project No. 8465-0467

Review activities:

Navy - SA, MC
Air Force - 45, 82

User activities:

Navy - YD
Air Force - 11

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:57Z
Check the source to verify that this is the current version before use.

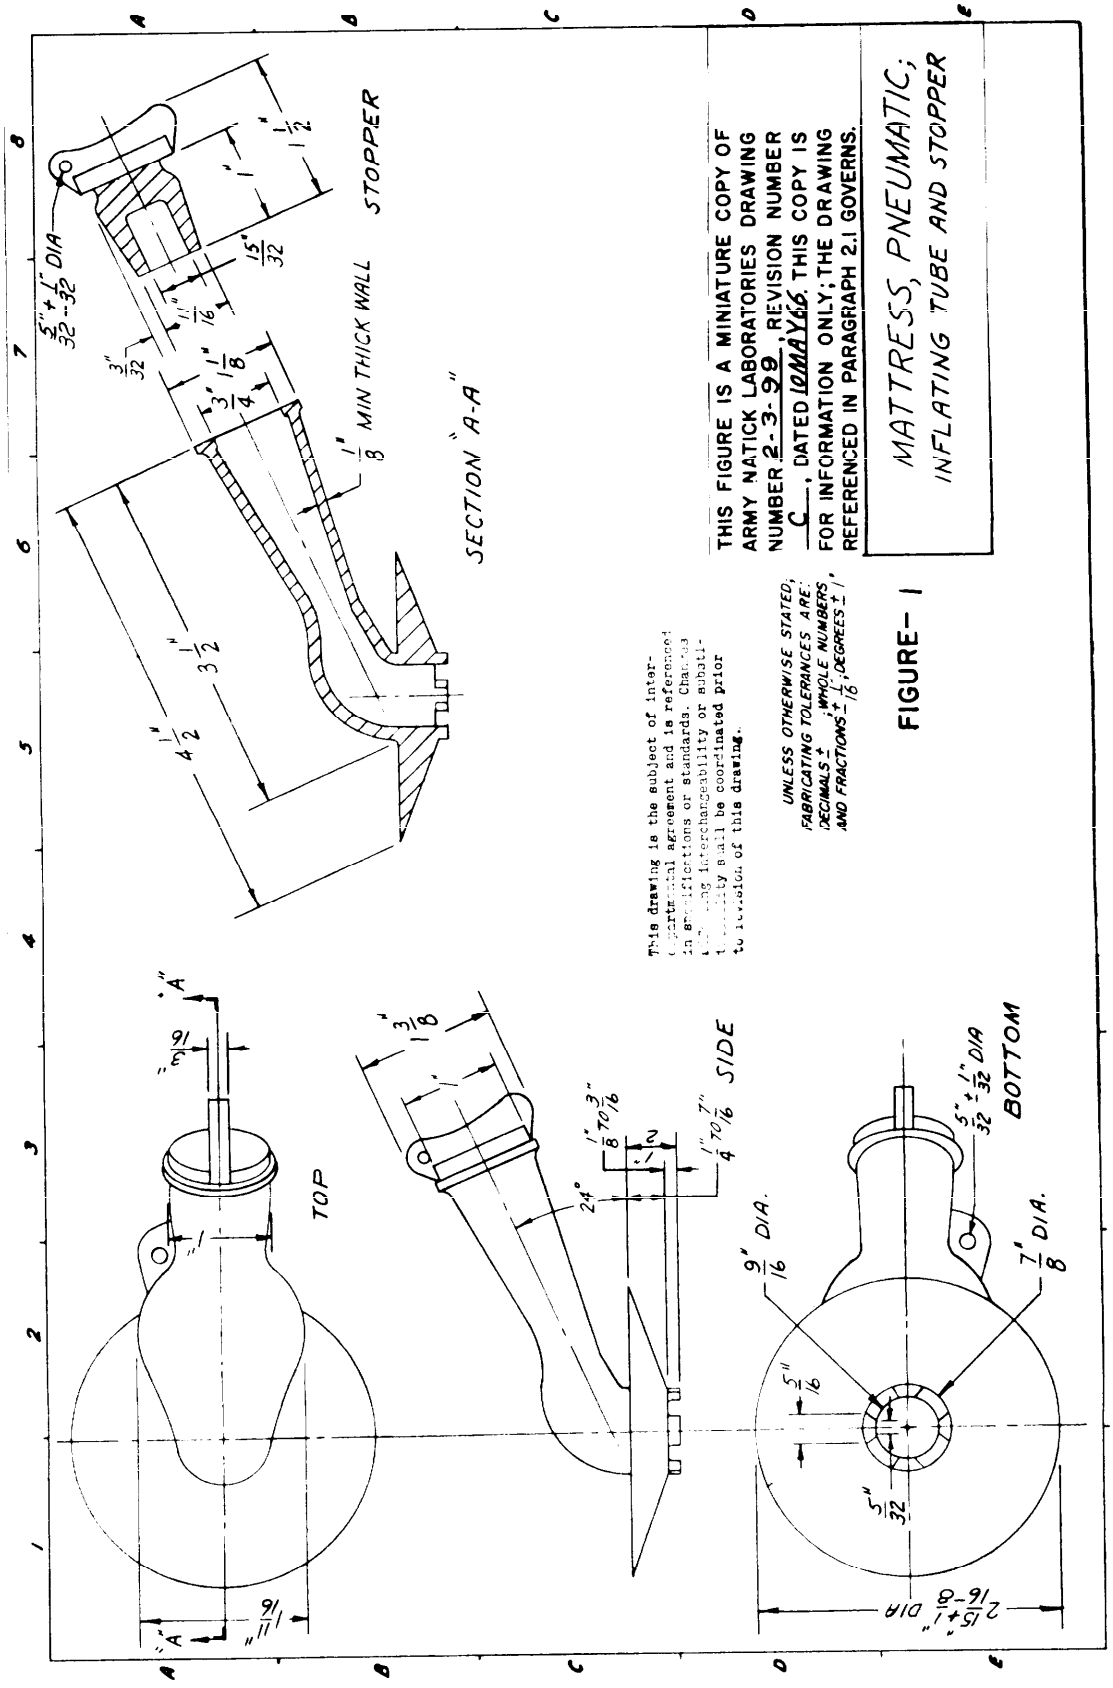


FIGURE- 1

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-G-858B - Gray Iron Alloy Castings, (Scale-Resisting)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specificat... If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:57Z
Check the source to verify that this is the current version before use.

FOLD

Commanding Officer
U.S. Naval Construction Battalion Center
Davisville, Rhode Island 02854

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding Officer
Code 310
U. S. Naval Construction Battalion Center
Davisville, Rhode Island 02854

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:57Z
Check the source to verify that this is the current version before use.