INCH-POUND

MIL-T-43654D
15 April 1991
SUPERSEDING
MIL-T-43654C
19 June 1986

MILITARY SPECIFICATION

TROUSERS, SNOW CAMOUFLAGE, WHITE, ARCTIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers snow camouflage, white arctic trousers.

1.2 Classification. The trousers shall be one type in the following sizes as specified (see 6.2).

Schedule of sizes

Short	Regular	Long
X-Small	X-Small	X-Small
Small	Small	Small
Medium	Medium	Medium
Large	Large	Large
X-Large	X-Large	X-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50083	-	Bag, Plastic, Folded Garment
A-A-50198	-	Thread, Gimp, Cotton, Buttonhole
A-A-50199	-	Thread, Polyester Core, Cotton- or Polyester-Covered
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fastener, Slide, Interlocking
DDD-L-20	-	Label: For Clothing, Equipage and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-371	-	Braid, Textile, Tubular
MIL-T-3530	-	Thread and Twine, Mildew Resistant or Water Repellent Treated
MIL-C-3924	-	Cloth, Oxford, Cotton Warp and Nylon Filling, Quarpel Treated
MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit; Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment, and Equipage; General Specification For
MIL-T-43566	-	Tape, Textile, Cotton or Polyester, General Purpose, Natural or in Colors

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets
MIL-STD-1488	-	Provisions for Evaluating Quality of Trousers

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material. The basic material shall be cotton warp and nylon filling oxford cloth, quarpel treated, conforming to class 1 of MIL-C-3924.

3.3.2 Braid, textile (tubular). The braid for leg hem and waistband drawcords shall conform to type IV, class 2, 4/32 inch diameter, and the braid for the slide fastener thong and suspender loops shall conform to type III, class 2, 6/32 inch wide of MIL-B-371. The braid shall be unbleached or

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

bleached. The ends of the leg hem and waistband drawcords and slide fastener thong shall be dipped or impregnated with cellulose acetate or cellulose butyrate, to prevent ravelling. The dipped or impregnated end shall be at least 1/2 inch in length.

3.3.3 Tape. The cotton tape for the waistband eyelet reinforcement pieces, waistband button tabs and snap fastener reinforcement pieces for side openings and hip pocket shall be 1-inch wide, conforming to type I, class 1 (natural) or class 2 (bleached) of MIL-T-43566.

3.3.4 Thread. The thread for seaming and stitching shall be cotton-or polyester-covered polyester core conforming to ticket numbers 30, 2 or 3 ply, 50, 2 ply and 70, 2 ply of A-A-50199. The color shall be bleached white, AH, C.A. 66050. The thread shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530.

3.3.5 Gimp. The cotton gimp for reinforcing buttonholes shall be natural or bleached, conforming to size No. 8, type I or II of A-A-50198.

3.3.6 Labels. Each trouser shall have an identification label, a size label, an instruction label or combination identification and instruction label or combination size, identification and instruction label conforming to DDD-L-20. The labels shall show fastness to laundering.

3.3.6.1 Identification label. The identification label shall conform to type VI, class 1.

3.3.6.2 Size label. The size label shall conform to type VI, class 2, and shall contain the following information for each respective size. Descriptive information shall be printed in characters not less than 10 point.

X-Small - Short	X-Small - Regular	X-Small - Long
Waist: Below 27 inches Inseam: Up to 29-1/2 in. Stock No.	Waist: Below 27 inches Inseam: 29-1/2 to 32-1/2 in. Stock No.	Waist: Below 27 Inseam: Over 32-1/2 in. Stock No.
Small - Short	Small - Regular	Small - Long
Waist: From 27 to 31 in. Inseam: Up to 29-1/2 in. Stock No.	Waist: From 27 to 31 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.	Waist: From 27 to 31 in. Inseam: Over 32-1/2 in. Stock No.
Medium - Short	Medium - Regular	Medium - Long
Waist: From 31 to 35 in. Inseam: Up to 29-1/2 in. Stock No.	Waist: From 31 to 35 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.	Waist: From 31 to 35 in. Inseam: Over 32-1/2 in. Stock No.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

Large - Short	Large - Regular	Large - Long
Waist: From 35 to 39 in. Inseam: Up to 29-1/2 in. Stock No.	Waist: From 35 to 39 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.	Waist: From 35 to 39 in. Inseam: Over 32-1/2 in. Stock No.
X-Large - Short	**X-Large - Regular**	**X-Large - Long**
Waist: From 39 to 43 in. Inseam: Up to 29-1/2 in. Stock No.	Waist: From 39 to 43 in. Inseam: 29-1/2 to 32-1/2 in. Stock No.	Waist: From 39 to 43 in. Inseam: Over 32-1/2 in. Stock No.

3.3.6.3 Instruction label. The instruction label shall conform to type VI, class 3, and shall contain the following information:

1. Wear as the outer garment in cold-dry climate.
2. Button in liner for extra warmth. Remove when damp or wet, and allow to dry.
3. Attach suspender hooks to suspender loops.
4. Adjust waist by drawcord.
5. Wear leg bottoms outside footgear and secure drawcords.
6. Brush off snow and frost before entering heated shelters.
7. Lubricate slide fastener with wax.
8. For cleaning and restoring of water repellancy, return to laundry for machine washing in accordance with established procedures for quarpel treated garments.
9. DO NOT STARCH.

DO NOT REMOVE THIS LABEL

3.3.6.4 Combination label. The identification label (class 1) and instruction label (class 3) may be combined into one label conforming to type VI, class 15 of DDD-L-20.

3.3.6.5 Combination size, identification, and instruction label. The identification label (class 1), size label (class 2), and instruction label (class 3) may be combined into one label. The combination label shall conform to type VI, class 14 of DDD-L-20.

3.3.7 Slide fastener. The slide fastener shall be type I, style 3, size MS, short tab pull, brass chain conforming to V-F-106. The tape shall be natural or bleached.

3.3.8 Buttons. The buttons shall be type II, class D, style 26, 30-line, White BA, Cable 62031, dull finish, conforming to V-B-871.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

3.3.9 Snap fasteners. The snap fasteners for side openings and hip pocket shall be brass, style 2A, finish 2, male and female complete, consisting of stud and eyelet, size 1 or 2, with button size 1 or 2 and socket conforming to MIL-F-10884, except an uncapped button shall be used to attach the socket.

3.4 Design. The trousers shall have side hand openings with flaps and right hip pocket with flap (all having snap fastener closures), suspender loops, inside button tabs, waistband and leg drawcords (see figure 1).

3.5 Figure. Figure 1 is furnished solely for guidance and information. Should variation from the written specification appear in the figure, the written specification shall govern.

3.6 Patterns. Standard patterns, which provide a seam allowance of 1/2 inch for double needle joining seams and 3/8 inch seam allowance for all other seams, except where otherwise specified will be furnished by the Government. The standard patterns are provided as a guide for cutting the contractor's working patterns and shall not be altered in any way. The working patterns shall be identical to the standard patterns.

3.6.1 List of pattern parts. The component parts of the trousers shall be cut from the material specified according to the number of parts listed in table I.

TABLE I. List of pattern parts.

Material	Pattern nomenclature	Cut parts
Cloth, oxford, cotton warp and nylon filing	Front	2
	Back	2
	Hip pocket flap	1
	Hip pocket	1
	Side opening flap	2
	Side opening flap lining	2
	Side opening facing	2
	Fly	4

3.7 Construction.

3.7.1 Stitches, seams, and stitchings. Stitch, seam and stitching types specified in table II are those covered by FED-STD-751. Whenever two or more seam or stitch types are given for the same part of the operation, any one of them may be used. When stitch type 401 is used, the looper (underthread) shall be one the inside of the trousers. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twist, pleats, puckers or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose tension.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

Unless otherwise indicated, the gage of stitching for double-needle seams shall be 1/4 to 5/16 inch with the outer row of stitching 1/16 to 1/8 inch from edge. The bight of the overedge stitching shall be 1/8 to 3/16 inch. When a knife is used on overedging machine, set guide so that the edge of fabric is not cut off but only the raw edge is trimmed when overedged.

3.7.2 Stitching per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.7.3 Thread breaks and ends of seams. Ends of all seams and stitchings produced with a 301 stitch type, when not caught in other seams or stitching, shall backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of each end not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired using 301 stitch type.

3.7.4 Buttonholes. The buttonholes for the trouser hems shall be eyelet-end, taper-bar type worked over gimp. The bar end shall have a minimum of four tacks, not counting the first cross-over stitch. The purling shall finish on the outside of the trousers prior to hemming. The finished cut length of the buttonhole shall be 1/2 to 5/8 inch.

3.8 Manufacturing operations requirements. The trousers shall be manufactured in accordance with operations specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible provided the thread is removed or does not show on the finished trousers.

3.8.1 Shade and size marking. The cut parts of the trousers shall be marked to insure a uniform shade and size throughout the trousers. Any method of marking may be used except:

a. Corrosive metal fastening devices.
b. Sew-on type tickets.
c. Adhesive type tickets which leave traces of paper or adhesive on the material after removal of the tickets

3.9 Bartacks. The bartacks shall measure 1/2 to 5/8 inch in length unless otherwise specified and be free from thread breaks and loose stitching.

3.10 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government furnished shaper pattern is forwarded, the component shall conform to that pattern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the material in strict accordance with patterns furnished, which show size, placement of pockets, directional lines, and notches for proper assembly. Directional lines indicate the warp direction of the material. The directional lines on the fronts and backs of the trouser parts may vary from the warp direction by not more than 2-1/2 inches. Measurements shall be taken from the top and bottom of the directional line on pattern to the selvage edge of the fabric and the difference between the two measurements shall not exceed 2-1/2 inches. b. Cut all parts from the same piece of material except side opening flap lining, side opening facing, fly pieces and buttonhole reinforcement pieces, which may be cut from ends. c. Cut leg drawcords (two per trouser) of sufficient length to allow for an extension of not less than 3 inches (unknotted) from each buttonhole (see 3.3.2). d. Cut waistband drawcord (one per trouser) of sufficient length to allow for an extension of not less than 9 inches (unknotted) from each eyelet (see 3.3.2). e. Cut waistband button tabs (six per trouser) from the 1 inch tape of sufficient length to conform to finished length required in operation 18.a. f. Cut suspender loops (two per trouser) to measure 8-3/8 ± 1/4 inches in length for all sizes.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) g. Cut the 6/32 inch braid for slide fastener thong (one per trouser) 15 ± 1/2 inches long (see 3.3.2). h. Cut 1 inch width of base material for waistband eyelet reinforcement pieces (two per trouser) 1-1/2 ± 1/4 inches long. i. Cut the 1 inch tape for snap fasteners on side opening flaps, hip pocket and flap of sufficient length to reinforce the surrounding area of the fasteners. Cut the 1 inch tape for side openings facings to sufficient length so that the tape shall be caught in the joining seam of facing to outseam and extend to reinforce stud part of snap fastener (see operation 11).						
2.	Replacement of defective or damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to insure that material defects and damages as specified in MIL-STD-1488 are excluded and replaced with non-defective and properly matched material.						
3.	Shade and size marking. Mark, ticket, or bundle all cut parts of the basic material except those cut from ends to insure a uniform shade and size throughout the trousers.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labeling.						
	a. Center (1 inch off center tolerance) the size label on the right back of trousers not more than 1/2 inch below the hip pocket flap location marks and stitch on all four sides. The top edge of the size label may be caught in the hip pocket flap.	301	LSbj-1	10-14	30-3	30-3	
	b. Center (1 inch off center tolerance) the instruction label not more than 1 inch below the size label and stitch on all four sides. The top edge of the instruction label may be caught in the bottom of size label stitching.	301	LSbj-1	10-14	30-3	30-3	
	c. Center (1 inch off center tolerance) the identification label below the instruction label and stitch on all four sides. the stitching for the bottom edge of the instruction label shall catch the top edge of the identification label.	301	LSbj-1	10-14	30-3	30-3	
	d. Position the combination identification and instruction label (when used) as in "b" above and stitch on all four sides.	301	LSbj-1	10-14	30-3	30-3	
	e. Position the combination size, identification and instruction label (when used) as in "a" above and stitch on all four sides. NOTE: The stitching for the labels shall not be through the printing. The stitch margin shall be 1/8 to 3/16 inch.	301	LSbj-1	10-14	30-3	30-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make waistband button tabs.						
	a. Turn end of the tape 1/2 to 5/8 inch and stitch or bartack across tape not less than 1/8 inch from raw edge. The bartack shall not be less than 3/4 inch long.	301 or 401 or Bartack	EFa-1 EFa-1 EFa-1	10-14 10-14 28 per bartack	30-3 30-3 30-3	30-3 30-3 30-3	
	b. Sew button on center of tab (1/8 inch off center tolerance) with center of button 3/4 to 1 inch from the folded edge.	101 or 301	- -	20-24 per button 14-16 per button	30-3 30-3 30-3	- 	
	- or -						
	c. Fold tape in half and sew button on center (1/8 inch off center tolerance) of tab through plies of tape with the center of button 3/4 to 1 inch from folded end.	101 or 301	- -	20-24 per button 14-16 per button	30-3 30-3	- 30-3	
6.	Make flaps for side hand openings.						
	a. Attach socket part of snap fastener to flap lining through tape reinforcement pieces, as indicated by mark on pattern.						
	b. Seam flap lining to flap along the sides and pointed edges. Turn, work out edges and points, and stitch 3/16 to 1/4 inch from edges.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30-3 30-3 30-3	30-3 30-3 30-3	
7.	Make hip pocket flap.						
	a. Attach socket part of snap fastener to underside of flap through tape reinforcement piece, as indicated by mark on pattern.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make hip pocket flap. (cont'd)						
	b. Fold flap in half and seam sides. Turn, work cut corners and edge stitch 3/16 to 1/4 inch from side edges and along folded edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b) and	10-14 10-14 10-14	30-3 30-3 30-3	30-3 50-3 30-3	
		301	OSf-1	10-14	30-3	30-3	
	- or -						
	c. Fold flap in half, turning the side edges to the inside and stitch 1/16 to 1/8 inch from side edges and along folded edge.	301	SSc-1 and	10-14	30-3	30-3	
		301	OSf-1	10-14	30-3	30-3	
	- or -						
	d. Fold flap in half, turning all raw edges to the inside and stitch 1/16 to 1/8 inch from all edges.	301	SSc-1 and	10-14	30-3	30-3	
		301	OSf-1	10-14	30-3	30-3	
8.	Make hip pocket.						
	a. Hem the top of pocket with the raw edges turned in and stitch 1/16 to 1/8 inch from turned edge, catching the tape reinforcement piece for snap fastener (inclosed within the hem) in the stitching. The hem shall finish 1-3/4 ± 1/4 inches wide.	301	EFb-1	10-14	30-3	30-3	
	b. Attach stud part of snap fastener through hem and tape reinforcement piece. The stud shall be positioned so that when engaged with the socket part of the pocket flap on the finished trousers, the flap will be flat without twists or distortions.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make left fly.						
	a. Overedge the back edge of left fly and interlining pieces together.	502 or 503	SSa-1 SSa-1	6-10 6-10	50-3 50-3	50-3 50-3	
	b. Position the left side of fastener chain on left fly with the edge of chain 3/8 to 1/2 inch from the front finished edge of fly and the bottom end of chain 1/4 to 1/2 inch above the fly notch so that the bottom edge of chain shall correspond with bottom edge of chain on right fly.						
	c. Seam the fastener tape through the fly and interlining with two rows of stitching with the first row 1/16 to 1/8 inch from the back edge of the tape and a second row of stitching 1/8 to 3/16 inch from the inside edge of scoops. Both rows of stitching are to be continued to the end of the tape extension.	301	SSv-2	10-14	30-3	30-3	
10.	Make right fly.						
	a. Seam lining to the front edge of right fly. Turn fly lining to inside and edge stitch 1/16 to 1/8 inch from folded edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30-3 30-3 30-3	30-3 50-3 30-3	
	b. Overedge the back edge of right fly and right fly lining.	502 or 503	SSa-1 SSa-1	6-10 6-10	50-3 50-3	50-3 50-3	
11.	Set facings and flaps for side hand openings.						
	a. Seam side hand opening facing to each front, notch to notch, catching tape reinforcement piece in the stitching. Turn and stitch 1/16 to 1/8 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30-3 30-3 30-3	30-3 50-3 30-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Set facings and flaps for side hand openings. (cont'd)						
	b. Turn under the back raw edge of facing and stitch 1/16 and to 1/8 inch from edge.	301	LSd-1	10-14	30-3	30-3	
	c. Attach stud part of snap fastener through facing, tape reinforcement piece, and trouser front. The stud shall be positioned so that when engaged with the socket part on flap on the finished trousers, the flap will lie flat without twists or distortions.						
	d. Position flaps on each back, as indicated by marks on pattern, and stitch flaps to right and left outseam allowances.	301	SSa-1	10-14	30-3	30-3	
	NOTE: This operation d. may be omitted (see operation 14).						
12.	Sew on fly.						
	a. Seam left fly to front of trousers, with notches matching, from notch at base of fly to top of trouser. Turn left fly to inside with seam 1/16 to 1/8 inch back of folded edge and raise stitch 1/16 to 1/8 inch from folded edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b)	10-14 10-14 10-14	30-3 30-3 30-3	30-3 30-5 30-3	
	b. Stitch back edge of left fly to trousers 1-1/2 ± 1/8 inches from front edge of finished fly.	301	-	10-14	30-3	30-3	
	c. Overedge the right front from fly notch to top of waist.	502 or 503	EFd-1 EFd-1	6-10 6-10	50-3 50-3	50-3 50-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Sew on fly. (cont'd)						
	d. Position the right half of slide fastener to the back edge of right fly with the ends of chain 1/4 to 1/2 inch above the fly notch, so that the bottom edge shall correspond with the left fly and stitch tape to fly 1/16 to 1/8 inch from back edge.	301	SSa-1	10-14	30-3	30-3	
	e. Seam right fly to front of trousers with notches matching, catching fastener tape in the stitchings; turn seam and raise stitch 1/16 to 1/8 inch from seam from top of trousers to base of fly through fly lining. The top edge of fastener tape shall be turned toward the back and caught in the stitching. The top stop of the slide fastener chain shall finish 1-1/2 to 2 inches form the top finished edge of trousers.	301 or 401 and 301	LSq-2(a) LSq-2(a) LSq-2(b)	10-14 10-14 10-14	30-3 30-3 30-3	30-3 50-3 30-3	
	NOTE: The slide fastener may be sewn to fly already assembled and stapled.						
13.	Sew on hip pocket and flap.						
	a. Position pocket as indicated by marks on pattern, turn in the sides and bottom of pocket and stitch to trousers with two rows of stitching.	301	LSd-2	10-14	30-3	30-3	
	b. Seam top edge of flap to trousers above pocket opening as indicated by marks on pattern, turn, and stitch with two rows of stitching.	301	LSbk-3	10-14	30-3	30-3	
	- or -						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Sew on hip pocket and flap. (cont'd)						
	c. When all raw edges of hip pocket flap are turned in (see operation 7.d.), seam with two rows of stitching.	301	LSbj-2	10-14	30-3	30-3	
14.	Join outseams and form hand openings.						
	Join outseams with a double-lapped, double-stitched seam with the backs of trousers lapping fronts, catching the flaps and knee pleats (two each leg) in the joining seam. The hand openings shall be formed by not catching the front in the seaming under the flap. The outside folded edge of pleats shall face toward bottom of trousers.	301 or 401	LSc-2 LSc-2	10-14 10-14	30-3 30-3	30-3 50-3	
15.	Join crotch seam.						
	a. Turn crotch seam of right front to the outside and stitch 1/16 to 1/8 inch from edge, catching the end of right fly.	301 or 401	LSdc-3(a) LSdc-3(a)	10-14 10-14	30-3 30-3	30-3 30-3	
	b. Turn edge of left front crotch seam to the inside overlap on right front and stitch with two rows of stitching 3/16 to 1/4 inch apart catching the right crotch seam with both rows of stitching.	301 or 401	LSdc-3(b) LSdc-3(b)	10-14 10-14	30-3 30-3	30-3 30-3	
16.	Join seat seam.						
	Join seat seam with a double-lapped, double-stitched seam.	401	LSc-2	10-14	30-3	50-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Join inseams.						
	Join inseams with a double-lapped, double-stitched seam with backs of trousers lapping fronts, forming knee pleats (two each leg) in the joining seam. The outside folded edge of pleats shall face toward the bottom of trousers. The crotch seam and seat seam may be staggered the width of the seam.	301 or 401	LSc-2 LSc-2	10-14 10-14	30-3 30-3	30-3 50-3	
18.	Attach button tabs.						
	a. Position six waistband button tabs on inside of trousers at waist a sufficient distance from top raw edge of trousers so that tabs shall finish 1-3/4 to 2 inches in length in the finished trouser. Tabs shall be placed as follows, with measurements taken from center of tabs to center of seams: One tab 2-1/4 ± 1/4 inches each side of seat seam. One tab centered on each outseam (± 1/4 inch off center tolerance). One tab 3-1/4 ± 1/4 inches back from the finished edge of right fly. One tab 4 ± 1/4 inches back from the finished edge of left fly.						
19.	Attach eyelet reinforcement pieces and eyelets.						
	a. Turn in raw edges of reinforcement material with end edges abutted. Center (1/8 inch off center tolerance) eyelet reinforcement pieces on marks for eyelets	301		10-14	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Attach eyelet reinforcement pieces and eyelets. (cont'd)						
	and stitch on all four sides 1/16 to 3/32 inch from edges on wrong side of waistband. The tape shall finish 3/4 ± 1/8 inch long. The folded edges shall not be caught in the waistband stitching.						
	b. Stitch eyelets through reinforcement pieces and trousers. The eyelets shall be centered (3/16 inch off center tolerance) on the reinforcement pieces.	401		19-24 per eyelet	50	70	
		or 502		26-32 per eyelet	70	70	
		or 503		26-32 per eyelet	70	70	
20.	Attach snap fastener, suspender loops and button tabs, and hem waist.						
	a. Attach socket part of snap fastener to top edge of waist positioned so that it will finish 1/2 ± 1/8 inch from top edge of finished waist and 3/4 ± 1/8 inch from finished left fly. Measurements shall be taken to the center of snap fastener socket. Socket shall face toward inside of trousers.						
	b. Position braid for loops on inside front of trousers on waistband 1/4 to 1/2 inch from side seam (measured from center of side seam to edge nearest seam). Turn braid under the waist hem, even with the turned under raw edge of the hem. The opposite end of the braid shall be positioned 5 to 5-1/2 inches toward front of trousers.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Attach snap fastener, suspender loops and button tabs, and hem waist. (cont'd)						
	c. Turn top of trousers over drawcord, turn in the raw edge and stitch 1/16 to 1/8 inch from edge, forming a hem, and catching button tabs and braid for suspender loops in the stitching. The hem shall finish 1 to 1-1/4 inches wide and continue across width of hem at each end 1/16 to 1/8 inch from edges. The drawcord shall be threaded through the eyelets and knotted to prevent return into hem; the drawcord shall not be caught in the stitching of waist hem.	301	EFb-1	10-14	30-3	30-3	
	d. Bartack waistband button tabs to trousers with a horizontal bartack (1/8 inch off center tolerance) centered on the tab not less than 3/16 inch down from raw edge of tab. Care shall be taken not to catch bartack in drawcord.	Bartack	-	28 per bartack	30-3	30-3	
	e. Mark the position of stud part of snap fastener at the top of right fly on outside to correspond with the socket of the left fly at waistband hem (with slide fastener closed). Attach stud fastener at this mark, with stud facing toward outside of trousers.						
21.	Position and bartack suspender loops.						
	Bartack with two horizontal bartacks 1/4 to 1/2 inch apart. The first bartack shall be 1/8 inch from turned edge. The opposite turned edge of braid shall be positioned 5 to 5-1/2 inches toward front of trouser and with turned edge even with bottom of	Bartack	-	28 per bartack	30-3	30-3	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
21.	Position and bartack suspender loops. (cont'd) waistband bartack with two horizontal bartacks, positioned as previously mentioned. Each loop shall extend over the top edge of the trousers 3/4 to 1 inch to form an arc as indicated on figure 1.						
22.	Hem bottoms of trousers.						
	a. Make four horizontal buttonholes (two each trouser leg) at each mark indicated by pattern through each leg of trousers and basic material reinforcement piece. The eyelet end of the button-holes shall face each other.	Button-hole	-	44-46 per buttonhole	30-3	30-3	
	- or -						
	b. In lieu of buttonholes, make two sewn eyelets (two each trouser leg) through reinforcement, positioned as indicated by marks on pattern for the eyelet end of the buttonhole. NOTE: The reinforcement pieces shall be cut to sufficient length and width to cover the area surrounding the buttonholes.	Eyelet		19-24 per eyelet	50-3	50-3	
	c. Thread drawcords through outlets of trousers with drawcords criss-crossed at buttonholes.						
	d. Turn up bottoms of trousers over drawcords, turn under raw edge, and stitch 1/16 to 1/8 inch from edge through legs. The drawcords shall not be caught in the stitching of trouser hems. The hem shall finish 1 ± 1/4 inches wide.	301	EFb-1	10-14	30-3	30-3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
22.	Hem bottoms of trousers. (cont'd)						
	e. Knot ends of drawcords to prevent return into hem.						
23.	Bartacking.						
	a. Bartack both corners of hip pocket opening with a vertical bartack on inside row of double stitching.	Bartack	-	28 per bartack	30-3	30-3	
	b. Bartack the base of fly with a diagonal bartack positioned on the fly stitching	Bartack	-	28 per bartack	30-3	30-3	
	c. Bartack the top and bottom end of each side hand opening flap with a horizontal bartack through flap, trousers, and facing pieces. The bartacks shall be positioned 1/4 to 3/8 inch from ends of flap	Bartack	-	28 per bartack	30-3	30-3	
	d. Bartack each leg drawcord through hem at center of back (± 1/2 inch off center tolerance) with a vertical bartack.	Bartack	-	28 per bartack	30-3	30-3	
24.	Assemble slide fastener.						
	a. When a divided fastener is used, attach slide and staple bottom of fastener together.						
	b. Fold braid in half. Insert folded end through eyelet of slide fastener tab pull. Insert ends through braid loop and pull to form a thong. Secure the free ends of the braid with a knot.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
25.	Cleaning. a. Trim all ends of stitching and remove loose threads. b. Remove all spots and stains. c. Remove all shade and size tickets. d. Close slide fastener.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

3.11 Finished measurements. Finished measurements shall conform to table III.

TABLE III. Finished measurements (inches)

Size	1/2 Waist 1/	Inseam 2/	Outseam 3/	1/2 Knee 4/	1/2 Bottom 5/
Short					
X-Small	16	25-1/2	38-1/2	13-7/8	12
Small	18	25-1/2	39	14-1/2	12-1/4
Medium	20	25-1/2	39-1/2	15-1/4	12-1/2
Large	22	25-1/2	40	16	12-3/4
X-Large	24	25-1/2	40-1/2	16-5/8	13
Regular					
X-Small	16	28-1/2	42	13-7/8	12
Small	18	28-1/2	42-1/2	14-1/2	12-1/4
Medium	20	28-1/2	43	15-1/4	12-1/2
Large	22	28-1/2	43-1/2	16	12-3/4
X-Large	24	28-1/2	44	16-5/8	13
Long					
X-Small	16	31-1/2	45-1/2	13-7/8	12
Small	18	31-1/2	46	14-1/2	12-1/4
Medium	20	31-1/2	46-1/2	15-1/4	12-1/2
Large	22	31-1/2	47	16	12-3/4
X-Large	24	31-1/2	47-1/2	16-5/8	13
Tolerance	± 1/2	± 3/4	± 3/4	± 1/2	± 1/2

1/ Measurement taken along top edge of waist from folded edge to folded edge with front snap fastener secured.

2/ Measurement taken from center of crotch seam to bottom of leg.

3/ Measurement taken from top of waist to bottom of trousers along outseam.

4/ Measurement taken between knee pleats across knee from folded edge to folded edge.

5/ Measurement taken across bottom of leg from folded edge to folded edge.

3.12 Workmanship. The finished trousers shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable acceptable quality level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicted or actual, nor does it commit the Government to accept defective material.

4.1.2 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.1.3 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for visual and dimensional defects specified in MIL-STD-1488.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component and material certification. A certificate of compliance may be acceptable as evidence that the dipping or impregnating compound conforms to the requirements specified in 3.3.2.

4.4.2 End item visual examination. The end items shall be examined for utility trousers (U) visual defects in accordance with the provisions of MIL-STD-1488.

4.4.3 End item dimensional examination. The end items shall be examined for dimensional defects in accordance with the provisions of MIL-STD-1488.

4.4.4 Packaging examination. The fully packaged end items shall be examined in accordance with the provisions of MIL-STD-1488.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each pair of trousers, with inseams meeting, shall be folded from the leg bottom up toward the waistband right side out to an overall length of approximately 23 inches. For the larger sizes it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches. Each pair of trousers shall be placed in its own plastic bag in accordance with A-A-50083.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial preservation. The trousers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Forty pairs of trousers of one type and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, water-proofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Forty pairs of trousers of one type and size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the fiberboard container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Trousers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), trousers packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The trousers are intended for wear by military personnel of the Department of Defense in cold dry areas as supplementary trousers with attached liner.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2)
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistance grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Subject term (key word) listing.

Cold dry
Cold weather clothing
Water repellent clothing

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Preparing activity:

Army - GL

(Project 8415-0780)

Review activities:

Army - MD
Navy - MC
Air Force - 82
DLA - CT

User activity:

Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

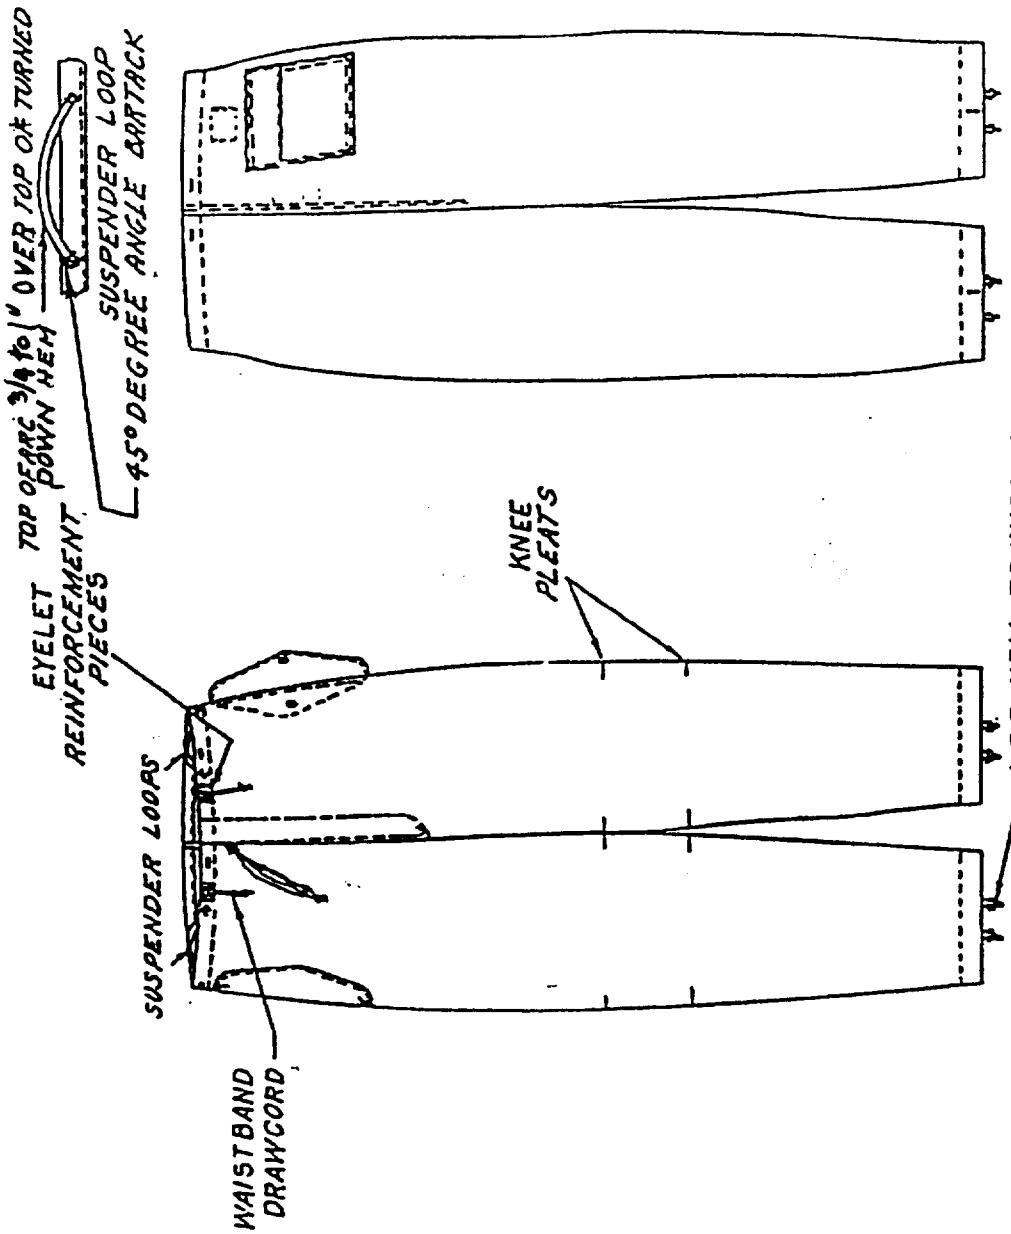


FIGURE 1. TROUSERS, SNOW CAMOUFLAGE, WHITE, ARTIC, 21-T-677 C

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-43654D	1991 April 15

3. DOCUMENT TITLE

TROUSERS, SNOW CAMOUFLAGE, WHITE, ARCTIC

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
J.S. Army Natick RD&E Center	508-651-4532	256-4532
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.