INCH-POUND

MIL-T-0043654E(GL)
10 February 1992
USED IN LIEU OF
MIL-T-43654D
15 April 1991

MILITARY SPECIFICATION

TROUSERS, SNOW CAMOUFLAGE, WHITE

This specification is approved for use by the Natick Research, Development, and Engineering Center, Department of the Army, based upon currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-T-43654. It is subject to modification. However, pending its promulgation as a coordinated military specification it may be used in acquisition.

1. SCOPE

1.1 Scope. This specification covers snow camouflage, white, trousers.

1.2 Classification. The trousers shall be of one type in the following sizes as specified (see 6.2).

Schedule of sizes

Short	Regular	Long
X-Small	X-Small	X-Small
Small	Small	Small
Medium	Medium	Medium
Large	Large	Large
X-Large	X-Large	X-Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
A-A-50199	-	Thread, Polyester Core, Cotton- or Polyester-Covered
V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fastener, Slide, Interlocking
DDD-L-20	-	Label: For Clothing, Equipage and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-371	-	Braid, Textile, Tubular
MIL-T-3530	-	Thread and Twine, Mildew Resistant or Water Repellent Treated
MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit; Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment, and Equipage; General Specification For
MIL-C-43303	-	Cord, Elastic Cotton
MIL-T-43566	-	Tape, Textile, Cotton or Polyester, General Purpose, Natural or in Colors
MIL-C-44431	-	Cloth, Plain Weave, Nylon Filament, Lightweight

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets
MIL-STD-1488	-	Provisions for Evaluating Quality of Trousers

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Basic material. The basic material shall be a nylon filament, plain weave, lightweight cloth conforming to MIL-C-44431.

3.2.2 Braid. The braid for the waistband and storage pouch drawcords shall conform to type IV, class 2 of MIL-B-371 and the braid for the slide fastener thongs and suspender loops shall conform to type III, class 2 of MIL-B-371. The braid shall be unbleached or bleached. The ends of the storage pouch drawcord, waistband drawcord, and slide fastener thongs shall be dipped or impregnated with cellulose acetate or cellulose butyrate, to prevent ravelling. The dipped or impregnated ends shall be at least 1/2 inch in length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

3.2.3 Elastic cord. The elastic cord for the leg bottom shall conform to class 2 of MIL-C-43303. The cord shall be unbleached or bleached. The ends of the cord shall be dipped or impregnated with cellulose acetate or cellulose butyrate to prevent ravelling. The dipped or impregnated ends shall be at least 1/2 inch.

3.2.4 Tape. The cotton tape for the waistband button tabs shall be 1-inch wide, conforming to type I, class 1 (natural) or class 2 (bleached) of MIL-T-43566.

3.2.5 Thread. The thread for all seaming and stitching shall be cotton- or polyester-covered polyester core conforming to ticket numbers 50, 2 ply and 70, 2 ply of A-A-50199. The color shall be bleached white, AH, C.A. 66050. The thread shall be water repellent treated in accordance with type II, class 3 of MIL-T-3530.

3.2.6 Buttons. The buttons shall be type II, class D, style 26, 30-line, White BA, Cable 62031, dull finish, conforming to V-B-871.

3.2.7 Snap fasteners. The snap fasteners for front hand openings and cargo pockets shall be brass, style 2A, finish 6, male and female complete, consisting of stud and eyelet, size 1 or 2, with button size 1 or 2 and socket conforming to MIL-F-10884, except an uncapped button shall be used to attach the socket.

3.2.8 Labels. Each of the trousers shall have an identification label, a size label, an instruction label or combination identification and instruction label or combination size, identification and instruction label conforming to DDD-L-20. The labels shall show fastness to laundering.

3.2.8.1 Identification label. The identification label shall conform to type VI, class 1.

3.2.8.2 Size label. The size label shall conform to type VI, class 2, and shall contain the following information for each respective size. Descriptive information shall be printed in characters not less than 10 point.

X-Small - Short	X-Small - Regular	X-Small - Long
Waist: Below 27 inches Inseam: Up to 29-1/2 in. Stock No. NATO Size: 6975/6469	Waist: Below 27 inches Inseam: 29-1/2 to 32-1/2 in. Stock No. NATO Size: 7583/6469	Waist: Below 27 Inseam: Over 32-1/2 in. Stock No. NATO Size: 8386/6469
Small - Short	**Small - Regular**	**Small - Long**
Waist: From 27 to 31 in. Inseam: Up to 29-1/2 in. Stock No. NATO Size: 6975/6979	Waist: From 27 to 31 in. Inseam: 29-1/2 to 32-1/2 in. Stock No. NATO Size: 7583/6979	Waist: From 27 to 31 in. Inseam: Over 32-1/2 in. Stock No. NATO Size: 8386/6979

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

Medium - Short	Medium - Regular	Medium - Long
Waist: From 31 to 35 in. Inseam: Up to 29-1/2 in. Stock No. NATO Size: 6975/7989	Waist: From 31 to 35 in. Inseam: 29-1/2 to 32-1/2 in. Stock No. NATO Size: 7583/7989	Waist: From 31 to 35 in. Inseam: Over 32-1/2 in. Stock No. NATO Size: 8386/7989
Large - Short	Large - Regular	Large - Long
Waist: From 35 to 39 in. Inseam: Up to 29-1/2 in. Stock No. NATO Size: 6975/8999	Waist: From 35 to 39 in. Inseam: 29-1/2 to 32-1/2 in. Stock No. NATO Size: 7583/8999	Waist: From 35 to 39 in. Inseam: Over 32-1/2 in. Stock No. NATO Size: 8386/8999
X-Large - Short	X-Large - Regular	X-Large - Long
Waist: From 39 to 43 in. Inseam: Up to 29-1/2 in. Stock No. NATO Size: 6975/9909	Waist: From 39 to 43 in. Inseam: 29-1/2 to 32-1/2 in. Stock No. NATO Size: 7583/9909	Waist: From 39 to 43 in. Inseam: Over 32-1/2 in. Stock No. NATO Size: 8386/9909

3.2.8.3 Instruction label. The instruction label shall conform to type VI, class 3, and shall contain the following information:

1. For camouflage only - not a substitute for outer garment.
2. Button in liner for extra warmth. Remove when damp or wet, and allow to dry.
3. Attach suspender hooks to suspender loops.
4. Adjust waist by drawcord.
5. Wear leg bottoms outside footgear with slide fasteners closed.
6. Brush off snow and frost before entering heated shelters.
7. Lubricate slide fasteners with wax.
8. Machine/hand laundering. The trousers are to be laundered using wash and wear setting, in warm water (90°F) with phosphate detergent, when not restricted. Rinse three times. Wash darks separately. Dry by tumble drying at the permanent press setting (temperature not to exceed 90°F) or use a clothes rack, line, or non-metal hanger to drip dry the trousers.

CAUTION

Do not use chlorine bleach or starch. Discoloration and degradation of infrared protection capacity of the material will result.

9. Field laundering. The trousers are to be laundered using Formula II of FM 10-280. Dry the trousers by tumble drying at the permanent press setting (temperature not to exceed 90°F). Do not press this item.

DO NOT REMOVE THIS LABEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

3.2.8.4 Combination identification and instruction label. The identification label (class 1) and instruction label (class 3) may be combined into one label conforming to type VI, class 15 of DDD-L-20.

3.2.8.5 Combination size, identification, and instruction label. The identification label (class 1), size label (class 2), and instruction label (class 3) may be combined into one label. The combination label shall conform to type VI, class 14 of DDD-L-20.

3.2.9 Slide fasteners. The slide fasteners shall be type I, style 3, size MS, short tab pull, continuous plastic element chain with a hole large enough to accommodate a thong conforming to V-F-106. The tape slider and thong shall be white. The length of the slide fasteners shall be as follows:

Fly (inches)

X-Small - Short	9-3/4
X-Small - Regular	10-1/4
X-Small - Long	10-3/4
Small - Short	10-1/4
Small - Regular	10-3/4
Small - Long	11-1/4
Medium - Short	10-3/4
Medium - Regular	11-1/4
Medium - Long	11-3/4
Large - Short	11-1/4
Large - Regular	11-3/4
Large - Long	12-1/4
X-Large - Short	11-3/4
X-Large - Regular	12-1/4
X-Large - Long	12-3/4

Leg (inches)

Short (all sizes)	17-5/8
Regular (all sizes)	20-5/8
Long (all sizes)	20-5/8

3.3 Design. The trousers shall have front hand openings with flaps and cargo pockets with flaps (all having snap fastener closures), suspender loops, inside button tabs for attaching a button-in liner, slide fastener openings on legs, waist drawcord, storage pouch and elastic cord at leg bottoms (see figure 1).

3.4 Figure. Figure 1 is furnished solely for guidance and information. Should variation from the written specification appear in the figure, the written specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns will be furnished by the Government and will provide a seam allowance of 3/8 inch for all seams, unless otherwise specified in table II. The standard patterns are provided as a guide for cutting the contractor's working patterns and shall not be altered in any way. The working patterns shall be identical to the standard patterns.

3.5.1 List of pattern parts. The component parts of the trousers shall be cut from the material specified and in the quantity indicated in table I.

TABLE I. List of pattern parts.

Material	Nomenclature	Cut parts
Nylon filament, plain weave cloth	Leg	2
	Storage pouch	1
	Storage pouch tab	1
	Cargo pocket	2
	Cargo pocket facing	2
	Cargo pocket flap	2
	Front hand opening flap	2
	Front hand opening facing	2
	Front hand opening flap facing	1

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. All stitches, seams and stitching types shall conform to FED-STD-751. When two or more seam or stitch types are given for the same part of the operation, any one of them may be used. When stitch type 401 is used, the looper (underthread) shall be on the inside of the trousers. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twist, pleats, puckers or open seams shall result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose tension. The bight of the overedge stitching shall be 1/8 to 3/16 inch. When a knife is used on overedging machine, set guide so that the edge of fabric is not cut off but only the raw edge is trimmed.

3.6.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue a minimum of 1/2 inch beyond

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.6.1.2 Repairs of types 401, 502 and 503 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.1.1.a and 3.6.1.1.b. Repairs to stitch type 401 may be accomplished by use of stitch type 301 except where used for eyelets.

3.6.1.3 Repairs of types 515, 516 and 519 stitching. All repairs shall be in accordance with 3.6.1.1.a and 3.6.1.1.b.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings produced with a 301 stitch type, when not caught in other seams or stitching, shall backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of the label stitching shall be overlapped not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of each end not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired using 301 stitch type.

3.7 Bartacks. The bartacks shall measure 1/2 to 5/8 inch in length, unless otherwise specified, and be free from thread breaks and loose stitching.

3.8 Use of automated apparel equipment. Automated apparel equipment may be used to perform any of the operations specified in table II, providing that the seam and stitch type are as specified and the finished component conforms to the required configuration. When a government furnished shaper pattern is forwarded, the component shall conform to that pattern.

3.9 Manufacturing operations requirements. The trousers shall be manufactured in accordance with operations specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible provided the thread is removed or does not show on the finished trousers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the material in strict accordance with patterns furnished, which show size, placement of pockets, directional lines, and notches for proper assembly. Directional lines indicate the warp direction of the material. The directional lines on the fronts and backs of the trouser parts may vary from the warp direction by not more than 2-1/2 inches. Measurements shall be taken from the top and bottom of the directional line on pattern to the selvage edge of the fabric and the difference between the two measurements shall not exceed 2-1/2 inches. b. Cut all component parts of the trousers from the same piece of material except front hand opening flap facing, front hand opening facing, storage pouch, storage pouch tab, cargo pocket facing, snap fastener reinforcements and eyelet reinforcement which may be cut from ends. c. Cut the waistband drawcord (one per trouser) in the lengths specified below. The drawcord shall have the ends dipped or impregnated as specified in 3.2.2. X-Small - 48 ± 1 inches Small - 52 ± 1 inches Medium - 56 ± 1 inches Large - 60 ± 1 inches X-Large - 64 ± 1 inches d. Cut the elastic cord for the bottom of trousers (two per trouser) in the lengths specified below.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. (cont'd) The elastic cord shall have the ends dipped or impregnated as specified in 3.2.3. X-Small - 9-3/4 ± 1/4 inches Small - 10-1/4 ± 1/4 inches Medium - 10-3/4 ± 1/4 inches Large - 11-1/4 ± 1/4 inches X-Large - 11-3/4 ± 1/4 inches e. Cut waistband button tabs (six per trouser) from the 1 inch tape of sufficient length to conform to finished length required in operation 15.d. f. Cut suspender loops (two per trouser) to measure 8-3/8 ± 1/4 inches in length for all sizes. g. Cut the 6/32 inch braid for slide fastener thongs (three per trouser) 10 ± 1/2 inches long (see 3.2.2). h. Cut eyelet reinforcement piece from basic material of sufficient size to finish not less than 3/4 inch square. Cut snap fastener reinforcement pieces from from basic material of sufficient size to finish not less than 1 inch square. i. Cut slit for front hand openings on trouser front as indicated on pattern.						
2.	Marking. Mark, ticket, or bundle all components, except those cut from ends to ensure a uniform shade and size						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
2.	Marking. (cont'd) throughout the trousers. Any method of marking may be used except: a. Corrosive metal fastening devices. b. Sew-on type tickets. c. Adhesive type tickets which leave traces of paper or adhesive on the material upon removal of the tickets.						
3.	Replacement of defective or damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to ensure that material defects or damages, as specified in MIL-STD-1488 are excluded and replaced with non-defective and properly matched components.						
4.	Labeling.						
	a. Position the size label to the right of the center back seam, not more than 4 inches below the finished waist, and stitch on all four sides.	301	LSbj-1	10-14	50	70	
	b. Position the instruction label not more than 1 inch below the size label and stitch on all four sides. The top edge of the instruction label may be caught in the bottom of the size label stitching.	301	LSbj-1	10-14	50	70	
	c. Position the identification label below the instruction label and stitch on all four sides.	301	LSbj-1	10-14	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labeling. (cont'd)						
	d. Position the combination identification and instruction label (when used) as in "b" above and stitch on all four sides.	301	LSbj-1	10-14	50	70	
	e. Position the combination size, identification and instruction label (when used) as in "a" above and stitch on all four sides.	301	LSbj-1	10-14	50	70	
	NOTE: The stitching for the labels shall not be through the printing. The stitch margin shall be 1/8 to 3/16 inch.						
5.	Attach front hand opening facing.						
	a. Position facing on top of the hand opening slit, face to face, as indicated on pattern, and stitch together 1/4 from the cut line (stopping 3/8 inch from side edges of facing).	301	SSa-1 or LSd-1	10-14	50	70	
	b. Cut hand opening (if not previously cut during the cutting operation).						
	c. Position snap fastener reinforcement piece on wrong side of facing, centering the snap location, as indicated on pattern.						
	d. Turn facing to inside of trousers on fold line. Fold in seam allowance and stitch facing down on back side 1/16 to 1/8 inch from turned in edge.	301	LSd-1	10-14	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Attach front hand opening facing. (cont'd)						
	e. Topstitch facing (top edge) on front side 1/16 to 1/8 inch from facing joining seam.	301	LSd-1	10-14	50	70	
	f. Attach snap fastener studs (male portion) through all layers at location indicated on pattern.						
6.	Make and attach front hand opening flap.						
	a. Position snap fastener reinforcement piece to wrong side of front hand opening flap facing, centering the snap location, as indicated on pattern.						
	b. With face sides together, stitch flap to flap facing using a 3/8 inch seam allowance (stopping short 1/4 inch from straight edge of flap). Turn right side out, working out edges.	301 or 401	SSe-2(a)	10-14	50	70	
	c. With face sides together, stitch flap to hand opening along cut line using a 1/4 inch seam allowance. Do not stitch flap facing.	301 or 401	SSe-2(a)	10-14	50	70	
	d. Turn so that flap facing extends to cover seam allowance on back side. Turn raw edge of flap facing in 1/4 inch. Stitch 1/16 to 1/8 inch from edge. Topstitch edge of flap joining seam on face side, 1/16 to 1/8 inch from edge.	301 and 401	SSe-2(b)	10-14	50	70	
	e. Topstitch flap 1/4 inch from edge.	301 or 401	SSc-1	10-14	50	70	
	f. Place a vertical bartack on each side of pocket flap directly over the stitching.	Bartack		28 per bartack	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make and attach front hand opening flap. (cont'd)						
	g. Position snap fastener socket (female portion) through all layers of hand opening flap, at location indicated on pattern.						
7.	Make cargo pocket flaps.						
	Finished appearance. The pocket flaps shall be uniformly stitched and shall finish smooth and flat without twists, puckers, pleats or raw edges.						
	a. Position snap fastener reinforcement pieces on wrong side of flap, centering the snap locations, as indicated on pattern.						
	b. Fold pocket in half along line indicated on pattern, with fabric face to face and raw edges even. Stitch the sides, leaving the top raw edges open.	301	SSa-1	10-14	50	70	
	c. Turn flap right side out and work out edges and corners. Topstitch bottom and side edges 3/16 to 1/4 inch from the edge.	301	SSe-2(b)	10-14	50	70	
	d. Overedge stitch the top raw edges of each pocket flap together.	515, 516 or 519	SSa-1	6-10	50	70	
	e. Position snap fastener sockets (female portion) through all layers of cargo pocket flap, at locations indicated on pattern.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make cargo pockets.						
	a. Fold the cargo pocket pleats at marks indicated on pattern. Stitch along the folds, 1/8 to 3/16 inch from the edge. The pleats shall face towards the back of the trousers.	301	OSf-1	10-14	50	70	
	b. With top raw edges of facing and pocket turned under, stitch facing to the top inside of the pocket, 3/32 to 1/8 inch from edges.	301 or 401	LSk-2 LSk-2	10-14 10-14	50 50	70 70	
	or						
	c. Position the pocket facing to the pocket, face to face with raw edges even and stitch. Turn facing to inside of pocket and topstitch 3/32 to 1/8 inch from edge.	301	EFa-1	10-14	50	70	
	and						
	d. Turn in bottom raw edge of facing and stitch to pocket 3/32 to 1/8 inch from edge of facing.	301	LSd-1	10-14	50	70	
	e. Bartack horizontally across fold of pleats with 3/8 to 5/8 inch bartacks. The bartacks shall be not more than 1/8 inch from the lower row of facing stitching.	Bartack		28 per bartack	50	70	
	f. Attach snap fastener studs (male portion) through all layers at locations indicated on pattern.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Attach cargo pockets and flaps.						
	Finished appearance. The bellows side of the cargo pocket shall finish toward the back. Pockets shall be uniformly stitched and properly positioned with the top corners of pocket opening covered by the flap.						
	a. Mark position of cargo pockets and flaps, as indicated on the patterns.						
	b. Turn in seam allowance of the pocket. Stitch pocket to trousers, positioned as marked with one row of stitching 1/16 to 1/8 inch from edge. The end of the seam shall catch the thread under seam allowance at bottom of pocket, closing bellows at bottom.	301	LSd-1	10-14	50	70	
	c. Bartack top edges of pocket opening with vertical bartacks superimposed on pocket stitching through pocket and trousers.	Bartack		28 per bartack	50	70	
	d. Position overedged edges of flap above pocket opening as indicated on pattern, and join to trousers 1/8 to 3/16 inch from edges. Turn flap down and raise stitch 3/16 to 1/4 inch from turned edge making sure to bury the raw edges within the seam.	301 or 401 and 301	LSbl-2	10-14 10-14 10-14	50 50 50	70 70 70	
10.	Attach slide fastener to leg opening.						
	a. Overedge stitch the raw edges of the leg opening.	503 or 504	EFd-1	6-10	50	70	
	b. Form knee pleats as indicated on patterns. The pleat may be held in place by a holding stitch no more than 1 inch from side raw edge, stitched along the	301 or 401	OSe-1 OSe-1	10-14 10-14	50 50	70 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Attach slide fastener to leg opening. (cont'd)						
	pleat fold. The fold of the pleats shall be towards the bottom of the trousers.						
	c. With right sides together and edges even, stitch slide fastener to leg opening along each side of slide fastener, using a 1/4 inch seam allowance, and stitching from notch to cut line.	301	SSa-1	10-14	50	70	
	d. Turn to right side, making sure seam allowance at notch is turned under. Edge stitch 1/16 to 1/8 inch from folded edge.	301	SSe-2	10-14	50	70	
11.	Join inseams.						
	Join inseams together, forming the knee pleats as indicated on the pattern and catching them in the inseam. The pleat may be held in place by a holding stitch no more than 1 inch from side raw edge, stitched along the pleat fold. The fold of the pleats shall be towards the bottom of the trousers.	515, 516 or 519	SSa-1	10-14	50	70	
12.	Join crotch seam.						
	Stitch from back waist to front, stopping at location indicated on pattern.	301	SSa-1	10-14	50	70	
13.	Assemble front fly.						
	a. Overedge stitch around raw edges of fly, from top of trousers around bottom of fly curve.	503 or 504	EFd-1	6-10	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Assemble front fly. (cont'd)						
	b. Position closed slide fastener face side up on right front of trouser, as indicated on pattern. Stitch from top to bottom of slide fastener, 1/16 to 1/8 inch from edge of slide fastener tape, to position indicated on pattern (turning under top of slide fastener).	301	SSa-1	10-14	50	70	
	c. With right sides together, position left side of slide fastener tape to left front of trousers. Stitch 1/8 inch from tape edge, tacking ends.	301	SSa-1	10-14	50	70	
	d. Fold the left front fly to the inside per marks on pattern. Stitch through trouser and slide fastener from top to J curve, with fly under slide fastener. Tack ends.	301	SSb-1	10-14	50	70	
	e. With edges aligned, stitch bottom of fly extension together. The stitching at the curve shall be a minimum of 1-1/2 inches.	301	SSa-1	10-14	50	70	
14.	Make waistband button tabs.						
	a. Turn end of the tape 1/2 to 5/8 inch and stitch or bartack across tape not less than 1/8 inch from the raw edge. The bartack shall not be less than 3/4 inch long.	301 or 401 or Bartack	EFa-1 EFa-1	10-14 10-14 28 per bartack	50 50 50	70 70 70	
	b. Sew button on center of tab (1/8 inch off center tolerance) with center of button 3/4 to 1 inch from the folded edge.	101 or		20-24 per button	50	--	
	or	301		14-16 per button	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Make waistband button tabs. (cont'd)						
	c. Fold tape in half and sew button on center (1/8 inch off center tolerance) of tab through plies of tape with the center of button 3/4 to 1 inch from the folded end.	101 or		20-24 per button	50	--	
		301		14-16 per button	50	70	
15.	Attach eyelet reinforcement and waistband button tabs.						
	a. Overedge raw edges of waistband.	503 or 504	EFd-1	6-10	50	70	
	b. Position eyelet reinforcement piece on wrong side of waistband, centering the eyelet location, as indicated on pattern.						
	c. Stitch eyelet through reinforcement piece with purling toward the wrong side of waistband.	401 or		19-24 per eyelet	50	70	
		502 or		26-32 per eyelet	50	70	
		503		26-32 per eyelet	50	70	
	d. Position six waistband button tabs on inside of trousers at waist, a sufficient distance from the top raw edge of trousers so that tabs shall finish 1-3/4 to 2 inches in length. The tabs shall be placed as follows, with measurements taken from the center of tabs to center of seams:						
	One tab 2-1/4 ± 1/4 inches each side of seat seam.						
	One tab centered on each outside, ± 1/4 inch off center tolerance.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Attach eyelet reinforcement and waistband button tabs. (cont'd)						
	One tab 3-1/4 ± 1/4 inches back from the finished edge of right fly.						
	One tab 4 ± 1/4 inches back from the finished edge of left fly.						
	e. Bartack button tabs to waist of trousers with a horizontal bartack (1/8 inch off center tolerance) centered on the tab not less than 3/16 inch down from the raw edge of tab.	Bartack		28 per bartack	50	70	
16.	Make storage pouch and tab.						
	a. Position eyelet reinforcement pieces on wrong side of fabric, as indicated on pattern.						
	b. Stitch sewn eyelets through reinforcement pieces as indicated by marks on pattern.	401 or		19-24 per eyelet	50	70	
		502 or		26-32 per eyelet	50	70	
		503		26-32 per eyelet	50	70	
	c. Fold tab in half along fold line with wrong sides together, with 1/4 inch seam allowance turned in and stitch 1/16 to 1/8 inch from the side edges.	502 or 503	EFd-1	6-10	50	70	
	d. With right sides together, overedge stitch side and bottom edges of pouch together.	515, 516 or 519	SSa-1	6-10	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Make storage pouch and tab. (cont'd)						
	e. Overedge stitch around the top edge of pouch, catching the tab on outside, as indicated by marks on pattern.	503 or 504	SSa-1	6-10	50	70	
	f. Turn pouch right side out, insert drawcord into hem, through eyelets and stitch hem 5/8 inch from folded edge. Do not catch drawcord in stitching. Tab should be caught in stitching so it extends from the top of the pouch.	301	EFb-1	10-14	50	70	
	g. Place a horizontal bartack on outside of pouch, superimposed on hem stitching, catching the pouch tab.	Bartack		28 per bartack	50	70	
17.	Attach storage pouch.						
	Position tab of storage pouch at waist, as indicated on pattern. Bartack in place with a horizontal bartack (1/8 inch off center tolerance) centered on tab not less than 3/16 inch down from raw edge of tab.	Bartack		28 per bartack	50	70	
18.	Hem waist and insert drawcord.						
	Turn top of trousers over drawcord, turn in the raw edge and stitch, forming a hem, and catching the button tabs and storage pouch tab in the stitching. The hem shall finish 3/4 ± 1/8 inch. The drawcord shall be threaded through the eyelet on the right side (when worn) and through the formed hem on the left side. The ends of drawcord shall be knotted to prevent return into hem. The drawcord shall not be caught in the stitching of waist hem.	301	EFb-1	10-14	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Position and attach suspender loops.						
	a. With ends of braid turned under 3/8 to 1/2 inch, position on inside front of trouser waistband, 1/4 to 1/2 inch from side seam (measured from center of side seam to edge of nearest seam). The turned edge shall be even with the bottom edge of the waist hem.						
	b. Bartack with two horizontal bartacks 1/4 to 1/2 inch apart. The first bartack shall be 1/8 inch from the turned edge.	Bartack		28 per bartack	50	70	
	c. The opposite turned edge of braid shall be positioned 5 to 5-1/2 inches toward the front of trouser and with the turned edge even with the bottom of waist hem, bartack with two horizontal bartacks, positioned as previously mentioned.	Bartack		28 per bartack	50	70	
	d. The drawcord shall not be caught in the bartack stitching. Each loop shall extend over the top edge of trousers 3/4 to 1 inch to form an arc as indicated on figure 1.						
20.	Hem trousers and insert leg elastic.						
	a. Overedge the raw edges of the leg bottoms.	503 or 504	EFd-1	6-10	50	70	
	b. Place the ends of each elastic cord on ends of leg opening and bartack in place. The bartacking shall extend across the width of the elastic.	Bartack		28 per bartack	50	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Hem trousers and insert leg elastic. (cont'd)						
	c. Turn up bottoms of trousers over the elastic cord, using fold lines indicated on pattern. Stitch 1/16 to 1/8 inch from folded edge. The hem shall finish 1 ± 1/8 inch wide.	301	EFb-1	10-14	50	70	
21.	Attach slide fastener thongs.						
	Attach the thongs to the three slide fasteners by threading one end of the braid through the end of slide fastener. Tie the two ends of braid in a knot.						
22.	Cleaning.						
	a. Trim all ends of stitching and remove loose threads.						
	b. Remove all spots and stains.						
	c. Remove all shade and size tickets.						
	d. Close all slide fasteners and snap all snap fasteners.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

3.10 Finished measurements. The trousers shall conform to the finished measurements shown in table III.

TABLE III. Finished measurements (inches)

Size	1/2 Waist 1/	Inseam 2/	Outseam 3/	1/2 Knee 4/	1/2 Bottom 5/
Short					
X-Small	16	25-1/2	38-1/2	10-1/2	5-3/4
Small	18	25-1/2	39	11-1/8	6
Medium	20	25-1/2	39-1/2	11-3/4	6-1/4
Large	22	25-1/2	40	12-3/8	6-1/2
X-Large	24	25-1/2	40-1/2	13	6-3/4
Regular					
X-Small	16	28-1/2	42	10-1/2	5-3/4
Small	18	28-1/2	42-1/2	11-1/8	6
Medium	20	28-1/2	43	11-3/4	6-1/4
Large	22	28-1/2	43-1/2	12-3/8	6-1/2
X-Large	24	28-1/2	44	13	6-3/4
Long					
X-Small	16	31-1/2	45-1/2	10-1/2	5-3/4
Small	18	31-1/2	46	11-1/8	6
Medium	20	31-1/2	46-1/2	11-3/4	6-1/4
Large	22	31-1/2	47	12-3/8	6-1/2
X-Large	24	31-1/2	47-1/2	13	6-3/4
Tolerance	± 1/2	± 3/4	± 3/4	± 1/2	± 1/2

1/ Measurement taken along top edge of waist from folded edge to folded edge with slide fastener closed.

2/ Measurement taken from center of crotch seam to bottom of leg.

3/ Measurement taken from top of waist to bottom of trousers along outseam.

4/ Measurement taken between knee pleats across knee from folded edge to folded edge.

5/ Measurement taken across bottom of leg in a relaxed state from folded edge to folded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. The end item shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality level.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicted or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for visual and dimensional defects specified in MIL-STD-1488.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.1.1 Component and material certification. A certificate of compliance may be acceptable as evidence that the dipping or impregnating compound conforms to the requirements specified in 3.2.2 and 3.2.3.

4.4.2 End item visual examination. The end items shall be examined for utility trousers (U) visual defects in accordance with the provisions of MIL-STD-1488.

4.4.3 End item dimensional examination. The end items shall be examined for dimensional defects in accordance with the provisions of MIL-STD-1488.

4.4.4 Packaging examination. The fully packaged end items shall be examined in accordance with the provisions of MIL-STD-1488.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. Each pair of trousers, with inseams meeting, shall be folded from the leg bottom up toward the waistband right side out to

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

an overall length of approximately 23 inches. For the larger sizes it may be necessary to adjust the seat area to achieve the desired width of approximately 14-1/2 inches.

5.1.2 Commercial preservation. The trousers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Forty pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Forty pairs of trousers of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW grade 275 of PPP-B-636. Inside dimensions of each shipping container shall approximate 23-1/2 inches in length, 15 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the fiberboard container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Trousers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2), trousers packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The trousers are intended for use by personnel of the Department of Defense to provide camouflage in snow areas.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3 and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2)
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistance grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209-4. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 International standardization agreement. Certain provisions of this specification are the subject of international standardization agreement as cited in NATO, STANAG No. 2333. When amendment, revision, or cancellation of this specification is proposed that will modify the international agreement

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

concerned, the preparing activity will take appropriate action through international standardization channels, including departmental standardization offices, to change the agreement or make other appropriate accommodations.

6.5 Subject term (key word) listing.

Cold weather clothing
Water repellent clothing

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:

Army - GL

Preparing activity:

Army - GL

(Project 8415-A856)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

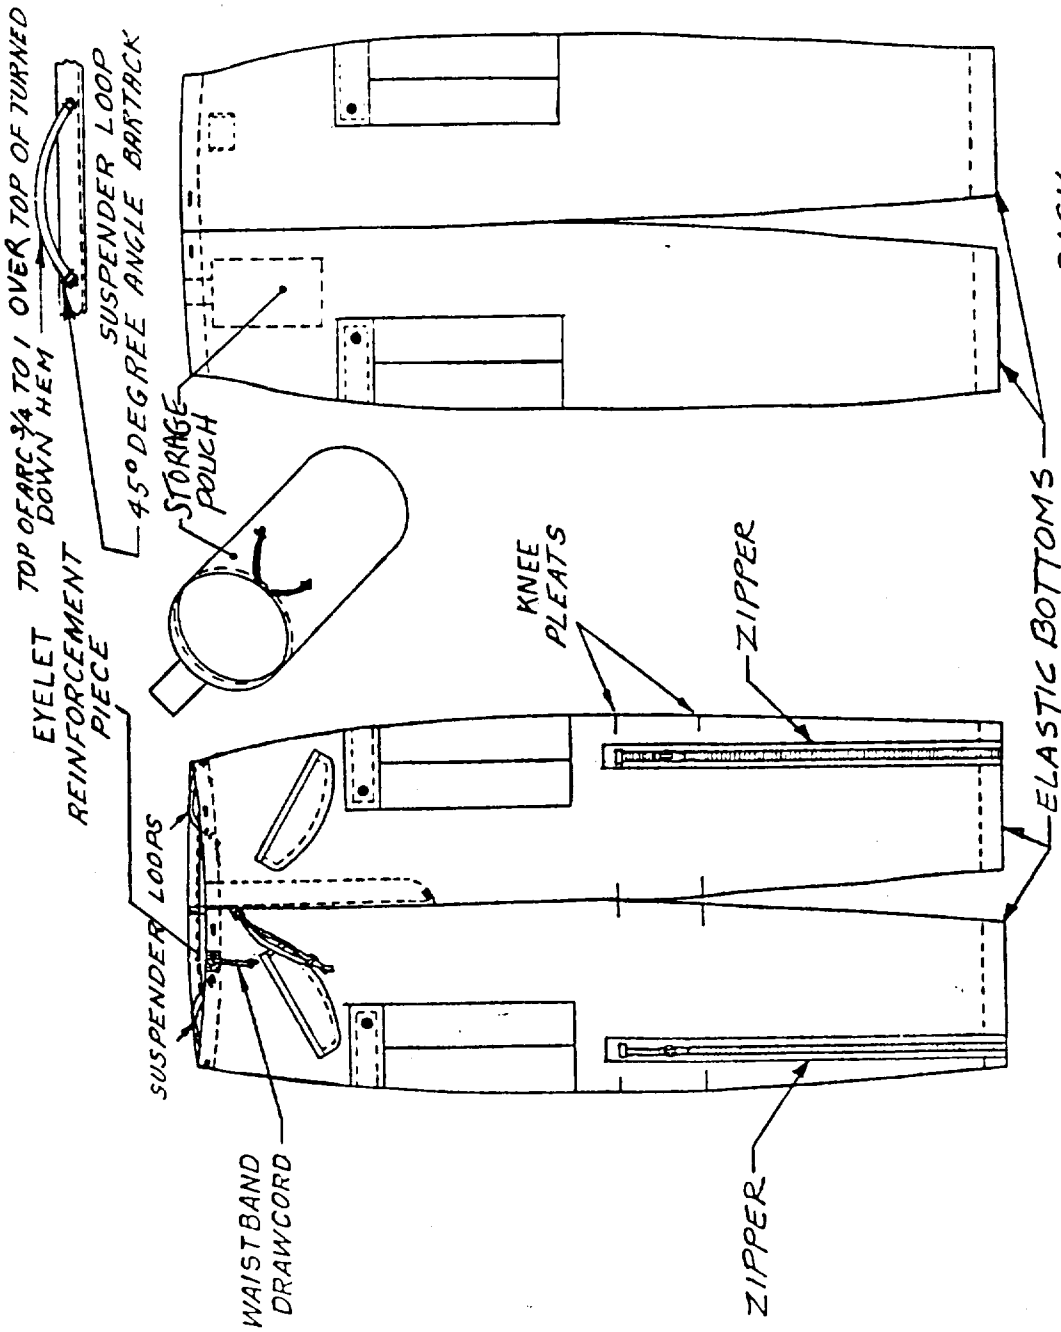


FIGURE 1. TROUSERS, SNOW CAMOUFLAGE, WHITE 2-1-677

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-T-0043654E(GL)	1992 February 10

3. DOCUMENT TITLE

TROUSERS, SNOW CAMOUFLAGE, WHITE

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. Army Natick RD&E Center	(1) Commercial 508-651-4532	(2) AUTOVON/DSN 256-4532
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-IRT Natick, MA 01760-5019	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:56Z
Check the source to verify that this is the current version before use.