The documentation and process conversion measures necessary to comply with this revision shall be completed by 10 December 1993

INCH-POUND

MIL-S-19500/430A
3 September 1993
SUPERSEDING
MIL-S-19500/430(USAF)
14 January 1970

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DUAL FIELD EFFECT TRANSISTORS, N-CHANNEL, SILICON
TYPES 2N5545, 2N5546, AND 2N5547, JAN, JANTX, AND JANTXV

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for two electrically isolated, matched N-channel, junction, silicon field-effect transistors in one package. Two levels of product assurance are provided for each device type as specified in MIL-S-19500.

1.2 Physical dimensions. See figure 1 (TO-71).

1.3 Maximum ratings. T_A = +25°C, unless otherwise specified.

P_T 1/ T_A = +25°C		V_{DG}	V_{GS}	I_G	T_{STG}
One section	Both sections				
mW	mW	V dc	V dc	mA dc	°C
250	400	50	-50	30	-65 to +200

1/ For T_A > +25°C, derate linearly 1.67 mW/°C one section, 2.67 mW/°C both sections.

1.4 Primary electrical characteristics. T_C = +25°C, unless otherwise specified.

Limit	I_{DSS} V_{GS} = 0 V_{DS} = 15 V dc	$V_{GS(off)}$ V_{DS} = 15 V dc I_D = 0.5 nA dc	$\|y_{fs}\|$ V_{DS} = 15 V dc V_{GS} = 0 f = 1 kHz	$\|y_{fs}\|$ V_{DS} = 15 V dc V_{GS} = 0 f = 100 MHz	NF V_{DS} = 15 V dc I_D = 200 µA dc R_G = 1 MΩ f = 10 Hz		C_{iss} V_{DS} = 15 V dc V_{GS} = 0 f = 1 MHz	C_{rss} V_{DS} = 15 V dc V_{GS} = 0 f = 1 MHz
					2N5545	2N5546		
	mA dc	V dc	µmho	µmho	dB	dB	pF	pF
Min	0.5	-0.5	1.5	1.5				
Max	8.0	-4.5	6.0		3.5	5.0	6.0	2.0


Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Electronics Supply Center, ATTN: DESC-ECT, 1507 Wilmington Pike, Dayton, OH 45444-5270 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.


AMSC N/A

FSC 5961


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

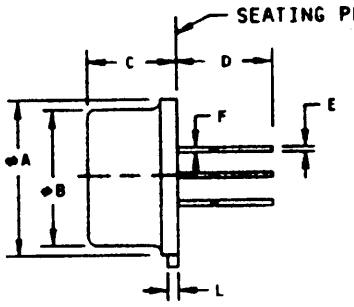

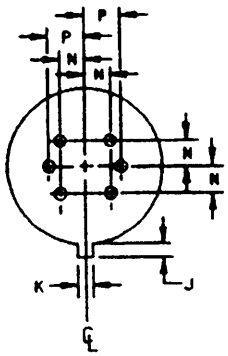

Dimensions					Notes
Ltr	Inches		Millimeters		
	Min	Max	Min	Max	
φA	.209	.230	5.31	5.84	
φB	.178	.195	4.52	4.95	
C	.170	.210	4.32	5.33	
D	.500	.750	12.70	19.05	
E		.021		.53	3
F	.016	.019	.41	.48	4
J	.028	.048	.71	1.22	7
K	.036	.046	0.91	1.17	
L		.020		.51	
N	.0146 Nom.		.037 Nom.		5
P	.0354 Nom.		.90 Nom.		5

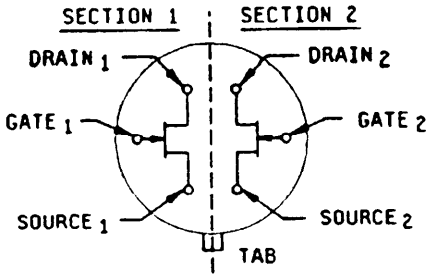

CONNECTION DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Measured in the zone beyond .250 inch (6.35 mm) from the seating plane.
4. Measured in the zone from .50 inch (1.27 mm) to .250 inch (6.35 mm) from the seating plane.
5. When measured in a gauging plane .054 +.001, -.000 inch (1.37 -0.03, -0.00 mm) below the seating plane of the transistor, maximum diameter leads shall be within .007 inch (0.18 mm) of their true location relative to a maximum width tab. Smaller diameter leads shall fall within the outline of the maximum diameter lead tolerance.
6. All leads electrically insulated from case and each section electrically isolated from the other.
7. Measured from the maximum diameter of the actual device.

FIGURE 1. Physical dimensions (TO-71).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

	$\frac{I_{DSS1}}{I_{DSS2}}$ V_{DS} = 15 V dc V_{GS} = 0			$\frac{\lvert y_{fs}\rvert 1}{\lvert y_{fs}\rvert 2}$ V_{DG} = 15 V dc I_D = 200 µA dc f = 1 kHz			$\lvert V_{GS1} - V_{GS2}\rvert$ V_{DG} = 15 V dc I_D = 200 µA dc			$\lvert\Delta(V_{GS1} - V_{GS2})\Delta T_A\rvert$					
										V_{DG} = 15 V dc I_D = 200 µA dc $T_{A(1)}$ = +25°C $T_{A(2)}$ = -55°C			V_{DG} = 15 V dc I_D = 200 µA dc $T_{A(1)}$ = +25°C $T_{A(2)}$ = +125°C		
2N#	5545	5546	5547	5545	5546	5547	5545	5546	5547	5545	5546	5547	5545	5546	5547
							mV dc	mV dc	mV dc	mV dc	mV dc	mV dc	mV dc	mV dc	mV dc
Min	0.95	0.9	0.9	0.97	0.95	0.9									
Max	1.05	1.10	1.10	1.03	1.05	1.10	5	10	15	0.8	1.6	3.2	1	2	4

1/ Pulsed, (see 4.5.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-S-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated detail specification. The individual item requirements shall be in accordance with MIL-S-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-S-19500.

$\frac{\lvert I_{DSS1}\rvert}{\lvert I_{DSS2}\rvert}$ - - - - - - - - - - - Zero-gate-voltage drain current ratio.

$\lvert I_{G1} - I_{G2}\rvert$ - - - - - - - - - Gate current differential.

$\lvert V_{GS1} - V_{GS2}\rvert$ - - - - - - - - Gate - source voltage differential.

$\lvert\Delta(V_{GS1} - V_{GS2})\Delta T_A\rvert$ - - - - Gate - source voltage differential change with temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

V_n - - - - - - - - - - - - - - Equivalent short circuit input noise voltage for unity bandwidth.

$\frac{|y_{fs}|1}{|y_{fs}|2}$ - - - - - - - - - - - - Small-signal common-source forward transfer admittance ratio.

$||y_{os}|1 - |y_{os}|2|$ - - - - - - Small-signal common-source output admittance differential.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-S-19500, and on figure 1 herein.

3.3.1 Lead finish. Lead finish shall be solderable in accordance with MIL-S-19500. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4 Marking. Marking shall be in accordance with MIL-S-19500.

3.5 Electrostatic discharge protection. The devices covered by this specification require electrostatic protection.

3.5.1 Handling. MOS devices must be handled with certain precautions to avoid damage due to the accumulation of electrostatic charge. The following handling practices shall be followed:

a. Devices shall be handled on benches with conductive handling devices.

b. Ground test equipment, tools, and personnel handling devices.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent, if practical.

g. Care shall be exercised, during test and troubleshooting, to apply not more than maximum rated voltage to any lead.

h. Gate must be terminated to source, R ≤ 100 k, whenever bias voltage is to be applied drain to source.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-S-19500, and as specified herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-S-19500, and as specified herein. Alternate flow is allowed for qualification inspection in accordance with figure 2 of MIL-S-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with table II of MIL-S-19500), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

	Measurement
Screen (see table II of MIL-S-19500)	JANTX and JANTXV levels
9	Not applicable
10	Not applicable
11	I_{DSS}, I_{GSS}, $\|y_{fs}\|$
12	See 4.3.1
13	Subgroup 2 of table I herein; ΔI_{GSS} = 0.1 nA dc or ±10 percent of initial value, whichever is greater. $\|\Delta y_{fs}\|$ = ±20 percent of initial value. ΔI_{DSS} = 10 percent of initial value.

4.3.1 Power burn-in. Power burn-in conditions are in accordance with MIL-STD-750, method 1039, condition A and as follows:

T_A = +175°C; V_{GS} = -40 V dc; V_{DS} = 0.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-S-19500, and as specified herein. Alternate flow is allowed for quality conformance inspection in accordance with figure 2 of MIL-S-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-S-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IVb (JANTX and JANTXV) of MIL-S-19500, and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps and footnotes of table II herein.

Subgroup	Method	Condition
B3	1027	V_{GS} = -40 V dc; T_A = +175°C; V_{DS} = 0

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table V of MIL-S-19500, and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps of table II herein.

Subgroup	Method	Condition
C2	2036	Lead fatigue: Test condition E
C6	1027	V_{GS} = -40 V dc; T_A = +175°C; V_{DS} = 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

Procedure: The device shall be made to conduct in one chosen direction a half-

4.4.4 Gate current differential. The gate current of each individual section of a dual unit shall be measured at the specified conditions and the absolute value of the difference of the two currents shall be calculated. If possible, this difference shall be measured directly to improve accuracy.

4.4.5 Gate - source voltage differential. The gate - source voltage of each individual section of a dual unit shall be measured at the specified conditions and the absolute value of the difference of the two voltages shall be calculated. If possible, this difference shall be measured directly to improve accuracy.

4.4.6 Gate - source voltage differential change with temperature. The gate - source voltage differential shall be measured at the two specified temperatures in accordance with 4.4.5 herein except that the polarities of the differentials and identities of the individual sections shall be maintained. The absolute value of the algebraic differences between the values at the two temperatures shall be calculated. If possible, this difference shall be measured directly to improve accuracy. A mathematical formula for the parameter is:

$$|(V_{GS1} - V_{GS2})T_1 - (V_{GS1} - V_{GS2})T_2|$$

4.4.7 Zero-gate-voltage drain current ratio. The value for the zero-gate-voltage drain current for each individual section of a dual unit shall be measured using method 3413 of MIL-STD-750. The zero-gate-voltage drain current ratio shall be calculated by dividing one of the values by the other. If possible, this ratio shall be measured directly to improve accuracy.

4.4.8 Small-signal common-source forward transfer admittance ratio. The magnitude for the small-signal common-source forward transfer admittance ratio for each individual section of a dual unit shall be measured using method 3455 of MIL-STD-750. The small-signal common-source forward transfer admittance ratio shall be calculated by dividing one of the values by the other. If possible, this ratio shall be measured directly to improve accuracy.

4.4.9 Small-signal common-source output admittance differential. The magnitude for the small-signal common-source output admittance differential for each individual section of a dual unit shall be measured using method 3453 of MIL-STD-750. The small-signal common-source output admittance differential shall be calculated by dividing one of the values by the other. If possible, this ratio shall be measured directly to improve accuracy.

4.4.10 Spot noise figure and equivalent input noise voltage. These tests shall be conducted with a model 2173C Quan Tech Laboratories test set or equivalent. Conditions shall be as specified in table I.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Reverse gate current	3411	Bias condition C; V_{GS} = -50 V dc; V_{DS} = 0	I_{GSS1}		-1.0	µA dc
Reverse gate current	3411	Bias condition C; V_{GS} = -30 V dc; V_{DS} = 0	I_{GSS2}		-0.1	nA dc
Drain current	3413	bias condition C; V_{DS} = 15 V dc; V_{GS} = 0	I_{DSS}	0.5	8.0	mA dc
Gate current		V_{DG} = 15 V dc; I_D = 200 µA dc	I_G		-50	pA dc
Gate - source cutoff voltage	3403	V_{GS} = 15 V dc; I_D = 0.5 nA dc	$V_{GS(off)}$	-0.5	-4.5	V dc
Gate - source voltage differential	3403	V_{DG} = 15 V dc; I_D = 50 µA dc; (see 4.4.4)	$\lvert V_{GS1} - V_{GS2} \rvert$			
2N5545					5	mV dc
2N5546					10	mV dc
2N5547					15	mV dc
Gate - source voltage differential	3403	V_{DG} = 15 V dc; I_D = 200 µA dc; (see 4.4.4)	$\lvert V_{GS1} - V_{GS2} \rvert$			
2N5545					5	mV dc
2N5546					10	mV dc
2N5547					15	mV dc
Gate - source voltage differential change with temperature	3403	V_{DG} = 15 V dc; I_D = 200 µA dc; $T_{A(1)}$ = +25°C; $T_{A(2)}$ = -55°C; (see 4.4.5)	$\lvert \Delta(V_{GS1} - V_{GS2})\Delta T_A \rvert$			
2N5545					.8	mV dc
2N5546					1.6	mV dc
2N5547					3.2	mV dc
Gate - source voltage differential change with temperature	3403	V_{DG} = 15 V dc; I_D = 200 µA dc; $T_{A(1)}$ = +25°C; $T_{A(2)}$ = +125°C; (see 4.4.6)	$\lvert \Delta(V_{GS1} - V_{GS2})\Delta T_A \rvert$			
2N5545					1	mV dc
2N5546					2	mV dc
2N5547					4	mV dc

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 2 - Continued						
Zero-gate-voltage drain current ratio	3413	Bias condition C; V_{DG} = 15 V dc; V_{GS} = 0; (see 4.4.7)	$\frac{I_{DSS1}}{I_{DSS2}}$			
2N5545				0.95	1.05	
2N5546				0.90	1.10	
2N5547				0.90	1.10	
Small-signal common-source short-circuit forward transfer admittance ratio	3455	V_{DG} = 15 V dc; I_D = 200 µA dc; f = 1 kHz; (see 4.4.8)	$\frlvert y_{fs} \frrvert 1$ / $\frlvert y_{fs} \frrvert 2$			
2N5545				0.97	1.03	
2N5546				0.95	1.05	
2N5547				0.90	1.10	
Small signal common-source short-circuit, output admittance differential	3453	V_{GS} = 15 V dc; V_{DS} = 0; f = 1 kHz	$\frlvert \frlvert y_{os} \frrvert 1 - \frlvert y_{os} \frrvert 2 \frrvert$			
2N5545					1	µmho
2N5546					2	µmho
2N5547					3	µmho
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse gate current	3411	Bias condition C; V_{GS} = -30 V dc; V_{DS} = 0	I_{GSS1}		-150	nA dc
Gate current differential		V_{DG} = 15 V dc; I_D = 200 µA dc; T_A = +125°C; (see 4.4.4)	$\frlvert I_{G1} - I_{G2} \frrvert$		-5	nA dc
Subgroup 4						
Small-signal common-source short-circuit forward transfer admittance	3455	V_{GS} = 15 V dc; V_{DS} = 0; f = 1 kHz	$\frlvert y_{fs} \frrvert$	1.5	6.0	mmho
Small signal common-source short-circuit, output admittance	3453	V_{GS} = 15 V dc; V_{DS} = 0 f = 1 kHz	$\frlvert y_{os} \frrvert$		25	µmho

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 4 - Continued						
Small signal common-source short-circuit, input capacitance	3431	V_{GS} = 15 V dc; V_{DS} = 0; 100 kHz ≤ f ≤ 1 MHz	C_{iss}		6	pF
Small signal common-source short-circuit, reverse transfer capacitance	3433	V_{GS} = 15 V dc; V_{DS} = 0; 100 kHz ≤ f ≤ 1 MHz	C_{rss}		2	pF
Spot noise figure (2N5545, 2N5546 only)		V_{GS} = 15 V dc; I_D = 200 µA dc; f = 10 Hz; R_G = 1 MΩ; Noise bandwidth = 1 Hz (see 4.4.10)	NF			
2N5545					3.5	dB
2N5546					5.0	dB
Equivalent input noise voltage		V_{GS} = 15 V dc; I_D = 200 µA dc; Noise bandwidth = 1 Hz (see 4.4.10)	V_n			
2N5545					180	$nV/\sqrt{Hz}$
2N5546					5.0	$nV/\sqrt{Hz}$
Subgroups 5 and 6						
Not applicable						
Subgroup 7						
Low temperature operation		T_A = -65°C				
Magnitude of small-signal common-source short-circuit forward transfer admittance	3455	V_{GS} = 15 V dc; V_{DS} = 0; f = 1 kHz	$\|y_{fs}\|$		10.0	mmho

1/ For sampling plan, see MIL-S-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

TABLE II. Groups A, B, C, and E electrical end-point measurements. 1/ 2/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Reverse gate current	3411	Bias condition C; V_{GS} = -30 V dc; V_{DS} = 0	I_{GSS}		-0.5	nA dc
2.	Magnitude of small-signal common-source short-circuit forward transfer admittance	3455	V_{GS} = 15 V dc; V_{DS} = 0; f = 1 kHz	$\|y_{fs}\|$	1.5	6.0	mmho
3.	Reverse gate current	3411	Bias condition C; V_{GS} = -30 V dc; V_{DS} = 0	I_{GSS}		-1.0	nA dc
4.	Small-signal common-source short-circuit forward transfer admittance	3455	V_{GS} = 15 V dc; V_{DS} = 0; f = 1 kHz	$\Delta\|y_{fs}\|$	±20		percent change from initial group A reading
5.	Gate - source voltage differential	3403	V_{DG} = 15 V dc; I_D = 200 µA dc	$\|V_{GS1} - V_{GS2}\|$			
	2N5545					6	mV dc
	2N5546					12	mV dc
	2N5547					18	mV dc
6.	Zero-gate-voltage drain current ratio	3413	Bias condition C; V_{DG} = 15 V dc; V_{GS} = 0	$\frac{I_{DSS1}}{I_{DSS2}}$			
	2N5545				0.95	1.05	
	2N5546				0.90	1.10	
	2N5547				0.90	1.10	

1/ The electrical measurements for table IVb (JAN, JANTX, JANTXV) of MIL-S-19500 are as follows:

a. Subgroup 2, see table II herein, steps 1 and 2.

b. Subgroups 3 and 6, see table II herein, steps 3, 4, 5, and 6.

2/ The electrical measurements for table V of MIL-S-19500 are as follows:

Subgroups 2, 3, and 6, see table II herein, steps 3, 4, 5, and 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-S-19500.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-S-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents shall specify the following:

a. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

b. Lead finish (see 3.3.1).

c. Type designation and product assurance level.

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Air Force - 17

Review activities:
Army - MI
Air Force - 19, 85, 99
DLA - ES

Preparing activity:
Air Force - 17

Agent:
DLA - ES

(Project 5961-F036)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-S-19500/430A(USAF)	2. DOCUMENT DATE (YYMMDD) 93/09/03

3. DOCUMENT TITLE
SEMICONDUCTOR DEVICE, DUAL FIELD EFFECT TRANSISTORS, N-CHANNEL, SILICON, TYPES 2N5545, 2N5546, AND 2N5547, JAN, JANTX, AND JANTXV

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE (Include Area Code) (1) Commercial: 513-296-6048 (2) AUTOVON: 986-6048
c. ADDRESS (Include Zip Code) DESC-ECT Dayton, OH 45444-5270	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T01:46Z
Check the source to verify that this is the currentversion before use.