The documentation and process conversion measures necessary to comply with this revision shall be completed by 14 APR 94.

INCH-POUND

MIL-S-19500/444C
14 January 1994
SUPERSEDING
~~MIL-S-19500/444B~~
10 July 1990

MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING
TYPES 1N5711-1 AND 1N5711UR-1
JAN, JANTX, JANTXV, JANS, JANHC, AND JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for Schottky barrier diodes intended for use in applications requiring switching speeds of less than 100 picoseconds. Four levels of product assurance are provided for each encapsulated device type as specified in MIL-S-19500. Two level of product assurance are provided each unencapsulated device type.

1.2 Physical dimensions. See figure 1, similar to DO-35, figure 2 (DO-213AA), and figure 3 (JANHC and JANKC).

1.3 Maximum ratings.

TYPE	V_{RWM}	I_O	$R_{\theta JL}$ 1/	T_{STG} and T_J
	V(pk)	mA dc	°C/W	
1N5711-1	50	33 2/	250	-65°C to +150°C
1N5711UR-1	50	33 3/	100	-65°C to +150°C

1/ Lead length = .375 inch (9.52 mm) except for surface mount.
2/ At T_L = +130°C and L = .375 inch (9.52 mm), derate I_O to 0 at +150°C.
3/ At T_{EC} = +140°C, derate I_O to 0 at +150°C.

1.4 Primary electrical characteristics.


Limits	$V_{(BR)1}$ I_R = 10 µA dc	V_{F1} I_F = 1 mA dc	V_{F2} I_F = 15 mA dc	I_{R1} V_R = 50 V dc	C V_R = 0, f = 1 MHz V_{sig} = 50 mV(pk)	τ_{CL} I_F = 5.0 mA	$Z_{\theta JX}$
	V dc	V dc	V dc	nA dc	pF	ns	°C/W
Minimum	70						
Maximum		0.410	1.0	200	2.0	100	40

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: NASA/Parts Projects Office (NPPO), NASA Goddard Space Flight Center, Code 310.A, Greenbelt, MD 20771 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

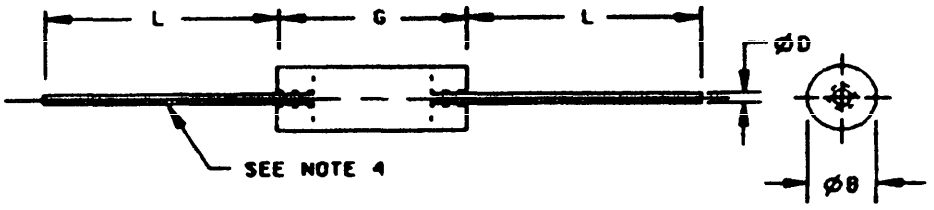


Dimensions					
Ltr	Inches		Millimeters		Notes
	Min	Max	Min	Max	
G	.150	.170	3.81	4.32	3
ØB	.068	.076	1.73	1.93	3, 4
L	1.000	1.500	25.40	38.10	
ØD	.014	.022	0.36	0.56	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Dimensions G and ØB include all components of the diode periphery except the sections of the leads over which the diameter is controlled.
4. Dimension ØB shall be measured at the largest diameter.

FIGURE 1. Physical dimensions for 1N5711-1.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

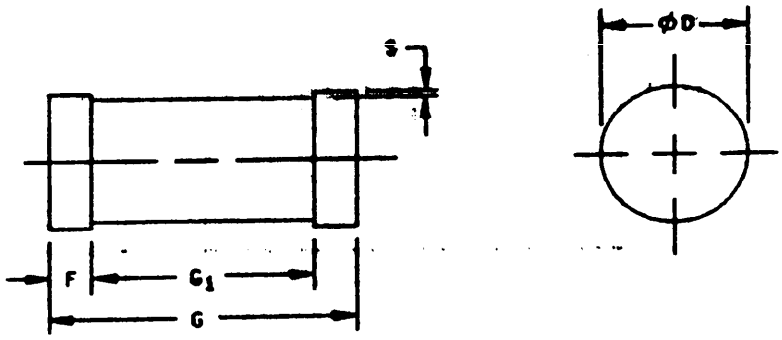

Dimensions				
Ltr	Inches		Millimeters	
	Min	Max	Min	Max
ϕD	.063	.067	1.60	1.70
F	.016	.022	0.41	0.55
G	.130	.146	3.30	3.71
G_1	.100 Ref		2.54 Ref	
S	.001 Min		0.03 Min	

FIGURE 2. Physical dimensions, 1N5711UR-1 (DO-213AA).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

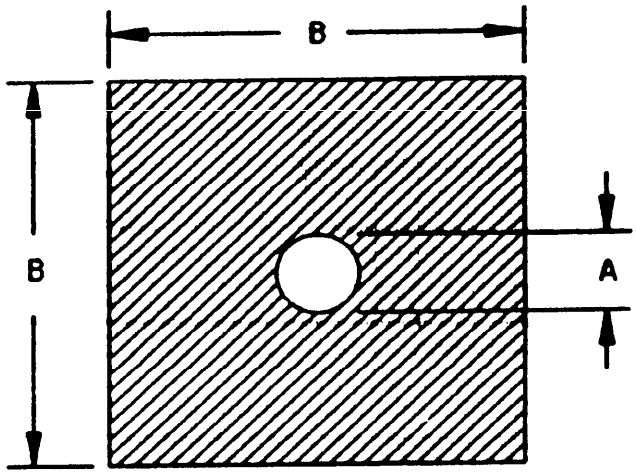

BACKSIDE IS CATHODE

Dimensions				
Ltr	Inches		Millimeters	
	Min	Max	Min	Max
A	.0049	.0051	.124	.129
B	.0130	.0170	.330	.430

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Element evaluation accomplished utilizing TO-5 package.
4. The physical characteristics of the die are:

Metallization:
Top (anode): Al.
Back (cathode): Au.
Al thickness: 25,000 Å minimum.
Gold thickness: 4,000 Å minimum.
Chip thickness: .010 inches (.25 mm) ±.002 inches (.05 mm).

FIGURE 3. Physical dimensions, JANHCA and JANKCA die.

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T01:59Z
Check the source to verify that this is the currentversion before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

MILITARY

MIL-S-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Defense Printing Service Detachment Office, Building 4D (Customer Service), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWING

Defense Electronics Supply Center.

C68001 - Test Fixture for Effective Minority Carrier Lifetime.

(Copies of DESC drawing C68001 are available from Defense Electronics Supply Center, DESC-ECT, Dayton, OH 45444-5280.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Associated detail specification. The individual item requirements shall be in accordance with MIL-S-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-S-19500, and as follows:

EC - - - - - - - - - - End cap.

UR - - - - - - - - - - Surface mount case outline, round end cap.

τ_{CL} - - - - - - - - - - Effective carrier lifetime.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-S-19500, and figures 1, 2, and 3 herein.

3.3.1 Lead finish. Lead finish shall be solderable as defined in MIL-S-19500, MIL-STD-750, and herein.

3.3.2 Diode construction. All devices shall be metallurgically bonded double plug construction in accordance with the requirements of category I or II (see MIL-S-19500).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

3.4 Marking. Marking shall be in accordance with MIL-S-19500.

3.4.1 UR devices. "UR" devices shall be marked with a cathode band only. Initial container package marking will be in accordance with MIL-S-19500.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-S-19500, and as specified herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-S-19500.

4.2.1 Group E inspection. Qualification inspection shall be in accordance with MIL-S-19500 and table II herein.

4.2.2 JANHC and JANKC devices. Qualification for shall be in accordance with appendix H of MIL-S-19500.

4.3 Screening (JAN, JANTX, JANTXV, and JANS levels only). Screening shall be in accordance with MIL-S-19500 (table II), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table II of MIL-S-19500)	Measurement		
	JANS	JANTX and JANTXV	JAN level
3a	Temperature cycling	Temperature cycling	Temperature cycling (in accordance with JANTX level).
3c 1/	Thermal impedance (see 4.3.3)	Thermal impedance (see 4.3.3)	Thermal impedance (see 4.3.3)
9	Not applicable	Not applicable	
10	Not applicable	Not applicable	
11	I_{R1} and V_{F1}	I_{R1} and V_{F1}	
12	See 4.3.1	See 4.3.1, t = 48 hours	
13 2/	Subgroups 2 and 3 of table I herein, ΔI_{R1} = 100 percent of initial value or 25 nA dc, whichever is greater; ΔV_{F1} = 20 mV dc.	Subgroup 2 of table I herein, ΔI_{R1} = 100 percent of initial reading or 50 nA, whichever is greater; ΔV_{F1} = 40 mV dc.	

1/ Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-S-19500, screen 3 prior to this thermal test.
2/ Test within 24 hours after removal from test.

4.3.1 Burn-in conditions. Burn-in conditions are as follows:

High temperature reverse bias (HTRB), MIL-STD-750 method 1038, test condition A, V_R = 40 V; T_A = +150°C.

4.3.2 Screening (JANHC or JANKC). Screening of JANC die shall be in accordance with MIL-S-19500, appendix H. As a minimum, die shall be 100-percent probed in accordance with group A, subgroup 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.3.3 Thermal impedance ($Z_{\theta JX}$ measurements). The $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750, method 3101. The maximum limit (not to exceed the group A, subgroup 2 limit) for $Z_{\theta JX}$ in screening (table II of MIL-S-19500) shall be derived by each vendor by means of statistical process control. When the process has exhibited control and capability, the capability data shall be used to establish the fixed screening limit. In addition to screening, once a fixed limit has been established, monitor all future sealing lots using a random five piece sample from each lot to be plotted on the applicable X, R chart. If a lot exhibits an out of control condition, the entire lot shall be removed from the line and held for engineering evaluation and disposition.

4.3.3.1 For initial qualification or requalification. Read and record data ($Z_{\theta JX}$) shall be supplied to the qualifying activity on one lot (random sample of 500 devices minimum). Twenty-two serialized devices shall be sent to the qualifying activity for test correlation.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-S-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-S-19500, and table I herein. The following test conditions shall be used for $Z_{\theta JX}$, group A inspection:

a. I_M measurement current - - - - - - - - - - - - - - - - - 1 mA to 10 mA.

b. I_H forward heating current - - - - - - - - - - - - - - - 50 mA to 200 mA.

c. t_H heating time - 10 ms.

d. t_{MD} measurement delay time - - - - - - - - - - - - - - - 70 µs maximum.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table IVa (for JANS) and table IVb (for JAN, JANTX, and JANTXV) of MIL-S-19500, and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps and footnotes of table 1, group A, subgroup 2 herein.

4.4.2.1 Group B inspection, table IVa (JANS) of MIL-S-19500.

Subgroup	Method	Condition
4	1037	I_O = 33 mA; V_R = 50 V(pk); f = 60 Hz; T_A = room ambient as defined in 4.5 of MIL-STD-750; t_{on} = t_{off} = 3 minutes minimum for 2,000 cycles; (see 4.5.1).
5	1027	V_C = 50 V(pk); f = 60 Hz; T_A = +125°C ±25°C for 240 hours with I_O adjusted as required by the chosen T_A to give an average lot T_J = +150°C. Marking legibility requirements shall not apply (see 4.5.1).
6	3101 or 4081	$R_{\theta JL}$ = 250°C/W .375 inch (9.52 mm) lead length (non-surface mount). $R_{\theta JEC}$ = 100°C/W (surface mount).

4.4.2.2 Group B inspection, table IVb (JAN, JANTX, and JANTXV) of MIL-S-19500.

Subgroup	Method	Condition
B3	1027	I_O = 33 mA dc; V_r = 50 V(pk); f = 50-60 Hz (see 4.5.1); T_A = room ambient as defined in 4.5 of MIL-STD-750.
B4 and B5		Not applicable.
B6	1032	T_A = +150°C.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table V of MIL-S-19500, and as follows. Electrical measurements (end-points) and delta requirements shall be in accordance with the applicable steps and footnotes of table I, group A, subgroup 2 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

Subgroup	Method	Condition
2	2036	(Not applicable to surface mount devices); Lead fatigue conditions: Test condition E; .062 inch (1.57 mm) lead restriction from case. Tension conditions: Test condition A; 4 pounds, 15 seconds.
3	2056	Nonoperating (not required for double plug metallurgical bonded device).
3	2006	20,000 g's; Y1, Y2, X1 (Not required for double plug metallurgical bonded device).
6	1026	I_O = 33 mA dc; V_r = 50 V(pk); f = 50-60 Hz (see 4.5.1); T_A = room ambient as defined in 4.5 of MIL-STD-750.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Steady-state operation life. This test shall be conducted with a half-sine wave of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conduction angle of the rectified current shall not be greater than 180° nor less than 150°.

4.5.2 Effective carrier lifetime (τ_{CL}). This test shall be measured with the device installed in the test fixture, drawing C68001 using the test setup shown on figure 5 herein. Adjust the signal generator to 54 MHz and maximum output in order to obtain a sufficient trigger signal for the oscilloscope. Adjust the sensitivity of the oscilloscope to 5 mV/cm. With the device in the test fixture, adjust the output of the amplifier until the peak amplitude of the forward current is 5 mA or 5 cm as seen on the oscilloscope. Change sensitivity of scope to 2 mV/cm. Under these conditions, the effective carrier lifetime is related to the amplitude designated as "τ_{CL}" shown on figure 6. This amplitude has the calibration of 200 ps/cm.

4.5.3 Thermal resistance. Thermal resistance measurement shall be in accordance with MIL-STD-750, method 3101 or 4081. Forced moving air or draft shall not be permitted across the device during test. The maximum limit for $R_{\theta JL}$ under these test conditions shall be as shown in group E. The following conditions shall apply when using method 3101:

a. I_M - 1 mA to 10 mA.

b. I_H - 25 mA to 100 mA.

c. t_H - 25 seconds minimum.

d. t_{MD} - 70 µs maximum.

LS = Lead spacing = .375 inch (9.52 mm) as defined on figure 4 below:

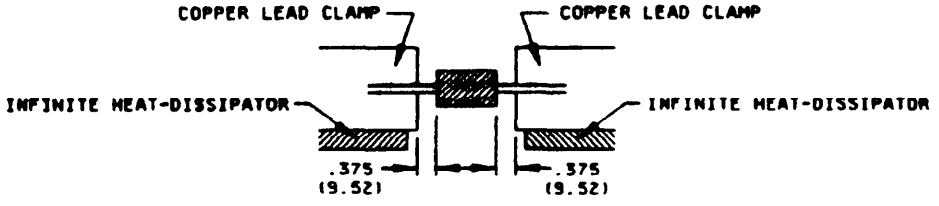


FIGURE 4. Mounting conditions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical inspection	2071					
Subgroup 2						
Forward voltage	4011	I_F = 1 mA dc	V_{F1}		0.410	V dc
Forward voltage	4011	I_F = 15 mA dc	V_{F2}		1.0	V dc
Reverse current	4016	DC method; V_R = 50 V dc	I_{R1}		200	nA dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)1}$	70		V dc
Thermal impedance	3101	See 4.4.1	$Z_{\theta JX}$		40	°C/W
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current	4016	DC method; V_R = 50 V dc	I_{R2}		200	µA dc
Low temperature operation:		T_A = -55°C				
Forward voltage	4011	I_F = 1 mA dc	V_{F3}		0.55	V dc
Forward voltage	4011	I_F = 15 mA dc	V_{F4}		1.0	V dc
Breakdown voltage	4021	I_R = 10 µA dc	$V_{(BR)2}$	70		V dc
Subgroup 4						
Capacitance	4001	V_R = 0 V dc; f = 1 MHz; V_{sig} = 50 mV(pk) maximum	C		2.0	pF
Effective carrier lifetime (see 4.5.2)		(see DESC drawing 68001)	τ_{CL}		100	ps
Subgroups 5, 6, and 7						
Not applicable						

1/ For sampling plan, see MIL-S-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspections (all quality levels) for qualification only.

Inspection 1/	MIL-STD-750		Sampling
	Method	Conditions	
Subgroup 1			22 devices c = 0
Thermal shock (temperature cycling)	1051	500 cycles	
Electrical measurements		See table I, group A, subgroup 2 (V_{F1} and I_{R1})	
Subgroup 2			22 devices c = 0
Steady-state dc blocking life	1038		
Electrical measurements		See table I, group A, subgroup 2 (V_{F1} and I_{R1})	
Subgroup 3			
Not applicable			
Subgroup 4			22 devices c = 0
Thermal resistance surface mount	3101 or 4081	$R_{\theta JEC}$ = 100°C/W (maximum) at zero lead length. +25°C ≤ T_R ≤ +35°C, (see 4.5.3) at T_H ≥ 25 s.	
Thermal resistance leaded	3101 or 4081	$R_{\theta JL}$ = 250°C/W (maximum) at .375 inches (9.52 mm) lead length +25°C ≤ T_R ≤ +35°C, (see 4.5.3) at T_H ≥ 25 s in still air.	
Subgroup 5			
Not applicable			
Subgroup 6			3 devices
ESD testing	1020		

1/ For sampling plan, see MIL-S-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

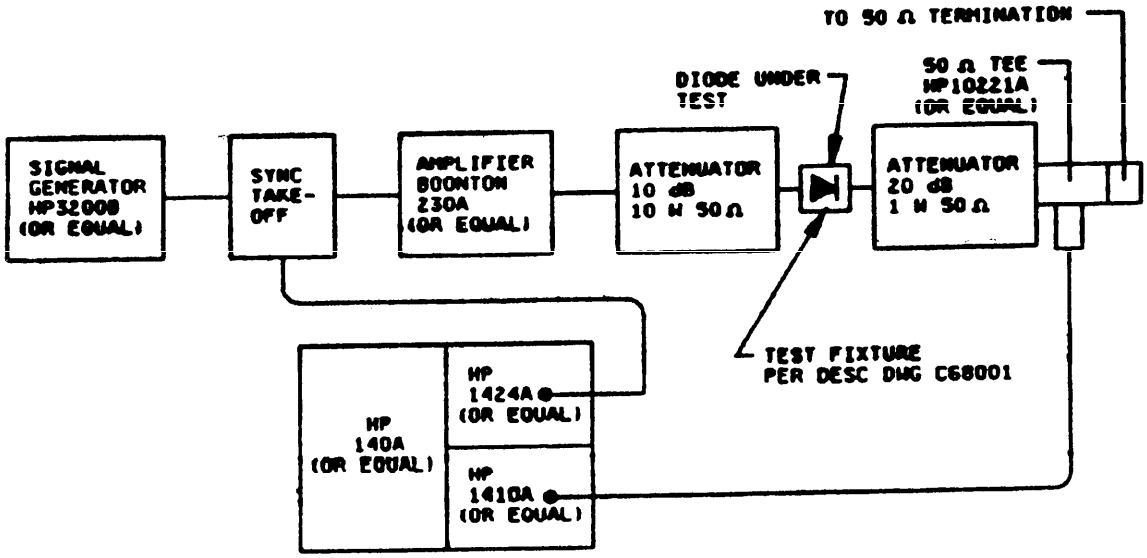


FIGURE 5. Test setup for diode lifetime measurement.

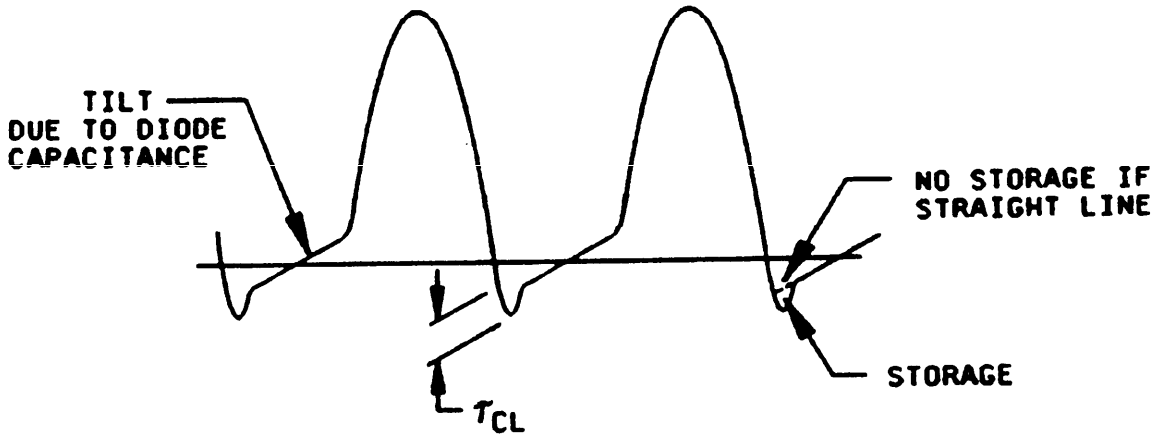


FIGURE 6. Oscilloscope display in diode lifetime measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

4.5.4 Decap internal visual scribe and break. Scratch glass at cavity area with diamond scribe. Carefully snap open. Using 30X magnification examine the area where die (or bonding material) are in contact with the plugs, verify metallurgical bonding area.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-S-19500.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-S-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation.

b. Lead finish as specified (see 3.3.1).

c. Product assurance level, type designator, and for die acquisition the JANHC and JANKC identification (see figure 3 and 6.3).

6.3 Suppliers of die. The qualified die suppliers with the applicable letter version (e.g., JANHCA1N5711) will be identified on the QPL.

JANC ordering information		
	Manufacturer	
PIN	55801	
1N5711-1	JANHCA1N5711	
1N5711-1	JANHKA1N5711	

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC
Air Force - 19, 85, 99
DLA - ES

Preparing activity:
NASA - NA

Agent:
DLA - ES

(Project 5961-1556)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T01:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8 in block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE	1. DOCUMENT NUMBER MIL-S-19500 / 444 C	2. DOCUMENT DATE (YYMMDD) 940114

3. DOCUMENT TITLE

SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING, TYPES 1N5711-1 AND 1N5711UR-1, JAN, JANTX, JANTXV, JANS, JANHC, AND JANKC

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME NASA Parts Project Office, NASA-NA	b. TELEPHONE (Include Area Code) (1) Commercial (301) 286-6286 (2) AUTOVON
c. ADDRESS (Include Zip Code) Manager (310.A) NASA Parts Project Office Goddard Space Flight Center Greenbelt, MD 20771	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703)756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete 198/29

Source: https://assist.dla.mil -- Downloaded: 202610-19T01:59Z
Check the source to verify that this is the current version before use.