The documentation and process conversion measures necessary to comply with this document shall be completed by 20 March 2022.

INCH-POUND
MIL-PRF-19500/561K
w/AMENDMENT 2
20 December 2021
SUPERSEDING
MIL-PRF-19500/561K
w/AMENDMENT 1
19 July 2016

PERFORMANCE SPECIFICATION SHEET

TRANSISTOR, PNP, SILICON, SWITCHING,
TYPES 2N6193, JAN, JANTX, JANTXV, JANS, JANHC, JANKC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for PNP silicon switching transistors. Four levels of product assurance (JAN, JANTX, JANTXV and JANS) are provided for each encapsulated device type as specified in MIL-PRF-19500. Two levels of product assurance (JANHC and JANKC) are provided for each unencapsulated device type as specified in MIL-PRF-19500. Radiation hardness assurance (RHA) level designators "M", "D", "P", "L", "R", "F", "G", and "H" are appended to the device prefix to identify devices which have passed RHA requirements. Provisions for (RHA) to two radiation levels ("R" and "F") are provided for JANTXV product assurance level.

* 1.2 Package outlines and die topography. The device packages for the encapsulated device types are as follows: (TO-39) in accordance with figure 1, (U3 surface mount) in accordance with figure 2. The dimensions and topography for JANHC and JANKC unencapsulated die is as follows: The A version die in accordance with figure 3, B version die in accordance with figure 4, C version die in accordance with figure 5, and D version die in accordance with figure 6.

1.3 Maximum ratings unless otherwise specified $T_A$ = +25°C.

| Types | $P_T$ (1) $T_A$ = +25°C | $P_T$ (2) $T_C$ = +25°C | $R_{\theta JA}$ | $R_{\theta JC}$ | $V_{CBO}$ | $V_{CEO}$ | $V_{EBO}$ | $I_C$ | $I_B$ | $T_J$ and $T_{STG}$ |
|---|---|---|---|---|---|---|---|---|---|---|
| | W | W | °C/W | °C/W | V dc | V dc | V dc | A dc | A dc | °C |
| 2N6193 | 1.0 | 17.5 | 175 | 10 | -100 | -100 | -6.0 | -5.0 | -1.0 | -65 to +200 |
| 2N6193U3 | 1.0 | 100 | 175 | 1.75 | -100 | -100 | -6.0 | -5.0 | -1.0 | |

* (1) See figure 7
* (2) See figure 8 and figure 9

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics $T_A$ = +25°C. (Unless otherwise indicated, applies to all devices.)

| Types | $h_{FE1}$ (1) $V_{CE}$ = -2.0 V dc; $I_C$ = -0.5 A dc | | $h_{FE2}$ (1) $V_{CE}$ = -2.0 V dc; $I_C$ = -2.0 A dc | | $h_{FE3}$ (1) $V_{CE}$ = -2.0 V dc; $I_C$ = -5.0 A dc | |
|---|---|---|---|---|---|---|
| | Min | Max | Min | Max | Min | Max |
| 2N6193 | 60 | | 60 | 240 | 40 | |
| 2N6193U3 | 60 | | 60 | 240 | 40 | |

| Limits | $\|h_{FE}\|$ $V_{CE}$ = -10 V dc $I_C$ = -0.5 A dc f = 10 MHz | $C_{obo}$ $V_{CB}$ = -10 V dc $I_E$ = 0 100 kHz ≤ f ≤ 1 MHz | Switching | | $V_{CE(SAT)1}$ $I_C$ = -2.0 A dc $I_B$ = -0.2 A dc (1) | $V_{BE(SAT)1}$ $I_C$ = -2.0 A dc $I_B$ = -0.2 A dc (1) |
|---|---|---|---|---|---|---|
| | | | See figure 12 $t_{on}$ | See figure 13 $t_{off}$ | | |
| | | pF | µs | µs | V dc | V dc |
| Min | 3.0 | | | | | |
| Max | 15 | 300 | 0.2 | 2.2 | -0.7 | -1.2 |

(1) Pulsed (see 4.5.1).

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.5 for PIN construction example and 6.6 for a list of available PINs.

1.5.1 JAN certification mark and quality level designators.

1.5.1.1 Quality level designators for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", “JANTXV”, and "JANS".

1.5.1.2 Quality level designators for unencapsulated devices (die). The quality level designators for unencapsulated devices (die) that are applicable for this specification sheet from the lowest to the highest level are as follows: "JANHC" and "JANKC".

1.5.2 Radiation hardness assurance (RHA) designator. The RHA levels that are applicable for this specification sheet from lowest to highest for JANS quality levels are as follows: "M", "D", "P", "L", “R”, “F’, “G”, and “H”. For the RHA levels for TXV quality levels are as follows: “R” and “F’.

1.5.3 Device type. The designation system for the device types covered by this specification sheet are as follows.

1.5.3.1 First number and first letter symbols. The semiconductors of this specification sheet use the first number and letter symbols "2N".

1.5.3.2 Second number symbols. The second number symbols for the semiconductors covered by this specification sheet are as follows: "6193".

1.5.4 Suffix symbols. The following suffix letters are incorporated in the PIN for this specification sheet.

| | |
|---|---|
| | A blank first suffix symbol indicates encapsulated devices. Applicable for the 2N6193 (see figure 1 TO-39). |
| U3 | Indicates a surface mount 2N6193U3, (see figure 2). |

1.5.5 Lead finish. The lead finishes applicable to this specification sheet are listed on QML-19500.

1.5.6 Die identifiers for unencapsulated devices (manufacturers and critical interface identifiers). The manufacturer die identifiers that are applicable for this specification sheet is "A", “B”, “C”, and “D”.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

* 1.6 Radiation features. The following radiation features are applicable for RHA devices supplied to this specification sheet.

* 1.6.1 Maximum total ionizing dose (TID). The maximum TID that RHA devices were tested to in accordance with condition A (dose rate = 50 to 300 rad(Si)/s) of method 1019 of MIL-STD-750 are as follows:


For device type 2N6193: ..... 300 krads(Si) 1/

For device type 2N6193U3: ..... 100 krads(Si) 1/

1/ The manufacturers supplying these device types have performed characterization testing in accordance with condition A (dose rate = 50 to 300 rad(Si)/s) of method 1019 of MIL-STD-750. The radiation end point limits are guaranteed only to a maximum TID level of 100 and 300 krads(Si).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

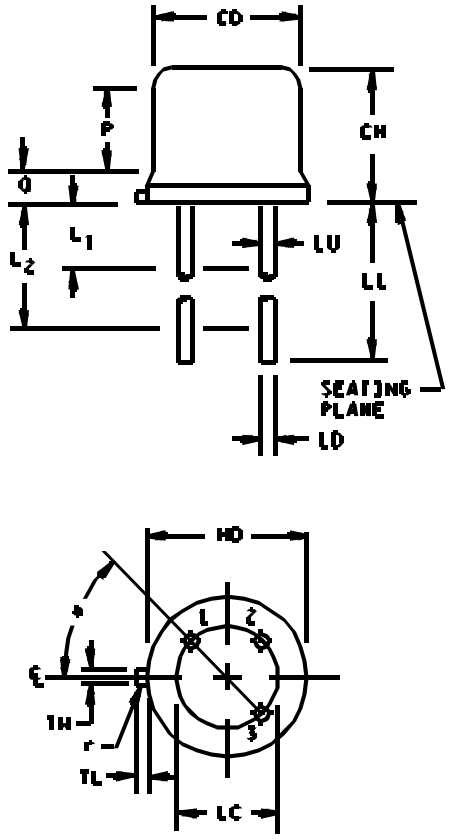



| Ltr | Dimensions | | | | Notes |
|---|---|---|---|---|---|
| | Inches | | Millimeters | | |
| | Min | Max | Min | Max | |
| CD | .305 | .355 | 7.75 | 9.02 | |
| CH | .240 | .260 | 6.10 | 6.60 | |
| HD | .355 | .370 | 9.02 | 9.40 | |
| LC | .200 TP | | 5.08 TP | | 6 |
| LD | .016 | .021 | 0.41 | 0.53 | 7 |
| LL | .500 | .750 | 12.70 | 19.05 | 7 |
| LU | .016 | .019 | 0.41 | 0.48 | 7 |
| L1 | | .050 | | 1.27 | 7 |
| L2 | .250 | | 6.35 | | 7 |
| TL | .029 | .045 | 0.74 | 1.14 | 3 |
| TW | .028 | .034 | 0.71 | 0.86 | 10 |
| P | .100 | | 2.54 | | 5 |
| Q | | .040 | | 1.02 | 4 |
| R | | .010 | | 0.25 | 11 |
| $\alpha$ | 45° TP | | 45° TP | | 6 |
| Notes | 1, 2, 8, 9 | | | | |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Symbol TL is measured from HD maximum.
4. Details of outline in this zone are optional.
5. Symbol CD shall not vary more than .010 inch (0.25 mm) in zone P. This zone is controlled for automatic handling.
6. Leads at gauge plane .054 inch (1.37 mm) +.001 inch (0.03 mm) -.000 inch (0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) relative to tab. Device may be measured by direct methods or by gauge.
7. Symbol LD applies between $L_1$ and $L_2$. Dimension LD applies between $L_2$ and LL minimum.
8. Lead designation, depending on device type, shall be as follows: 1 Emitter, 2 Base, and 3 Collector
9. Lead number three is electrically connected to case.
10. Beyond r maximum, TW shall be held for a minimum length of .011 inch (0.28 mm).
11. Symbol r applied to both inside corners of tab.
* 12. In accordance with ASME Y14.5, diameters are equivalent to $\phi$x symbology.

FIGURE 1. Physical dimensions (TO-39).




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

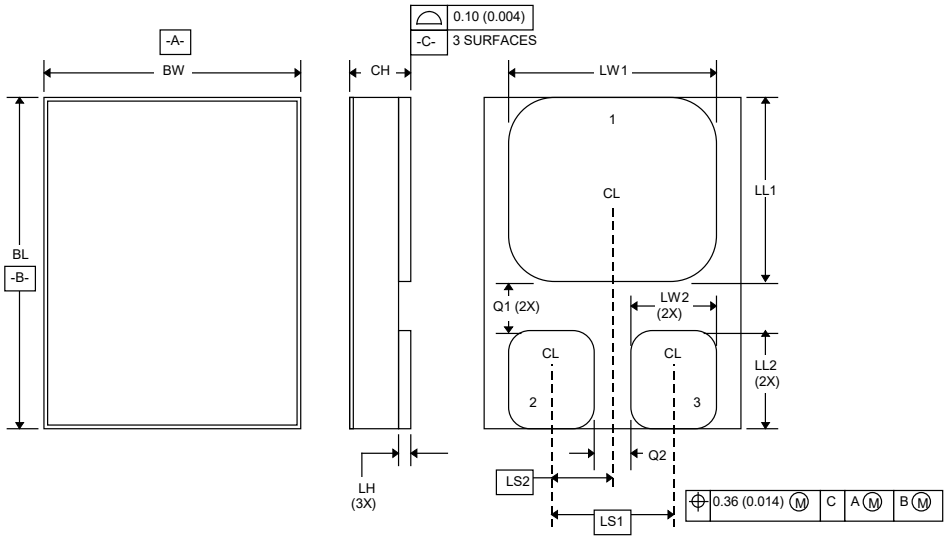


| Ltr | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| BL | .395 | .405 | 10.04 | 10.28 |
| BW | .291 | .301 | 7.40 | 7.64 |
| CH | .1085 | .1205 | 2.76 | 3.06 |
| LH | .010 | .020 | 0.25 | 0.51 |
| LW1 | .281 | .291 | 7.14 | 7.39 |
| LW2 | .090 | .100 | 2.29 | 2.54 |
| LL1 | .220 | .230 | 5.59 | 5.84 |
| LL2 | .115 | .125 | 2.93 | 3.17 |
| LS1 | .150 BSC | | 3.81 BSC | |
| LS2 | .075 BSC | | 1.91 BSC | |
| Q1 | .030 | | 0.762 | |
| Q2 | .030 | | 0.762 | |

SCHEMATIC





NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
* 3. In accordance with ASME Y14.5, diameters are equivalent to ϕx symbology.
4. Terminal 1 - collector, terminal 2 -base, terminal 3 - emitter.

FIGURE 2. Physical dimensions and configuration 2N6193U3.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

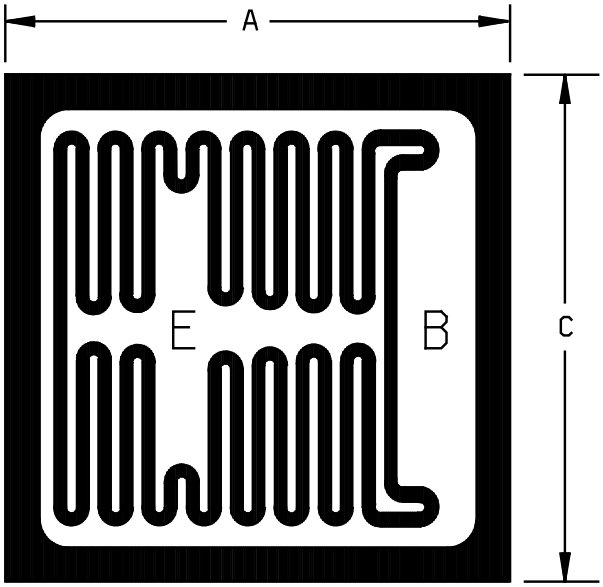



| Letter | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| A | .120 | .124 | 3.05 | 3.15 |
| C | .120 | .124 | 3.05 | 3.15 |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. The physical characteristics of the die are:
   Thickness:.....008 inch (0.20 mm) to .012 inch (0.30 mm).
   Top metal:.....Aluminum 40,000 Å minimum, 50,000 Å nominal.
   Back metal: .....Gold 2,500 Å minimum, 3,000 Å nominal.
   Back side: .....Collector.
   Bonding pad:.....B = .015 inch (0.38 mm) x .072 inch (1.83 mm).
   E = .015 inch (0.38 mm) x .060 inch (1.52 mm).
4. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
* 5. In accordance with ASME Y14.5, diameters are equivalent to ϕx symbology.

FIGURE 3. Physical dimensions JANHCA and JANKCA.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

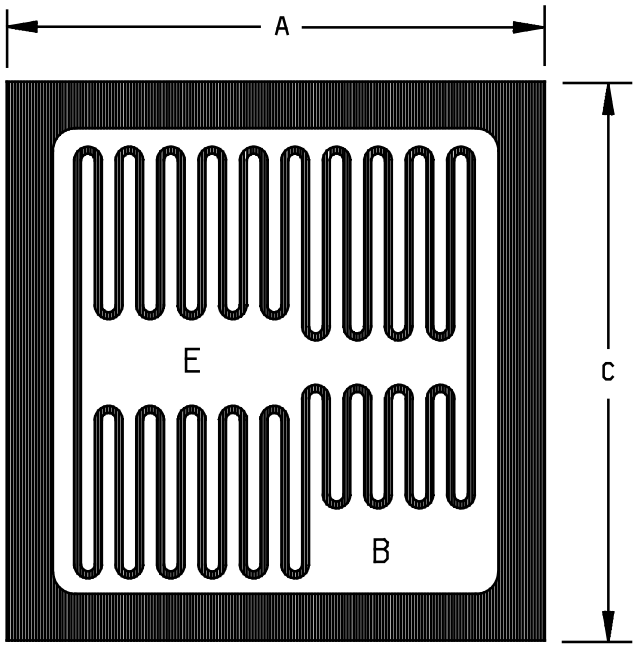



| Letter | Dimensions | | | |
|---|---|---|---|---|
| | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| A | .098 | .102 | 2.49 | 2.59 |
| C | .098 | .102 | 2.49 | 2.59 |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. The physical characteristics of the die are:
   Thickness: ..... .006 inch (0.15 mm) to .010 inch (0.25 mm).
   Top metal: ..... Aluminum 25,000 Å minimum, 33,000 Å nominal.
   Back metal: ..... Gold 1,500 Å minimum, 2,500 Å nominal.
   Back side: ..... Collector.
   Bonding pad: ..... B = .014 inch (0.36 mm) x .030 inch (0.76 mm).
4. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
* 5. In accordance with ASME Y14.5, diameters are equivalent to ϕx symbology.

FIGURE 4. Physical dimensions JANHCB and JANKCB.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

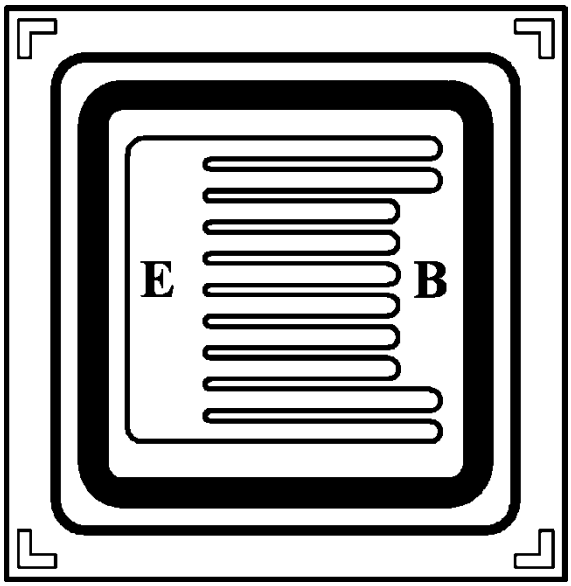



NOTES:

1. Chip size .....128 x .128 inch ±.002 inch, (3.25 x 3.25 mm ±0.051mm).
2. Chip thickness .....010 ±.0015 inch nominal, (.254 ±0.038 mm)
3. Top metal .....Aluminum 30,000Å minimum, 33,000Å nominal.
4. Back metal.....A. Al/Ti/Ni/Ag15kÅ/2kÅ/7kÅ/7kÅmin.18kÅ/3kÅ/10kÅ/10kÅ nom.
   B. Gold 2,500Å minimum, 3,000Å nominal.
5. Backside.....Collector
6. Bonding pad .....B = .052 x .012 inch, (1.32 x 0.30 mm).
   E = .084 x .012 inch, (2.13 x 0.30 mm).

FIGURE 5. Physical dimensions JANHCC and JANKCC.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

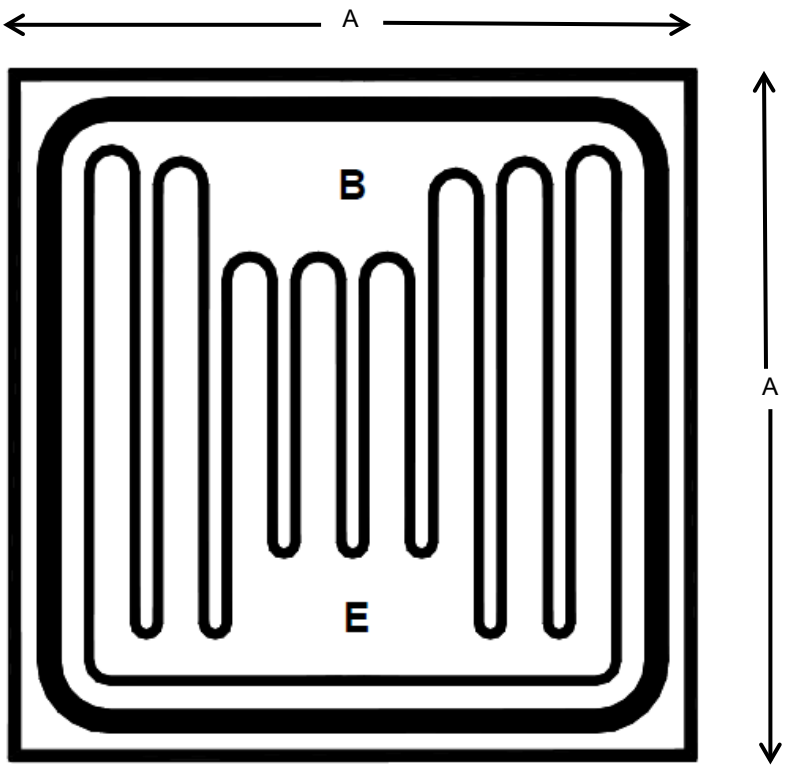


**Backside: Collector**

| Dimensions | | | | |
|---|---|---|---|---|
| LTR | Inches | | Millimeters | |
| | Min | Max | Min | Max |
| A | .118 | .122 | 3.0 | 3.1 |

NOTES:
1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. The physical characteristics of the die are:
   - Thickness: .0135 inch (0.34 mm) nominal, tolerance is ±.0015 inch (0.04 mm).
   - Top metal: Aluminum, 54,000 Å minimum, 60,000 Å nominal.
   - Back metal: Gold 6,400 Å minimum, 8,000 Å nominal.
   - Back side: Collector.
   - Bonding pad: B = .038 x .022 inch (0.97 x 0.56 mm)
     E = .042 x .020 inch (1.07 mm x 0.51 mm)

FIGURE 6. JANHC and JANKC (D-version) die dimensions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

$R_{\theta JA}$ ..... Thermal resistance junction to ambient.
$R_{\theta JC}$ ..... Thermal resistance junction to case.

* 3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 (TO-39), figure 2 (U3), figure 3 (JANHC and JANKC version A), and figure 4 (JANHC and JANKC version B), figure 5 (JANHC and JANKC version C), and figure 6 (JANHC and JANKC version D) herein.

3.4.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.5 Radiation hardness assurance (RHA). Radiation hardness assurance requirements, PIN designators, and test levels shall be as defined in MIL-PRF-19500.

3.6 Electrical performance characteristics. Unless otherwise specified, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.8 Marking. Devices shall be marked in accordance with MIL-PRF-19500.

3.9 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and table I and table II).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 JANHC and JANKC qualification. JANHC and JANKC qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.2 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening.

* 4.3.1 Screening of encapsulated devices (JANS, JANTX, and JANTXV levels only). Screening of packaged devices shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

| Screen | Measurements | |
|---|---|---|
| | JANS level | JANTX and JANTXV levels |
| (1) 3c | Thermal impedance, method 3131 of MIL-STD-750 | Thermal impedance, method 3131 of MIL-STD-750 |
| 9 | $I_{CBO1}$ and $h_{FE2}$ | Not applicable |
| 11 | $I_{CBO1}$; $h_{FE2}$, $\Delta I_{CBO1}$ = ±100 percent of initial value or 1.0 µA dc whichever is greater; $\Delta h_{FE2}$ = ±15 percent | $I_{CBO1}$ and $h_{FE2}$ |
| 12 | See 4.3.1.1 | See 4.3.1.1 |
| 13 | Subgroups 2 and 3 of table I herein; $\Delta I_{CBO1}$ = ±100 percent of initial value or 1.0 µA dc, whichever is greater; $\Delta h_{FE2}$ = ±15 percent | Subgroup 2 of table I herein; $\Delta I_{CBO1}$ = ±100 percent of initial value or 1.0 µA dc, whichever is greater; $\Delta h_{FE2}$ = ±15 percent. |
| * 17 | For U3 packages: Method 1081 of MIL-STD-750 (see 4.3.4), Endpoints: Subgroup 2 of table I herein. | For U3 packages: Method 1081 of MIL-STD-750 (see 4.3.4), Endpoints: Subgroup 2 of table I herein. |

(1) Shall be performed anytime after temperature cycling, screen 3a; TX and TXV devices do not need to be repeated in screening requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

4.3.1.1 Power burn-in conditions. Power burn-in conditions are as follows: $V_{CB}$ = -10 to -30 V dc, $T_A$ = room ambient as defined in the general requirements of 4.5 of MIL-STD-750, power shall be applied to the device to achieve $T_J$ = minimum +175°C and minimum power dissipation of $P_D$ = 75 percent $P_T$ max as defined in 1.3. With approval of the qualifying activity and preparing activity, alternate burn-in criteria (hours, bias conditions, $T_J$, and mounting conditions) may be used for JANTX and JANTXV quality levels. A justification demonstrating equivalence is required. In addition, the manufacturing site's burn-in data and performance history will be essential criteria for burn-in modification approval.

4.3.2 Screening of unencapsulated die (JANHC and JANKC). Screening of JANHC and JANKC unencapsulated die shall be in accordance with MIL-PRF-19500 "Discrete Semiconductor Die/Chip Lot Acceptance". Burn-in duration for the JANKC level follows JANS requirements; the JANHC follows JANTX requirements.

4.3.3 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3131 of MIL-STD-750 using the guidelines in that method for determining $I_M$, $I_H$, $t_H$, $t_{MD}$ (and $V_C$ where appropriate). The thermal impedance limit used in screen 3c and subgroup 2 of table I shall comply with the thermal impedance graph in figures 10 and 11 (less than or equal to the curve value at the same $t_H$ time) and/or shall be less than the process determined statistical maximum limit as outlined in method 3131.

4.3.4 Dielectric withstanding voltage.

a. Magnitude of test voltage..... 600 V dc.

b. Duration of application of test voltage..... 15 seconds (min).

c. Points of application of test voltage..... All leads to case (bunch connection).

d. Method of connection..... Mechanical.

e. Kilovolt-ampere rating of high voltage source..... 1,200 V/1.0 mA (min).

f. Maximum leakage current..... 1.0 mA.

g. Voltage ramp up time..... 500 V/second

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIa of MIL-PRF-19500 (JANS) and 4.4.2.1 herein. See 4.4.2.2 herein for JAN, JANTX, and JANTXV group B testing.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

4.4.2.1 Group B inspection, table E-VIa (JANS) of MIL-PRF-19500.

| Subgroup | Method | Conditions |
|---|---|---|
| B4 | 1037 | $V_{CB} \geq$ -10 V dc, adjust device current, or power, to achieve a minimum $\Delta T_J$ of +100°C. |
| B5 | 1027 | (NOTE: If a failure occurs, resubmission shall be at the test conditions of the original sample.) $V_{CB}$ = -10 V dc; $P_D \geq$ 100 percent of maximum rated $P_T$ (see 1.3).<br><br>Option 1: 96 hours minimum sample size in accordance with table VIa, of MIL-PRF-19500, adjust $T_A$ or $P_D$ to achieve $T_J$ = +275°C minimum.<br><br>Option 2: 216 hours minimum, sample size = 45, c = 0; adjusted $T_A$ or $P_D$ to achieve a $T_J$ = +225°C minimum. |
| B5 | 2037 | Test condition D. |

4.4.2.2 Group B inspection, (JAN, JANTX, and JANTXV). Separate samples may be used for each step. In the event of a group B failure, the manufacturer may pull a new sample at double size from either the failed assembly lot or from another assembly lot from the same wafer lot. If the new assembly lot option is exercised, the failed assembly lot shall be scrapped.

| Step | Method | Condition |
|---|---|---|
| 1 | 1026 | Steady-state life: 1,000 hours minimum, $V_{CB}$ = -10 V dc, power shall be applied to achieve $T_J$ = +150°C minimum using a minimum of $P_D$ = 75 percent of maximum rated $P_T$ as defined in 1.3. n = 45 devices, c = 0. The sample size may be increased and the test time decreased as long as the devices are stressed for a total of 45,000 device hours minimum, and the actual time of test is at least 340 hours. |
| 2 | 1048 | Blocking life, $T_A$ = +150°C, $V_{CB}$ = 80 percent of rated voltage, 48 hours minimum. n = 45 devices, c = 0. |
| 3 | 1032 | High-temperature life (non-operating), t = 340 hours, $T_A$ = +200°C. n = 22, c = 0. |

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and as follows.

4.4.3.1 Group C inspection (JANS), table E-VII of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 2036 | Test condition E, not applicable for U3. |
| C5 | 3131 | $R_{\theta JA}$ and $R_{\theta JC}$ (see 1.3) and applied thermal impedance curves. |
| C6 | 1026 | Steady-state life: 1,000 hours, $V_{CB}$ = -10 dc, power shall be applied to achieve $T_J$ = +150°C minimum using a minimum of $P_D$ = 75 percent of maximum rated $P_T$ as defined in 1.3. n = 45 devices, c = 0. The sample size may be increased and the test time decreased so long as the devices are stressed for a total of 45,000 device hours minimum, and the actual time of test is at least 340 hours. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

4.4.3.2 Group C inspection (JAN, JANTX, and JANTXV), table E-VII of MIL-PRF-19500.

| Subgroup | Method | Condition |
|---|---|---|
| C2 | 2036 | Test condition E, not applicable for U3. |
| C5 | 3131 | $R_{\theta JA}$ and $R_{\theta JC}$ only, as applicable (see 1.3 and applied thermal impedance curves). |
| C6 | | Not applicable. |

4.4.4 Group D inspection. Conformance inspection for hardness assured JANS and JANTXV types shall include the group D tests specified in table II herein. These tests shall be performed as required in accordance with MIL-PRF-19500 and method 1019 of MIL-STD-750 for total ionizing dose, or method 1017 of MIL-STD-750 for neutron fluence, as applicable (see 6.2.f herein), except group D, subgroup 2 may be performed separate from other subgroups. Group D inspection may also be performed ahead of the screening lot using die selected in accordance with MIL-PRF-19500 and related documents. Alternate package options may also be substituted for the testing provided there is no adverse effect to the fluence profile.

4.4.5 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified in table III herein.

4.5 Method of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Input capacitance. This test shall be conducted in accordance with method 3240 of MIL-STD-750, except the output capacitor shall be omitted.

4.5.3 Thermal resistance (to be performed for qualification inspection only). The thermal resistance measurements shall be conducted in accordance with method 3131 of MIL-STD-750. The following details shall apply:

a. Collector current magnitude during power application shall be -0.15 A dc.

b. Collector to emitter voltage magnitude shall be -20 V dc.

c. Reference temperature measuring point shall be the case.

d. Reference point temperature shall be + 25°C ≤ $T_R$ ≤ +35°C and recorded before the test is started.

e. Mounting arrangement shall be with heat sink to case.

f. Maximum limit shall be $R_{\theta JC}$ = 10°C/W for TO-39 devices and 1.75°C/W for U3 devices.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 2/ | | | | | | |
| Visual and mechanical Inspection | 2071 | | | | | |
| Solderability 3/ 4/ | 2026 | n = 15 leads, c = 0 | | | | |
| Resistance to solvents 3/ 4/ 5/ | 1022 | n = 15 devices, c = 0 | | | | |
| Salt atmosphere (corrosion) | 1041 | N = 6 devices, c = 0 (For laser marked devices only.) | | | | |
| Temp cycling 3/ 4/ | 1051 | Test condition C, 25 cycles. n = 22 devices, c = 0 | | | | |
| Electrical measurements 4/ | | Table I, subgroup 2 | | | | |
| Hermetic seal 4/ 6/ Fine leak Gross leak | 1071 | n = 22 devices, c = 0 | | | | |
| Bond strength 3/ 4/ | 2037 | Precondition $T_A$ = +250°C at t = 24 hours or $T_A$ = +300°C at t = 2 hours n = 11 wires, c = 0 | | | | |
| Decap internal visual (design verification) 4/ | 2075 | n = 4 devices, c = 0 | | | | |
| Subgroup 2 | | | | | | |
| Thermal impedance 7/ | 3131 | See 4.3.3 | $Z_{\theta JX}$ | | | °C/W |
| Breakdown voltage, collector to emitter | 3011 | Bias condition D; $I_C$ = -50 mA dc; pulsed (see 4.5.1) | $V_{(BR)CEO}$ | -100 | | V dc |
| Collector to emitter cutoff current | 3041 | Bias condition D; $V_{CE}$ = -100 V dc | $I_{CEO}$ | | -100 | µA dc |
| Collector to emitter cutoff current | 3041 | Bias condition A; $V_{BE}$ = +1.5 V dc; $V_{CE}$ = -90 V dc | $I_{CEX1}$ | | -10 | µA dc |
| Collector to base cutoff current | 3036 | Bias condition D; $V_{CB}$ = -100 V dc | $I_{CBO}$ | | -10 | µA dc |
| Emitter to base, cutoff current | 3061 | Bias condition D; $V_{EB}$ = -6.0 V dc | $I_{EBO}$ | | -100 | µA dc |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 2 – Continued | | | | | | |
| Forward - current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc; $I_C$ = -0.5 A dc, pulsed (see 4.5.1) | $h_{FE1}$ | 60 | | |
| Forward - current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc; $I_C$ = -2.0 A dc; pulsed (see 4.5.1) | $h_{FE2}$ | 60 | 240 | |
| Forward - current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc; $I_C$ = -5.0 A dc; pulsed (see 4.5.1) | $h_{FE3}$ | 40 | | |
| Collector to emitter voltage (saturated) | 3071 | $I_C$ = -2.0 A dc; $I_B$ = -0.2 A dc; pulsed (see 4.5.1) | $V_{CE(SAT)1}$ | | -0.7 | V dc |
| Collector to emitter voltage (saturated) | 3071 | $I_C$ = -5.0 A dc; $I_B$ = -0.5 A dc; pulsed (see 4.5.1) | $V_{CE(SAT)2}$ | | -1.2 | V dc |
| Base to emitter voltage (saturated) | 3066 | Test condition A; $I_C$ = -2.0 A dc; $I_B$ = -0.2 A dc; pulsed (see 4.5.1) | $V_{BE(SAT)1}$ | | -1.2 | V dc |
| Base to emitter voltage (saturated) | 3066 | Test condition A; $I_C$ = -5.0 A dc; $I_B$ = -0.5 A dc; pulsed (see 4.5.1) | $V_{BE(SAT)2}$ | | -1.8 | V dc |
| Subgroup 3 | | | | | | |
| High - temperature operation | | $T_A$ = +150°C | | | | |
| Collector to emitter cutoff current | | Bias condition A; $V_{CE}$ = -90 V dc; $V_{BE}$ = +1.5 V dc | $I_{CEX2}$ | | -15 | µA dc |
| Low - temperature operation | | $T_A$ = -55°C | | | | |
| Forward - current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc; $I_C$ = -2.0 A dc; pulsed (see 4.5.1) | $h_{FE4}$ | 12 | | |
| Subgroup 4 | | | | | | |
| Small-signal short-circuit forward-current transfer ratio | 3306 | $V_{CE}$ = -10 V dc; $I_C$ = -0.5 A dc; f = 10 MHz | $\lvert h_{fe} \rvert$ | 3 | 15 | |
| Open circuit output capacitance | 3236 | $V_{CB}$ = -10 V dc; $I_E$ = 0; 100 kHz ≤ f ≤ 1 MHz | $C_{obo}$ | | 300 | pF |
| Input capacitance (output open-circuited) | 3240 | $V_{BE}$ = -2.0 V dc; $I_C$ = 0; 100 kHz ≤ f ≤ 1 MHz | $C_{ibo}$ | | 1,250 | pF |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

| Inspection 1/ | MIL-STD-750 | | Symbol | Limit | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 4 – Continued | | | | | | |
| Pulse response | | | | | | |
| Pulse delay time | 3251 | See figure 12 | $t_d$ | | 100 | ns |
| Pulse rise time | 3251 | See figure 12 | $t_r$ | | 100 | ns |
| Pulse storage time | 3251 | See figure 13 | $t_s$ | | 2 | µs |
| Pulse fall time | 3251 | See figure 13 | $t_f$ | | 200 | ns |
| Subgroup 5 | | | | | | |
| Safe operating area (continuous dc) | 3051 | $T_C$ = +25°C; t ≥ 0.5 s; 1 cycle | | | | |
| Test 1 | | $V_{CE}$ = -2.0 V dc; $I_C$ = -5.0 A dc | | | | |
| Test 2 | | $V_{CE}$ = -90 V dc; $I_C$ = -55 mA dc | | | | |
| End-point electrical Measurements | | See table I, subgroup 2 herein. | | | | |
| Subgroups 6 and 7 | | | | | | |
| Not applicable | | | | | | |

1/ For sampling plan, see MIL-PRF-19500.
2/ For resubmission of failed in table I, subgroup 1, double the sample size of the failed test or sequence of tests. A failure in table I, subgroup 1 shall not require retest of the entire subgroup. Only the failed test shall be rerun upon submission.
3/ Separate samples may be used.
4/ Not required for JANS devices.
5/ Not required for laser marked devices.
6/ This hermetic seal test is an end-point to temp-cycling in addition to electrical measurements.
* 7/ For end-point measurements, this test is required for the following subgroups:
Group B, subgroups 3, 4 and 5 (JANS).
Group B, subgroups 2 and 3 (JAN, JANTX, JANTXV).
Group C, subgroups 2 and 6.
Group E, subgroup 1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

TABLE II. Group D inspection and end-point limits.

| Inspection 1/ 2/ 3/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 1 4/ | | | | | | |
| Neutron irradiation | 1017 | Neutron exposure $V_{CES}$ = 0V | | | | |
| Breakdown voltage, collector to emitter | 3011 | Bias condition D; $I_C$ = -50 mA dc; pulsed (see 4.5.1) | $V_{(BR)CEO}$ | -100 | | V dc |
| Collector to emitter cutoff current | 3041 | Bias condition D; $V_{CE}$ = -100 V | $I_{CEO}$ | | -200 | µA dc |
| Collector to emitter cutoff current | 3041 | Bias condition A; $V_{BE}$ = +1.5 V; $V_{CE}$ = -90 V dc | $I_{CEX1}$ | | -20 | µA dc |
| Collector to base cutoff current | 3036 | Bias condition D; $V_{CB}$ = -100 V dc | $I_{CBO}$ | | -20 | µA dc |
| Emitter to base cutoff current | 3061 | Bias condition D; $V_{EB}$ = -6.0 V dc | $I_{EBO}$ | | -200 | µA dc |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc, $I_C$ = -0.5 A dc; pulsed (see 4.5.1) | [$h_{FE1}$] 5/ | [30] | | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc, $I_C$ = -2.0 A dc; pulsed (see 4.5.1) | [$h_{FE2}$] 5/ | [30] | 240 | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc, $I_C$ = -5.0 A dc; pulsed (see 4.5.1) | [$h_{FE3}$] 5/ | [20] | | |
| Collector to emitter voltage (saturated) | 3071 | $I_C$ = -2.0 A dc; $I_B$ = -0.2 A dc; pulsed (see 4.5.1) | $V_{CE(sat)1}$ | | -0.81 | V dc |
| Collector to emitter voltage (saturated) | 3071 | $I_C$ = -5.0 A dc; $I_B$ = -0.5 A dc; pulsed (see 4.5.1) | $V_{CE(sat)2}$ | | -1.38 | V dc |
| Base to emitter voltage (saturated) | 3066 | Test condition A; $I_C$ = -2.0 A dc; $I_B$ = -0.2 A dc; pulsed (see 4.5.1) | $V_{BE(sat)1}$ | | -1.38 | V dc |
| Base to emitter voltage (saturated) | 3066 | Test condition A; $I_C$ = -5.0 A dc; $I_B$ = -0.5 A dc; pulsed (see 4.5.1) | $V_{BE(sat)2}$ | | -2.07 | V dc |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

TABLE II. Group D inspection and end-point limits – Continued.

| Inspection 1/ 2/ 3/ | MIL-STD-750 | | Symbol | Limits | | Unit |
|---|---|---|---|---|---|---|
| | Method | Conditions | | Min | Max | |
| Subgroup 2 4/ | | | | | | |
| * Steady-state total dose irradiation | 1019 | Condition A, Gamma exposure $V_{CES}$ = -80 V | | | | |
| Breakdown voltage, collector to emitter | 3011 | Bias condition D; $I_C$ = -50 mA dc; pulsed (see 4.5.1) | $V_{(BR)CEO}$ | -100 | | V dc |
| Collector to emitter cutoff current | 3041 | Bias condition D; $V_{CE}$ = -100 V | $I_{CEO}$ | | -200 | µA dc |
| Collector to emitter cutoff current | 3041 | Bias condition A; $V_{BE}$ = +1.5 V; $V_{CE}$ = -90 V dc | $I_{CEX1}$ | | -20 | µA dc |
| Collector to base cutoff current | 3036 | Bias condition D; $V_{CB}$ = -100 V dc | $I_{CBO}$ | | -20 | µA dc |
| Emitter to base cutoff current | 3061 | Bias condition D; $V_{EB}$ = -6.0 V dc | $I_{EBO}$ | | -200 | µA dc |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc, $I_C$ = -0.5 A dc; pulsed (see 4.5.1) | [$h_{FE1}$] 5/ | [30] | | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc, $I_C$ = -2.0 A dc; pulsed (see 4.5.1) | [$h_{FE2}$] 5/ | [30] | 240 | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = -2.0 V dc, $I_C$ = -5.0 A dc; pulsed (see 4.5.1) | [$h_{FE3}$] 5/ | [20] | | |
| Collector to emitter voltage (saturated) | 3071 | $I_C$ = -2.0 A dc; $I_B$ = -0.2 A dc; pulsed (see 4.5.1) | $V_{CE(sat)1}$ | | -0.81 | V dc |
| Collector to emitter voltage (saturated) | 3071 | $I_C$ = -5.0 A dc; $I_B$ = -0.5 A dc; pulsed (see 4.5.1) | $V_{CE(sat)2}$ | | -1.38 | V dc |
| Base to emitter voltage (saturated) | 3066 | Test condition A; $I_C$ = -2.0 A dc; $I_B$ = -0.2 A dc; pulsed (see 4.5.1) | $V_{BE(sat)1}$ | | -1.38 | V dc |
| Base to emitter voltage (saturated) | 3066 | Test condition A; $I_C$ = -5.0 A dc; $I_B$ = -0.5 A dc; pulsed (see 4.5.1) | $V_{BE(sat)2}$ | | -2.07 | V dc |

1/ Tests to be performed on all devices receiving radiation exposure.
2/ For sampling plan, see MIL-PRF-19500.
3/ Electrical characteristics apply to the corresponding AL, UA, UB, and UBC suffix versions unless otherwise noted.
4/ See 6.2.f herein.
5/ See method 1019 of MIL-STD-750 for how to determine [$h_{FE}$] by first calculating the delta ($1/h_{FE}$) from the pre- and Post-radiation $h_{FE}$. Notice the [$h_{FE}$] is not the same as $h_{FE}$ and cannot be measured directly. The [$h_{FE}$] value can never exceed the pre-radiation minimum $h_{FE}$ that it is based upon.




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

* TABLE III. Group E inspection (all quality levels) - for qualification and requalification only.

| Inspection | MIL-STD-750 | | Qualification |
|---|---|---|---|
| | Method | Conditions | |
| Subgroup 1 | | | 45 devices<br>c = 0 |
| Temperature cycling (air to air) | 1051 | Test condition C, 500 cycles | |
| Hermetic seal | 1071 | | |
| Fine leak<br>Gross leak | | | |
| Electrical measurements | | See table I, subgroup 2 herein. | |
| Subgroup 2 | | | 45 devices,<br>c = 0 |
| Intermittent life | 1037 | 6,000 cycles $t_{(on)}$, $t_{(off)}$ = 1 minute minimum. Adjust device current, or power, to achieve a minimum $\Delta T_J$ of +100°C. | |
| Electrical measurements | | See table I, subgroup 2 herein. | |
| Subgroup 4 | | | |
| Thermal impedance curves | | See table E-IX of MIL-PRF-19500, group E, subgroup 4. | |
| Subgroup 5 | | | |
| Not applicable | | | |
| Subgroup 6 | | | 11 devices |
| ESD | 1020 | | |
| Subgroup 8 | | | 45 devices<br>c = 0 |
| Reverse stability | 1033 | Condition B. | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

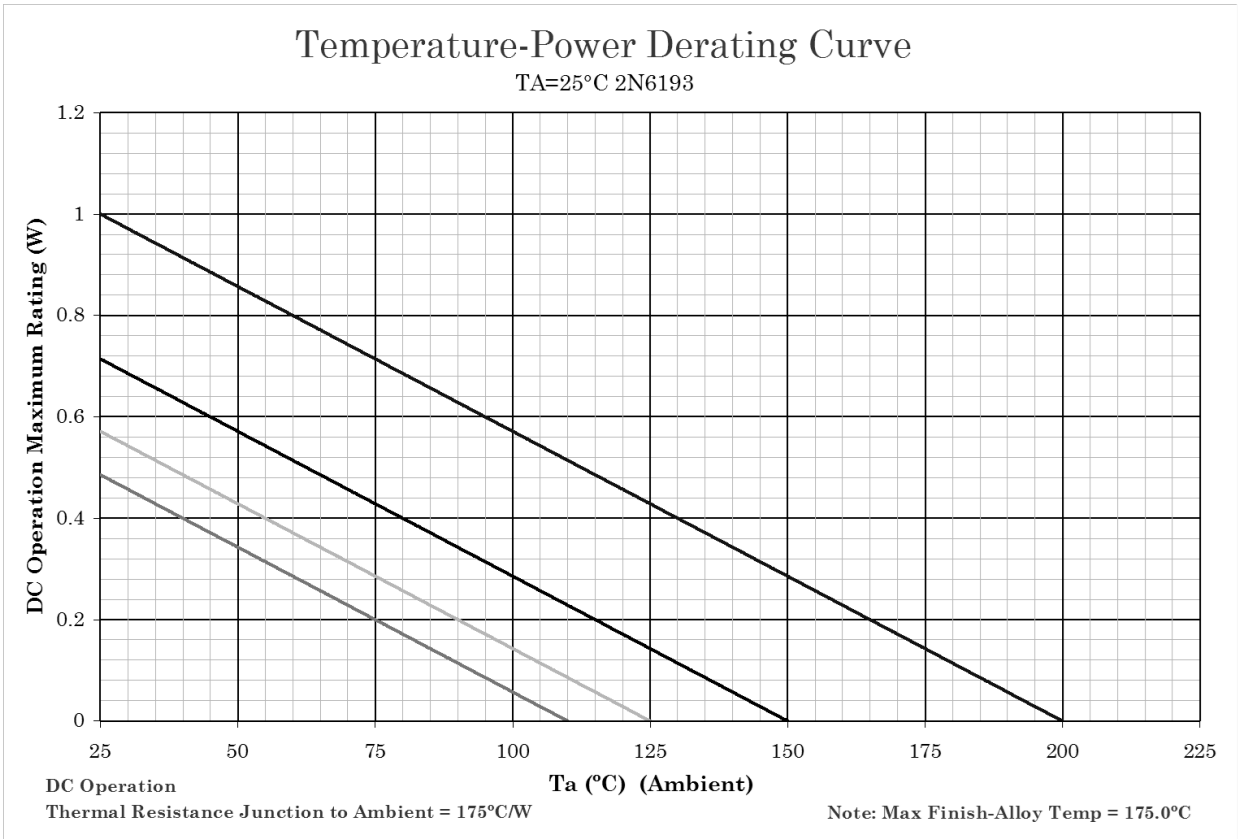



NOTES:

1. Maximum theoretical derate design curve. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperature ($T_J \leq 200°C$) and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq 150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq 125°C$, and 110°C to show power rating where most users want to limit $T_J$ in their application.

FIGURE 7. Temperature-power derating for 2N6193 $R_{\theta JA}$ (TO-39 Kovar).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

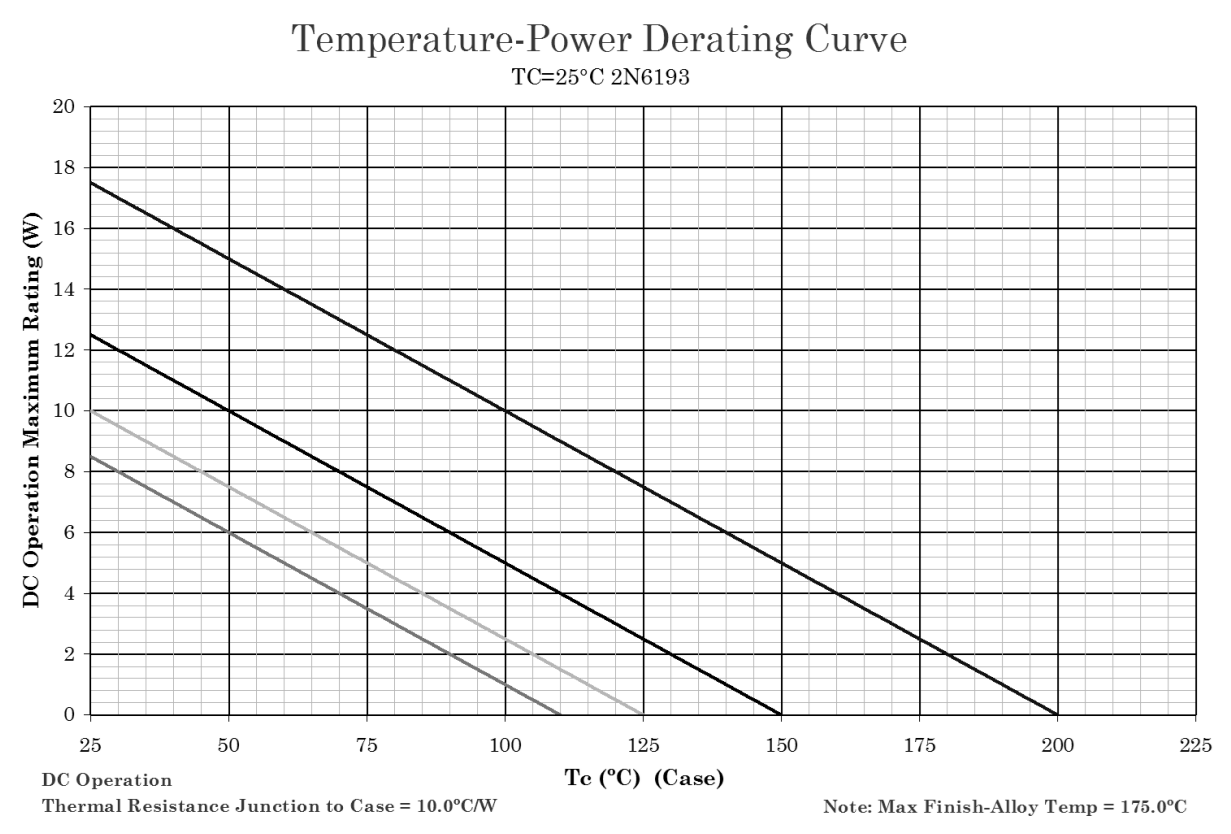



NOTES:

1. Maximum theoretical derate design curve. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperature ($T_J \leq 200°C$) and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq 150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq 125°C$, and 110°C to show power rating where most users want to limit $T_J$ in their application.

FIGURE 8. Temperature-power derating for 2N6193 $R_{\theta JC}$ (TO-39 Kovar).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

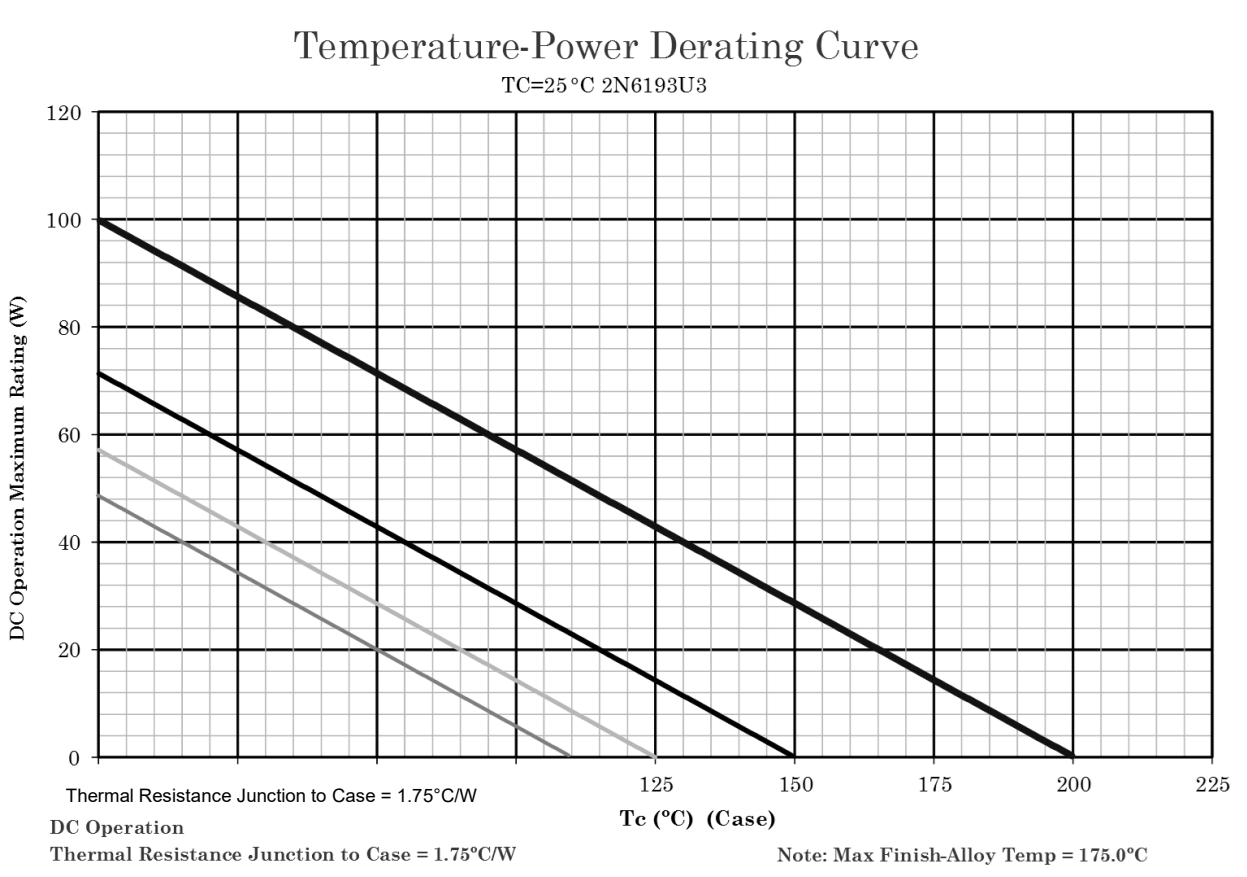


NOTES:


1. Maximum theoretical derate design curve. This is the true inverse of the worst case thermal resistance value. All devices are capable of operating at $\leq T_J$ specified on this curve. Any parallel line to this curve will intersect the appropriate power for the desired maximum $T_J$ allowed.
2. Derate design curve constrained by the maximum junction temperature ($T_J \leq 200°C$) and power rating specified. (See 1.3 herein.)
3. Derate design curve chosen at $T_J \leq 150°C$, where the maximum temperature of electrical test is performed.
4. Derate design curve chosen at $T_J \leq 125°C$, and 110°C to show power rating where most users want to limit $T_J$ in their application.

FIGURE 9. Temperature-power derating for 2N6193U3 $R_{\theta JC}$ (U3 package).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

**Maximum Thermal Impedance**

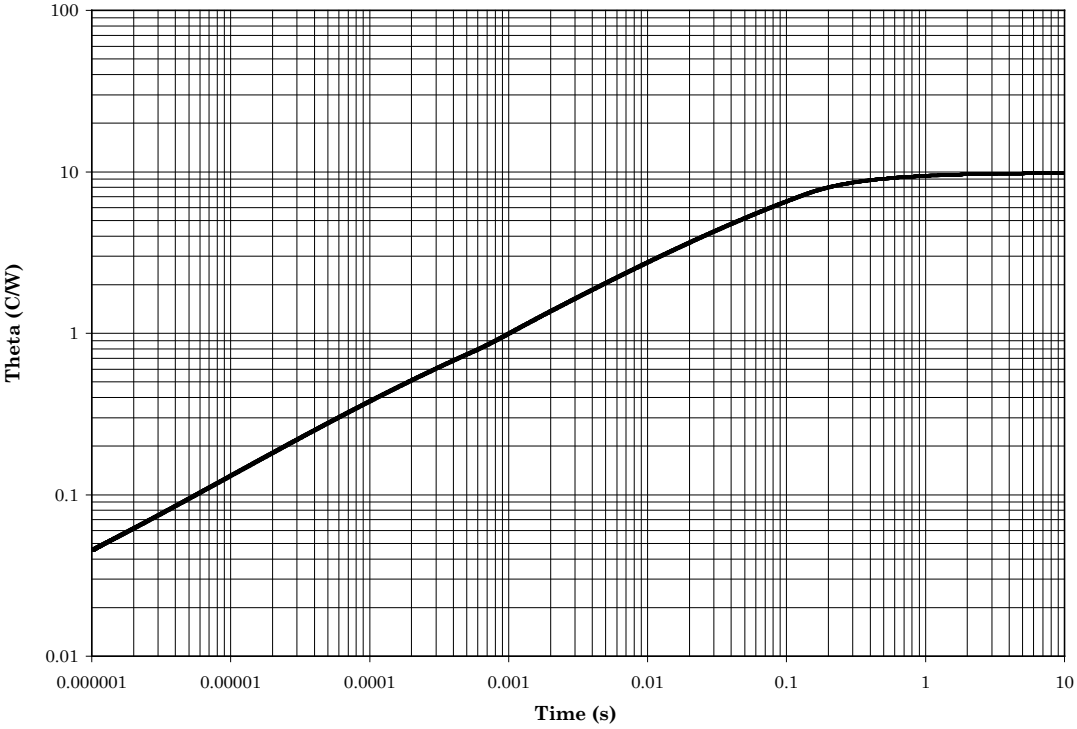



$T_C$ = 25°C, thermal resistance $R_{\theta JC}$ = 10°C/W.

FIGURE 10. Thermal impedance graph ($R_{\theta JC}$) for 2N6193 (TO-39 Kovar).



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

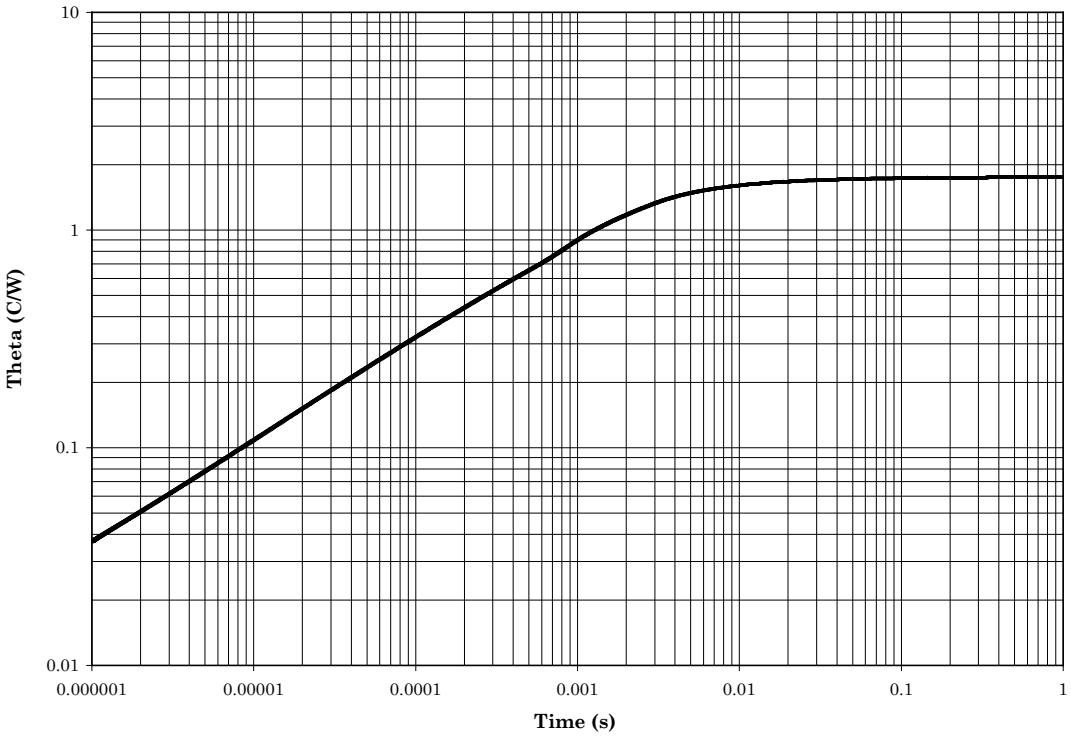



Solder mounted to copper heatsink at $T_C$ = +25°C thermal resistance = 1.75°C/W, Pdiss = 100W.

FIGURE 11. Thermal impedance graph ($R_{\theta JC}$) for 2N6193U3 (U3).




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

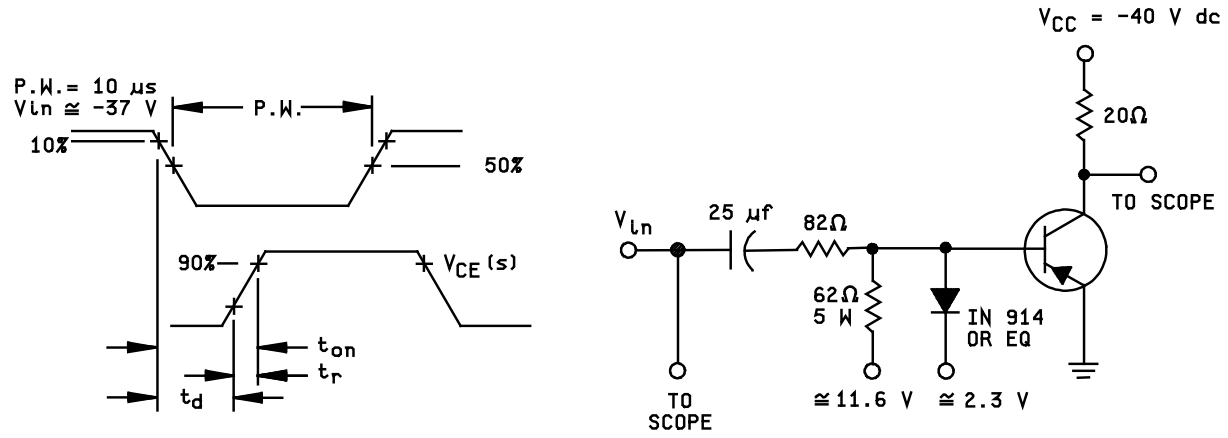


NOTES:

1. The rise time ($t_r$) of the applied pulse shall be ≤ 2.0 ns, duty cycle ≤ 2 percent, and the generator source impedance shall be 50Ω.
2. Sampling oscilloscope: $Z_{in}$ ≥ 1 MΩ, $C_{in}$ ≤ 20 pF, rise time ≤ 0.2 ns.
3. $I_C$ = 2 A, $I_{B1}$ = 200 mA.

FIGURE 12. Saturated turn-on switching waveform and time test circuit.

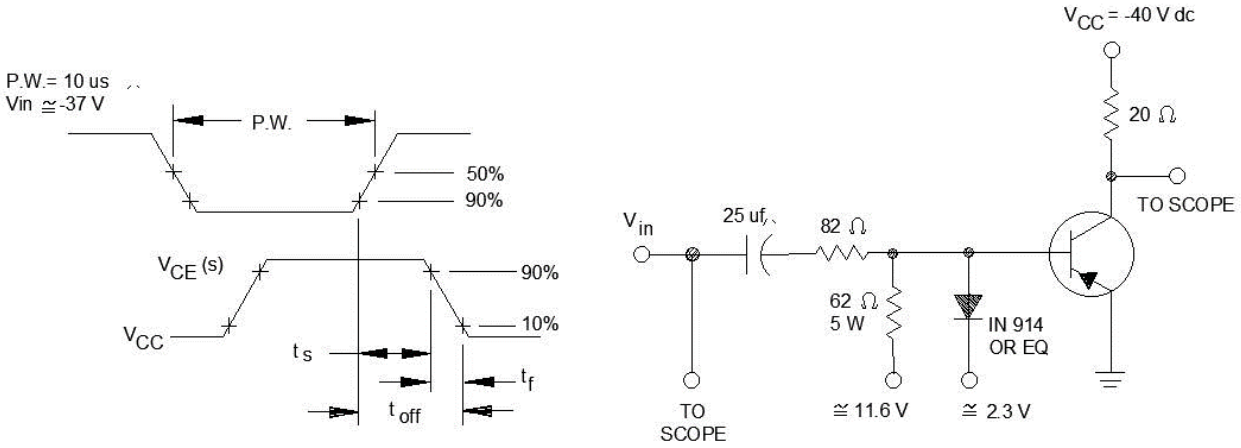


NOTES:

1. The rise time ($t_r$) of the applied pulse shall be ≤ 2.0 ns, duty cycle ≤ 2 percent, and the generator source impedance shall be 50Ω.
2. Sampling oscilloscope: $Z_{in}$ ≥ 1 MΩ, $C_{in}$ ≤ 20 pF, rise time ≤ 0.20 ns.
3. $C_I$ = 2 A, $I_{B1}$ = $I_{B2}$ = 200 mA.

FIGURE 13. Pulse response test circuit for $t_s$ and $t_f$.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Packaging requirements (see 5.1).

c. Lead material and finish may be specified (see 3.4.1).

d. The complete Part or Identifying Number (PIN), see title and section 1.5

e. For die acquisition, the JANHC or JANKC letter version should be specified (see figure 3, figure 4, figure 5, and figure 6 herein).

f. For acquisition of RHA designed devices, table II, subgroup 1 testing of group D is optional. If subgroup 1 testing is desired, it should be specified in the contract.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML-19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://assist.dla.mil .

6.4 Application guidance. The following NPN type transistor is complimentary to the PNP device listed herein.


| NPN | PNP |
|---|---|
| 2N5339 | 2N6193 |




Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

6.5 PIN construction example.

6.5.1 Encapsulated devices The PINs for encapsulated devices are constructed using the following form.

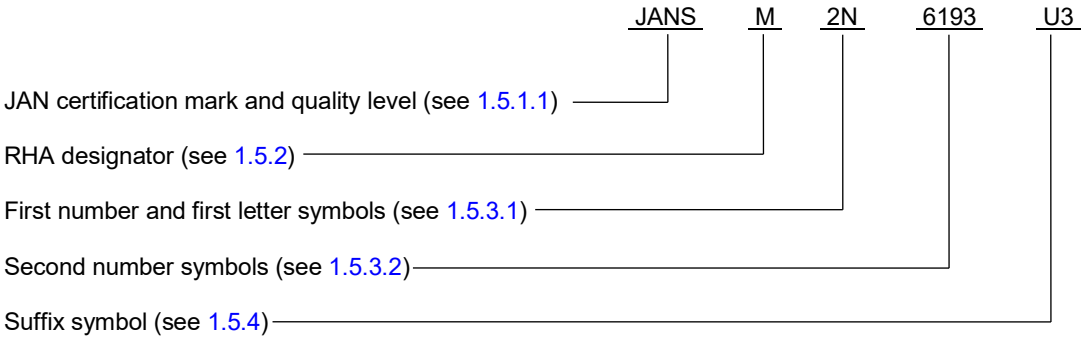


6.5.2 Unencapsulated devices. The PINs for un-encapsulated devices are constructed using the following form.

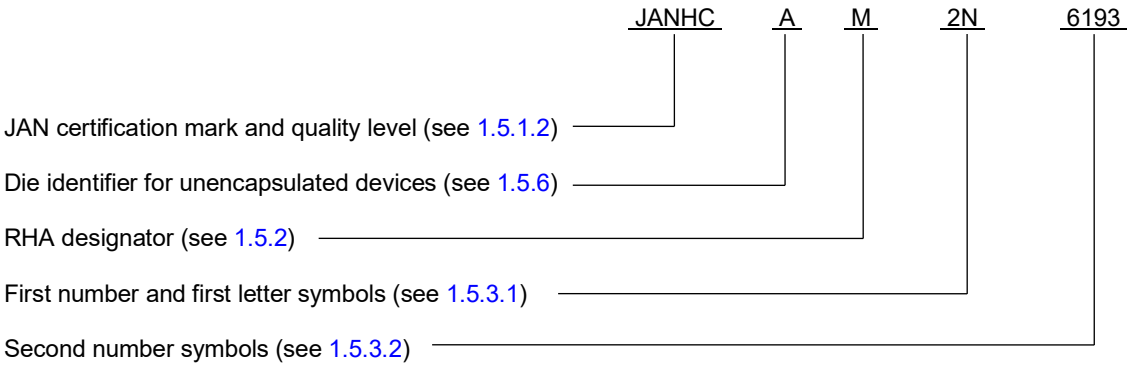


6.6 List of PINs. The following is a list of possible PINs available on this specification sheet.

| PINs for type 2N6193. | |
|---|---|
| JAN2N6193 | JAN2N6193U3 |
| JANTX2N6193 | JANTX2N6193U3 |
| JANTXV2N6193 | JANTXV2N6193U3 |
| JANTXVF2N6193 | JANTXVF2N6193U3 |
| JANTXVR2N6193 | JANTXVR2N6193U3 |
| JANS#2N6193 | JANS#2N6193U3 |

(1) The number sign (#) represent one of eight RHA designators available (M, D, P, L, R, F, G, or H). The PIN is also available without a RHA designator.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.

6.6.1 List of PINs for unencapsulated devices. The following is a list of possible PINs for unencapsulated devices available on this specification sheet. The qualified die suppliers with the applicable letter version (e.g., JANHCA1N4693) will be identified on the QML.

| JANHC and JANKC ordering information | | | | |
|---|---|---|---|---|
| PIN | Manufacturers | | | |
| | 33178 | 34156 | 43611 | 52GC4 |
| 2N6193 | JANHCA#2N6193<br>JANKCA#2N6193 | JANHCB#2N6193<br>JANKCB#2N6193 | JANHCC#2N6193<br>JANKCC#2N6193 | JANHCD#2N6193<br>JANKCD#2N6193 |

(1) The number sign (#) represent one of eight RHA designators available (M, D, P, L, R, F, G, or H). The PIN is also available without a RHA designator.

* 6.7 Amendment notations. The margins of this specification are marked with asterisks to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
* Navy - SH
Air Force - 85
NASA - NA
DLA - CC

Review activities:
Army - MI
Air Force - 19

Preparing activity:
DLA - CC

(Project 5961-2021-072)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:24Z
Check the source to verify that this is the current version before use.