MIL-D-51091J(EA)
16 December 1986
SUPERSEDING
MIL-D-51091H(MU)
27 June 1972

MILITARY SPECIFICATION

DECONTAMINATING APPARATUS, POWER DRIVEN, SKID-MOUNTED, MULTIPURPOSE, NONINTEGRAL, 500-GALLON, M12A1

This specification is approved for use within the Chemical Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of decontaminating apparatus.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

MM-L-751	-	Lumber; Softwood.
QQ-S-781	-	Strapping, Steel, and Seals.
PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-C-843	-	Cushioning, Material, Cellulosic.
PPP-C-1120	-	Cushioning Material, Uncompressed Bound Fiber for Packaging.

: Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed: to: Commander, U.S. Army Chemical Research, Development and Engineering Center, ATTN: SMCCR-SPD-TS, Aberdeen Proving Ground, MD 21010-5423 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter. :

AMSC N/A FSC 4230

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

PPP-P-291 - Paperboard, Wrapping and Cushioning.
PPP-T-60 - Tape: Packaging, Waterproof.
PPP-T-76 - Tape, Packaging, Paper (For Carton Sealing).
PPP-T-97 - Tape, Packaging/Industrial, Filament Reinforced.

MILITARY

MIL-C-104 - Crates, Wood: Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116 - Preservation, Methods of.
MIL-B-117 - Bags, Sleeves, and Tubing - Internal Packaging.
MIL-B-121 - Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-L-3150 - Lubricating Oil, Preservative, Medium.
MIL-E-10062 - Engines: Preparation for Shipment and Storage of.
MIL-V-13811 - Varnish, Waterproofing, Electrical, Ignition.
MIL-L-21260 - Lubricating Oil, Internal Combustion Engine, Preservative and Break-In.
MIL-H-51171 - Heater, Water, Liquid Fuel, Skid-Mounted, 600 GPH, M2.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-171 - Finishing of Metal and Wood Surfaces.
MIL-STD-1168 - Ammunition Lot Numbering.
MIL-STD-2073/1A - DOD Materiel Procedures for Development and Application of Packaging Requirements.

2.1.2 Drawings, technical data package lists, and publications. The following drawings, technical data package lists, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS AND TECHNICAL DATA PACKAGE LISTS (TDPL)

U.S. ARMY ARMAMENT, MUNITIONS AND CHEMICAL COMMAND

CHEMICAL RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

TDPL 5-45-3264 - Decontaminating Apparatus, Power Driven, Skid-Mounted, Multipurpose, Nonintegral, 500-Gallon, M12A1 (With Alternator, Personnel Shower and M2 Water Heater).
5-45-3269 - Marking, Shipping Container for Decon, M12A1, 500 Gallon Tank and M2 Heater.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

PUBLICATIONS

DEPARTMENT OF THE ARMY

TECHNICAL MANUALS

TM5-2805-259-14 - Operator, Organizational, Direct Support and General Support Maintenance Manual
Engine, Gasoline, 20 hp, Military Standard
(model 4A084-2), FSN 2805-952-3926
(model 4A084-3), FSN 2805-872-5972.

(Copies of specifications, standards, drawings, technical data package lists, and publications required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on TDPL 5-45-3264 or in subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth in the drawings.

3.1.2 Components. All components of the decontaminating apparatus shall conform to the specifications and drawings listed on TDPL 5-45-3264 and subsidiary drawings.

3.2 Assembly. The decontaminating apparatus shall be assembled in accordance with Drawing 5-45-3264.

3.3 Tanks.

3.3.1 Decontaminating tank. The decontaminating tank shall not leak when tested as specified in 4.4.4.1.

3.3.2 Fuel tank. The unpainted tank shall not leak when subjected to an internal air pressure of 2 to 3 pounds per square inch gage (psig) when tested as specified in 4.4.4.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

3.3.3 Prime-detergent tank. The unpainted tank shall not leak when subjected to an internal air pressure of 2 to 3 psig and when tested as specified in 4.4.4.1.

3.4 Gun. The gun shall open and close easily without sticking or binding and shall not leak when subjected to a water pressure of 105 psig minimum when tested as specified in 4.4.4.2.

3.5 Nozzles.

3.5.1 Slurry nozzle. The nozzle when subjected to a minimum pressure of 105 psig at 25 ± 5 gallons per minute (gpm) at 3850 ± 50 revolutions per minute (rpm) at the pump and held at a height of 4 feet ± 6 inches from the ground, shall conform to the following when tested as specified in 4.4.4.3(a):

(a) When set for straight stream, it shall project a solid stream a minimum distance of 75 feet in still air.

(b) When the deflector plate is depressed, the fan spray shall be a minimum of 6 feet wide at the point of contact with the ground.

3.5.2 Fire nozzle. The nozzle (Drawing 5-45-2699) shall be easily adjustable from a straight stream to 120° wide angle fog including peripheral spray at 3850 ± 50 rpm at the pump while subjected to a minimum water pressure of 105 psig at 25 ± 5 gpm in still air when tested as specified in 4.4.4.3(b).

3.6 Functioning.

3.6.1 Pumping. The decontaminating tank, piping, valves, hose, connections, nozzles and gages shall function properly and shall not leak when the apparatus is operated for a minimum period of 1 hour pumping water to and from the tank at a discharge pressure of 105 psig minimum as specified in 4.4.4.4.

3.6.2 Alternator. The governor shall be adjusted to permit the engine to turn at 3850 ± 50 rpm instead of 3600 rpm in figure 3-16, page 3-18 of TM5-2805-259-14. The alternator system shall produce 26 to 30 volts direct current with the switch in the ON position and shall indicate no voltage with the switch in the OFF position when tested as specified in 4.4.4.4.

3.7 Preproduction. Prior to the start of regular production, a preproduction sample shall be produced in accordance with this specification for examination and tests.

3.8 Workmanship. The decontaminating apparatus shall be free from foreign matter (oil, grease or dirt) and damage such as dents, cracks or deformation which could affect its intended use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Objective evidence. The contractor shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisified.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4)

4.3 Preproduction inspection.

4.3.1 Sample. One decontaminating apparatus shall be produced using the same methods, materials, equipment and processes as will be used in regular production.

4.3.2 For examination and tests. The sample shall be examined and tested for all the requirements of this specification.

4.3.3 Acceptance/rejection criteria. The sample shall meet the examinations and tests specified in this specification to be acceptable. The contractor shall obtain written approval from the contracting officer prior to proceeding with regular production.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:04Z
Check the source to verify that this is the currentversion before use.

4.4 Quality conformance inspection.

4.4.1 Lotting. Each lot shall be identified and controlled in accordance with MIL-STD-1168. A lot of decontaminating apparatus shall consist of components produced by one manufacturer, at one plant, under essentially the same manufacturing conditions. No more than one interfix number of the following components shall be contained in any one lot:

(a) Decontaminating tank.
(b) Fuel tank.
(c) Prime detergent tank.
(d) Gun.
(e) Nozzles.

4.4.2 Sampling. Sampling shall be conducted in accordance with table I.

4.4.3 Inspection procedure.

4.4.3.1 For examination and nondestructive tests. Sampling decontaminating apparatus shall be examined and tested in accordance with table I and the classification of defects.

TABLE I. Sampling and inspection

Requirements paragraph	Test	Sample size	AQL	Test paragraph
3.3.1	Decontaminating tank	100%	---	4.4.4.1
3.3.2	Fuel tank	100%	---	4.4.4.1
3.3.3	Prime detergent tank	100%	---	4.4.4.1
3.4	Gun	100%	---	4.4.4.2
3.5	Nozzles	MIL-STD-105 Level S-4	1.0	4.4.4.3
3.6	Functioning	100%	---	4.4.4.4

4.4.3.2 Classification of defects.

(a) Decontaminating apparatus, power driven, skid-mounted, multipurpose, nonintegral, 500-gallon, M12A1 (Dwg 5-45-3264).

Categories	Defects
Critical:	None defined
Major:	AQL 1.0 percent defective
101	Marking incorrect
102	Workmanship (3.8)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

Minor: AQL 2.5 percent defective

201	Marking illegible
202	Protective finish missing

4.4.4 Tests. Tests shall be conducted as follows:

4.4.4.1 Fuel tank, prime detergent tank and decontaminating tank. Subject the fuel and prime detergent tanks to the specified internal air pressure. All joints and seams shall be coated with a soap solution and examined for leaks. Fill the decontaminating tank with water and examine for leaks.

4.4.4.2 Gun. Connect the gun to the discharge hose or a suitable adapter and apply water at the specified pressure. With the valve on the gun closed, the gun shall be checked for leaks. While the gun is under pressure, the valve shall be opened and closed 10 times. The valve shall move freely, with no sticking or binding.

4.4.4.3 Nozzles.

(a) Slurry. Connect the nozzle to a suitable adapter and pump water to the nozzle at the specified rate and pressure. Observe to determine compliance with 3.5.1 as follows:

(1) When held at the specified height and inclined 30° ± 5° above the horizontal, the nozzle shall project a solid stream the specified distance.

(2) With the nozzle set horizontally at the specified height and the deflector plate deflected downward, the fan spray from the nozzle shall cover the specified area.

(b) Fire. Connect the nozzle to a suitable adapter or hose line. The nozzle, while subjected to the specified water pressure, shall be easily adjustable from the straight flow to the 120° wide angle fog and shall deliver the specified flow.

4.4.4.4 Functioning. With the decontaminating tank completely filled with water, operate the apparatus at the specified pressure for the required period of time. Observe for improper functioning of gages and evidence of leakage at all connections. With the engine running at 3850 ± 50 rpm take voltage readings between the pin of the junction box receptacle and the shell (ground) of the receptacle, with the junction box switch ON and OFF. During the foregoing voltage readings, preload the alternator using two No. 10 copper cables, 25 feet long terminated with a 20 ampere load. Attach the end of one No. 10 cable to ground and the other end to the receptacle pin.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation.

5.1.1 Level A.

5.1.1.1 Cleaning and drying. After all tests have been completed, and before the application of a preservative, all surfaces shall be cleaned and dried in accordance with MIL-P-116, using method C-1 and any applicable drying method listed therein. Preservatives shall be in compliance with MIL-P-116.

5.1.1.2 Pump unit. All areas of the unit where paint damage has occurred shall be treated and repainted in accordance with the applicable requirements of MIL-STD-171. The interior surfaces of the tanks and fittings including the gasoline tank, shall be completely coated with preservative oil conforming to grade 2, MIL-L-21260. All openings, including valve openings, threaded surfaces, the interior surfaces of the pump and other uncoated metal surfaces shall be coated with preservative oil. Excess oil shall be drained off and openings and external threaded surfaces shall be covered with barrier material conforming to grade A, MIL-B-121. The valve between the detergent tank and the pump and the drain valve for the pump shall be in the "open" position. Application of preservative may be by fogging or other appropriate means to insure complete coating coverage. The pump unit engine shall be preserved in accordance with level A requirements of MIL-E-10062, type IV, method I, except the governor ball joints shall not be preserved and the fuel filter and starter rope shall be cushioned, then placed in the same MIL-B-117, type I, class B or C, style 1 or 2, heat sealed bag; change of crankcase oil is not included in this procedure. The air cleaner shall be removed, preserved, wrapped in barrier material conforming to grade A, MIL-B-121 and inclosed in an overwrap of paperboard cushioning material conforming to type III, style 1, PPP-P-291. The overwrap shall be secured by taping with pressure-sensitive tape conforming to PPP-T-76, and the wrapped air cleaner shall be secured, by taping to the inside of the pump assembly corner post adjacent to the carburetor. With preserved tools and other accessories stowed within, the tool compartment door shall be closed and secured, including cushioning material as necessary (see 5.1.1.6). The cover panels shall be installed in place and secured after coating all hinges and fasteners with preservative oil. The discharge hoses shall be extended full length, completely drained and rewound on the reels. The guns shall be secured in the holding brackets by taping, tying, or strapping together to restrict free movement.

5.1.1.3 Tank unit. The loading hopper and cover shall be installed in place. The two hold-down bolts provided shall be tightened to a torque of 10 foot-pounds. Suitable spacers or stops shall be placed between the hopper flange and the tank and between the cover flange and hopper flange to limit compression of the gaskets to 33 percent of their total thickness. The foot valve assembly shall be installed in its holding clamp and secured in place with the thumb screw provided. In addition, the valve shall be secured to the

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the currentversion before use.

installed valve assembly by strapping or wiring to prevent separation from the holding bracket. Threaded areas of the valves shall be coated with preservative oil conforming to either P-7 (MIL-L-3150) or P-10 (MIL-L-21260) and the openings covered, either with appropriate plastic caps or plugs or with grade A, MIL-B-121, barrier material secured with tape. The threads of the thumb screw shall be coated with preservative oil.

5.1.1.4 Water heater unit. The water heater shall be preserved and packaged in accordance with the level A requirements of MIL-H-51171.

5.1.1.5 Pipe and fittings, shower (TDPL 5-45-3186). The sections of pipe with fittings attached, shall be packaged in two fiberboard boxes conforming to grade V3C, PPP-B-636. At least one of the boxes shall be of a size that will fit into the holding brackets at the end of the tank. Threaded areas of the pipe and fittings, not connected, shall be coated with preservative oil conforming to either P-7 (MIL-L-3150) or P-10 (MIL-L-21260) and the openings covered with grade A, MIL-B-121, barrier material. External threaded ends not protected by fittings or protective caps shall further be over-wrapped with appropriate wrapping to prevent damage. Appropriate filler material shall be included in the boxes to restrict free movement of the items. The boxes shall be closed in accordance with the appendix to PPP-B-636.

5.1.1.6 Tools, parts and accessories (PL5-45-3251). Unpainted metal surfaces of tools, parts and accessories, including nozzles and crank handles, shall be coated with preservative oil conforming to either P-7 (MIL-L-3150) or P-10 (MIL-L-21260). The preservative treated items shall then be inclosed individually in a wrap of barrier material conforming to grade A, MIL-B-121. The wrap shall be secured in place with tape conforming to PPP-T-76. The items, including collapsible bucket, shall then be stowed in the tool compartment of the pump unit. Cushioning material, conforming to either PPP-C-1120, PPP-C-843 or PPP-P-291, shall be used to restrict free movement of the items. The compartment door shall be securely closed.

5.1.1.7 Hoses. The suction hose and the agitator-blending hose shall be drained dry. The attached fittings shall have the interior and exterior surfaces coated with preservative oil conforming to either P-7 (MIL-L-3150) or P-10 (MIL-L-21260). The hose ends shall then be covered by inclosing in a wrap of barrier material conforming to grade A, MIL-B-121. The barrier material shall be secured in place with tape conforming to PPP-T-76. The blending-agitator hose, shall then be stowed within the suction hose. Both hoses, together, shall then be installed, coiled, within the holding brackets on top of the tank unit. The coiled hoses shall be secured to restrict free movement of the hose ends and be secured to the tank unit by steel strapping to restrict free movement. Solid fiberboard material shall be utilized between contact points of strapping and hose and strapping and tank unit to prevent damage to the hose and the painted metal surfaces of the tank unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

5.1.1.8 Exhaust extensions. The exhaust extensions shall have the threaded surfaces of the fastening clamp coated with either P-7 (MIL-L-3150) or P-10 (MIL-L-21260) preservative oil. The preserved area shall be covered with grade A, MIL-B-121 barrier material which shall be secured in place with tape conforming to PPP-T-76. The extensions shall be coiled and inclosed in a fiberboard box conforming to V3C, PPP-B-636. The box shall fit the contents snugly to restrict free movement of the contents. The box shall be closed in accordance with the appendix to PPP-B-636.

5.1.1.9 Technical publications. The technical publications shall be packaged in accordance with method IC-3, MIL-P-116, and secured to the top of the pump unit with tape conforming to PPP-T-60.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Pump unit. The pump unit, preserved in accordance with 5.1.1.2 and with tools, repair parts and technical publications intact, shall be packed in a wood crate conforming to type I, class 1 or 2, style a, MIL-C-104, except skids shall be nominal 2 by 8 lumber. The unit shall be firmly secured to the skid base in accordance with figure 1. The canvas cover shall be installed over the unit and secured thereto by the tie-down straps provided, after the technical publications have been secured to the unit (see 5.1.1.9). Battery cables shall be secured to the frame of the pumping unit. Cushioning material, 2-inches thick, conforming to type IV, PPP-C-1120 shall be used to cover the hose reel end of the unit and the instrument panel on the side of the unit. A piece of nominal 1 by 12 lumber, length equal to height of the unit, shall be placed in a vertical position, against the cushioning, over the slurry nozzles. The piece of lumber and the cushioning at the end and side shall be secured in position with 3 bands of 3/4-inch steel strapping applied horizontally around the unit. Strapping shall conform to class B, QQ-S-781. The exhaust extensions, packaged in accordance with 5.1.1.8, shall be secured to the top of the unit with steel strapping. The crate shall be assembled and closed in accordance with MIL-C-104.

5.2.1.2 Tank unit. The tank unit preserved in accordance with 5.1.1.3 and with hoses (5.1.1.7) and shower pipe and fittings (5.1.1.5) intact shall be packed in a wood crate conforming to type I, class 1 or 2, style A, MIL-C-104, except skids shall be nominal 2 by 8 lumber. The unit shall be firmly secured to the skid base in accordance with figure 1. The packages of pipe and fittings shall be strapped together, one box within the storage rack on the unit and the other box outside the rack. A minimum of two straps shall be used to secure the boxes together. The crate shall be assembled and closed in accordance with MIL-C-104.

5.2.1.3 Water heater unit. The water heater preserved as specified in 5.1.1.4 shall be packed in a wood crate in accordance with level A packing, MIL-H-51171.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:04Z
Check the source to verify that this is the currentversion before use.

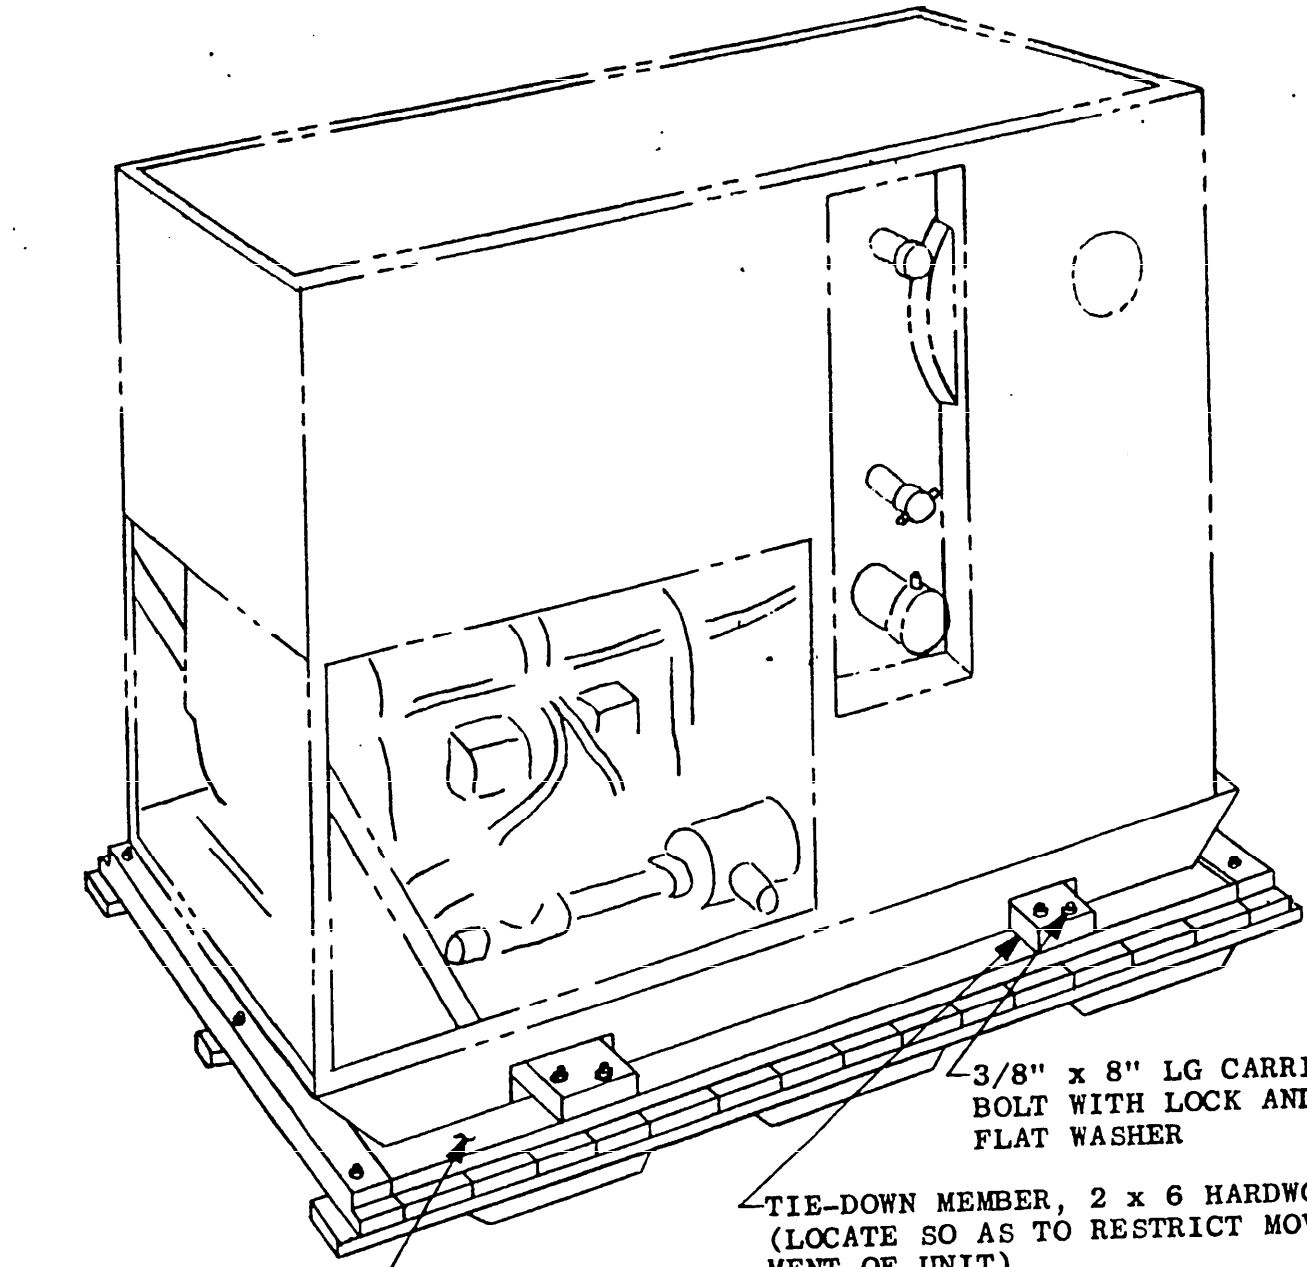


FIGURE 1. Typical method of securing pumping unit or water tank to skid base

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

5.2.2 Level C. The decontaminating apparatus, component parts and technical publications, preserved and packaged as specified, shall be packed to insure carrier acceptance and safe delivery to the first domestic destination. Containers shall be as specified in MIL-STD-2073/1A.

5.3 Marking. In conjunction with information furnished in the contract or order, shipping containers shall be marked in accordance with the applicable requirements of Drawing 5-45-3269. Packages shall be marked in accordance with applicable requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The apparatus is intended for field use for decontaminating, fire fighting with water or foam, deicing, cleaning vehicles, pumping various fluids and personnel shower. The apparatus is self contained and may be used in any location.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) Level of preservation and packing required.
(c) The serial or registration number and whether additional data plates are required.
(d) That the latest engine model 4A084-III, starter and 24 volt alterator will be Government supplied.
(e) Technical requirements for operating and maintenance publications.
(f) Color of apparatus.
(g) Preproduction.

(1) Time allowed for contractor submission of sample for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the contractor whether to proceed with production.

6.3 Components. The following specifications reflect the components required for the complete assembly of the decontaminating apparatus:

MIL-H-51171 - Heater, Water, Liquid Fuel, Skid-Mounted, 600 GPH, M2.
MIL-P-51227 - Pump, Centrifugal, Decontaminating Apparatus.

6.4 International interest. Certain provisions of this specification are the subject of international standardization agreement ABCA-ARMY-Quadripartite Standardization Agreement -223. When amendment, revision, or cancellation of this specification is proposed which will modify international agreement concerned, the preparing activity will take appropriate action through international standardization channels including departmental standardization offices to change the agreement or make other appropriate accommodations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Decontaminating agent
Decontaminating apparatus, power driven, skid mounted
Decontamination equipment

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 4230-A066

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 Alexandria, VA

POSTAGE WILL BE PAID BY

Commander
U.S. Army Chemical Research, Development
and Engineering Center
ATTN: SMCCR-SPT-S
Aberdeen Proving Ground, MD 21010-5423

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-D-51091J(EA)	DECONTAMINATING APPARATUS, POWER DRIVEN, SKID-MOUNTED, MULTIPURPOSE, NONINTEGRAL, 500-GALLON, M12A1

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.