MILITARY SPECIFICATION

FUZE, PD, M567/XM935 LESS BOOSTER

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification contains requirements and provides quality assurance provisions for loading, assembling and packaging of the M567 Point Detonating Fuze, Less Booster and the XM935 Point Detonating Fuze, Less Booster.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-D-14951	-	Delay Element, M53, Loading, Assembling and Packaging
MIL-A-48078	-	Ammunition, Standard Quality Assurance Provisions, General Specification for
MIL-F-48172	-	Fuze, PD, XM935, Loading, Assembling and Packing
MIL-D-50420	-	Detonator, Stab, M98 (T83E1) Parts for, and Loading, Assembling and Packing
MIL-F-50988	-	Fuze, PD, M567, Loading, Assembling and Packing
MIL-D-50998	-	Detonator, Stab, M76

FSC 1390

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	-Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-331	- Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-1169	- Packaging, Packing and Marking for Shipment of Inert Ammunition Components

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS (See 6.6)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

9246242	- Fuze, PD, M567
9255176	- Fuze, Point Detonating, M567, Less Boosters
9255254	- Disc, Retainer (60MM)
9255256	- Fuze, Point, Detonating, XM935 Less Booster
9255258	- Fuze, PD, XM935
9272193	- Packing and Marking for Box, Fiberboard, Inner for Fuze, PD, M567, Less Boosters or Fuze, PD, XM935, Less Boosters
9272194	- Packing and Marking for Box, Fiberboard Outer for Fuze, PD, M567, Less Boosters or Fuze, PD, XM935, Less Boosters
9278620	- Lead Disc
9278621	- Disc, Retainer (81MM)

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

PUBLICATIONS

American Society of Testing Materials (ASTM)

ASTM Method E - 8	- Tension Testing of Metallic Materials

(Applications for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the reference cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Material. Materials and parts shall be in accordance with applicable drawings and specifications.

3.2 Components and assemblies

3.2.1 M567 fuze. The M567 fuze components and assemblies shall comply with all requirements specified on drawing (dwg) 9255176, 9246238, and 9246215 and with all the requirements specified in applicable specifications.

3.2.2 XM935 fuze. The XM935 fuze components and assemblies shall comply with all requirements specified on drawing 9255256, 8798658, and 9255254 and with all the requirements specified in applicable specifications.

3.3 Embrittlement. The plated springs and formed pull rings and pull wires shall not break or split when deformed to the minimum point of permanent distortion.

3.4 Freedom of latch. The firing pin assembly shall be retained by the latch so that the firing pin point does not protrude into the slider cavity when the front body sub-assembly is held upright with the fuze centerline vertical. Additionally, the firing pin assembly shall move with external force into the inner body assembly until the head strikes the top of the inner body assembly, and return with no external force when the front body subassembly is held inverted with the fuze centerline vertical.

3.5 Selector cap torque test. The selector cap, when assembled and crimped securely, shall move from the SQ to the Delay setting within the torque range specified by the applicable drawings. In addition, rotation of the selector cap shall be stopped in both directions within the range specified in the applicable drawings.

3.6 Slider cavity function and safety test. The front body subassembly shall pass functional and safety gaging of the slider cavity using gages incorporating the functional dimensional requirements of the three sketches of Figure 1 attached to this specification.

3.7 Slider assembly functional test. The slider assembly shall pass a functional test designed to check detenting, camming, presence and ability to be blocked by the arming pin. The functional dimen-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

sions of the nest required for the test are specified in Figure 2 attached to this specification.

3.8 Critical check test. The front body subassembly shall demonstrate retention of both firing pin and striker under the applicable loads and shall exhibit the required force range on both setback pins when checked at heights specified in applicable drawings.

3.9 Leak test. The front body assembly (forward of the shoulder and rearward of the shoulder shall be tested separately) and the rear body shall have a leak rate of no greater than 0.5 pounds per square inch (psi) in 15 seconds minimum after pressure stabilization using a fixed volume of air of 3 psi $\pm$ 0.5 psi.

3.10 Jolt and jumble. The assembly shall meet the requirements of Test 101.2 and 102.1 of MIL-STD-331 and of paragraph 4.5.10.

3.11 Transportation vibration. The modified front body (see 4.5.9) assemblies and complete loaded fuzes shall meet the requirements of Test 401 of MIL-STD-331 Test Procedure II, and shall then function satisfactorily as required by 3.12.

3.12 Arming and ballistic functioning.

3.12.1 Lead assembly output. The front body subassemblies when modified to include lead discs, disc retainers and rear bodies and assembled to inert cartridges and ballistically fired at charge zero, set superquick (SQ) shall not fail to cause performation of the lead discs to a minimum diameter of 0.290 inch.

3.12.2 Impact functioning. The front body subassemblies when loaded and assembled as complete fuzes, then assembled to complete high explosive (HE) cartridges, and ballistically fired at charge 0 or charge 9, set either SQ or Delay shall not fail to function on impact with the ground as evidenced by cartridge functioning in accordance with the setting option.

3.12.3 Premature functioning. The front body subassemblies and complete fuzes shall show no evidence of premature functioning. Premature functioning is defined as the explosive functioning of the assemblies in the mortar tube or in flight prior to impact.

3.13 Die castings. The die castings shall be of uniform quality, free of cold shuts, blowholes and shrinkage defects. The casting must be dry, clean, and free from chips. All unfilled castings shall be rejected. The contractor, as part of his in-process control for die cast material, shall incorporate die cast procedures into his quality control manual.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:04Z
Check the source to verify that this is the currenversion before use.

3.13.1 Flash removal. All flash must be completely removed from parting lines, internal and external profiles, cored holes and ejector pin marks, except as noted on drawings.

3.13.2 Gates. All waste material remaining from the gate must be removed except when so noted on the drawing.

3.13.3 Surface porosity. Surface porosity is defined as metallic discontinuities called voids or pores. Individual pores shall be limited in number and in size to the requirements applicable to each component. A surface is defined as any area visible on the completed component. These surfaces include cavities, threads and surfaces revealed after completion of all machining operations:

Inner Body, Right Half Dwg. 9246219
Inner Body, Left Half Dwg. 9246220

One pore shall be permitted no greater than .020 inch by .050 inch by .020 inch deep in any area measuring 1/4 inch by 1/4 inch.


Slider End Plate Dwg. 9246216
Slider Dwg. 9246221
Delay Element Holder Dwg. 9246247

One pore shall be permitted no greater than .020 inch by .020 inch by .020 inch deep in any area measuring 1/4 inch by 1/4 inch.

Latch Dwg. 9246232

No surface porosity shall be permitted on any surface of the latch.

Rear Body Dwg. 9246215 (See sketch below)

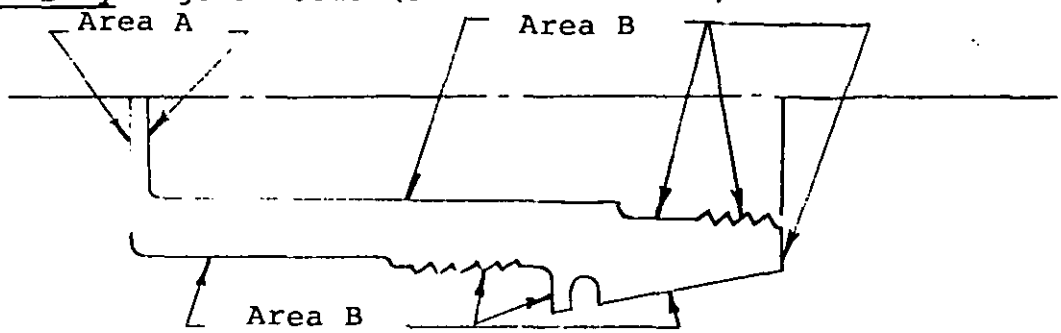

Area A: No surface porosity shall be permitted in Area A.

Area B: Pores smaller than 1/64 inch shall be disregared. No pore shall be permitted greater than 1/32 inch in diameter, length or depth. There shall not be more than eight pores greater than

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

1/64 inch and smaller than 1/32 inch in diameter, length or depth in all surfaces in Area B.

3.13.4 Interior porosity. Interior porosity is limited to those areas visible after sectioning in accordance with Sketch below. Individual metal discontinuities called voids or pores, shall be limited in number and in size to the requirements applicable to each component, and each dimension (length, width and depth) of the void or pore:

Latch Dwg. 9246232. No more than two pores not exceeding .020 inch in entire sectioned surface.


Slider Dwg. 9246221. No more than five pores not exceeding .020 inch in entire sectioned surface.

Slider End Plate Dwg. 9246216. No more than five pores not exceeding .020 inch in entire sectioned surface.

Inner Body, Right Half Dwg. 9246219. No more than five pores not exceeding .030 inch in any area 1/4 inch by 1/4 inch.

Inner Body, Left Half Dwg. 9246220. No more than five pores not exceeding .030 inch in any area 1/4 inch by 1/4 inch.

Rear Body Dwg. 9246215. Interior porosity in the areas depicted below shall be limited to:

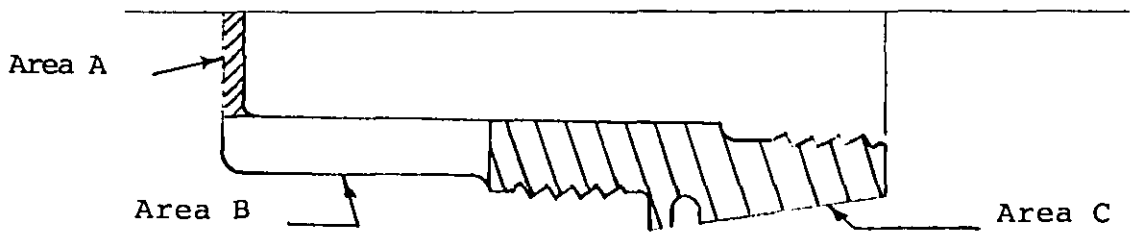

Area A: Pores smaller than .020 inch shall be disregarded. One pore greater than .020 but smaller than .040 inch is permitted in each of the eight resultant Area A sections. No pore greater than .020 inch shall be allowed closer than .020 inch to either external surface.

Area B: Pores smaller than .020 inch shall be disregarded. Two pores greater than .020 inch but not exceeding .100 inch shall be permitted in each of the eight resultant Area B sections. No pore greater than .020 inch shall be permitted closer than .020 inch to either external surface.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

Area C: Pores smaller than .020 inch shall be disregarded. No pore greater than .125 inch shall be permitted. One pore greater than .062 inch shall be permitted in each of the resulting Area C sections. Five pores greater than .020 inch but not greater than .062 inch shall be permitted in any 1/4 x 1/4 inch area. No pore greater than .062 inch shall be closer than .020 inch to either external surface.

3.13.5 Remelted scrap. No scrap shall be used other than sprues, gates and rejected die castings of the particular alloy required by the item print and produced in the manufacturer's own plant when that alloy is zinc. No aluminum scrap of any kind shall be used. The rejected die castings used shall be free from finishes, lubricants or any substance which may contaminate the alloy.

3.14 Latch shear test. The latch shall support a load of 50 ± 1 pound without shearing or cracking.

3.15 Detonator push-out test. The SQ and Delay detonators shall not move when subjected to a push-out force specified on the applicable drawings after assembly into the slider.

3.16 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.17 Proving ground test. The fuze shall comply with the following requirements.

3.17.1 Functioning. The fuze shall function on impact with the ground (as evidenced by cartridge functioning).

3.17.2 Premature burst. The fuze shall show no evidence of premature burst. A premature burst is defined as the functioning of the assembly in the mortar tube or in the flight before impact.

3.17.3 Arming safety. The fuze shall not function on impact against a 1/2 inch plywood screen set 100 ± 1 meter from the muzzle.

3.18 Data requirements. The contractor shall generate data in accordance with the requirements of the data item description cited in 4.5.9, 4.5.10 and 4.5.11.

3.19 Workmanship. All parts shall be finished and assembled in a thorough, workmanlike manner. They shall be free of burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part, nor shall the parts

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:04Z
Check the source to verify that this is the currentversion before use.

be contaminated by the cleaning agent. All required markings shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item:

a. First article inspection

b. Quality conformance inspection

4.3 First article inspection

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provision of 4.3.2.

4.3.1.1 Sample sizes M567 fuze. The first article sample shall consist of ten pieces of every component, subassembly, and assembly on dwg. 9255176 with the following exception:

Part Description	Drawing	Sample Size
Rear Body	9246215	*3
Slider End Plate	9246216	*3
Inner Body, Right Half	9246219	*3
Inner Body, Left Half	9246220	*3
Slider	9246221	*3
Selector Cap	9246222	*3
Safety Latch	9246232	*3 + 5
Pull Wire Assembly	9246235	22
Aft Support	9246238	*3
Front Body Subassembly, prior to assembly of Firing Pin Detent Ball	9246240	25

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:04Z
Check the source to verify that this is the current version before use.

Part Description	Drawing	Sample Size
Pin, Firing, Point	9299423	20
Firing Pin Subassembly	9299424	42
Front Body Subassembly	9246240	25
Delay Element Holder	9246247	*3
O-Ring	9246261	3
Slider Assembly	9246273	25
Inner Body Assembly, Left Half	9299420	40
Special Front Body Subassembly	9246241 (See 4.5.15)	15
Body Assembly, Front M567	9246241	349

* The sample shall consist of consecutively produced components from each cavity of each mold and die to be used in production. Inspections and examinations shall be in accordance with the Classification of Defects referenced in Table I.

4.3.1.2 Sample sizes XM935 fuze. The first article sample shall consist of ten pieces of every component, subassembly, and assembly on dwg. 9255256 with the following exceptions:

Part Description	Drawing	Quantity
Cap, Selector	9246222	3*
O-Ring	9246261	3*
Slider	9246221	3*
Plate, End, Slider	9246216	3*
Latch, Safety	9246232	3* + 5
Inner Body, Right Half	9246219	3*
Inner Body, Left Half	9246220	3*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

Part Description	Drawing	Quantity
Holder Delay Element	9246247	3*
Body, Inner, Left Half, Assembly	9299420	40
Pin, Firing, Point	9299423	20
Pull Wire Assembly	9246235	22
Firing Pin Subassembly	9299424	42
Body, Subassembly, Front	9246240	40
Body, Subassembly, Front Less Firing Pin Retaining Ball	9246240	25
Cup, Booster	8798658	10
Cap, Shipping	9255255	10
Fuze, PD, XM935, Less Boosters	9255256	349

* The sample shall consist of consecutively produced components from each cavity of each mold and die to be used in production. Inspections and examinations shall be in accordance with the Classification of Defects referenced in Table I.

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 11		DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Body, Outer, Front				
	Dwg. 9246218				
	Examination for defects	10		3.2	4.4.2.1
	Body, Inner, Right Half				
	Dwg. 9246219				
	Examination for defects	3/		3.2	4.4.2.2
	Porosity	Cavity		3.13	
	Body, Inner, Left Half				
	Dwg. 9246220				
	Examination for defects	3/		3.2	4.4.2.3
	Porosity	Cavity		3.13	
	Sleeve, Lead Cup				
	Dwg. 9246270				
	Examination for defects	10		3.2	4.4.2.4
	Body, Inner, Left Half Assembly				
	Dwg. 9299420				
	Lead Cup Push Out Test	40		3.2	4.4.2.5
	Latch Safety				
	Dwg. 9246232				
	Examination for defects	3/		3.2	4.4.2.6
	Porosity	Cavity		3.13	
	Latch Shear Test	5		3.14	4.4.2.6

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 2 OF 11		DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Inner Body Subassembly				
	Dwg 9299421				
	Examination for defects	10		3.2	4.4.2.7
	Presence of Spring Pin			3.2	4.4.2.7
	Holder, Delay Element				
	Dwg. 9246247				
	Examination for defects	3/		3.2	4.4.2.8
	Porosity	Cavity		3.13	
	Delay Assembly				
	Dwg. 9246246				
	Examination for defects	10		3.2	4.4.2.9
	Spacer, Front Body				
	Dwg. 9246254				
	Examination for defects	10		3.2	4.4.2.10
	Inner Body Assembly				
	Dwg. 9246262				
	Examination for defects	10		3.2	4.4.2.11
	Pin, Setback				
	Dwg. 9246226				
	Examination for defects	10		3.2	4.4.2.12

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-01-07 07:01:04 EST
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies		3 OF 11	See Below
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Spring, Setback Pin Dwg. 9246227 Examination for defects Spring Embrittlement	10		3.2 3.3	4.4.2.13
	Striker Dwg. 9246230 Examination for defects	10		3.2	4.4.2.14
	Disk Dwg. 9246260 Examination for defects	10		3.2	4.4.2.15
	O-Ring Dwg. 9246261 Examination for defects	3/ Cavity		3.2	4.4.2.16
	Spring, Firing Pin Dwg. 9246225 Examination for Defects Spring Embrittlement	10		3.2 3.3	4.4.2.17
	Pin, Firing, Holder Dwg. 9299422 Examination for Defects	10		3.2	4.4.2.18

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2024-10-29T04:04:47Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies		4 OF 11	See Below
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Pin, Firing, Point				
	Dwg. 9299423				
	Examination for defects	10		3.2	4.4.2.19
	Firing Pin Subassembly				
	Dwg. 9299424				
	Examination for defects	10		3.2	4.4.2.20
	Torque test			3.2	
	Firing Pin Assembly				
	Dwg. 9246244				
	Examination for defects	10		3.2	4.4.2.21
	Body Subassembly, Front				
	Dwg. 9246240				
	Slider Cavity Function and Safety Test	25		3.6	4.4.2.22
	Critical Check Test			3.8	
	Body Subassembly Front (Less Firing Pin Detent Ball)				
	Dwg. 9246240				
	Freedom of Latch Test	25		3.4	4.4.2.22
	Plate, End, Slider				
	Dwg. 9246216				
	Examination for defects	3/ Cavity		3.2	4.4.2.23
	Porosity			3.13	

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2020-10-20T20:07Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE			SHEET 5 OF 11	DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Slider Dwg. 9246221 Examination for defects Porosity	3/ Cavity		3.2 3.13 3.13	4.4.2.24
	Spring Slider Detent Dwg. 9246255 Examination for defects Spring Embrittlement	10		3.2 3.3	4.4.2.25
	Detent, Slider Dwg. 9246231 Examination for defects	10		3.2	4.4.2.26
	Slider Assembly Dwg. 9246273 Examination for defects Slider Assembly Functional Test	25		3.2 3.7	4.4.2.27
	Slider Assembly Loaded Dwg. 9246272 Examination for defects Detonator Push-Out Test	10		3.2 3.15	4.4.2.28

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:04Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 6 OF 11		DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Spring, Slider, Outer Dwg. 9246236 Examination for defects Spring Embrittlement	10		3.2 3.3	4.4.2.29
	Spring, Slider, Inner Dwg. 9246256 Examination for defects Spring Embrittlement	10		3.2 3.3	4.4.2.30
	Cap Selector Dwg. 9246222 Examination for defects	3 Cavity		3.2	4.4.2.31
	Ring, Selector Dwg. 9246223 Examination for defects	10		3.2	4.4.2.32
	Plug, Retainer Dwg. 9246264 Examination for defects	10		3.2	4.4.2.33
	Windshield Dwg. 9246239 Examination for defects	10		3.2	4.4.2.34

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2020-10-20T04:09Z
Check the source to verify that this is the current version before use.

TABLE I. First article insepction

CLASSIFICATION OF DEFECTS & TESTS MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 7 OF 11		DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Pull Wire Assembly				
	Dwg. 9246235				
	Examination for defects	10		3.2	4.4.2.35
	Elongation, Tensile, and Yield Strength	2		3.2	
	Embrittlement Test	10		3.3	
	Label, Warning				
	Dwg. 9298875				
	Examination for defects	10		3.2	4.4.2.36
	Body Assembly, Front, M567				
	Dwg. 9246241				
	Examination for defects	10		3.2	4.4.2.37
	Selector Cap Torque Test			3.5	
	Leak test			3.9	
	Front Body, Special Assembly				
	Dwg. 9246241				
	Selector Ring Pushout Test	10		3.2	4.4.2.37.1
	Body, Rear				
	Dwg. 9246215				
	Examination for defects	3/		3.2	4.4.2.38
	Porosity	Cavity		3.13	
	Leak Test			3.9	

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:04:42Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies	8 OF 11	See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Support Aft				
	Dwg. 9246238				
	Examination for defects	3/		3.2	4.4.2.39
	Dimensional Control of Molded Parts	Cavity		3.2	
	Pad, Felt				
	Dwg. 9246234				
	Examination for defects	10		3.2	4.4.2.40
	Fuze, PD, M567, Less Boosters				
	Dwg. 9255176				
	Examination for defects	15		3.2	4.4.2.41
	Body Assembly, Front, XM935				
	Dwg. 9255261				
	Examination for defects	10		3.2	4.4.2.42
	Selector Cap Torque Test			3.5	
	Leak Test			3.9	
	Cup, Booster				
	Dwg. 8798658				
	Examination for defects	10		3.2	4.4.2.43
	Cap, Shipping				
	Dwg. 9255255				
	Examination for defects	10		3.2	4.4.2.44

NOTES:

DRDAR-QA Form 160 Jul 77

18
Source: https://assist.dla.mil -- Downloaded: 2026-10-26 10:04 GMT
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 9 OF 11		DRAWING NUMBER
	Fuze, PD, M567/XM935, Less Boosters with Components and Assemblies				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Fuze, PD, XM935, Less Boosters Dwg. 9255256 Examination for Defects	15		3.2	4.4.2.45

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T04:04Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	Fuze, PD, X567/XM935, Less Boosters (Front Body Assembly) Destructive Testing	10 OF 11	9246241
			NEXT HIGHER ASSEMBLY 9246242/9255258

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	At Contractor's Test Facility	92			
	Jolt and Jumble	12	(a)	3.10	4.5.10
	Transportation Vibration	20	(a)(b)	3.11	4.5.9.1
	Ballistic Functioning				
	Cng. 0, Set SQ	60	(c)(d)(e)	3.12.1 3.12.3	4.5.11.1
	Chg. 0, Set SQ, TV	10	(c)(d)(e)	3.12.1 3.12.3	4.5.11.1
	Chg. 0, Set Delay, TV	10	(c)(i)	3.12.1 3.12.3	4.5.11.1
	At Government Proving Ground	242			
	Transportation Vibration	25	(a)(b)	3.11	4.5.9.2
	Arming Safety	12	(a)(c)(f)	3.17.3	4.5.21
	Ballistic Functioning				
	Cng. 0, Set SQ	90	(c)(g)	3.17.1 3.17.2	4.5.11.2
	Chg. 0, Set Delay	15	(c)(h)(i)	3.17.1 3.17.2	4.5.11.2
	Cng. maximum, Set SQ	90	(c)(g)	3.17.1 3.17.2	4.5.11.2
	Chg. maximum, Set Delay	15	(c)(i)	3.17.1 3.17.2	4.5.11.2
	Chg. maximum, Set, SQ, TV	20	(c)(g)(j)	3.17.1 3.17.2	4.5.11.2

NOTES: (a) One or more defective assemblies shall reject the first article.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:04:47Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	Fuze, PD, X567/XM935, Less Boosters (Front Body Assembly) Destructive Testing	11 OF 11	9246241
			NEXT HIGHER ASSEMBLY 9246242/9255258

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Transportation Vibration, article. the first article. Delay." missed target or low velocity. first article. performed ONLY. Transportation Vibration test at the Government proving ground. configuation, dwg. 9246242, unless otherwise determined by the contracting officer.	(b) Each assembly in the sample shall be marked in accordance with 4.5.9 prior to Transportation Vibration testing. These assemblies, if found acceptable after Transportation shall be used in the ballistic functioning phase. (c) One or more premature functionings shall reject the first article. (d) Two or more duds in the combined sample of 70 assemblies shall reject the first (e) Two or more assemblies failing to meet the requirements of 3.12.1 shall reject (f) Replacement rounds shall be obtained from the "Ballistic functiong, cng. 9, set Group for all tests declared as arming safety "No-tests." A "No-test" includes (g) Four or more duds in the combined sample of 200 assemblies shall reject the (n) This quantity includes 5 assemblies from Transportation Vibration tests performed at Government proving ground. (i) Results, other than premature functioning, shall be reported FOR INFORMATION (j) Samples for this test shall be obtained from the quantity of 25 subjected to (k) Samples tested at the contractor's facility shall be assembled to the M567				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of fuzes shall contain:

a. Leads of one lot interfix number from one manufacturer.

b. M76 Detonator of one lot interfix number from one manufacturer.

c. M98 Delay Elements of one lot interfix number from one manufacturer.

d. M53 Delay Elements of one lot interfix number from one manufacturer.

4.4.2 Examination. See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Body, Outer, Front	1 OF 2	9246218
			NEXT HIGHER ASSEMBLY 9246240

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Depth of selector cap counterbore		0.40%	3.2	Gage
102	Distance from centerline to flat		0.40%	3.2	Gage
103	Length of slider cavity		0.40%	3.2	Gage
104	Diameter of selector cap counterbore		0.40%	3.2	Gage
105	True position of selector cap counterbore		0.40%	3.2	Gage
106	Diameter of slider cavity bore		0.40%	3.2	Gage
107	True position of slider cavity bore		0.40%	3.2	Gage
108	Diameter of retaining ring counterbore		0.40%	3.2	Gage
109	Radius of delay holder slot		0.40%	3.2	Gage
110	True position of delay holder slot		0.40%	3.2	Gage
111	Diameter of front bore		0.40%	3.2	Gage
112	True position of front bore		0.40%	3.2	Gage
113	Diameter of inside bore		0.40%	3.2	Gage
114	Diameter of ball hole		0.40%	3.2	Gage
115	True position of ball hole		0.40%	3.2	Gage
116	Diameter of o-ring counterbore		0.40%	3.2	Gage
117	Diameter of safety pin hole		0.40%	3.2	Gage
118	True position of safety pin hole		0.40%	3.2	Gage
119	Profile of windshield crimping groove		0.40%	3.2	Gage
120	Corner radius on nose		0.40%	3.2	Gage
121	Distance from inner seat to front		0.40%	3.2	Gage
122	Distance from inner seat to outer shoulder		0.40%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Body, Outer, Front	2 OF 2	9246218
			NEXT HIGHER ASSEMBLY 9246240

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
123	Runout of retaining ring counterbore		0.40%	3.2	Gage
124	Radius under shoulder		0.40%	3.2	Gage
125	Minimum full threads (inside)		0.40%	3.2	Gage
126	Minor diameter of inside threads		0.40%	3.2	Gage
127	True position of inside threads		0.40%	3.2	Gage
128	Diameter of wrench hole		0.40%	3.2	Gage
129	True position of wrench hole		0.40%	3.2	Gage
130	Distance to bottom of wrench hole		0.40%	3.2	Gage
131	Excessive depression on inside bore		0.40%	3.2	Gage
132	Diameter of stop pin hole		0.40%	3.2	Gage
133	Location of stop pin hole		0.40%	3.2	Gage
134	Major diameter of outside thread		0.40%	3.2	Gage
135	True position of major diameter		0.40%	3.2	Gage
Minor					
201	Presence and location of "SQ" and "D"		0.65%	3.2	Visual
202	Outside unthreaded diameter, max.		0.65%	3.2	Gage
203	Diameter of disk counterbore		0.65%	3.2	Gage
204	True position of disk counterbore		0.65%	3.2	Gage
205	Depth of disk counterbore		0.65%	3.2	Gage
206	Depth of O-ring counterbore		0.65%	3.2	Gage
207	True position O-ring counterbore		0.65%	3.2	Gage
208	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 9246219
4.4.2.2	Body, Inner, Right Half (Die Check)				NEXT HIGHER ASSEMBLY 9299421
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Depth of setback pin slot	(a)		3.2	Gage
102	Width of setback pin slot	(a)		3.2	Gage
103	True position of setback pin slot	(a)		3.2	Gage
104	Maximum radius at intersection of ball hole and firing pin cavity	(a)		3.2	Gage
105	True position of ball hole	(a)		3.2	Gage
106	Angle of ball hole	(a)		3.2	Gage
107	Diameter of ball hole	(a)		3.2	Gage
108	True position of latch pivot seat	(a)		3.2	Gage
109	Distance from locating hole to bottom of firing pin spring cavity	(a)		3.2	Gage
110	Depth of firing pin spring cavity	(a)		3.2	Gage
111	True position of locating tab	(a)		3.2	Gage
112	Depth of firing pin shank cavity	(a)		3.2	Gage
113	True position of firing pin shank cavity	(a)		3.2	Gage
114	True position of slider cavity	(a)		3.2	Gage
115	Depth of slider cavity	(a)		3.2	Gage
116	Diameter of locating hole	(a)		3.2	Gage
117	Distance from locating hole to top	(a)		3.2	Gage
118	Distance from locating hole to base	(a)		3.2	Gage
119	Cold shuts, shrinkage defects, unfilled or incomplete component	(a)		3.13	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9246219
4.4.2.2	Body, Inner, Right Half (Die Check)				NEXT HIGHER ASSEMBLY 9299421
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
120	Presence of flash, gates	(a)		3.13.1	Visual
121	Surface porosity	(a)		3.13.3	Visual
122	Interior porosity	(a)		3.13.4	Visual
Minor					
201	Cavity identification mark missing or improper	(a)		3.2	Visual
202	Surface finish improper	(a)		3.2	Visual
203	Evidence of poor workmanship	(a)		3.19	Visual
204	Radius of firing pin restrictor cavity below minimum	(a)		3.2	Gage

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil - Downloaded: 2026-02-28 04:04:42
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246219
4.4.2.2.1	Body, Inner Right Half (Production Verification)				NEXT HIGHER ASSEMBLY 9299421
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
115	Depth of slider cavity	(a)		3.2	Gage
116	Diameter of locating hole	(a)		3.2	Gage
117	Distance from locating hole to top	(a)		3.2	Gage
118	Distance from locating hole to base	(a)		3.2	Gage
119	Cold shuts, shrinkage defects, unfilled or incomplete component		0.40%	3.13	Visual
120	Presence of flash, gates		0.40%	3.13.1	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criteria.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Body, Inner, Left Half (Die Check)	1 OF 2	9246220
			NEXT HIGHER ASSEMBLY 9299420

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of lead hole	(a)		3.2	Gage
102	True position of lead hole	(a)		3.2	Gage
103	Depth of setback pin slot	(a)		3.2	Gage
104	Width of setback pin slot	(a)		3.2	Gage
105	True position of setback pin slot	(a)		3.2	Gage
106	Radius at end of locking ball slot	(a)		3.2	Gage
107	Length of locking ball slot	(a)		3.2	Gage
108	Width of locking ball slot	(a)		3.2	Gage
109	Depth of locking ball slot	(a)		3.2	Gage
110	True position of locking ball slot	(a)		3.2	Gage
111	Length of striker firing pin cavity	(a)		3.2	Gage
112	Angle in striker cavity	(a)		3.2	Gage
113	Width of striker cavity	(a)		3.2	Gage
114	Depth of striker cavity	(a)		3.2	Gage
115	True position of striker cavity	(a)		3.2	Gage
116	Depth of firing pin cavity	(a)		3.2	Gage
117	Width of firing pin cavity	(a)		3.2	Gage
118	True position of firing pin cavity	(a)		3.2	Gage
119	Width of striker locking ball groove	(a)		3.2	Gage
120	True position of striker locking ball groove	(a)		3.2	Gage
121	True position of latch pivot seat	(a)		3.2	Gage
122	Diameter of locating boss	(a)		3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26 10:47:42
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9246220
4.4.2.3	Body, Inner, Left Half (Die Check)				NEXT HIGHER ASSEMBLY 9299420
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
123	Distance from locating boss to bottom of firing pin spring cavity	(a)		3.2	Gage
124	Distance from locating boss to top	(a)		3.2	Gage
125	Distance from locating boss to base	(a)		3.2	Gage
126	Distance from locating boss to top of flange	(a)		3.2	Gage
127	True position of delay holder key	(a)		3.2	Gage
128	True position of width of delay holder cavity	(a)		3.2	Gage
129	True position of slider cavity	(a)		3.2	Gage
130	Depth of slider cavity	(a)		3.2	Gage
131	Diameter of firing pin shank cavity	(a)		3.2	Gage
132	True position of firing pin shank cavity	(a)		3.2	Gage
133	Cold shuts, shrinkage defects, unfilled or incomplete component	(a)		3.13	Visual
134	Presence of flash, gates	(a)		3.13.1	Visual
135	Surface porosity	(a)		3.13.3	Visual
136	Interior porosity	(a)		3.13.4	Visual
137	Diameter of groove pin hole	(a)		3.2	Gage
138	True position of groove pin hole	(a)		3.2	Gage
Minor					
201	Cavity identification missing or improper	(a)		3.2	Visual
202	Surface finish improper	(a)		3.2	Visual
203	Evidence of poor workmanship	(a)		3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3.1	Body, Inner, Left Half (Production Verification)	1 OF 1	9246220
			NEXT HIGHER ASSEMBLY 9299420

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
124	Distance from locating boss to top	(a)		3.2	Gage
125	Distance from locating boss to base	(a)		3.2	Gage
126	Distance from locating boss to top of flange	(a)		3.2	Gage
130	Depth of slider cavity	(a)		3.2	Gage
133	Cold shuts, shrinkage defects, unfilled or incomplete component		0.40%	3.13	Visual
134	Presence of flash, gates		0.40%	3.13.1	Visual
Minor					
201	Evidence of poor workmanhsip		0.65%	3.19	Visual
202	Radius of firing pin restrictor cavity below minimum	(a)		3.2	Gage

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

Source: https://assist.dla.mil - Downloaded: 20200720104042
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246270
4.4.2.4	Sleeve, Lead Cup				NEXT HIGHER ASSEMBLY 9299420
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Small outside diameter		0.40%	3.2	Gage
102	Length of small outside diameter		0.40%	3.2	Gage
103	Inside diameter		0.40%	3.2	Gage
104	Presence of chamfer		0.40%	3.2	Gage
Minor					
201	Length of head diameter		0.65%	3.2	Gage
202	True position of large outside diameter		0.65%	3.2	Gage
203	True position of inside diameter		0.65%	3.2	Visual
204	Protective finish improper		0.65%	3.2	Visual
205	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Body, Inner, Left Half, Assembly				9299420
					NEXT HIGHER ASSEMBLY 9299421
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Lead cup sleeve push out test	30	(a)	3.2	4.5.16
Minor	None defined				

NOTES:

(a) One or more defects shall be cause for lot rejection.

DRDAR-QA Form 160 Jul 77

32 Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Latch, Safety (Die Check)	1 OF 1	9246232
			NEXT HIGHER ASSEMBLY 9299421

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of firing pin contour	(a)		3.2	Gage
102	True position of firing pin contour	(a)		3.2	Gage
103	Diameter of pivots	(a)		3.2	Gage
104	True position of pivots	(a)		3.2	Gage
105	Radius of sear tip	(a)		3.2	Gage
106	Height from pivots to sear tip	(a)		3.2	Gage
107	Total width	(a)		3.2	Gage
108	Surface porosity	(a)		3.13.3	Visual
109	Internal porosity	(a)		3.13.4	Visual
110	Shear test	(a)		3.14	4.5.13
111	Presence of flash, gates	(a)		3.13.1	Visual
112	Cold shuts, shrinkage defects, unfilled or incomplete component	(a)		3.13	Visual
Minor					
201	Cavity identification missing or improper	(a)		3.2	Visual
202	Evidence of poor workmanship	(a)		3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6.1	Latch Safety (Production Verification)	1 OF 1	9246232
			NEXT HIGHER ASSEMBLY 9299421

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
103	Diameter of pivots	(a)		3.2	Gage
106	Height from pivots to sear tip	(a)		3.2	Gage
107	Total width	(a)		3.2	Gage
110	Shear test	(b)		3.14	4.5.13
111	Presence of flash, gates		0.40%	3.13.1	Visual
112	Cold shuts, shrinkage defects, unfilled or incomplete component		0.40%	3.13	Visual
Minor					
202	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES: (a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.
(b) A sample of 32 shall be selected from the production run. One of more defectives shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-06T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET		DRAWING NUMBER
4.4.2.7	Inner Body Subassembly		1 OF 1		9299421
					NEXT HIGHER ASSEMBLY 9246262
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Presence of spring pin		100%	3.2	4.5.18
Major					
101	Location of spring pin cavity (prior to insertion of pin)		0.40%	3.2	Gage
102	Deptn of spring pin cavity (prior to insertion of pin)		0.40%	3.2	Gage
103	Spring pin above flush		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Holder, Delay Element (Die Check)	1 OF 2	9246247
			NEXT HIGHER ASSEMBLY 9246246

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Depth from outside diameter at slider groove to far side of arming pin-head cavity, max.	(a)		3.2	Gage
102	Depth from outside diameter to bottom of slider groove	(a)		3.2	Gage
103	Outside diameter	(a)		3.2	Gage
104	Total length	(a)		3.2	Gage
105	Radius of slider groove	(a)		3.2	Gage
106	Depth of key slot, max.	(a)		3.2	Gage
107	Diameter of delay element cavity	(a)		3.2	Gage
108	Depth of delay element cavity	(a)		3.2	Gage
109	Diameter of cavity adjacent to delay element cavity, min.	(a)		3.2	Gage
110	Depth of cavity adjacent to delay element cavity, min.	(a)		3.2	Gage
111	Diameter of arming pin-head cavity	(a)		3.2	Gage
112	Depth of arming pin-head cavity, min.	(a)		3.2	Gage
113	Location of slider groove	(a)		3.2	Gage
114	True position of delay element cavity	(a)		3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9246247
4.4.2.8	Holder, Delay Element (Die Check)				NEXT HIGHER ASSEMBLY 9246246
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
115	True position of outside diameter to arming pin-head cavity	(a)		3.2	Gage
116	True position of key slot	(a)		3.2	Gage
117	True position of arming pin base cavity	(a)		3.2	Gage
118	Cold shuts, shrinkage defects, unfilled or incomplete component	(a)		3.13	Visual
119	Presence of flash, gates	(a)		3.13.1	Visual
120	Surface porosity	(a)		3.13.3	Visual
121	Interior porosity	(a)		3.13.4	Visual
122	Diameter of groove pin hole	(a)		3.2	Gage
Minor					
201	Cavity marking missing or improper	(a)		3.2	Visual
202	Surface finish improper	(a)		3.2	Visual
203	Evidence of poor workmanship	(a)		3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8.1	Holder, Delay Element (Production Verification)	1 OF 1	9246247
			NEXT HIGHER ASSEMBLY 9246246

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Depth from outside diameter at slider groove to far side of arming pin-head cavity, max.	(a)		3.2	Gage
102	Depth from outside diameter to bottom of slider groove	(a)		3.2	Gage
103	Outside diameter	(a)		3.2	Gage
104	Total length	(a)		3.2	Gage
105	Cold shuts, shrinkage defects, unfilled or incomplete component		0.40%	3.13	Visual
106	Presence of flash, gates		0.40%	3.13.1	Visual
Minor					
201	Evidence of poor workmanship		0.65%		Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.9	Delay Assembly	1 OF 1	9246246
			NEXT HIGHER ASSEMBLY 9246262

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter after staking		0.40%	3.2	Gage
102	Presence of stake		0.40%	3.2	Visual
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.10	Spacer, Front Body				9246254
					NEXT HIGHER ASSEMBLY
					9246262
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of ball hole		0.40%	3.2	Gage
102	Hole size, min. (after forming)		0.40%	3.2	Gage
103	Height of dimples, min.		0.40%	3.2	Gage
104	Overall length		0.40%	3.2	Gage
105	Radius of curvature of spacer		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual
202	Chamfers missing		0.65%	3.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET		DRAWING NUMBER
4.4.2.11	Inner Body Assembly		1 OF 1		9246262
					NEXT HIGHER ASSEMBLY 9246240
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Groove pin missing		100%	3.2	Visual
Major					
101	Width of setback pin slot		0.40%	3.2	Gage
102	Width of striker slot		0.40%	3.2	Gage
103	Improper stake on delay holder (2 places)		0.40%	3.2	Visual
104	Improper stake on spacer (4 places)		0.40%	3.2	Visual
105	Groove pin, above or below flush		0.40%	3.2	Gage
106	Improper stake on groove pin		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.12	Pin, Setback	1 OF 1	9246226
			NEXT HIGHER ASSEMBLY 9246240

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length		0.40%	3.2	Gage
102	Straightness		0.40%	3.2	Gage
103	Step or mismatch at radii		0.40%	3.2	Visual
104	Diameter		0.40%	3.2	Gage
105	Improper surface finish		0.40%	3.2	Gage
106	Lubrication missing or improperly applied		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.13	Spring, Setback Pin				9246227
					NEXT HIGHER ASSEMBLY 9246240
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Free length		0.40%	3.2	Gage
102	Load at specified height		0.40%	3.2	Gage
103	Outside diameter		0.40%	3.2	Gage
104	Outside diameter at end		0.40%	3.2	Gage
105	Spring embrittlement test	20	(a)	3.3	4.5.2.1
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) One or more defects shall be cause for lot rejection.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246230
4.4.2.14	Striker				NEXT HIGHER ASSEMBLY 9246240
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length, overall		0.40%	3.2	Gage
102	Length of point		0.40%	3.2	Gage
103	Distance to datum		0.40%	3.2	Gage
104	Diameter		0.40%	3.2	Gage
105	Diameter of point		0.40%	3.2	Gage
106	True position of point		0.40%	3.2	Gage
107	Profile of point		0.40%	3.2	Gage
108	Improper surface finish		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:04Z
Check the source to verify that this is the currentversion before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.15	Disk	1 OF 1	9246260
			NEXT HIGHER ASSEMBLY 9246240

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter		0.40%	3.2	Gage
102	Inside diameter		0.40%	3.2	Gage
103	True position of inside diameter		0.40%	3.2	Gage
104	Thickness		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246261
4.4.2.16	O-Ring (Mold Check)				NEXT HIGHER ASSEMBLY 9246240
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter	(a)		3.2	Gage
102	Outside diameter	(a)		3.2	Gage
103	Presence of flash, gates	(a)		3.2	Visual
Minor					
201	Evidence of poor workmanship	(a)		3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-02-26 10:47:47Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.16.1	O-Ring (Production Verification)	1 OF 1	9246261
			NEXT HIGHER ASSEMBLY 9246240

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside diameter	(a)	0.40%	3.2	Gage
102	Outside diameter	(a)	0.40%	3.2	Gage
103	Presence of flash, gates, etc.	(a)(b)	0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship	(a)(b)	0.65%	3.19	Visual

NOTES: (a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion. If first and last component sampling from each cavity is selected during producion runs, characteristics with (b) shall be sampled and examined in accordance with the QAL and MIL-STD-105. If regular lotting is selected than disregard (a) and (b) completely.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.17	Spring, Firing Pin	1 OF 1	9246225
			NEXT HIGHER ASSEMBLY 9246244

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Height at .120 lb. load		0.40%	3.2	Gage
102	Height at .280 lb. load		0.40%	3.2	Gage
103	Outside diameter		0.40%	3.2	Gage
104	Outside diameter at small end		0.40%	3.2	Gage
105	Spring embrittlement test	20	(a)	3.3	4.5.2.1
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Gage

NOTES:

(a) One or more defects shall be cause for lot rejection.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26 10:04 GMT
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.18	Pin, Firing, Holder	1 OF 2	9299422
			NEXT HIGHER ASSEMBLY 9299424

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of long shank		0.40%	3.2	Gage
102	True position of long shank		0.40%	3.2	Gage
103	Diameter above and below ball groove and above latch locking groove		0.40%	3.2	Gage
104	Distance from centerline of ball groove radius to bottom of head		0.40%	3.2	Gage
105	Diameter of base of ball groove, max.		0.40%	3.2	Gage
106	True position of diameter at base of ball groove		0.40%	3.2	Gage
107	Diameter at base of latch locking groove, max.		0.40%	3.2	Gage
108	Diameter at base of clearance groove beneath head		0.40%	3.2	Gage
109	Distance from bottom of head to end of long shank		0.40%	3.2	Gage
110	Pitch diameter and length of internal threads, min.		0.40%	3.2	Gage
Minor					
201	Angles above and below latch locking groove		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.18	Pin, Firing, Holder	2 OF 2	9299422
			NEXT HIGHER ASSEMBLY 9299424

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
202	Distance from top of latch locking groove to bottom of head		0.65%	3.2	Gage
203	Diameter of head		0.65%	3.2	Gage
204	Radius under head		0.65%	3.2	Gage
205	Protective coating		0.65%	3.2	Visual
206	Finish improper		0.65%	3.2	Visual
207	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9299423
4.4.2.19	Pin, Firing, Point				NEXT HIGHER ASSEMBLY 9299424
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Profile of point		0.40%	3.2	Gage
102	Diameter of shank next to firing pin point		0.40%	3.2	Gage
103	Radius between small fiirng pin shank and O.D.		0.40%	3.2	Gage
104	Pitch diameter of external threads, min.		0.40%	3.2	Gage
105	Mechanical properties	(a)	(a)	3.2	(a)
Minor					
201	Diameter of thread undercut, both ends		0.65%	3.2	Gage
202	Width of undercut at shoulder		0.65%	3.2	Gage
203	Finish improper		0.65%	3.2	Visual
204	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES: (a) Sampling, methods and acceptance criteria per ASTM Method E-8. This test applies to each heat of material prior to use in forming components after "Method E-8".

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.20	Firing Pin Subassembly	1 OF 1	9299424
			NEXT HIGHER ASSEMBLY 9246244

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Distance from bottom of head to end of firing pin shoulder, min.		0.40%	3.2	Gage
102	360° crimp inadequate or missing		0.40%	3.2	Visual
103	True position of firing pin point shank to holder long shank		0.40%	3.2	Gage
104	Firing pin subassembly torque test	32	(a)	3.2	4.5.17
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) One or more defects shall be cause for lot rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246244
4.4.2.21	Firing Pin Assembly				NEXT HIGHER ASSEMBLY 9246240
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Spring damaged		0.40%	3.2	Visual
Minor 201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
4.4.2.22	Body, Subassembly, Prior to Assembly Firing Pin Detent Ball		1 OF 1	9246240
				NEXT HIGHER ASSEMBLY 9246241/9255261

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical 1	Freedom of Latch Test Firig pin not blocked by latch in upright position		100%	3.4	4.5.3
Major 101	Freedom of Latch Test Firing pin does not travel freely in inverted position		100%	3.4	4.5.3
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22.1	Body Subassembly, Front				9246240
					NEXT HIGHER ASSEMBLY 9246241/9255261
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Slider Cavity Function and Safety Test Arming pin does not block gage		100%	3.6	4.5.4 (a)
2	Firing pin does not block gage		100%	3.6	4.5.4 (a)
	Critical Check Test				
3	Firing pin or striker not blocked at specified heights		100%	3.8	4.5.7
Major					
	Slider Cavity Function and Safety Test				
101	Functional gage does not fit freely into slider cavity		100%	3.6	4.5.4 (a)
	Critical Check Test				
102	Load to depress either setback pin as specified exceeds maximum permitted		100%	3.8	4.5.7
103	Height of stop pin		0.40%	3.2	Gage
Minor	None defined				

NOTES: (a) Test shall be performed using fixture whose functional dimensions are included in figure 1 attached to this specification.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246216
4.4.2.23	Plate, End, Slider (Die Check)				NEXT HIGHER ASSEMBLY 9246273
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter	(a)		3.2	Gage
102	Depth of detent cavity	(a)		3.2	Gage
103	Diameter of detent cavity, max.	(a)		3.2	Gage
104	True position of detent cavity	(a)		3.2	Gage
105	True position of shaft slot	(a)		3.2	Gage
106	Width of shaft slot, min.	(a)		3.2	Gage
107	Location of arming pin clearance slot	(a)		3.2	Gage
108	Location of key slot	(a)		3.2	Gage
109	Arming pin seat corner radius improper	(a)		3.2	Visual
110	Cold shuts, shrinkage defects, unfilled or incomplete component	(a)		3.13	Visual
111	Presence of flash, gates	(a)		3.13.1	Visual
112	Surface porosity	(a)		3.13.3	Visual
113	Interior porosity	(a)		3.13.4	Visual
Minor					
201	Cavity identification missing or improper	(a)		3.2	Visual
202	Surface finish improper	(a)		3.2	Visual
203	Evidence of poor workmanship	(a)		3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.23.1	Plate, End, Slider (Production Verification)	1 OF 1	9246216
			NEXT HIGHER ASSEMBLY 9246273

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter	(a)		3.2	Gage
102	Depth of detent cavity	(a)		3.2	Gage
109	Arming pin seat corner radius improper		0.40%	3.2	Visual
110	Cold shuts, shrinkage defects, unfilled or incomplete component		0.40%	3.2	Visual
111	Presence of flash, gates		0.40%	3.2	Visual
Minor					
203	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2	DRAWING NUMBER 9246221
4.4.2.24	Slider (Die Check)			NEXT HIGHER ASSEMBLY 9246273
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter	(a)		3.2	Gage
102	Diameter of superquick initiator cavity	(a)		3.2	Gage
103	Depth of superquick initiator cavity, min.	(a)		3.2	Gage
104	Diameter of delay initiator cavity	(a)		3.2	Gage
105	Depth of delay initiator cavity, min.	(a)		3.2	Gage
106	True position of superquick initiator cavity	(a)		3.2	Gage
107	True position of delay initiator cavity	(a)		3.2	Gage
108	True position of setting stops	(a)		3.2	Gage
109	Diameter of shaft	(a)		3.2	Gage
110	Length of shaft	(a)		3.2	Gage
111	Total length	(a)		3.2	Gage
112	Location of arming pin clearance slot from center	(a)		3.2	Gage
113	Radius at junction of shaft and main body, min.	(a)		3.2	Gage
114	Cold shuts, shrinkage defects, unfilled or incomplete component	(a)		3.13	Visual
115	Presence of flash, gates	(a)		3.13.1	Visual
116	Surface porosity	(a)		3.13.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9246221
4.4.2.24	Slider (Die Check)				NEXT HIGHER ASSEMBLY 9246273
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
117	Interior porosity	(a)		3.13.4	Visual
118	Cracks at shaft and body junction	(a)		3.2	Visual
Minor					
201	Cavity identificaton missing or improper	(a)		3.2	Visual
202	Surface finish improper	(a)		3.2	Visual
203	Evidence of poor workmanship	(a)		3.19	Visual

NOTES: (a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE			SHEET 1 OF 1	DRAWING NUMBER 9246221
4.4.2.24.1	Slider (Production Verification)				NEXT HIGHER ASSEMBLY 9246273
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter	(a)		3.2	Gage
103	Depth of superquick initiator cavity, min.	(a)		3.2	Gage
105	Depth of delay initiator cavity, min.	(a)		3.2	Gage
111	Total length	(a)		3.2	Gage
114	Cold shuts, shrinkage defects, unfilled or incomplete component		0.40%	3.13	Visual
115	Presence of flash, gates		0.40%	3.13.1	Visual
118	Cracks at junction of shaft and body		0.40%	3.2	Visual
Minor					
203	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246255
4.4.2.25	Spring, Slider Detent				NEXT HIGHER ASSEMBLY 9246273
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Free length		0.40%	3.2	Gage
102	Load at specified height		0.40%	3.2	Gage
103	Spring embrittlement test	20	(a)	3.3	4.5.2.1
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) One or more defects shall be cause for lot rejection.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET		DRAWING NUMBER
4.4.2.26	Detent, Slider		1 OF 1		9246231
					NEXT HIGHER ASSEMBLY 9246273
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length		0.40%	3.2	Gage
102	Diameter of head		0.40%	3.2	Gage
103	Diameter of shank		0.40%	3.2	Gage
104	Radius of head		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:04Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246273
4.4.2.27	Slider Assembly				NEXT HIGHER ASSEMBLY 9246272
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	Slider assembly not blocked by arming pin		100%	3.7	4.5.5 (a)
Major					
101	Assembly cannot be inserted into fixture		100%	3.7	4.5.5 (a)
102	Rotation force from SQ to delay and back excessive or insufficient		100%	3.7	4.5.5 (a)
103	Assembly will not traverse and align with applicable force in SQ position with arming pin down		100%	3.7	4.5.5 (a)
104	Assembly will not traverse and align with applicable force in delay position with arming pin		100%	3.7	4.5.5 (a)
Minor	None defined				

NOTES: (a) Test shall be performed using fixture whose functional dimensions are included in figure 2 attached to this specification.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246272
4.4.2.28	Slider Loaded Assembly				NEXT HIGHER ASSEMBLY 9246241/9255261
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Detonators push-out-test		100%	3.15	4.5.14
102	Detonators inverted		100%	3.2	Visual
103	Raised burrs present due to staking		0.40%	3.2	Visual
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.29	Spring, Slider Outer	1 OF 1	9246236
			NEXT HIGHER ASSEMBLY: 9246241/9255261

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Load at .660 height		0.40%	3.2	Gage
102	Load at .250 height		0.40%	3.2	Gage
103	Solid height		0.40%	3.2	Gage
104	Outside diameter		0.40%	3.2	Gage
105	Spring embrittlement test	20	(a)	3.3	4.5.2.1
Minor					
201	Ends not properly closed		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) One or more defects shall be cause for lot rejection.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.30	Spring, Slider, Inner	1 of 1	9246256
			NEXT HIGHER ASSEMBLY: 9246241/9255261

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Load at .660 height		0.40%	3.2	Gage
102	Load at .250 height		0.40%	3.2	Gage
103	Solid height		0.40%	3.2	Gage
104	Outside diameter		0.40%	3.2	Gage
105	Spring embrittlement test	20	(a)	3.3	4.5.2.1
Minor					
201	Ends not properly closed		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) One or more defects shall be cause for lot rejection.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246222
4.4.2.31	Cap, Selector (Mold Check)				NEXT HIGHER ASSEMBLY 9246241/9255261
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Intermediate outside diameter, min.	(a)		3.2	Gage
102	Width of setting tabs	(a)		3.2	Gage
103	Width of setting tang	(a)		3.2	Gage
104	True position of setting tabs	(a)		3.2	Gage
105	True position of setting tang	(a)		3.2	Gage
106	Location of ends of setting cutout	(a)		3.2	Gage
107	Large outside diameter	(a)		3.2	Gage
108	Small inside diameter, min.	(a)		3.2	Gage
109	Shrinkage defects, unfilled or incomplete component	(a)		3.2	Visual
110	Presence of flash, gates	(a)		3.2	Visual
Minor					
201	Cavity identification missing or improper	(a)		3.2	Visual
202	Evidence of poor workmanship	(a)		3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
4.4.2.31.1	Cap, Selector (Production Verification)		1 OF 1	9246222
				NEXT HIGHER ASSEMBLY 9246241/9255261

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Intermediate outside diameter, min.	(a)		3.2	Gage
107	Large outside diameter	(a)		3.2	Gage
109	Shrinkage defects, unfilled or incomplete component		0.40%	3.2	Visual
110	Presence of flash, gates		0.40%	3.2	Visual
Minor					
202	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246223
4.4.2.32	Ring, Selector				NEXT HIGHER ASSEMBLY 9246241/9255261
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter		0.40%	3.2	Gage
102	Inside diameter		0.40%	3.2	Gage
103	True position of inside diameter		0.40%	3.2	Gage
104	Length of outside diameter, max		0.40%	3.2	Gage
105	Angle of chamfer		0.40%	3.2	Gage
Minor					
201	Protective finish improper		0.65%	3.2	Visual
202	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246264
4.4.2.33	Plug, Retainer				NEXT HIGHER ASSEMBLY 9246241
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter of flange, max.		0.40%	3.2	Gage
102	Distance from top face ridge to top of flange		0.40%	3.2	Gage
103	Overall length		0.40%	3.2	Gage
104	Inside diameter, min.		0.40%	3.2	Gage
105	Radius of flange to corner, min.		0.40%	3.3	Gage
106	Pitch diameter of thread		0.40%	3.2	Gage
107	True position of thread		0.40%	3.2	Gage
108	Minimum full thread		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.34	Windshield	1 OF 1	9246239
			NEXT HIGHER ASSEMBLY 9246241/9255261

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Cracking, tearing or porosity present		0.40%	3.2	Visual
102	Diameter at open end		0.40%	3.2	Gage
103	Length		0.40%	3.2	Gage
104	Distance to reference diameter		0.40%	3.2	Gage
105	Thickness of end		0.40%	3.2	Gage
106	Radius of corner		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246235
4.4.2.35	Pull Wire Assembly				NEXT HIGHER ASSEMBLY 9246241/9255261
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Length of safety pin		100%	3.2	Gage
Major					
101	Diameter of ring		0.40%	3.2	Gage
102	Diameter of safety pin loop		0.40%	3.2	Gage
103	Diameter of wire		0.40%	3.2	Gage
104	Embrittlement	20(a)		3.3	4.5.2.2
105	Elongation, tensile and yield strength	(b)		3.2.1/ 3.2.2	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual
if one or more applicable	(a) Sample shall be selected from each plating batch. The batch shall be rejected drawing. (b) These tests shall be performed as specified in the ASTM's referenced on the cause rejection of that heat of material. These tests shall be performed on each heat of steel prior to use in forming components.				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9298875
4.4.2.36	Label, Warning				NEXT HIGHER ASSEMBLY 9246241/9255261
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Lettering illegible or misleading		0.40%	3.2	Visual
Minor 201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246241
4.4.2.37	Body Assembly, Front, M567				NEXT HIGHER ASSEMBLY 9246242
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Pull wire not present or not fully seated		100%	3.2	Gage
2	Detonator visible through lead hole	(b)	100%	3.2	Visual
Major					
101	Depth of windshield crimp (2 features -4 measurements - 90° apart)		0.40%	3.2	Gage
102	Maximum depression of windshield		0.40%	3.2	Gage
103	Presence of selector ring stake		0.40%	3.2	Visual
104	Presence of lead		0.40%	3.2	Visual
105	Presence of tape over lead		0.40%	3.2	Visual
106	Presence of tape over retainer plug		0.40%	3.2	Visual
107	Distance from front body shoulder to back of retainer plug		0.40%	3.2	Gage
108	Selector cap torque test		100%	3.5	4.5.6
109	Leak test	20	(a)	3.9	4.5.8.1
110	Retainer plug torque inadequate	15	(a)	3.2	Gage
111	Marking (other than label) incomplete, incorrect, illegible or missing		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

(a) One or more defects shall be cause for lot rejection.
(b) Inspect prior to assembly of lead assembly, tape, and retainer plug.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246241
4.4.2.37.1	Body Assembly, Front - Special				NEXT HIGHER ASSEMBLY 9246242
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Selector ring push-out test	15	(a)	3.2	4.5.15
Minor	None defined				

NOTES:

(a) One or more defects shall be cause for lot rejection.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.38	Body, Rear (Die Check), After Machining	1 OF 2	9246215
			NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pitch diameter of internal thread	(a)		3.2	Gage
102	Pitch diameter of external thread	(a)		3.2	Gage
103	Major diameter of external thread, min.	(a)		3.2	Gage
104	Minor diameter of internal thread, max.	(a)		3.2	Gage
105	Total length	(a)		3.2	Gage
106	Minimum length of internal threads	(a)		3.2	Gage
107	Small outside diameter, max.	(a)		3.2	Gage
108	Small inside diameter near base of cavity, min.	(a)		3.2	Gage
109	Length of tapered surface	(a)		3.2	Gage
110	Diameter of tapered surface at basic length	(a)		3.2	Gage
111	True position of internal thread	(a)		3.2	Gage
112	Depth to small inside diameter	(a)		3.2	Gage
113	Perpendicularity of top face	(a)		3.2	Gage
114	Width of wrench slot, min.	(a)		3.2	Gage
115	Distance between wrench slots, max.	(a)		3.2	Gage
116	Chamfer missing from internal thread	(a)		3.2	Visual
117	Cold shuts, shrinkage defects, unfilled or incomplete component	(a)		3.13	Visual
118	Presence of flash, gates	(a)		3.13.1	Visual
119	Surface porosity	(a)		3.13.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9246215
4.4.2.38	Body, Rear (Die Check), After Machining				NEXT HIGHER ASSEMBLY 9246242
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
120	Interior porosity	(a)		3.13.4	Visual
121	Leak test	(a)		3.9	Test 4.5.8.2
Minor					
201	Cavity identification missing or improper	(a)		3.2	Visual
202	Surface finish improper	(a)		3.2	Visual
203	Evidence of poor workmanship	(a)		3.19	Visual
204	Paint missing or improper (when applicable)	(a)		3.2	Visual

NOTES: (a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.38.1	Body, Rear (Production Verification) After Machining	1 OF 1	9246215
			NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pitch diameter of internal thread		0.40%	3.2	Gage
104	Minor diameter of internal thread, max.		0.40%	3.2	Gage
105	Total length	(a)		3.2	Gage
107	Small outside diameter, max.	(a)		3.2	Gage
111	True position of internal thread		0.40%	3.2	Gage
117	Cold shuts, shrinkage defects, unfilled or incomplete component		0.40%	3.13	Visual
118	Presence of flash, gates		0.40%	3.13.1	Visual
Minor					
203	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:
(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.39	Support, Aft (Mold Check)	1 OF 1	9246238
			NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter of large end, min.	(a)		3.2	Gage
102	Length of outside diameter at large end, max.	(a)		3.2	Gage
103	Large outside diameter, min.	(a)		3.2	Gage
104	Outside diameter of small end	(a)		3.2	Gage
105	Length of small outside diameter, max.	(a)		3.2	Gage
106	Small inside diameter	(a)		3.2	Gage
107	Length from flange to small end, min.	(a)		3.2	Gage
108	*Unfilled or incomplete component*	(a)		3.2	Visual
Minor					
201	Cavity identification missing or improper	(a)		3.2	Visual
202	Evidence of poor workmanship	(a)		3.19	Visual

NOTES:

(a) Refer to 4.4.3.1 for sampling, acceptance and rejection criterion.

DRDA-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
4.4.2.39.1	Support, Art (Production Verirication)		1 OF 1	9246238
				NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter of large end, min.	(a)		3.2	Gage
104	Outside diameter of small end	(a)		3.2	Gage
107	Length from flange to small end, min.	(a)		3.2	Gage
108	Unfilled or incomplete component		0.40%	3.2	Visual
Minor					
202	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES: (a) Refer to 4.4.5.1 for sampling, acceptance and rejection criterion.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9246234
4.4.2.40	Pad, Felt				NEXT HIGHER ASSEMBLY 9246242
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Thickness		0.40%	3.2	Gage
102	Diameter		0.40%	3.2	Gage
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.41	Fuze, PD, M567, Less Boosters	1 OF 1	9255176
			NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Pull wire not fully seated		100%	3.2	Gage
2	Any or all of four critical inspection marks missing		100%	3.2	Visual
Major					
101	Fuze not set SQ		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.42	Body Assembly, Front XM935	1 OF 1	9255261
			NEXT HIGHER ASSEMBLY 9255258

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Pull wire not present or not fully seated		100%	3.2	Gage
2	Detonator visible through lead hole	(b)	100%	3.2	Visual
Major					
101	Depth of windshield crimp (2 reature - 4 measurements - 90° apart)		0.40%	3.2	Gage
102	Maximum depression of windshield		0.40%	3.2	Gage
103	Presence of selector ring stake		0.40%	3.2	Visual
104	Presence of lead		0.40%	3.2	Visual
105	Presence of tape over lead		0.40%	3.2	Visual
106	Presence of shipping cap		0.40%	3.2	Visual
107	Selector cap torque test		100%	3.5	4.5.6
108	Leak test	20	(a)	3.9	4.5.8.1
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:
(a) One or more defects shall be cause for lot rejection.
(b) Inspect prior to assembly of lead assembly, tape, and retainer plug.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSEPCTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 8798658
4.4.2.43	Cup, Booster, XM935				NEXT HIGHER ASSEMBLY 9255258
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Outside diameter		0.40%	3.2	Gage
102	Thickness of bottom of cup		0.40%	3.2	Gage
103	Inside diameter		0.40%	3.2	Gage
104	Distance from face to bottom of cup		0.40%	3.2	Gage
105	Pitch diameter of threads		0.40%	3.2	Gage
106	Minimum thread length		0.40%	3.2	Gage
107	Cracks in cup		0.40%	3.2	Visual
Minor					
201	Diameter of thread lead-in		0.65%	3.2	Gage
202	Length of thread lead-in		0.65%	3.2	Gage
203	Corner radius		0.65%	3.2	Gage
204	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9255255
4.4.2.44	Cap, Shipping				NEXT HIGHER ASSEMBLY 9255261
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Length		0.40%	3.2	Gage
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET		DRAWING NUMBER
4.4.2.45	Fuze, PD, XM935, Less Boosters		1 of 1		9255256
					NEXT HIGHER ASSEMBLY 9255258
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Pull wire not fully seated		100%	3.2	Gage
2	Any or all of (4) critical inspection marks missing		100%	3.2	Visual
Major					
101	Fuze not set SQ		0.40%	3.2	Visual
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 20261O-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.46	Fuze, PD, M567, Less Boosters (Front Body Assembly) Destructive Lot Acceptance Testing	1 OF 2	9246241
			NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Contractor Test Facility				
Critical					
1	Jolt and Jumble	12	(a)	3.10	4.5.10
2	Transportation vibration	20	(a)(b)	3.11	4.5.9
3	Premature functioning	80	(c)(f)	3.12.2	4.5.20
Major					
101	Ballistic functioning; Cng 0, set SQ	60	(d)(e)(f)	3.12.1	4.5.11.1
102	Ballistic functioning; Chg 0, set SQ, TV	20	(d)(e)(f)	3.12.1	4.5.11.1
Minor	None defined				

(a) One or more defectives shall reject the lot.
(b) Mark each fuze in accordance with 4.5.9. Fuzes found to be acceptable after Transporation Vibration test shall be included in the sample of 80 for Ballistic Functioning test at the contractor's test facility.
(c) One or more premature functionings shall reject the lot.
(d) Three of more duds shall reject the lot, total sample of 80.
(e) Two or more fuzes failing to meet the requirements of 3.12.1 shall reject the lot, total sample of 80.
(f) Same samples considered.
(g) Fuzes tested at the contractor's facility shall be assembled to the M567 configuration, dwg. 9246242, unless otherwise determined by the contracting officer.

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4b	Fuze, PD, M567; Less Boosters (Front Body Assembly) Destructive Lot Acceptance Testing	2 OF 2	9246241
			NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Government Proving Ground	166			
Critical					
1	Premature functioning	(a)		3.17.2	4.5.20
2	Arming safety	12	(b)	3.17.3	4.5.21
Major					
101	Ballistic function; Chg 0, Set SQ	62	(c)(e)	3.17.1	4.5.20.1
102	Ballistic function; Chg 0, Set Delay	15	(d)	3.17.1	4.5.20.1
103	Ballistic function; Chg maximum, Set SQ	62	(c)(e)	3.17.1	4.5.20.1
104	Ballistic function, Chg maximum, Set Delay	15	(a)	3.17.1	4.5.20.1
Minor	None defined				

(a) All test firings during these tests shall be considered in this sample; one or more premature functionings shall reject the lot.
(b) One or more defectives shall reject the lot. Replacement rounds, shall be obtained from the "Ballistic Function' Chg maximum, Set Delay" group for all tests declared as arming safety "no tests". "No test" includes missing target or low velocity.
(c) Three or more duds in the combined sample of 124 shall reject the lot.
(d) Results, other than premature functioning, shall be reported for information only.
(e) Refer to 4.5.20.1.3 for authority instructions and rejection (for duds) criterion for reduced sampling.

NOTES:

88 Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.47	Fuze, PD, XM935, Less Boosters (Front Body Assembly) Destructive Lot Acceptance Testing	1 OF 2	9246241
			NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Contractor Test Facility				
Critical					
1	Jolt and Jumble	12	(a)	3.10	4.5.10
2	Transportation Vibration	20	(a)(b)	3.11	4.5.9
3	Premature functioning	80	(c)(f)	3.12.2	4.5.20
Major					
101	Ballistic Functioning; Chg 0, set SQ	60	(a)(e)(f)	3.12.1	4.5.11.1
102	Ballistic Functioning; Chg 0, set SQ, TV	20	(a)(e)(f)	3.12.1	4.5.11.1
Minor	None defined				

(a) One or more defectives shall reject the lot.
(b) Mark each fuze in accordance with 4.5.9. Fuzes found to be acceptable after Transportation Vibration test shall be included in the sample of 80 for Ballistic Functioning test at the contractor's test facility.
(c) One or more premature functionings shall reject the lot.
(d) Three or more duds shall reject the lot, total sample of 80.
(e) Two or more fuzes failing to meet the requirements of 3.12.1 shall reject the lot, total sample of 80.
(f) Same samples considered.
(g) Fuzes tested at the contractor's facility shall be assembled to the M567 configuration, dwg. 9246242, unless otherwise determined by the contracting officer.

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 20264O-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.47	Fuze, PD, XM935, Less Boosters (Front Body Assembly) Destructive Lot Acceptance Testing	2 OF 2	9246241
			NEXT HIGHER ASSEMBLY 9246242

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Government Proving Ground	166			
Critical					
1	Premature functioning	(a)		3.17.2	4.5.20
2	Arming safety	12	(b)	3.17.3	4.5.21
Major					
101	Ballistic function; Chg 0, Set SQ	62	(c)(e)	3.17.1	4.5.20.1
102	Ballistic function; Chg 0, Set Delay	15	(a)	3.17.1	4.5.20.1
103	Ballistic function; Chg 4, Set SQ	62	(c)(e)	3.17.1	4.5.20.1
104	Ballistic function, Chg 4, Set Delay	15	(a)	3.17.1	4.5.20.1
Minor	None defined				

(a) All test firings during these tests shall be considered in this sample; one or more premature functionings shall reject the lot.
(b) One or more defectives shall reject the lot. Replacement rounds, shall be obtained from the "Ballistic Function; Chg. 4, Set Delay" group for all tests declared as arming safety "no tests". "No test" includes missed target or low velocity.
(c) Three or more duds in the combined sample of 124 shall reject the lot.
(d) Results, other than prematuire functioning, shall be reported for information only.
(e) Refer to 4.5.20.1.3 for authority instructions and rejection (for duds) criterion for reduced sampling.
(f) Fuzes tested at the Government Proving Ground shall be tested in tn XM935 configuration.

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.48	Packing and Marking for Box, Fiberboard, Inner for Fuze, PD, M567, Less Boosters, or Fuze, PD, XM935, Less Boosters	1 OF 1	9272193
			NEXT HIGHER ASSEMBLY 9272194

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Fuze supports missing or improperly installed (top and bottom layers)		0.40%	3.2	Visual
102	Supports missing or improperly installed (3 places)		0.40%	3.2	Visual
103	Labeling missing, improperly marked or illegible		0.40%	3.2	Visual
104	Barrier bag damaged or improperly sealed		0.40%	3.2	Visual
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.49	Packing and Marking for Box, Fiberboard, Outer for Fuze, PD, M567 Less Boosters, or Fuze, PD XM935 Less Boosters	1 OF 1	9272194
			NEXT HIGHER ASSEMBLY: --

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Box not tightly packed		0.40%	3.2	Visual
102	Box improperly sealed		0.40%	3.2	Visual
103	Marking missing, misleading or illegible		0.40%	3.2	Visual
Minor	None defined				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 20261026T04:04Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-50945D (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.50	Pin, Groove				9349541
					NEXT HIGHER ASSEMBLY 9246262
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter, small tapered end		0.40%	3.2	Gage
102	Diameter, large tapered end		0.40%	3.2	Gage
103	Length		0.40%	3.2	Gage
104	Grooves missing or improper		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.19	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First Article and Quality Conformance Inspection Tables.

4.4.3.1 Dimensional control of molded and die cast component.

4.4.3.1.1 Qualification of molds and dies. The examination and acceptance of the first article is generally accepted as qualifications of the related molds and dies. Subsequent qualifications are mandatory in order to release molds and dies, or individual cavities which were rejected and removed from production due to producing a defective product, due to wear, breakage, etc. or because of a change in configuration of the component by a revision to the tech data package and the contract. A sample of three consecutively produced components shall be selected from each mold and die cavity and examined in accordance with the applicable Classification of Defects identified as "Die Check". If one or more components prove to be defective, the cavity producing the defective part shall not be released for production. Cavities not released for production and cavities removed from production because of forming defective components during a production run may, after repair or rework be subjected to the qualification test and, if found acceptable, be returned to production. A die containing multiple cavities and found to contain a defect producing cavity shall not be utilized in production until that cavity is repaired or a positive means of isolating that cavity from production is incorporated in the mold or die.

4.4.3.1.2 Production verification of mold or die. The first component from each cavity produced during a production run and the last component from each cavity produced during the same production run shall be examined in accordance with the applicable Classification of Defects identified as "Product Verification". A production run is defined as the continuous forming of consecutive components by a mold or die which has been prepared in accordance with its operating specifications, and maintained in that condition from when the first sample is selected until the last sample is formed which represents that production run. The production run represented by these two samples shall be rejected if either of the two samples are found to be defective. Samples shall be permitted to cool to room temperature, 80 $\pm$ 20 degrees Fahrenheit prior to examination for compliance to dimensional requirements.

A production run may be kept operating to produce all of the components required under the contract and the contractor may elect to cut-off certain quantities for deliveries. This is acceptable provided one component is selected at the end of that quantity. This sample may be also considered as the first component produced during the next quantity.

4.4.4 Inspection equipment. The inspection equipment required to perform the examination and tests prescribed herein is described in the 'Paragraph Reference/Inspection Method' column in the tables

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

starting with paragraph 4.4.2.1 and in 4.4.3. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See section 6 of MIL-A-48078 and 6.3 herein.

4.5 Methods of inspection.

4.5.1 Materials, components and processes. Compliance with all requirements of Section 3 of this specification shall be ascertained by current and continuing examination of inspection and test data to determine that all components (parts, subassemblies, and materials) have been inspected and tested and found to comply with their respective drawing and specification requirements, and that all specified manufacturing processes have been followed.

4.5.1.1 Visual and mechanical inspections. The visual, manual and mechanical inspections and tests shall verify compliance with the requirements of Sections 3 and 5 of this specification in accordance with 4.4.2 and 4.4.3 herein and Table 1.

4.5.2 Embrittlement.

4.5.2.1 Springs. The spring shall be stretched along its longitudinal axis until the spring no longer returns to its original length or profile. Any spring that breaks prior to this point shall be classed defective. Springs subjected to this test shall not be returned to the lot. If one or more springs fails the test, the batch of springs shall be rejected.

4.5.2.2 Pull pin and wire. The formed pull pin and pull wire shall be flexed to the point of minimum permanent deformation. The wire shall be flexed in a manner to straighten the component and the pin shall be flexed to bend the component until upon removal of the deforming pressure the ring no longer returns to its formed shape and the pin contains a permanent slight bend. Any component that breaks or splits prior to this condition shall be classed defective. Components subjected to this test shall not be returned to the lot. If one or more components fail the test, the batch of components shall be rejected.

4.5.3 Freedom of latch test. The assembly shall be held base down with the axis of the fuze vertical and firing pin held at the highest position at which the windshield would retain it. The firing pin shall be depressed until it stops and the unit shall be inspected for protrusion of the firing pin point into the slider cavity. If the pin protrudes into the cavity the unit shall be classed a critical defect and removed from the lot. This entire test shall be performed automatically and accept/reject decisions shall be mechanically accomplished. If the critical assembly is acceptable an indelible mark shall be automatically applied to the

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T04:04Z
Check the source to verify that this is the current version before use.

assembly per the applicable drawing before removal from the test fixture. Additionally, the assembly shall then be rotated to a nose down position with the fuze centerline vertical and the firing pin retained at the lowest point allowed by the windshield. The firing pin shall then be pushed upward and must move until the head bottoms on the inner body assembly. The firing pin shall then be released and it must return without external force to the original starting position. If the pin does not bottom or does not return, the unit shall be classed a major defect and removed from the lot.

4.5.4 Slider cavity function and safety test. The assembly shall accept a "go" gage whose functional requirements are specified in Sketch 1 of Fig. 1. If the assembly will not accept the "go" gage it shall be classed a major defect and removed from the lot. Additionally, the assembly shall not accept either of the two "no-go" gages whose functional requirements are specified in Sketches 2 and 3 of Fig. 1. The "no-go" gaging shall be performed automatically and the accept/reject decision shall be mechanically accomplished. If any assembly accepts either "no-go" gage it shall be classed a critical defect, and removed from the lot. If the assembly successfully passes both "no-go" tests an indelible mark shall be automatically applied per the applicable drawing before the assembly is removed from the test fixture.

4.5.5 Slider assembly functional test. The slider assembly shall be placed in a test fixture whose required functional dimensions appear in Fig. 2 attached to this specification. The test fixture should be so designed and operated that functional design requirements are checked in the following ways: Ability to install assembly into fixture, ability to rotate slider with applicable force from SQ to Delay position with controlled force and align properly in both positions and the ability to be released by arming pin. If any assembly fails to meet any of the above requirements, it shall be classed a major defect and removed from the lot. Additionally, the ability to be blocked by the arming pin must be automatically checked with the accept/reject decision being mechanically performed. If any assembly fails to be blocked it shall be classed a critical defect and removed from the lot. If the assembly passes the blocking test an indelible mark shall be automatically applied per the applicable drawing before the assembly is removed from the fixture.

4.5.6 Selector cap torque test. The assembly shall be placed in an appropriate fixture and the torque required to move from SQ to Delay setting and back shall be measured with a device capable of checking within a suitable torque range. If the torque required for any assembly is not within the applicable limits, it shall be classed a Major Defect and that assembly shall be removed from the lot. In addition, the torque measuring device shall check that the selector cap stops within the required range of rotation in both the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

SQ and Delay mode. If any selector cap turns too far or not far enough at either setting, that fuze shall be classed defective and removed from the lot.

4.5.7 Critical check test. The body assembly shall be fixtured securely nose-up. A 4.2 lb. min. load shall be applied to the top of the firing pin and 3.3 lb. min. load shall be applied to the top of the striker. If either or both components move down past the respective minimum dimensions on the drawing the assembly shall be classed a critical defect and removed from the lot. This test shall be automatically performed and accept/reject decision shall be mechanically accomplished. If the assembly successfully passes the above critical test an indelible mark shall be automatically applied per the applicable drawing before the unit is removed from the fixture. Additionally, with 4.2 lb. load on the firing pin, the 3.3 lb. load on the striker, both setback pins shall be depressed .400 inches max. If the load required to accomplish this exceeds 2.00 lbs. for either or both setback pins, the assembly shall be classed a major defect and removed from the lot.

4.5.8 Leak test.

4.5.8.1 Front body assembly leak test. A fixture designed to fit as tightly as possible around the shoulder of the fuze shall be used. The test procedure shall assure that the complete fuze is subjected to the test, but each section shall be tested separately, i.e., the fuze sections forward and rearward of the holding fixture. The test shall be conducted at ambient temperature using 3 $\pm$ 0.5 psi. Any sample which exhibits a pressure drop of more than 0.5 psi in 15 seconds minimum after stabilization shall be classed defective. A fixed volume of air shall be used so as to detect gross leaks.

4.5.8.2 Rear body leak test. A fixture which fits tightly around the outside of the rear body shall be designed. The test shall be conducted at ambient temperature using 3 $\pm$ 1 psi. Any sample which exhibits a pressure drop of 0.5 psi in 15 seconds minimum after stabilization shall be classed defective. A fixed volume of air shall be used so as to detect gross leaks.

4.5.9 Transportation vibration.

4.5.9.1 Contractor's facility. The test samples (M567 and XM935) shall be identified by the application of the letters "TV" in white or yellow paint or ink. The letters shall be 1/2 inch to 1 inch in height. These samples shall be modified by removing the retainers, (dwg. 9246264) with the tape, from the front body assemblies (dwg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

9246241) and installing lead discs (dwg. 9248620) and disc retainers (dwg. 9278621) conforming to the assembly torque requirements specified on dwg. 9246241. After completion of the specified Transportation Vibration test, the assemblies shall not be disassembled but shall be examined visually and radiographically to determine compliance with the specified requirement. The lot shall be rejected and testing for the Government stopped if any assembly is found to contain a safety type defect. NOTE: This test may be conducted with fuzes assembled to the XM935 configuration with approval of the contracting officer. These samples shall be modified by removing the tape from the front body assemblies (dwg. 9246241) and proceeding as specified herein.

4.5.9.2 Government proving ground. The test samples shall be identified by the application of the letters "TV" in white or yellow paint or ink. The letters shall be 1/2 inch to 1 inch in height. The M567 samples shall be loaded and assembled to conform to dwg. 9245242. The XM935 samples shall be loaded and assembled to conform to dwg. 9255258. After completion of the specified Transportation Vibration test, the assemblies shall not be disassembled but shall be examined visually and radiographically to determine compliance with the specified requirements. The lot shall be rejected and testing for the Government stopped if any assembly is found to contain a safety type defect.

4.5.10 Jolt and jumble test. This test shall be performed in the 81MM configuration regardless of which fuze is being manufactured. To the front body assembly M567 (dwg. 9246241) and rear body (dwg. 9246215) shall be assembled. For the front body assembly, XM935 (dwg. 9255261) the shipping cap (dwg. 9255255) shall be removed and a retainer (dwg. 9246264) and the rear body shall be assembled. The test shall be conducted in accordance with the procedures outlined in MIL-STD-331, Test 101.2 and 102.1. Upon completion of the jolt test, the fuzes shall not be disassembled, but shall be subjected to the Jumble test. After completion the fuzes shall be x-rayed to determine compliance with the requirements of para. 3.10 and MIL-STD-331. As a minimum requirement:

a. The slider shall not be in the armed position.

b. The setback pins shall not have moved so as to release the balls retaining the firing pin assembly or the striker.

c. The arming pin shall not have moved to the armed position.

d. The pull wire shall not have come loose in such a way as to not block the slider.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

e. The firing pin or striker shall not have moved past the balls to the armed position.

If any fuze fails to meet the requirements of MIL-STD-331 or the requirements above, the lot shall be rejected. The contractor shall submit a summary of test results for this test in accordance with Data Item Description DI-R-1724, summarizing test results.

4.5.11 Arming and ballistic functioning.

4.5.11.1 Contractors facility. The balance of the front body assemblies shall be modified as in 4.5.9.1 except that they will not be marked. These samples and the samples from the transportation vibration test in 4.5.9.1 shall be assembled to inert loaded 81MM M374 Cartridges and fired from a mortar tube that is standard for this round at charge 0 and set SQ or Delay as specified in Table 1. These rounds should be fired at an elevation of 45 to 83 degrees at ambient temperature.

The contractor shall submit a summary of test results for these tests in accordance with "Data Item Description DI-R-1724".

4.5.11.2 Government proving ground. Subsequent to the successful completion of the arming safety test all of the remaining samples shall be loaded and assembled to conform to dwg. 9246242 (M567) or dwg. 9255258 (XM935). These samples and the samples from the Transportation Vibration test in 4.5.9.2 (first article only) shall be assembled to 81MM, M374 Cartridges (M567) or 60MM, M720 cartridge (XM935) loaded with high explosives, and fired from a mortar which is standard for this round.

4.5.12 Exterior and interior porosity. Inspection for both exterior and interior porosity may be performed upon the same sample. For the purpose of interior porosity inspection, the location of the sections shall be approximately as specified in Figure 3 attached to this specification. If any part fails to meet the applicable requirement, the lot of parts shall be rejected.

4.5.13 Latch shear test. The latch (dwg. 9246232) shall be placed in a fixture providing support such as found in the fuze. The upper lug shall be evenly loaded vertically. Inspection shall be made for any structural failure. Components shall not be returned to the lot. If any latch does not meet the applicable requirements the lot shall be rejected.

4.5.14 Detonator push-out test. The loaded slider assembly (dwg. 9246272) shall be installed in an appropriate fixture and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

required load shall be applied to both SQ and Delay detonators from the insensitive end. If any detonator moves under the load that slider assembly shall be removed from the lot.

4.5.15 Selector ring push-out test. This test shall be performed on special Outer Front Body Assemblies consisting of Outer Front Body (Dwg. 9246218), Selector Cap (Dwg. 9246222), Selector Ring (Dwg. 9246223) and O-Ring (Dwg. MS28775-015) assembled as specified on Dwg. 9246241. The Outer Front Body may be modified by removing the blind end of the Slider Cavity to provide a path for the punch for applying the required push-out load. The required load shall be evenly applied to the selector cap along the axial centerline of the slider bore in the direction to push the cap out of the assembly. The assembly shall be classed defective if the selector ring becomes disassembled from the assembly or if any movement of the selector ring is evident.

4.5.16 Lead cup sleeve push out test. The required load shall be evenly applied along the centerline of the inner body assembly to the lead cup sleeve. If the sleeve moves, the sample shall be classed defective.

4.5.17 Firing pin subassembly torque test. The firing pin holder shall be held in a fixture and a torque of 15 inch-ounces shall be applied to the firing pin point in a counter-clockwise direction. If any movement is observed, the unit shall be rejected. Tested samples may be returned to the lot provided the surface finish has not been damaged.

4.5.18 Presence of spring pin. The presence of the spring pin shall be automatically inspected and the accept/reject decision shall be mechanically accomplished. All subassemblies which are acceptable shall have an indelible mark automatically applied before removal from the test fixture.

4.5.19 Retainer plug torque test. The protective tape shall be removed from the retainer and the fuze fixtured securely. The minimum required torque shall be applied to the retainer plug and if any movement is observed, the sample shall be classed defective. These samples may be returned to the lot only if requirements for re-conditioning and reapplication of the protective tape, as specified on dwg. 9246241, are observed.

4.5.20 Ballistic test (proving ground).

4.5.20.1 Functioning test. The sample fuzes less boosters, shall be assembled to high explosive (HE) boosters and auxillary

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

boosters as appropriate. The fuzes shall then be assembled to the high explosive cartridge appropriate to the fuzes being tested (M374A2 and M374A3 for M567 or M720 for XM935) and fired from the appropriate mortar between 45° and 75° elevation. If any fuze fails to cause the shell to function high order, that fuze shall be classified as defective. If any fuze in either SQ or Delay setting mode causes the round to function prematurely, that fuze shall be classified as having a critical defect. The proving ground shall utilize a geophonic sensing device to determine delay functionings at maximum charge.

4.5.20.1.1 SQ phase. The sample fuzes shall be divided into two equal groups. The groups shall be fired at Charge 0 set SQ and maximum charge set SQ.

4.5.20.1.2 Delay phase. The samples fuzes shall be divided into two equal groups. The groups shall be fired at Charge 0 set Delay and maximum charge set Delay, respectively. Sample fuzes required to be TV tested shall be conditioned in accordance with para. 4.5.9 except that the fuzes shall be set Delay after conditioning. This test is for informational purposes only and shall not be considered for lot acceptance purposes except for premature functions.

4.5.20.1.3 Double sampling for SQ phase. After three consecutive lots have been found acceptable by conforming to the requirements of 4.4.2.46 or 4.4.2.47 as applicable, a reduced double sampling plan for the SQ phase of ballistic functioning shall be used. Sixty-two fuzes shall be fired, thirty-one at charge 0 set SQ and thirty-one at charge maximum set SQ. If three or more duds are encountered the lot shall be rejected. If two duds are encountered, a second sample of sixty-two fuzes shall be fired, thirty-one at charge 0 set SQ and thirty-one at charge maximum set SQ. If two or more duds are encountered in the testing of the second sample the lot shall be rejected. The lot shall be rejected and testing for the Government stopped upon encountering any premature functioning.

4.5.21 Arming safety test. Further assembly and loading of the front body assemblies shall be completed to yield fully loaded and assembled fuzes in accordance with dwg. 9246242 and MIL-F-50988 for M567's or dwg. 9255258 and MIL-F-48172 for XM 935's and in turn assembled to inert loaded 81MM M374 or 60MM M720 rounds as appropriate. The fuzes shall be set SQ and fired horizontally at charge 0 against a 1/2 inch plywood screen set at a distance of 100 ± 1 meter from the muzzle. A minimum muzzle velocity of 180 fps is required for every round. If one or more fuzes function prematurely or do not meet the applicable requirements when the projectile muzzle velocity is equal to or greater than the requirement, the lot

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:04Z
Check the source to verify that this is the currentversion before use.

shall be rejected. If a fuze meets all the applicable requirements, but the muzzle velocity for that round is below the requirement, that sample shall be classed a "no-test" and a new sample shall be selected and tested.

5. PACKAGING

5.1 Packaging requirements. The fuze parts shall be packaged in accordance with the requirements of Specification MIL-STD-1169 and dwg. 9272193 and 9272194.

5.2 Packing and marking. The fuze parts shall be packed and marked in accordance with the requirements of MIL-STD-1169 and dwgs. 9272193 and 9272194.

6. NOTES

6.1 Intended use. The parts and assemblies covered by this specification are intended for use on 60MM, HE, M720 and 81MM, HE, M374 Series Mortar Ammunition. This specification is intended to be used in conjunction with LAP specifications MIL-F-50988 (M567) and MIL-F-48172 (XM935) as appropriate.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of designs for approval. See MIL-A-48078. Submit equipment designs required to, Commander, ARRADCOM, ATTN: DRDAR-QAT-I, Dover, New Jersey 07801.

6.4 Data requirements. Delivery data required by this specification is cited in the following paragraph:

Paragraph	Data Requirement	Applicable DID
4.5.9	Quality Inspection Test, Demonstration and Evaluation Report	DI-R-1724
4.5.10	Quality Inspection Test, Demonstration and Evaluation Report	DI-R-1724
4.5.11	Quality Inspection Test, Demonstration and Evaluation Report	DI-R-1724

(Copies of data item descriptions required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

6.5 Check test for deterioration of detonators and delay elements. If the total elapsed time between the acceptance of the detonator or delay element and assembly of that lot into fuze lots exceed two years, or if the detonators or delay elements have been subjected to adverse conditions, however brief, at any time since previous tests, the detonator and delay element lots shall be check-tested as specified in MIL-D-14951, MIL-D-50998 or MIL-D-50420, whichever applies, immediately prior to assembly into fuzes. This test shall be conducted at Government expense without cost to the supplier who loaded the percussion primer or the supplier assembling the percussion primer into the fuze, and shall not constitute a basis for rejection against either supplier, except where deterioration has occurred as a direct result of carelessness in handling storage, etc., while the percussion primer lot is under the jurisdiction of either contractor.

6.6 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities are now under the cognizance of ARRADCOM.

6.7 Proving ground summary.

6.7.1 First article test.

			FUNCTIONING		
FUZE	WEAPON	CARTRIDGE	CHARGE	FUZE SETTING	QUANTITY
M567	81MM Mortar	M374A2 or M374A3	0	SQ	90
			0	Delay	15*
			Maximum	SQ	90
			Maximum	Delay	15*
XM935	60MM Mortar	M720	0	SQ	90
			0	Delay	15*
			4	SQ	90
			4	Delay	15*

*Delay setting results for information purposes only except for premature functioning. Five fuzes of the charge zero quantity shall be TV tested prior to ballistic testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

ARMING SAFETY

FUZE	WEAPON	CARTRIDGE	CHARGE	FUZE SETTING	QUANTITY
M567	81MM Mortar	M734 INERT	0	SQ	12
XM935	60MM Mortar	M720 INERT	0	SQ	12

TRANSPORTATION - VIBRATION

FUZE	WEAPON	CARTRIDGE	CHARGE	FUZE SETTING	QUANTITY
M567	81MM Mortar	M374 INERT	0 Maximum	SQ SQ	10 10
XM935	60MM Mortar	M720 INERT	0 Maximum	SQ SQ	10 10

6.7.2 Quality conformance test.

FUNCTIONING

FUZE	WEAPON	CARTRIDGE	CHARGE	FUZE SETTING	QUANTITY
M567	81MM Mortar	M374A2 or M374A3	0 0 Maximum Maximum	SQ Delay SQ Delay	62* 15** 62* 15**
XM935	60MM Mortar	M720	0 0 4 4	SQ Delay SQ Delay	62* 15** 62* 15**

*After three consecutive lots have been accepted, a double sampling plan shall be used. Sample size shall be reduced to 31. See paragraph 4.5.21.1.3.

**Delay setting results for information purposes only except for premature functoning.


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the currentversion before use.

ARMING SAFETY


FUZE	WEAPON	CARTRIDGE	CHARGE	FUZE SETTING	QUANTITY
M567	81MM Mortar	M374 INERT	0	SQ	12
XM935	60MM Mortar	M720 INERT	0	SQ	12

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensiveness of the changes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

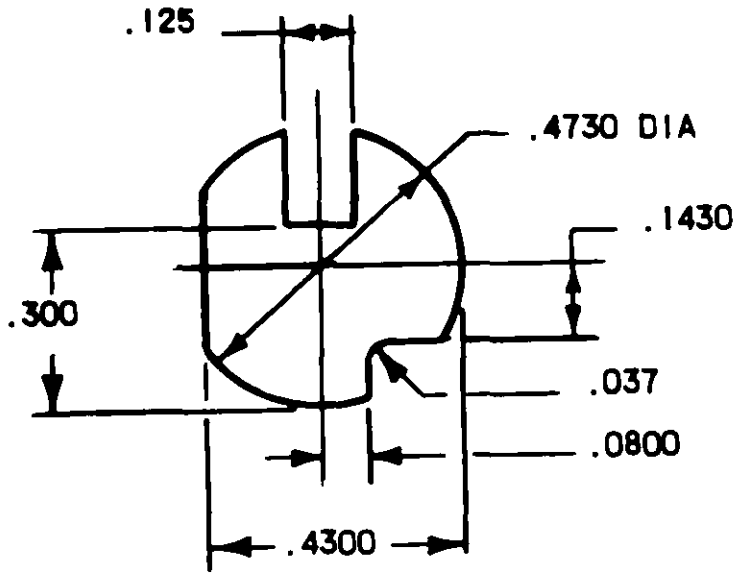

SKETCH NO. 1

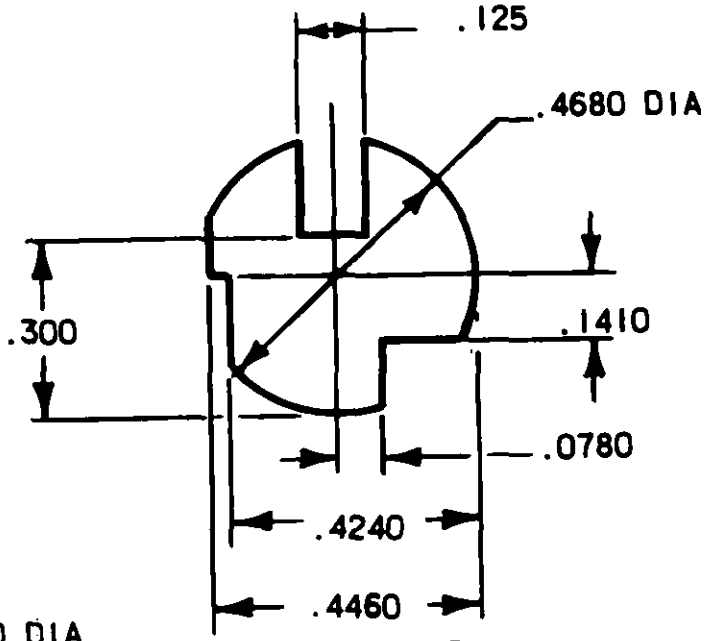

SKETCH NO. 2

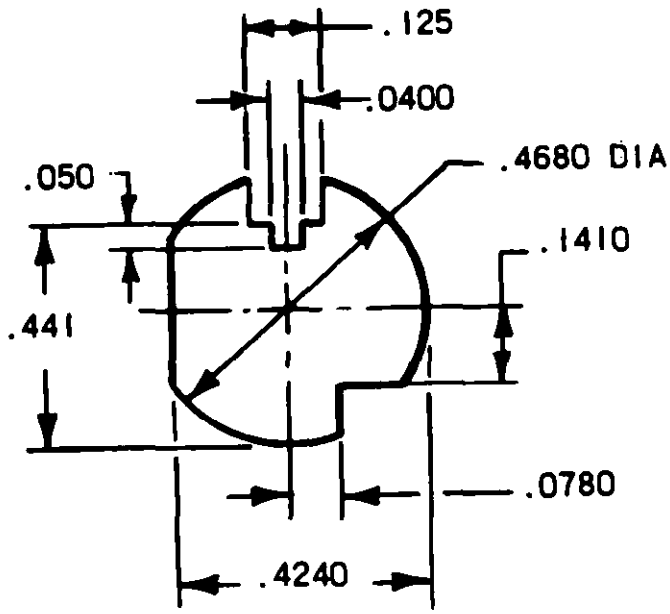

SKETCH NO. 3

FIG. NO. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

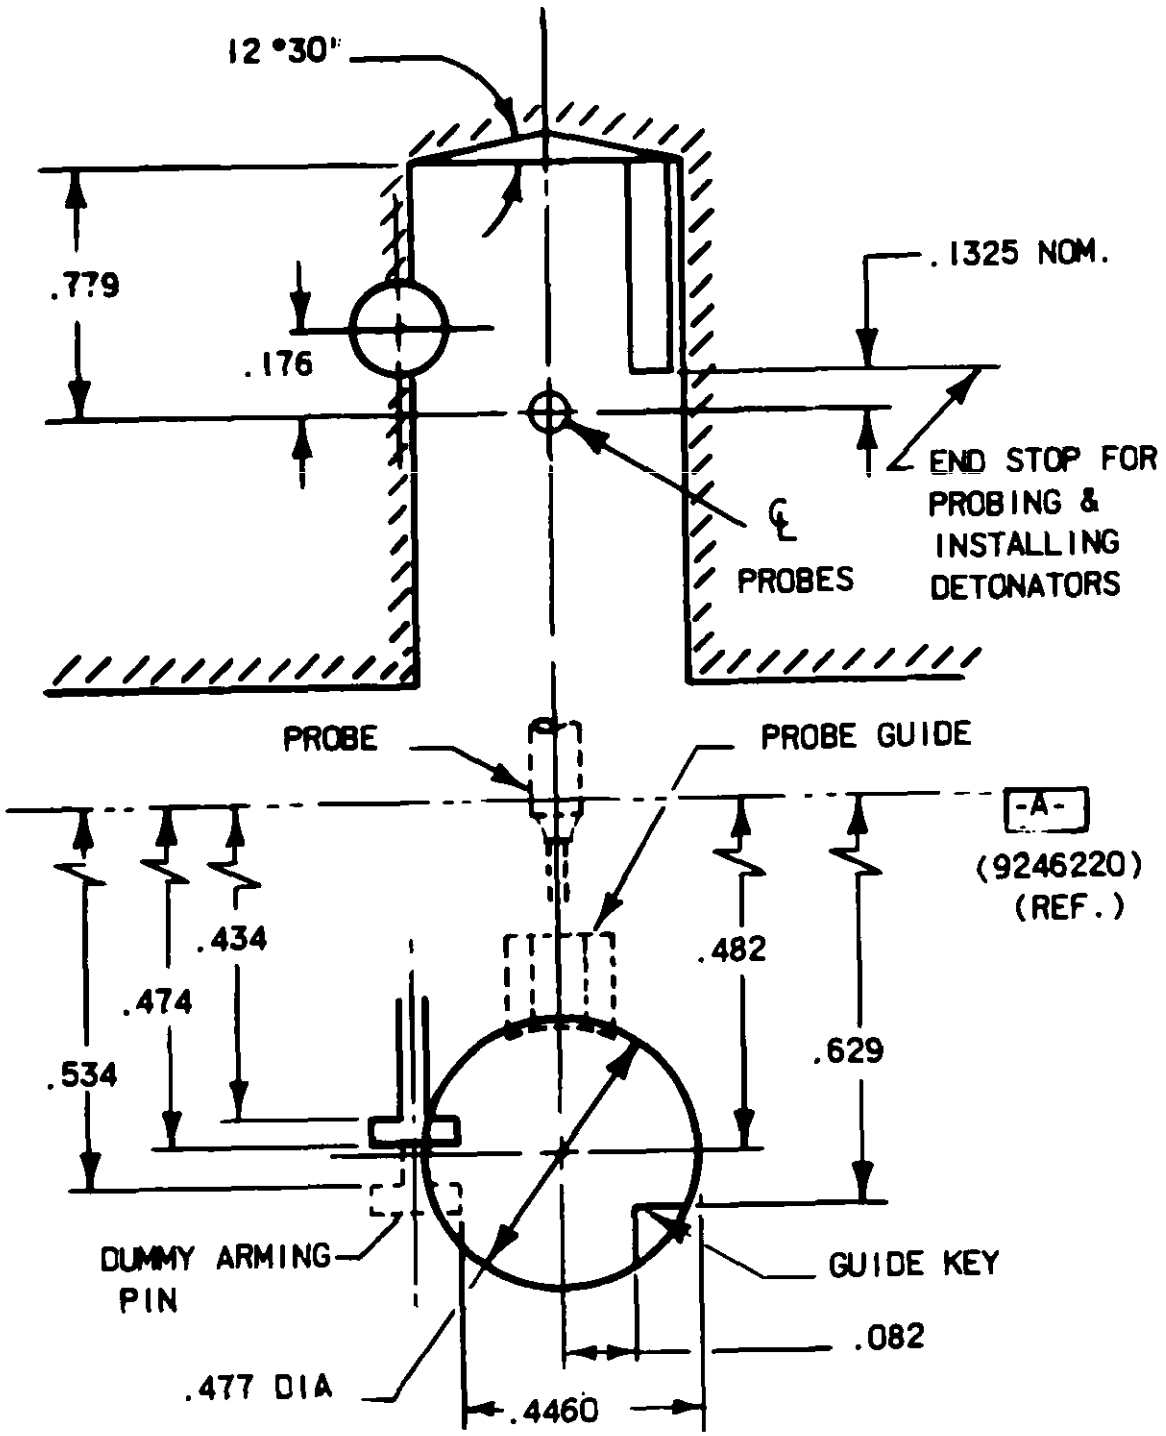


FIG. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

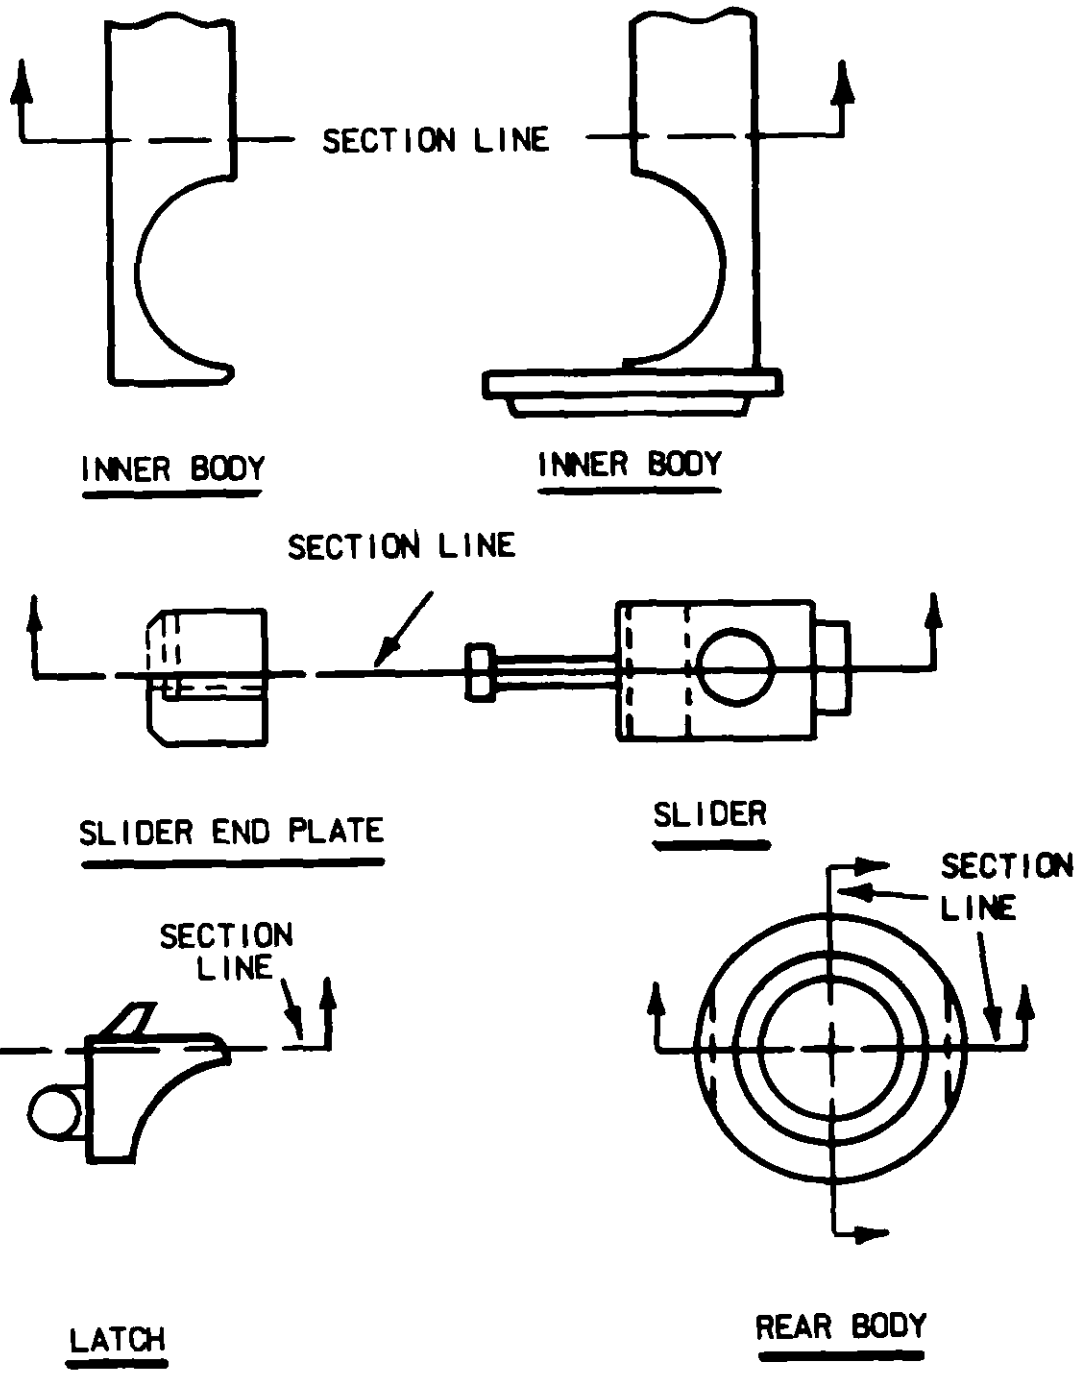


FIG. 3

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1390-A344)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-50945D Fuze, PD, ,457/XM935 Less Booster

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMMAND
ATTN: DRDAR-QAT
DOVER. NEW JERSEY 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:04Z
Check the source to verify that this is the current version before use.