MIL-N-51287C(EA)
8 August 1983
SUPERSEDING
MIL-N-51287B(EA)
20 January 1977

MILITARY SPECIFICATION

NOSECUP ASSEMBLIES, CHEMICAL-BIOLOGICAL MASK, C10

This specification is approved for use by US Army Armament, Munitions and Chemical Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of chemical-biological mask nosecup assembly.

1.2 Classification. Nosecup assemblies shall be of the following sizes, as specified (see 6.2):

Nosecup Assembly, Medium - Drawing D5-2-1017
Nosecup Assembly, Large - Drawing D5-2-1018
Nosecup Assembly, Extra Small - Drawing D5-1-548

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-TSC-S, Aberdeen Proving Ground, MD 21010 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

US ARMY ARMAMENT, MUNITIONS AND CHEMICAL COMMAND

CHEMICAL RESEARCH AND DEVELOPMENT CENTER

D5-1-548	-	Nosecup Assembly, Chemical-Biological Mask, C10, Extra Small.
B5-2-1034	-	Disk, Valve, Nonmetallic, Inlet and Nosecup.
D5-2-1017	-	Nosecup Assembly, Chemical-Biological Mask, C10, Medium.
D5-2-1018	-	Nosecup Assembly, Chemical-Biological Mask, C10, Large.
B136-14-170-2	-	Air Leakage Tester, Flow Type, Q211, Assembly.
D136-19-14	-	Puncture Tester, Natural Rubber, Q38, Assembly.
E136-19-22	-	Flexibility Tester, Natural Rubber, Q37, Assembly.

PUBLICATIONS

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

CHEMICAL SYSTEMS LABORATORY DIRECTIVE

No. 618 - Ozone Resistance Test of Natural Rubber Material.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

ASTM STANDARDS

D412 - Tension Testing of Vulcanized Rubber.
D572 - Accelerated Aging of Vulcanized Rubber by the Oxygen-Pressure Method.
D573 - Accelerated Aging of Vulcanized Rubber by the Oven Method.
D624 - Tear Resistance of Vulcanized Rubber.
D2240 - Indentation Hardness of Rubber and Plastics by Means of Durometer.

(Application for copies of the above publications should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103.)

SCHWARTZ, TULIPAN, AND BIRMINGHAM

Occupational Diseases of the Skin.

(This publication may be obtained from the publishers: Lea and Febiger, Philadelphia, PA).

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. All materials cited on Drawing D5-1-548, D5-2-1017, or D5-2-1018, as applicable, and on the subsidiary drawings shall conform to the specifications listed thereon or to the specific characteristics set forth on the drawings.

3.1.1 Rubber compound. The rubber compound shall be nonblooming, except for slight wax-type bloom, and shall contain no less than 65 percent, by volume, of new natural rubber. The compound shal be free from lead or mineral sulfates.

3.1.2 Antioxidants and accelerators. The rubber compound shall contain only approved antioxidants and accelerators (see 3.1.6).

3.1.3 Antiozonide. The rubber compound shall contain an antiozonide.

3.1.4 Copper and manganese inhibitor. The rubber compound shall contain a copper and manganese inhibitor.

3.1.5 Coloring materials. The rubber compound shall be colored by carbon black as required.

3.1.6 Toxicity. The nosecup shall not cause undue sensitization or primary irritation of the wearer's skin. Objective evidence shall be submitted in accordance with 4.1.2.2. Once the rubber formulation has been approved by the Government, the contractor shall not make a major change (6.4) in the formulation or in the curing process.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:05Z
Check the source to verify that this is the current version before use.

3.2 Components. All components of the nosecup assembly shall conform to the specifications and drawings listed on Drawing D5-1-548, D5-2-1017 or D5-2-1018, as applicable, and its subsidiary drawings.

3.3 Manufacture and assembly. The nosecup shall be manufactured, in one piece, by the conventional process of molding under heat and pressure. Each size of nosecup assembly specified in the contract or order shall be manufactured and assembled in accordance with the applicable drawing, D5-1-548, D5-2-1017 or D5-2-1018.

3.3.1 Repair of flaws. Nosecups with small flaws [major or minor defects (see 6.7] may be repaired and accepted provided the repair is vulcanized with material of the same approved formulation as the nosecup and the repaired area meets the requirements of physical properties of 3.4. The appearance of the nosecup repair shall be such that the color and shape blend into the surrounding area with no break in surface continuity and no feather edges.

3.3.2 Test slabs. Test slabs 6 by 6 inches, by 0.075 $\pm$ 0.010 inch shall be made from stock representative of the formulation used for the preproduction sample and from each sublot during regular production of nosecups. The slabs shall have a cure equivalent to that of the regular production nosecup (see 6.3).

3.4 Physical properties. Physical properties of nosecup shall conform to the requirements shown in table I when tested as specified therein.

3.5 Preproduction. Prior to the start of regular production, a preproduction lot of nosecups and nosecup assemblies shall be produced for examination and testing in accordance with 4.3. Any change in formulation, manufacturing methods, or molds shall require a new preproduction lot.

3.6 Critical areas. The peripheral sealing area of the valve and the flange surfaces shall be considered as critical areas of the nosecup.

3.7 Valve leakage. Leakage through the valve assembly shall not exceed 150 milliliters per minute when subjected to a pressure differential of one inch of water when tested as specifed in 4.4.4.3 (see 6.8).

3.8 Workmanship. The nosecup inner and outer surfaces shall be smooth and free from imperfections, such as pits, bumps, porous areas, cracks, splits, checks, flash, abrasions, blisters, or foreign matter. The rubber shall be compact and free from holes and bubbles. Ridges of mold parting lines on outer surfaces shall not be considered as flash when closely trimmed. Rips, tears, or punctures shall be considered as damage. Workmanship defects of a magnitude greater than the referee standards established by the Government for major and minor defects (see 6.7) shall be categorized in the appropriate defect class. The surface irregularilties or dents in valve seating surface which would impair its use shall also be considered as damage. The protective finish on valve shall not be missing or incorrect. The nosecup assemblies shall be free from burrs or sharp edges.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:05Z
Check the source to verify that this is the current version before use.

TABLE I. Physical properties of nosecup

Property	Unaged	After heat aging	Test paragraph	ASTM Test Method
Average tensile strength, MPa, min	20.7	17.6	4.4.4.2.1	D412
Average ultimate elongation, % min	600		4.4.4.2.1	D412
Percent increase, max		20		
Percent decrease, max		25		
Average tensile stress at 200% elongation, MPa	1.72 to 3.10	1.72 to 3.10	4.4.4.2.1	D412
Individuals, MPa, min	1.65	1.65		
Average tear resistance, kN/m, min			4.4.4.2.1	D624
Die A or B	52.5	36.8		
Die C	39.4	28.9		
Average tension set at 75% ultimate elongation, % max	20		4.4.4.2.1	D412
Average hardness (Shore "A" or "A2")	47 ± 3		4.4.4.2.1	D2240
Ozone resistance, min	80		4.4.4.2.2	
Flexibility			4.4.4.2.3	
Units at 24 ± 3°C, min	7.5			
Units retained at -32° ± 3°C, min	4.8			
Puncture resistance, psi, min	9.5		4.4.4.2.4	

3.9 Resistance to oxygen-pressure aging. The nosecup (Dwg E5-1-547, D5-2-970 or D5-2-972, as applicable) shall show no cracking or increased hardness or tackiness after 72 hours of accelerated aging in oxygen, at a pressure of 2.10 ± 0.10 megapascals (MPa) and a temperature of 70° ± 1°C, when tested as specified in 4.4.4.4.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.

4.1.1 Contractor's responsibility. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.2 Objective evidence.

4.1.2.1 Materials and packaging. The contractor shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

4.1.2.2 Toxicity. After date of award of contract, and within the time specified in the contract, and without additional cost to the Government, the contractor shall submit the information listed below which will constitute his evidence for establishing the nontoxicity of the information. The US Army Surgeon General will act as advisor to the Contracting Officer in evaluating this data for determining if the formulation and parts are acceptable. The information relating to the description of the candidate formulations may be classified as "company confidential" in which case it will be so treated by the Government.

a. Information relating to candidate formulations:

(1) The name of the contractor and the producing subcontractor, if any.

(2) Description of the item and end item and copies of applicable specifications shall be included.

(3) The number of items under procurement for which the proposed formulation shall be used.

(4) A description of the candidate formulation shall include:

(a) The chemical and trade names of the ingredients.

(b) The quantity of each ingredient, including the range of variation that can be tolerated without loss of quality in the finished item. Quantities shall be expressed in percent by weight and parts by weight.

(c) The proposed mold lubricants, dusting powders, wet spray or other materials used in the manufacturing process.

(d) Proposed cure times and temperatures.

(e) Results of previous toxic evaluation demonstrating acceptability or evidence of prior government approval of the proposed formulation.

(f) Information and data to substantiate the nontoxicity of the product. This information shall include a complete description of any programs the contractor has carried out to prove nontoxicity, such as prior patch testing with unlined items the use of which involves direct contact with the skin; evidence that the proposed formulation is the same as that used in his commercial products; and information on the nature, extent, and length of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

time of his commercial experience with the formulation. Other evidence may include references to technical or other scientific publications, commercial laboratory reports, opinions or statements of recognized authorities and agencies in the field of dermatology, and any other pertinent data.

b. Patch testing. If the above information is not sufficient to establish nontoxicity of the rubber formulation, the contractor shall perform 200 patch tests under the supervision of competent medical authorities in the field of dermatology. These patch tests shall be at no additional cost to the Government and shall be conducted in accordance with the prophetic patch test method described in "Occupational Diseases of the Skin", by Schwartz, Tulipan, and Birmingham. A control rubber for use in the patch tests shall be furnished by the Government upon written request of the contractor. The patches composed of the candidate rubber formulation shall not produce positive reactions in excess of that of the control rubber patches. A copy of the test results and the evaluation thereof by the medical authorities described above shall be furnished to the contracting officer.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 Preproduction inspection.

4.3.1 Sample. A preproduction sample of 15 (10 trimmed and 5 untrimmed) nosecups from each mold cavity, 10 nosecup assemblies, and 39 tests slabs (see 3.3.2) shall be manufactured using the same methods, materials, equipment and rubber formulations as will be used during regular production.

4.3.2 Inspection procedure.

4.3.2.1 For examination and nondestructive tests. The sample nosecups, and nosecup assemblies shall be inspected for all requirements of the drawings and this specification.

4.3.2.2 For destructive tests. Test slabs, produced in accordance with 3.3.2 and 4.3.1 shall be tested in accordance with 4.4.4.2. One nosecup shall be tested in accordance with 4.4.4.4.

4.3.3 Acceptance/rejection criteria. The preproduction sample shall meet the examination and tests specified in 4.3.2.1 and 4.3.2.2 to be acceptable. The contractor shall obtain written approval from the contracting officer before proceeding with regular production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Lotting. A lot of nosecup assemblies shall consist of the assemblies of one size produced in sequence during one month as indicated by the dots in the medallion on the nosecup; however no more than one lot of nosecups shall be represented in any one lot of nosecup assemblies. A sublot shall consist of the nosecups produced from one batch of material (see 6.5). A new lot shall be established following the occurence of any event affecting the homogeneity of the lot or use of an alternative approved formulation. Acceptably repaired nosecups from any accepted parent lot may be incorporated into and assume the lot number of the current production lot.

4.4.2 Sampling.

4.4.2.1 For examination and nondestructive tests. Sampling shall be conducted in accordance with MIL-STD-105.

4.4.2.2 For destructive tests. One nosecup and 39 test slabs produced in accordance with 3.3.2 shall be submitted with each sublot for testing.

4.4.3 Inspection procedure.

4.4.3.1 For examination and nondestructive tests. The sample nosecups and nosecup assemblies from the regular production lot shall be examined in accordance with the classification of defects and with MIL-STD-105.

4.4.3.2 For destructive test. The nosecup shall be tested in accordance with 4.4.4.4, and the test slabs shall be tested in accordance with 4.4.4.1 and 4.4.4.2. The acceptance number is zero.

4.4.3.3 Classification of defects.

(a) Nosecup assembly, chemical-biological mask, C10 Drawing D5-1-548, D5-2-1077 and D5-2-1018).

Categories	Defects	Acceptance standards
Critical:	None defined	
Major:	AQL 0.25 percent defective	
101	Valve leakage	4.4.4.3
	AQL 1.0 percent defective	
102	Incorrect assembly	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

Minor: AQL 2.5 percent defective

201	Protective finish on valve missing or incorrect
202	Burrs on sharp edges

(b) Nosecup (Drawing E5-1-547, D5-2-970 and D5-2-972).

Categories	Defects
Critical:	None defined
Major:	AQL 0.065 percent defective
101	Imperfections of damage in critical areas (see 3.6)
	AQL 1.0 percent defective
102	Thickness
103	Deformation or permanent set
104	Marking incorrect
105	Workmanship [other than Major 101, and Minor 201 and 202 in (a), see 3.8]
106	Buttonholes incorrect or incorrectly located
	AQL 2.5 percent defective
201	Excess flash or improper trim
202	Marking missing or illegible

4.4.4 Tests.

4.4.4.1 Test specimens. Specimens shall not be buffed or stretched before testing. Twenty specimens, two from each of 10 test slabs, shall be taken for tensile strength, ultimate elongation, and tensile stress testing. Ten specimens shall be tested before aging and 10 tested after aging. Six specimens, two from each of three test slabs, shall be taken, without aging, for hardness and tension set testing. Twenty specimens, two from each of 10 test slabs, shall be taken for tear resistance testing. Ten specimens shall be tested before aging and ten tested after aging. Twelve specimens, two from each of six test slabs, shall be taken for ozone resistance testing. Eight specimens, two from each of four test slabs, shall be taken for flexibility testing. Six specimens, one from each of six test slabs, shall be taken for puncture resistance testing. The test specimens selected for heat aging shall be aged in an air oven at a temperature of 70 $\pm$ 1°C for a continuous period of 168 $\pm$ 1 hours or at a temperature of 100 $\pm$ 1°C for a continuous period of 24 $\pm$ 1 hours, as specified in ASTM D573 (see 6.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

4.4.4.2 Physical properties tests.

4.4.4.2.1 Tensile strength, ultimate elongation, tensile stress, tear resistance, tension set, and hardness. Tensile strength, ultimate elongation, tensile stress, tear resistance, tension set, and hardness shall be determined in accordance with ASTM standards specified in table I. The angle-type or crescent-type die shall be used for tear resistance testing.

4.4.4.2.2 Ozone resistance. Ozone resistance shall be determined in accordance with Directive No. 618.

4.4.4.2.3 Flexibility. Flexibility shall be determined with the Q37 Natural Rubber Flexibility Tester Assembly (E136-19-22). Flexibility shall be read on the grid of the apparatus. Four specimens shall be tested at 24 ± 30°C and four specimens shall be tested at -32 ± 3°C after being conditioned for 72 hours at that temperature.

4.4.4.2.4 Puncture resistance. Resistance to hydrostatic pressure shall be determined with the Q38 Natural Rubber Puncture Tester Assembly (D136-19-14).

4.4.4.3 Valve leakage. The nosecup valve assembled with a disk (Drawing B5-2-1034) and crimped into the nosecup as specified on Drawing D5-1-548, D5-2-1017 or D5-2-1018, as applicable, shall be tested for leakage with the Q211 Flow Type Air Leakage Tester Assembly (Drawing B136-14-170-2).

4.4.4.4 Resistance to oxygen-pressure aging. The nosecup shall be tested in accordance with ASTM D572.

5. PACKAGING

5.1 Unit packing, packing, and marking, interplant shipment (see 6.9). The nosecup assemblies shall be unit packed and packed to provide adequate protection from physical damage from the supply source to the first receiving activity for immediate use or further processing. Shipping containers shall be in compliance with the rules and regulations applicable to the mode of transportation. Marking shall be in conformance with Fed. Std. No. 123. In addition, the following marking shall appear on all unit packages and shipping containers.

(1) Nosecup size
(2) Composition of nosecup and formulation code.
(3) Nomenclature of mask to which nosecup pertains.
(4) Date of cure.

5.2 Repair parts. When nosecup assemblies are procured for storage and issue as repair parts, preservation, unit packing, packing and marking shall be as specified on the packaging data sheet which is identified by the National Stock Number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The nosecup assemblies covered by this specification are intended for use in the manufacture of M17, M17A1 and M17A2 Field Chemical-Biological Masks.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Size of nosecup assembly.
(c) Preproduction:

(1) Time allowed for contractor submission of samples for Government test and evaluation after award of contract.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the contractor whether or not to proceed with production.

6.3 Equivalent cure. Slabs and nosecups of the same stock and gage are considered to have equivalent cures or the same state of valcanization when:

(a) Their free-sulfur contents do not vary more than 10 percent.
(b) Their average tensile-stress values at any given elongation (other than ultimate elongation) do not vary more than ± 2.5 percent.
(c) Their curing times can be equated in the following equation:

$$t_2 = t_1 \times 1.6^{(T_1 - T_2)/10}$$

where: t_1 = Minutes of cure at temperature T_1,
t_2 = Minutes of cure at temperature T_2,
T_1 = Temperature (°F) of cure for time t_2, and
T_2 = Temperature (°F) of cure for time t_2.

For convenience, the nomograph in figure 1 may be used instead of the mathematical computation time-temperature relationships in determining equivalent cure.

6.4 Major change. The term applies to any change in formulae, processing, or curing of currently approved rubber stocks which may induce toxic characteristics and cause casualties. The major change should be considered effected when one or more of the following conditions occur:

(a) Components of formulae are varied in excess of the limitations stated in the manufacturer's tolerance (see 4.1.2.2).
(b) The addition or deletion of one or more components of formulae.
(c) Substitutes for one or more components of formulae without advance approval of the Government.
(d) Deviations from the submitted and approved factory mold cure exceeding +5°F or -10°F, even though equivalent cure is attained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

EQUIVALENT CURE TIME

FOR

NATURAL RUBBER

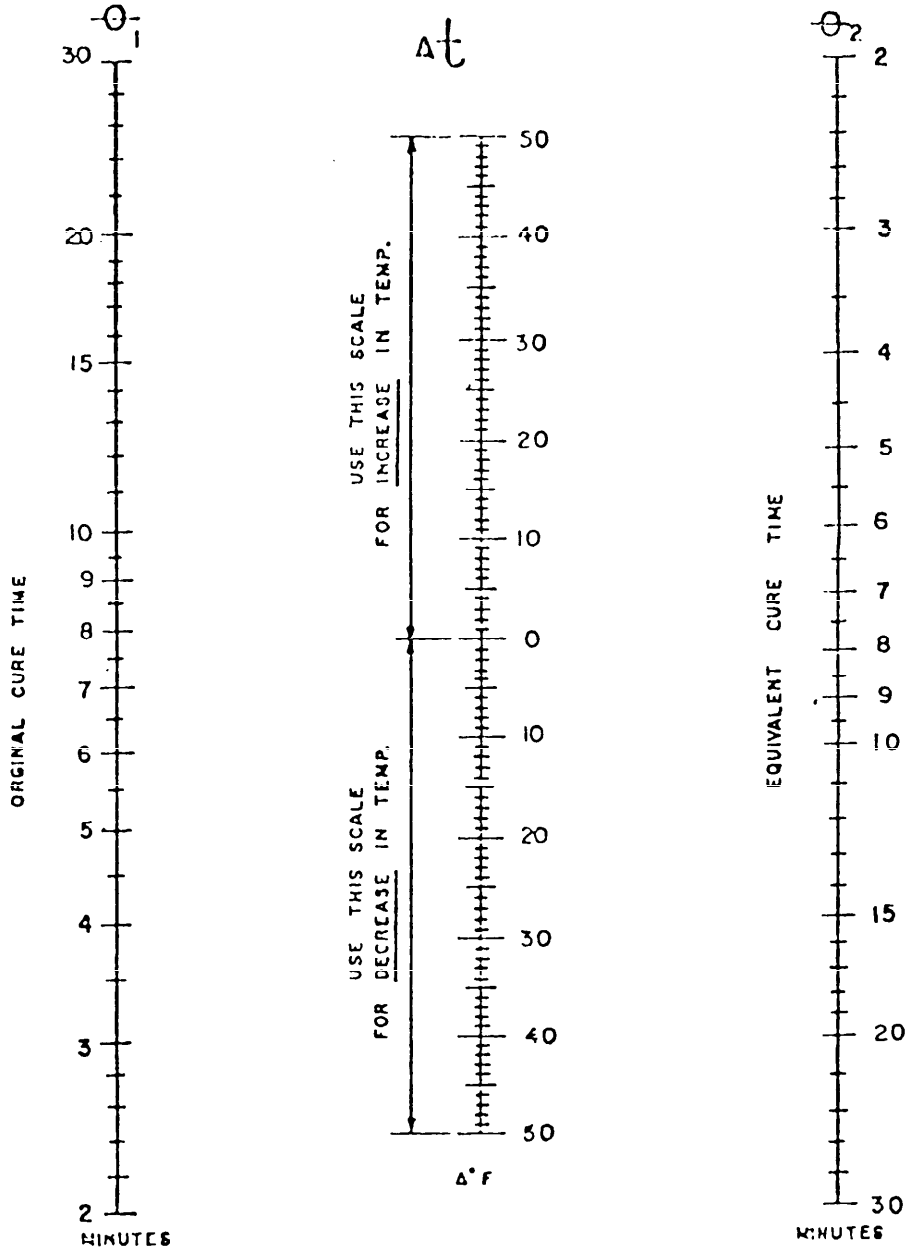


Figure 1.

USING A STRAIGHT EDGE, CONNECT THE ORIGINAL CURE TIME ON θ_1 SCALE WITH THE CHANGE OF CURE TEMPERATURE ON Δt SCALE. EXTEND THE LINE UNTIL IT INTERSECTS θ_2 SCALE AT THE EQUIVALENT CURE TIME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

(e) Use of mold lubricants, dusting powders, or wet sprays not submitted with original information for toxicity approval.

6.5 Batch. A batch is defined as the quantity of material which has been manufactured by some unit chemical process or subjected to some physical mixing operation intended to make the final product substantially uniform.

6.6 Aging. Aging at 100° ± 1°C for a continuous period of 24 hours is slightly more severe on rubber than aging at 70 ± 1°C for 168 consecutive hours; therefore, specimens that fail to meet requirements when aged at the higher temperature, may be discarded and replaced by new specimens aged at 70 ± 1°C for 168 consecutive hours.

6.7 Referee standards. During preproduction and subject to later revision during production, the Government will establish referee standards to define the type and category (major and minor) of each defect. This classification will be based upon the defect magnitude and potential deleterious effect on intended use.

6.8 Valve disk. The valve disks required for use in performing the valve leakage of nosecup assembly tests will be furnished by the Government and should be obtained as directed by the contracting officer.

6.9 Interplant shipment. Packaging for interplant shipment is for supplies and materials that do not directly enter the military supply system. Typical interplant shipments are shipments from a vendor to a subcontractor or a prime contractor or from a subcontractor to a prime contractor, or from a vendor or contractor to a military arsenal or plant.

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 4240-A788

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

[illegible] shall be packed as specified in 5.2.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

LD

PARTMENT OF THE ARMY

OFFICIAL BUSINESS
ALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
Armament Research and Development Center
US Army Armament, Munitions and Chemical Command
ATTN: DRSMC-TSC-S(A)
Aberdeen Proving Ground, MD 21010

)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-N-51287C(EA)	NOSECUP ASSEMBLIES, CHEMICAL-BIOLOGICAL MASK, C10

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation.

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 EDITION OF 1 OCT 76 IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:05Z
Check the source to verify that this is the current version before use.