MIL-P-50560A(AR)
28 October 1986
SUPERSEDING
MIL-P-50560(MU)
27 August 1971

MILITARY SPECIFICATION

PROJECTILE, HES, 8 INCH: M424A1 METAL PARTS

This specification is approved for use within the US Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements, quality assurance provisions and the preparation for delivery criteria for metal parts used on M424A1 8 Inch Projectiles (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issue of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions), and any pertinent data which may be of use in improving this document, should be addressed to: Commander, US Army Armament, Munitions and Chemical Command, ATTN: AMSMC-QAN-Q(D), Dover, New Jersey, 07801-5001, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426), appearing at the end of this document, or by letter.

AMSMC N/A FSC 1320
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

TT-C-490	Cleaning Method and Pre-treatment of Ferrous Surfaces for Organic Coatings

MILITARY

MIL-I-6866	Inspection, Penetrant Method of
MIL-P-20442	Plug, Lifting (Eye Bolt Type) for Projectiles
MIL-A-48078	Ammunition, Standard Quality Assurance Provisions, General Specification for

STANDARDS

MILITARY

MIL-STD-1169	Packaging, Packing and Marking for Shipment of Inert Ammunition Components

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.7)

US ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

8786495	Ogive
8787165	Blank, Rotating Band
8787840	Body, Cylinder
8787841	Housing
8787842	Plate
8787844	Adapter
8787845	Base
8787846	Plug, Nose
8800013	Adapter Housing
9241634	Body Assembly
9241635	Cylinder and Band Assembly
9241636	Cylinder Assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

9241639	Sleeve
9241640	Pin, Grooved
9241642	Resin
9241643	Catalyst
9241647	Body
9241656	Epoxy, Resin, Aradite
9241674	Metal Parts Assembly
9241685	Hardener
10520074	Plug, Lifting, Type G

(Copies of specifications, standards, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM E8	Tension Testing of Metallic Materials
ASTM E23	Method for Notched Bar Impact Testing of Metallic Materials

(Applications for copies shall be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA., 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials and finishes. The contractor shall furnish objective evidence (see 6.5) that the material complies with the specifications listed in the applicable drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

3.2 Assembly. The metal parts assembly shall comply with all requirements specified on Drawing (dwg) 9241674, with all requirements specified herein, and with the requirements of all applicable specifications to the extent specified on the drawing and herein.

3.3 First article testing. Requirements for the submission of first article samples by the contractor shall be as specified in the contract (see 4.3).

3.4 Rotating band.

3.4.1 Physical properties. The band after seating and before machining shall demonstrate the following physical properties when tested as specified in 4.5.1.1

a. Tensile strength - 30,000 pounds per square inch (psi), minimum.

b. Elongation 25% minimum.

3.4.2 Seating. After seating of the band before machining, no individual diametrical clearance between the band and the seat shall exceed 0.007 inch on stations 1 and 5, and no individual diametrical clearance between the band and the seat shall exceed 0.020 inch on stations 2, 3, and 4 when tested and computed as specified in 4.5.1.1. After banding, the height of the waves shall not be reduced more than 25 percent of the original height.

3.4.3 Damage. The finished machined and assembled rotating band shall be inspected for the following characteristics:

a. No cracks.

b. No foreign matter embedded in the rotating band material.

c. No dents, nicks, scratches or gouges which exceed the allowable depth (see Fig. 1).

Any rotating band which has any of the defects listed in a, b, and c shall be rejected and removed from the lot when inspected as specified in 4.5.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

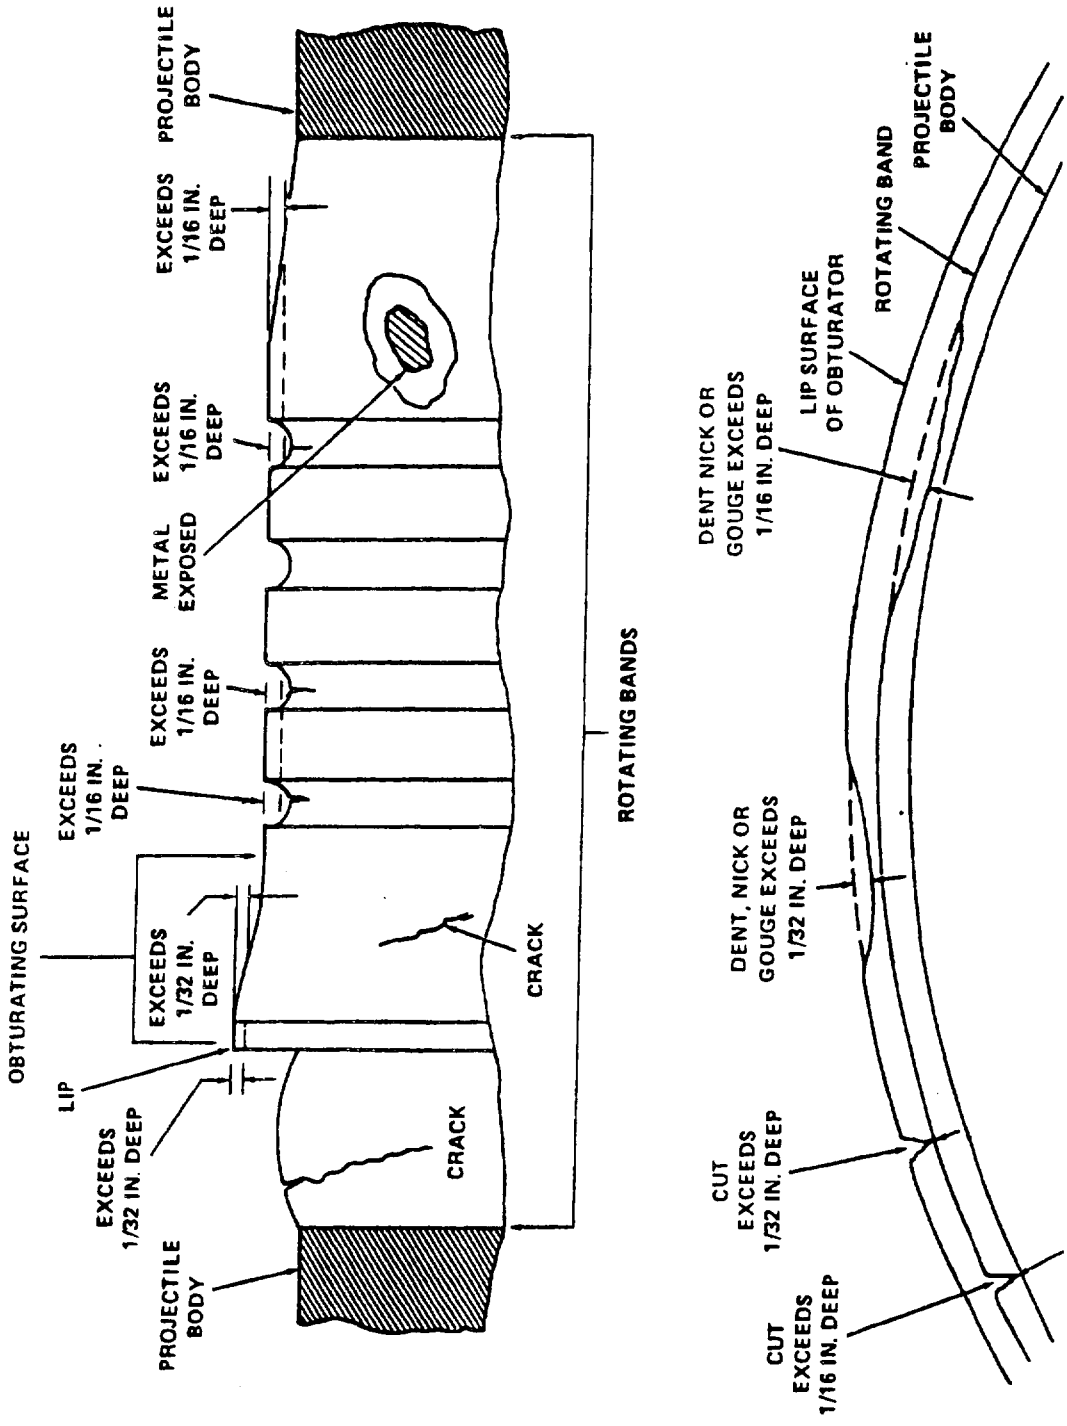


FIGURE 1. Rotating band inspection criteria.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

3.5 Metal to metal contact between base and body assembly (see dwg. 9241674). Metal to metal contact shall be confirmed when examined as specified in 4.5.2.

3.6 Tension test of ogive (alternate) (see dwg. 8786495). The ogive shall withstand a tension load of 8,000 ± 100 pounds applied slowly to the thread without any permanent visual or dimensional distortion or cracking of the ogive when tested as specified in 4.5.3 and 4.5.4.

3.7 Dye penetrant inspection (see dwg. 8786495). The ogive (alternate) shall show no evidence of discontinuities of any weld when tested as specified in 4.5.4.

3.8 Lifting plug (see dwg. 10520074). Each lifting plug shall withstand a load of 750 ± 5 pounds without evidence of distortion of the plug, or deformation of the threads when tested as specified in 4.5.5.

3.9 Paint adhesion. Paint adhesion shall comply with the paint adhesion requirements of TT-C-490 when tested as specified in 4.5.6.

3.10 Workmanship.

3.10.1 Plastic and metal characteristics. All components shall be free from cracks, splits, cold flow, shrinkage, cold shuts, inclusions, porosity, or any similar characteristic.

3.10.2 Threads. Threads shall be full and undamaged for the entire minimum length or depth as required on the applicable drawing.

3.10.3 Burrs. Parts shall be free from burrs.

3.10.4 Foreign matter. Parts shall be free from chips, dirt, grease, rust, corrosion, or any embedded foreign material.

3.10.5 Cleaning. The cleaning method shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agent.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:02Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The inspections specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

4.3 First article inspection.

4.3.1 Submission. When the contract requires first article inspection, the contractor shall submit one complete assembly (see dwg. 9241674), one subassembly (see dwgs. 9341634, 9341635 nd 9341636) and one set of parts for first article testing to the testing facility designated in the invitation for bids or request for proposal.

4.3.2 Inspections to be performed. The first article sample submitted in accordance with 4.3.1 shall be subjected to any or all of the requirements of the applicable dwg and to the tests and inspections specified in the first article inspection table herein. All parts shall have been manufactured using the same production processes, procedures and equipment which will be used in fulfilling the contract and all materials shall be from the same source as will be used in regular production.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspections and tests.

Inspection or Test	Contractors Inspection Permissible Before Submission	Non Dest	Dest	Parts	Sub Assy	Assy
1. Classification of Characteristics (see 4.4.2.1 thru 4.4.2.21)	X		X	X	X	X
2. Rotating band (see 3.4)		X			X	X
3. Metal to metal contact (see 3.5)	X		X		X	X
4. Tension test of ogive, if applicable (see 3.6)	X		X	X		
5. Dye penetrant inspection, if applicable (see 3.7)	X		X	X		
6. Tensile strength (see 4.4.3.6)		X		X		
7. Notch bar (charpy) impact (see 4.4.3.7)		X		X		
8. Lifting plug (see 3.8)	X		X	X		
9. Paint adhesion (see 3.9)	X		X			X

4.3.3 Inspection equipment. The inspections and tests specified in 4.3.2 shall be accomplished with gages and test equipment specified in 4.4.4.

4.3.4 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.2 Examinations and tests. See MIL-A-48078, the Quality Conformance Inspections and 4.4.3 herein.

a. Critical defects. Critical defects shall be inspected one hundred percent.

b. Major defects. Unless otherwise indicated Major defects shall be sampled in accordance with Table II.

c. Minor defects. Unless otherwise indicated Minor defects shall be sampled in accordance with Table III.

TABLE II. Major defect sampling plan.

Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size	Lot Size	Sample Size
1-72	all	101	96	135-136	121	179-180	146
73	72	102	97	137	122	181-182	147
74	73	103	98	138-139	123	183-184	148
75	74	104-105	99	140-141	124	185-187	149
76	75	106	100	142	125	188-189	150
77	76	107	101	143-144	126	190-191	151
78	77	108-109	102	145	127	192-193	152
79	78	110	103	146-147	128	194-195	153
80	79	111	104	148-149	129	196-197	154
81-82	80	112-113	105	150	130	198-200	155
83	81	114	106	151-152	131	201-202	156
84	82	115	107	153-154	132	203-204	157
85	83	116-117	108	155-156	133	205-207	158
86	84	118	109	157	134	208-209	159
87	85	119	110	158-159	135	210-212	160
88-89	86	120-121	111	160-161	136	213-214	161
90	87	122	112	162-163	137	215-217	162
91	88	123-124	113	164-165	138	218-219	163
92	89	125	114	166-167	139	220-222	264
93	90	126-127	115	168	140	223-224	165
94-95	91	128	116	169-170	141	225-227	166
96	92	129-130	117	171-172	142	228-230	167
97	93	131	118	173-174	143	231-232	168
98	94	132-133	119	175-176	144	233-235	169
99-100	95	134	120	177-178	145	236-238	170

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

TAB

Lot Size	Sample Size
1-16	all
17	16
18	17
19-20	18
21	19
22-23	20
24-25	21
26-27	22

TABLE I

Lot Size	Sample Size
239-241	171
242-243	172
244-246	173
247-249	174
250-252	175
253-255	176
256-259	177
260-262	178
263-265	179
266-268	180
269-271	181
272-275	182
276-278	183
279-282	184
283-285	185
286-289	186
290-293	187
294-296	188
297-300	189
301-304	190
305-308	191
309-312	192
313-316	193
317-320	194
321-324	195
325-329	196

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.1	Body, Cylinder				8787840
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	9241635
					PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Length, min.		Table II	3.2	Gage
102.	Seat diameter		Table II	3.2	Gage
103.	Height of bands, min.		Table II	3.2	Gage
104.	Location of band seat		Table II	3.2	Gage
105.	Length of band seat		Table II	3.2	Gage
106.	Presence of radius each end of seat		Table II	3.2	Gage
107.	Presence of chisel cuts 120° apart		Table II	3.2	Visual
108.	Protective finish		Table II	3.2	Visual
109.	Material		Table II	3.2	Visual
			Table II	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES

DRDSC-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.2	Blank, Rotating Band		8787165
			NEXT HIGHER ASSEMBLY 9241635

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Inside diameter, max.		Table II	3.2	Gage
102.	Thickness, min.		Table II	3.2	Gage
103.	Length, min.		Table II	3.2	Gage
104.	Hardness		Table II	3.2	Gage
105.	Material		Table II	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Cylinder and Band Assembly				9241635
					NEXT HIGHER ASSEMBLY 9241636
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Middle inside right diameter, max.		Table II	3.2	Gage
102.	True position of middle right diameter		Table II	3.2	Gage
103.	Perpendicularity of middle right diameter				
104.	Largest right inside diameter		Table II	3.2	Gage
105.	True position of largest right inside diameter		Table II	3.2	Gage
106.	Length of middle right diameter, max.		Table II	3.2	Gage
107.	Length of largest right diameter		Table II	3.2	Gage
108.	Depth of cavity, max.		Table II	3.2	Gage
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T04:02Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.4	Objective Evidence for Parts and Materials		See below
			NEXT HIGHER ASSEMBLY
			N.A.

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101.	Objective evidence not provided for the following parts and materials in accordance with applicable dwg. or standard		----	3.1	Visual

Item	Dwg. No.
Resin	9241642
Catalyst	9241643
Pin, Grooved	9241640
Epoxy	9241656
Resin Aradite	9241656
Hardness	9241685

Minor	None defined.				

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Sleeve				9241639
					NEXT HIGHER ASSEMBLY 9241636
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Small outside diameter, min.		Table II	3.2	Gage
102.	Length of small outside diameter, min.		Table II	3.2	Gage
103.	Large outside diameter, min.		Table II	3.2	Gage
104.	Chamfer present		Table II	3.2	Visual
105.	Material		Table II	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.6	Cylinder Assembly		9241636
			NEXT HIGHER ASSEMBLY 9241634

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Left inside diameter, max.		Table II	3.2	Gage
102.	True position of left inside diameter		Table II	3.2	Gage
103.	Right inside diameter, max.		Table II	3.2	Gage
104.	True position of right inside diameter		Table II	3.2	Gage
105.	Perpendicularity of right face		Table II	3.2	Gage
106.	Chamfer present		Table II	3.2	Visual
107.	Objective evidence for assembly procedure in accordance with dwg. 9241636		Table II	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.7	Housing				8787841
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	9241634 PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Runout bottom of left cavity		Table II	3.2	Gage
102.	True position of left inside diameter		Table II	3.2	Gage
103.	Left inside diameter, max.		Table II	3.2	Gage
104.	Thread clearance, max.		Table II	3.2	Gage
105.	Distance from left face to shoulder, min.		Table II	3.2	Gage
106.	Pitch diameter of outside thread, min.		Table II	3.2	Gage
107.	Major diameter of outside thread, min.		Table II	3.2	Gage
108.	Diameter of thread clearance, min.		Table II	3.2	Gage
109.	Large inside diameter, max.		Table II	3.2	Gage
110.	Radii and chamfer present		Table II	3.2	Gage
111.	Distance from bottom of cavity to diameter for inside thread		Table II	3.2	Visual
112.	Distance from bottom of left cavity to bottom of right cavity		Table II	3.2	Gage
113.	Depth of left cavity, max.		Table II	3.2	Gage
114.	Pitch diameter of inside thread		Table II	3.2	Gage
115.	Minor diameter of inside thread		Table II	3.2	Gage
116.	Major diameter of inside thread		Table II	3.2	Gage
117.	Minor diameter of outside thread		Table II	3.2	Gage
118.	Protective finish		Table II	3.2	Visual
119.	Material		------	3.1	Visual

NOTES

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET OF		DRAWING NUMBER
4.4.2.7 (Cont)	Housing		2 2		8787841
					NEXT HIGHER ASSEMBLY 9241634
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE			SHEET 1 OF 1	DRAWING NUMBER
4.4.2.8	Adapter				8787844
					NEXT HIGHER ASSEMBLY
					9241634
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Pitch diameter of left thread, max.		Table II	3.2	Gage
102.	Minor diameter of left thread, max.		Table II	3.2	Gage
103.	Length of left thread, min.		Table II	3.2	Gage
104.	Inside diameter, max.		Table II	3.2	Gage
105.	Total length, min.		Table II	3.2	Gage
106.	Pitch diameter of right thread, max.		Table II	3.2	Gage
107.	Minor diameter of right thread, min.		Table II	3.2	Gage
108.	Length of right thread, min.		Table II	3.2	Gage
109.	Inside chamfer present		Table II	3.2	Gage
110.	Material		-------	3.1	Visual
Minor					Visual
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-02-04:022
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.9	Adapter Housing		8800013
			NEXT HIGHER ASSEMBLY 9241634

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Runout of bottom of left cavity		Table II	3.2	Gage
102.	Pitch diameter of thread, max.		Table II	3.2	Gage
103.	Minor diameter of thread, max.		Table II	3.2	Gage
104.	Left large inside diameter, max.		Table II	3.2	Gage
105.	Left small inside diameter, max.		Table II	3.2	Gage
106.	True position of left small inside diameter		Table II	3.2	Gage
107.	Right large inside diameter, max.		Table II	3.2	Gage
108.	Distance from bottom of right cavity to small inside diameter		Table II	3.2	Gage
109.	Distance from bottom of left cavity to bottom of right cavity		Table II	3.2	Gage
110.	Length of left small inside diameter, max.		Table II	3.2	Gage
111.	Depth of left cavity, max.		Table II	3.2	Visual
112.	Length of left thread		Table II	3.2	Visual
113.	Protective finish		Table II	3.1	
114.	Material		Table III	3.2	Visual
Minor			Table III	3.10	Visual/Manual
201.	Surface finish				
202.	Workmanship				

NOTES:

DRSC-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.10	Body		9241647
			NEXT HIGHER ASSEMBLY 9241634

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Pitch diameter of left thread, min.		Table II	3.2	Gage
102.	Major diameter of left thread, min.		Table II	3.2	Gage
103.	Diameter of thread clearance, max.		Table II	3.2	Gage
104.	Left outside diameter, min.		Table II	3.2	Gage
105.	Runout of left outside diameter		Table II	3.2	Gage
106.	Pitch diameter of right thread, min.		Table II	3.2	Gage
107.	Major diameter of right thread, min.		Table II	3.2	Gage
108.	Length of right thread, min.		Table II	3.2	Gage
109.	Diameter of right thread clearance, max.		Table II	3.2	Gage
110.	Large right diameter		Table II	3.2	Gage
111.	Small right diameter, min.		Table II	3.2	Gage
112.	Runout of small right diameter		Table II	3.2	Gage
113.	Runout of right face		Table II	3.2	Gage
114.	Length of small right outside diameter, min.		Table II	3.2	Gage
115.	Length of largest outside diameter		Table II	3.2	Gage
116.	Width of right thread clearance, max.		Table II	3.2	Gage
117	Runout of left face of largest diameter		Table II	3.2	Gage
118.	Width of left thread clearance, max.		Table II	3.2	Gage
119.	Length from shoulder of left thread to left face of largest diameter, min.		Table II	3.2	Gage

NOTES

DRDA-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE			SHEET 2 OF 2	DRAWING NUMBER 9241647
4.4.2.10 (Cont)	Body				NEXT HIGHER ASSEMBLY 9241634
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
120.	Length from left face of largest diameter to right face, min.		Table II	3.2	Gage
121.	Total length		Table II	3.2	Gage
122.	Protective finish		Table II	3.2	Visual
123.	Material		-------	3.1	Visual
Minor					
201.	Radii or chamfer present		Table III	3.2	Visual
202.	Surface finish		Table III	3.2	Visual
203.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.11	Band, Protector		9257440
			NEXT HIGHER ASSEMBLY 9241634

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Small inside diameter, max.		Table II	3.2	Gage
102.	Large inside diameter, max.		Table II	3.2	Gage
103.	Outside diameter, min.		Table II	3.2	Gage
104.	Location of inside band		Table II	3.2	Gage
105.	Length of inside band		Table II	3.2	Gage
106.	Total length		Table II	3.2	Gage
107.	Material		-------	3.1	Visual
Minor					
201.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.12	Body Assembly				9241634
					NEXT HIGHER ASSEMBLY 9241674
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Threads coated with cement before assembly		Table II	3.2	Visual
102.	True position of left pin holes		Table II	3.2	Gage
103.	Diameter of left pin holes		Table II	3.2	Gage
104.	Depth of left pin holes		Table II	3.2	Gage
105.	True position of right pin holes		Table II	3.2	Gage
106.	Diameter of right pin holes		Table II	3.2	Gage
107.	Depth of right pin holes		Table II	3.2	Gage
108.	Materials		-------	3.1	Visual
Minor	None defined				

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.13	Body Assembly				9241634
					NEXT HIGHER ASSEMBLY
					9241674
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1.	Presence of pins before filling holes with epoxy		100%	3.2	Visual
Major					
101.	Runout of left face		Table II	3.2	Gage
102.	True position of left outside thread		Table II	3.2	Gage
103.	Cylinder assembly coated with cement before assembly		Table II	3.2	Visual
104.	Pins below flush and pin holes filled with epoxy		Table II	3.2	Visual
105.	Diameter of body and diameter of right end of housing		Table II	3.2	Gage
106.	Diameter of adapter and housing left portion		Table II	3.2	Gage
107.	Runout of adapter and housing left portion		Table II	3.2	Gage
108.	Length of projection adjacent to thread cavity		Table II	3.2	Gage
109.	Total depth of inside thread cavity		Table II	3.2	Gage
110.	Pitch diameter of inside thread		Table II	3.2	Gage
111.	Minor diameter of inside thread		Table II	3.2	Gage
112.	Runout of inside thread		Table II	3.2	Gage
113.	Diameter of inside thread clearance, max.		Table II	3.2	Gage
114.	Diameter of end of taper		Table II	3.2	Gage
115.	Length of right outside diameter		Table II	3.2	Gage
116.	Runout of right face		Table II	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.13 (Cont)	Body Assembly				9241634
					NEXT HIGHER ASSEMBLY 9241674
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
117.	Width of inside thread clearance, max.		Table II	3.2	Gage
118.	Inside of housing coated		Table II	3.2	Visual
119.	Thickness of housing, min.		Table II	3.2	Gage
120.	Gap between adapter and housing (see 9241634-2)		Table II	3.2	Gage
121.	Gap between body and adapter housing (see 9241634-1)		Table II	3.2	Gage
122.	Gap between body and adapter (see 9241634-2)		Table II	3.2	Gage
123.	Gap between body and cylinder assembly		Table II	3.2	Gage
124.	Total length		Table II	3.2	Gage
125.	Depth of large rotating band groove		Table II	3.2	Gage
126.	Largest outside diameter of rotating band		Table II	3.2	Gage
127.	Runout of largest outside diameter of rotating band		Table II	3.2	Gage
128.	Width of small grooves		Table II	3.2	Gage
129.	Depth of small grooves		Table II	3.2	Gage
130.	Diameter adjacent to last small groove		Table II	3.2	Gage
131.	Runout of diameter adjacent to last small groove		Table II	3.2	Gage
132.	Objective evidence for surface preparation after machining in accordance with dwg. 9241634		Table II	3.2	Visual
133.	Material		-------	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.14	Body Assembly				9241634
					NEXT HIGHER ASSEMBLY 9241674
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Damaged rotating band before assembly of band, protector				
102.	Diameter of body and right diameter of housing		Table II	3.4.3	Visual
103.	Rotating band protector present		Table II	3.2	Gage
			Table II	3.2	Visual
Minor					
201.	Painting no bare spot		Table III	3.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.15	Plug, Nose		8787846
			NEXT HIGHER ASSEMBLY 9241674

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Pitch diameter of thread		Table II	3.2	Gage
102.	Major diameter of thread, min.		Table II	3.2	Gage
103.	Distance across flats of notch		Table II	3.2	Gage
104.	Diameter of thread clearances, min.		Table II	3.2	Gage
105.	Inside diameter, max.		Table II	3.2	Gage
106.	Runout of thread shoulder		Table II	3.2	Gage
107.	Distance to outside datum diameter		Table II	3.2	Gage
108.	Distance to inside datum diameter		Table II	3.2	Gage
109.	Depth of cavity		Table II	3.2	Gage
110.	Width of notch, min.		Table II	3.2	Gage
111.	Thread clearance max.		Table II	3.2	Gage
112.	Location of notch		Table II	3.2	Gage
113.	Length from thread shoulder to right face		Table II	3.2	Gage
114.	Total length		Table II	3.2	Gage
115.	Length of left thread clearance		Table II	3.2	Visual
116.	Protective finish		Table II	3.1	Visual
117.	Material				
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Painting		Table III	3.2	Visual
203.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2020-10-20T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.16	Ogive				8786495 (Sh. 1)
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	9241674
					PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Distance across flats of notch		Table II	3.2	Gage
102.	True position of flats of notch		Table II	3.2	Gage
103.	Large inside diameter, max.		Table II	3.2	Gage
104.	Small inside diameter, max.		Table II	3.2	Gage
105.	True position of small inside diameter		Table II	3.2	Gage
106.	Thickness of wall of small inside diameter, min.		Table II	3.2	Gage
107.	Pitch diameter of left thread, max.		Table II	3.2	Gage
108.	Minor diameter of left thread, max.		Table II	3.2	Gage
109.	Length of left thread, min.		Table II	3.2	Gage
110.	Distance from left face to wall of small inside diameter		Table II	3.2	Gage
111.	Thickness of wall of ogive		Table II	3.2	Gage
112.	Thickness of wall of small diameter support		Table II	3.2	Gage
113.	Length of right thread, min.		Table II	3.2	Gage
114.	Inside diameter right of small inside diameter, max.		Table II	3.2	Gage
115.	Pitch diameter of right thread		Table II	3.2	Gage
116.	Minor diameter of right thread, max.		Table II	3.2	Gage
117.	Runout of right thread		Table II	3.2	Gage
118.	Runout .50 inch from right face		Table II	3.2	Gage
119.	Runout of right face		Table II	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.4.2.16 (Cont)	Ogive		8786495 (Sh. 1)
			NEXT HIGHER ASSEMBLY 9241674

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
120.	Total length		Table II	3.2	Gage
121.	Distance to right datum diameter		Table II	3.2	Gage
122.	Distance to left datum diameter		Table II	3.2	Gage
123.	Width of notch, min.		Table II	3.2	Gage
124.	Location of notch		Table II	3.2	Gage
125.	Protective finish		Table II	3.2	Visual
126.	Materials		-------	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.17	Ogive				8786495 (Sh. 2)
					NEXT HIGHER ASSEMBLY
					9241674
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Distance across flats of notch		Table II	3.2	Gage
102.	True position of flats of notch		Table II	3.2	Gage
103.	Large inside diameter, max.		Table II	3.2	Gage
104.	Small inside diameter, max.		Table II	3.2	Gage
105.	True position of small inside diameter		Table II	3.2	Gage
106.	Pitch diameter of left thread, max.		Table II	3.2	Gage
107.	Minor diameter of left thread, max.		Table II	3.2	Gage
108.	Length of left thread		Table II	3.2	Gage
109.	Thickness of wall of left cavity		Table II	3.2	Gage
110.	Length of inside diameter, min.		Table II	3.2	Gage
111.	Thickness of wall of right cavity		Table II	3.2	Gage
112.	Length of right thread, min.		Table II	3.2	Gage
113.	Pitch diameter of right thread, max.		Table II	3.2	Gage
114.	Minor diameter of right thread, max.		Table II	3.2	Gage
115.	Runout of right thread		Table II	3.2	Gage
116.	Runout .50 inch from right face		Table II	3.2	Gage
117.	Runout of right face		Table II	3.2	Gage
118.	Welding finish		Table II	3.2	Gage
119.	Distance from left face to right datum diameter		Table II	3.2	Visual
120.	Total length		Table II	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.4.2.17 (Cont)	Ogive		8786495 (Sh. 2)
			NEXT HIGHER ASSEMBLY 9241674

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
121.	Distance from left face to left datum diameter		Table II	3.2	Gage
122.	Location of notch		Table II	3.2	Gage
123.	Width of notch, min.		Table II	3.2	Gage
124.	Protective finish		Table II	3.2	Visual
125.	Material		-------	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE			SHEET 1 OF 2	DRAWING NUMBER
4.4.2.18	Plate				8787842
					NEXT HIGHER ASSEMBLY
					9241674
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Runout of left face		Table II	3.2	Gage
102.	True position of left inside diameter		Table II	3.2	Gage
103.	Pitch diameter of left inside thread		Table II	3.2	Gage
104.	Minor diameter of left inside thread		Table II	3.2	Gage
105.	Diameter of inside thread clearance		Table II	3.2	Gage
106.	True position of right inside diameter		Table II	3.2	Gage
107.	Pitch diameter of right inside thread		Table II	3.2	Gage
108.	Minor diameter of right inside thread		Table II	3.2	Gage
109.	Pitch diameter of left outside thread min.		Table II	3.2	Gage
110.	Major diameter of left outside thread min.		Table II	3.2	Gage
111.	Length of left inside thread		Table II	3.2	Gage
112.	Width of thread clearance, max.		Table II	3.2	Gage
113.	Length of right inside thread		Table II	3.2	Gage
114.	Runout of right inside thread shoulder		Table II	3.2	Gage
115.	Depth of 2 holes min.		Table II	3.2	Gage
116.	Pitch diameter of right outside thread, min.		Table II	3.2	Gage
117.	Major diameter of right outside thread, min.		Table II	3.2	Gage
118.	True position of right outside thread		Table II	3.2	Gage
119.	Right outside diameter, min.		Table II	3.2	Gage
120.	Large inside diameter		Table II	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.18 (Cont)	Plate				8787842
					NEXT HIGHER ASSEMBLY
					9241674
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
121.	Small inside diameter		Table II	3.2	Gage
122.	Diameter of 2 holes, min.		Table II	3.2	Gage
123.	True position of 2 holes		Table II	3.2	Gage
124.	Length of right outside diameter, max.		Table II	3.2	Gage
125.	Length of large inside diameter		Table II	3.2	Gage
126.	Width of right outside thread clearance, max.		Table II	3.2	Gage
127.	Length of left outside thread, min.		Table II	3.2	Gage
128.	Total length		Table II	3.2	Gage
129.	Protective finish		Table II	3.2	Visual
130.	Material		--------	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

MIL-P-50560A(AR)

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.19	Base				8787845
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	9241674
					PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	Length of left outside hub		Table II	3.2	Gage
102.	Outside diameter of left hub		Table II	3.2	Gage
103.	Runout of right face		Table II	3.2	Gage
104.	Outside diameter		Table II	3.2	Gage
105.	True position of outside diameter		Table II	3.2	Gage
106.	Pitch diameter of thread, max.		Table II	3.2	Gage
107.	Minor diameter of thread, max.		Table II	3.2	Gage
108.	Location of outside holes		Table II	3.2	Gage
109.	Diameter of outside holes, min.		Table II	3.2	Gage
110.	Depth of outside holes, min.		Table II	3.2	Gage
111.	Total length		Table II	3.2	Gage
112.	Radii and chamfer present		Table II	3.2	Gage
113.	Protective finish		Table II	3.2	Visual
114.	Material		Table II	3.2	Visual
			-------	3.1	Visual
Minor					
201.	Surface finish		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH 4.4.2.20	TITLE Plug, Lifting, Type G		SHEET 1 OF 1		DRAWING NUMBER 10520074
					NEXT HIGHER ASSEMBLY 9241674
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101.	Objective evidence for lifting plug in accordance with MIL-P-20442		------	3.1	Visual
Minor	None defined.				

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9241674
4.4.2.21	Metal Parts Assembly				NEXT HIGHER ASSEMBLY N.A.
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101.	No gap between base and body assembly		Table II	3.2	Visual
102.	Base threads coated with cement before assembly		Table II	3.2	Visual
103.	Ogive and plate assembled hand tight		Table II	3.2	Manual
104.	No raised metal		Table II	3.2	Visual/Manual
105.	Rotating band		Table II	3.4.3	Visual/Gage
106.	Bourrelet diameters after protective finish, max.		Table II	3.2	Gage
107.	Total length, max.		Table II	3.2	Gage
108.	Protective finish		Table II	3.2	Visual
109.	Material		-------	3.1	Visual
Minor					
201.	Stamping		Table III	3.2	Visual
202.	Workmanship		Table III	3.10	Visual/Manual

NOTES

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the correct version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-50560A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	Packaging				See 5.0
					NEXT HIGHER ASSEMBLY
					N.A.
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101.	Preservation, packaging, packing and marking in accordance with applicable requirements		Table III	5.0	Visual
Minor	None defined.				

NOTES:

DRDL:R-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing shall be performed as specified herein in accordance with applicable test methods of 4.5. All tests shall be performed. Tests need not be performed in the order specified.

Test	Test Classification
a. Rotating band	Major
b. Metal to metal contact	Major
c. Tension test of ogive	Major
d. Dye penetrant inspection	Major
e. Lifting plug	Major
f. Paint adhesion	Minor
g. Tensile strength	Major
h. Notch bar (charpy) impact	Major
i. Proving Ground	Major

Of these tests a, g, h and i are considered destructive and samples so tested shall not be returned to the lot. Destructive samples are over and above the deliverable quantity of items required by the contract.

4.4.3.1 Rotating band.

4.4.3.1.1 Physical properties and seating (see 3.4.1 and 3.4.2). Prior to machining of the rotating bands, one specimen shall be tested in accordance with 4.5.1.1 for every 50 pieces or less produced, or when a new lot of band blanks is used. If the sample fails to comply with 3.4.1 and 3.4.2, the lot of banded projectiles shall be rejected.

4.4.3.1.2 Damage (see 3.4.3). Each rotating band shall be inspected as specified in 4.5.1.2. If any rotating band fails to comply with 3.4.3, the projectile shall be rejected and removed from the lot.

4.4.3.2 Metal to metal contact (see 3.5). Each projectile shall be tested in accordance with 4.5.2. If any item fails to comply with 3.5, the item shall be rejected and removed from the lot.

4.4.3.3 Tension test of ogive (alternative) (see 3.6) and dye penetrant inspection (see 3.7). One sample shall be tested in accordance with 4.5.3 and 4.5.4 for each production lot of 110 or less, and one additional sample for every 40 or less produced over the lot size of 110. If the sample fails to comply with 3.6 and 3.7, the production lot shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:02Z
Check the source to verify that this is the currentversion before use.

4.4.3.4 Lift plug (see 3.8). Each lift plug shall be tested in accordance with 4.5.5. If any item fails to comply with 3.8, the item shall be rejected and removed from the lot.

4.4.3.5 Paint adhesion (see 3.9). Each projectile shall be tested in accordance with 4.5.6. If any item fails to comply with 3.9, the item shall be rejected and removed from the lot.

4.4.3.6 Tensile strength (see dwgs 8787840, 8787841, 8787844, 8787845, 9241647 and 8800013). One sample (2 specimens) shall be selected at random from each heat treated lot and shall be tested in accordance with 4.5.7. If any specimen fails to comply with drawing requirements, the heat treated lot shall be rejected.

4.4.3.7 Notch bar (charpy) impact (see dwgs. 8787841 and 9241647). One sample (2 specimens) shall be selected at random from each heat treated lot and shall be tested in accordance with 4.5.8. If any specimen fails to comply with drawing requirements, the heat treated lot shall be rejected.

4.4.3.8 Proving Ground. One shell shall be selected at random by the inspector from each lot of 1 to 100 shells for range and velocity firing. Two shells shall be selected at random by the inspector from each lot of 101 shells and over. Lots of 50 shells or less shall be combined into one test lot but not more than three of these sublots shall be so combined. All combined lots shall be of the same interfix number. Samples forwarded to the Proving Ground shall be identified as to the lot they represent. Proving Ground tests for velocity and range are not acceptance tests, but the results will be carefully evaluated by the Army to determine quality of the ammunition procured. Sample shall be tested in accordance with 4.5.9.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the tables starting with 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract (see MIL-A-48078 and 6.4 herein).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.5 Methods of Inspection. The tolerances specified herein are absolute with no allowance for test equipment inaccuracy. The tolerances used by the manufacturer shall be equal to the absolute tolerances less the accuracy tolerances of the test equipment used.

4.5.1 Rotating band (see 3.4).

4.5.1.1 Band seating and physical properties (see 3.4.1 and 3.4.2). Prior to removal the unmachined band shall be measured on three diameters 60 degrees apart. At each of the three diameters, measurements along the width of the band shall be taken at stations 1, 2, 3, 4 and 5 totaling 15 measurements in all. Stations 1 and 5 are those points 1/2 inch toward the center of the band, as measured from the front and rear of band respectively; stations 2 and 4 are those points 3/4 inch toward the center of the band, as measured from the front and rear of the band respectively; and station 3 is at center of the band. The location of the points of measurement shall be marked on the band along with the orientation of the band with the base. The band shall be removed in a manner that will keep deformation to a minimum. After removal, the thickness of the band shall be measured at each of the marked points (a total of 30 measurements) and the diameter of the band seat at these points shall also be measured. To each of the band seat diameters add the sum of the corresponding two band thicknesses and subtract from the corresponding diameter previously determined. The result will indicate the clearance between the band and its seat as indicated in 3.4.2. If the band is well seated, a negative clearance or interference may be indicated. When irregular band profiles interfere with measurement, the manufacturer is authorized to machine the outside of the band in order to obtain an adequate cylindrical surface. The diameter of the machined band shall exceed the bourrelet diameter. Since a piece must be destroyed to test clearances, a dummy component of similar material can be used for the test providing the dimensions of the band seat are within dwg 8787840 each time a band is tested. The machine settings and data used in banding the dummy component or scrap piece shall be the same as the lot being banded. The removed band shall be carefully flattened without hammering and test coupons shall be machined and tested in accordance with ASTM E8. Band seating and physical properties shall comply with 3.4.1 and 3.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

4.5.1.2 Damage to rotating band (see 3.4.3 and Fig. 1). An impression with "cast stone" (or grey stone) shall be taken of each scratch, dent, nick or gouge to determine the depth of the imperfection by a comparator type device or any other accurate approved measuring device (see 6.4). Any other method devised by the contractor to measure the depth of the imperfections shall also be approved before use (see 6.4). For allowable depth of the imperfection (see fig. 1). In addition, the rotating band shall be visually inspected for any crack or foreign matter embedded in the rotating band.

4.5.2 Metal to metal contact between base and body assembly (see 3.5). The contact between base and body assembly shall be examined with a 10 power magnifier and comply with 3.5.

4.5.3 Tension test of ogive (alternate) (see 3.6). The ogive assembly shall have a load applied by an approved testing device, thru a suitable adapter screwed into the tube thread. These adapters shall rely only on thread engagement to exert the tension force on the ogive. The load shall be applied in a minimum time of 10 seconds and permitted to dwell at full load for a minimum of 10 seconds.

4.5.4 Dye penetrant inspection (see 3.7). After the tension test of 4.5.3 has been performed, each sample which has been tension tested shall be subjected to dye penetrant inspection to determine possible permanent distortion or cracking of the ogive or weld in accordance with MIL-I-6866.

4.5.5 Lift plug (see 3.8). The lift plug shall have a load of 750 $\pm$ 5 pounds applied to the eye and the thread for a minimum time of 10 seconds.

4.5.6 Paint adhesion (see 3.9). Paint adhesion shall be tested in accordance with the paint adhesion test requirements of section 4 of TT-C-490.

4.5.7 Tensile strength test (see 4.4.3.6).

4.5.7.1 Dwgs 8787840, 8787841, 8787844 and 8787845. Specimens from each heat treated lot of parts shall be prepared and tensile tested in accordance with ASTM E8 using approved test equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the currentversion before use.

4.5.7.2 Dwg 9241647. Specimens shall be selected in accordance with dwg 9241647 and prepared and tensile tested in accordance with ASTM E8 using approved test equipment.

4.5.7.3 Dwg 8800013. A sample shall be drawn from the special test area specified on the drawing. Another sample shall be drawn from any area not noted on the drawing. Both samples shall be prepared and tensile tested in accordance with ASTM E8 using approved test equipment.

4.5.8 Notch bar (charpy) impact (see 4.4.3.7). A sample shall be prepared and tested in accordance with ASTM E23 using approved test equipment.

4.5.9 Proving Ground (see 4.4.3.8). The Proving Ground shall load the sample projectile to service weight with an inert filler and either a dummy or inert fuze. The sample projectile or projectiles representing each lot shall be fired at a pressure of 37,000 ± 500 pounds per square inch (psi), as determined by the standard gaging practice in the Army Howitzer, 8 inch, M2 or equivalent. Velocity and ranges shall be measured. Radar tracking, fastex photograph at the muzzle and recovery of any projectile that appears to malfunction shall also be used.

5. PACKAGING.

5.1 Preservation and packaging. Preservation and packaging shall be level A or B as specified (see 6.2).

5.1.1 Level A. The metal parts assembly shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169.

5.1.2 Level B. The metal parts assembly shall be preserved and packaged in accordance with instructions contained in MIL-STD-1169.

5.2 Packing.

5.2.1 Levels A and B. The metal parts assembly shall be packed in accordance with the applicable instructions contained in MIL-STD-1169.

5.3 Marking. Marking shall be in accordance with MIL-STD-1169.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:02Z
Check the source to verify that this is the currentversion before use.

6. NOTES

6.1 Intended use. The metal parts covered by this specification are intended for use in assembly of M424A1 8 Inch Projectiles.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. First article inspection, when required (see 3.3).

c. Applicable level of packaging and packing (see 5.0).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD1423 Contract Data Requirements List (CDRL) the data requirements identified below shall be developed as specified by an approved Data Item Description (DD1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR7-104.9 (n) (2) are involved and DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contractor purchase order requirements. Deliverable data required by this specification is cited in the following paragraph:

Paragraph No.	Data requirements	Applicable DID No.
(a) 4.4.4	Inspection equipment approval	DI-R-10054

(Copies of DID's required by contractors in connection with specific acquisition functions shall be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:02Z
Check the source to verify that this is the current version before use.

6.3 Subject term (key word) listing.

Adhesion, Paint
Charpy
Dye penetrant
Elongation
Notch bar impact
Plug, Lifting
Projectile
Rotating Band
Tensile strength

6.4 Equipment design approval. Submit equipment designs, as required, to Commander US Army Armament Munitions and Chemical Command, ATTN: AMSMC-QAN-I(D), Dover, New Jersey 07801.

6.5 Objective Evidence.

6.5.1 General. Contractors inspection records and documentation verifying compliance with applicable dwg. and specification requirements.

6.5.2 Materials. A statement (certification), supported by test data, that all materials produced or purchased by the contractor meets all requirements when such material is controlled by Government or commercial specifications referenced in contractual documents.

6.6 Changes from previous issue. Asterisks or vertical lines are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.7 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research, Development and Engineering Center (ARDEC) may also include dwgs. prepared and identified as Ordnance Corp, US Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Edgewood Arsenal, Rock Island Arsenal or Picatinny Arsenal dwgs. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1320-A919)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
US ARMY ARMAMENT, MUNITIONS AND CHEMICAL COMMAND
ATTM: AMSMC-QAN-Q
DOVER, NJ 07801 5001

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-50560A (AR)	PROJECTILE, HES, 8 INCH: M424A1 METAL PARTS

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:02Z
Check the source to verify that this is the current version before use.