

FED. SUP CLASS
5950

CASE, MOUNTING TERMINAL ARRANGEMENT AND MARKING

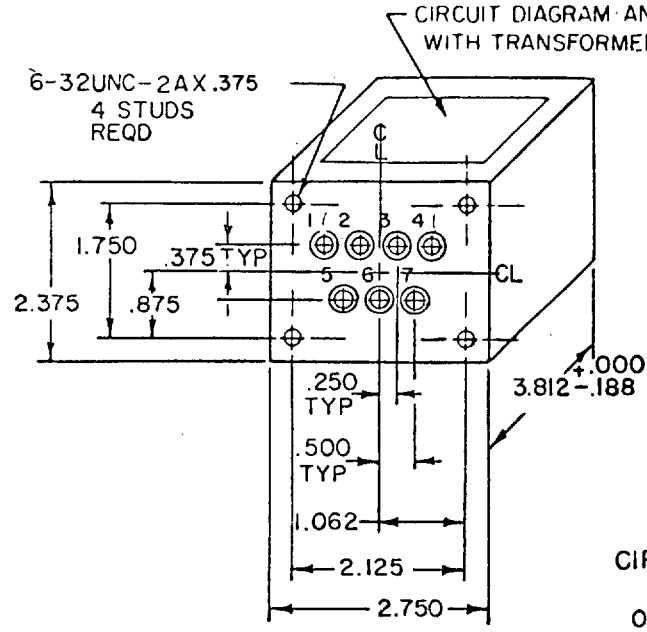


MINIMUM CHASSIS CUTOUT

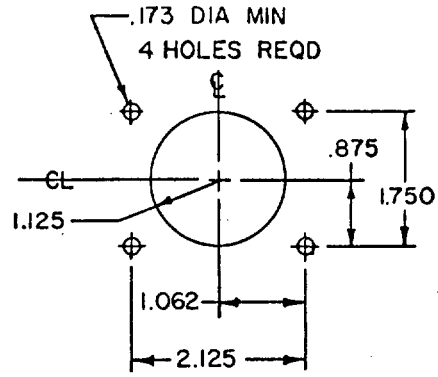

INCHES	MM	INCHES	MM
.173	4.39	1.062	26.97
.188	4.78	1.125	28.58
.250	6.35	1.750	44.45
.375	9.52	2.125	53.98
.500	12.70	2.375	60.32
.875	22.22	2.750	61.85
		3.812	96.84

CIRCUIT DIAGRAM AND MARKING

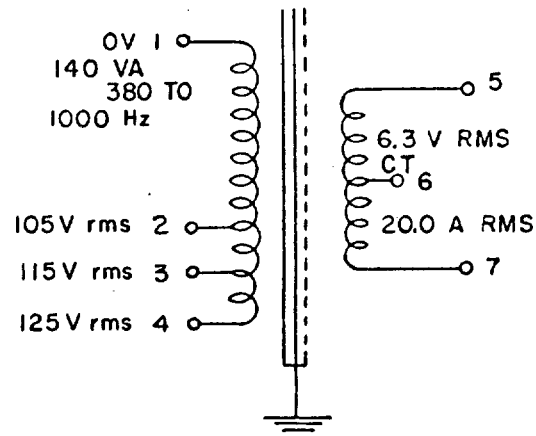

W V = 1070 V MAX
ALTITUDE - 50,000 FT MAX

THIS MILITARY STANDARD INACTIVE FOR NEW DESIGN AFTER 23 JUNE 1981
NO SUPERSEDING STANDARD

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance on case dimensions is +.000(.00 mm), -.125(3.18 mm).
4. Tolerance on mounting dimensions is ±.016(.41 mm). Mounting studs are symmetrically located with respect to the centerline of the case.
5. Tolerance on terminal position dimensions is ±.031(.79 mm). Terminals fit within minimum chassis cutout.
6. Type designation, MS part number and manufacturer's name or symbol to be marked on side opposite terminals.
7. Referenced document shall be of the issue in effect on date of invitation for bids.
8. This standard takes precedence over document referenced herein.

MS PART NUMBER	TYPE DESIGNATION
MS16471-1	TF4SX01GA209

(E) denotes changes

P.A EC
Other Cust ER
AF-85

International interest

TITLE
TRANSFORMER, POWER, STEP-DOWN,
TYPE TF4SX01GA209

MILITARY STANDARD
MS 16471

Procurement Specification
MIL-T-27

SUPERSEDES:

PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5950-0599-3

APPROVED 18 OCT 1956 REVISED (A) 17 MAR 1958 (B) 15 SEPT 1961 (C) 18 MAR 1966 (D) 23 JUNE 1981 (E) 2 June 1982

User activities: Army - MI, Navy - MC, CG, Air Force - 19, 14

Review activities: Army - AR, Navy - SH, Air Force - 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5950

ELECTRICAL RATING

Primary (1-2-3-4): 140 v amp, 105/115/125 v rms, 380 to 1,000 Hz
Secondary (5-6-7): 6.3 v rms ct, 20 amp rms

Duty cycle - - - - - - - - - - - - - - Continuous
Life expectancy - - - - - - - - - - 10,000 hr min
Working voltage - - - - - - - - - - 1,070 v max
Altitude - - - - - - - - - - - - - - - 50,000 feet max
Operating temperature- - - - - - - 130°C max

NOTE: When numbers in parentheses, eg (1–4) are used, they indicate the winding and the extreme terminals of the winding.

PHYSICAL CHARACTERISTICS

Case size - - - - - - - - - - - - - GA
Weight - - - - - - - - - - - - - - - 2.75 lb max
Terminals - - - - - - - - - - - - - Turret, standoff type
Terminal height - - - - - - - - - 0.812 (20.64 mm) max
Shock - - - - - - - - - - - - - - - Method I, test condition C (50G)

TEST	ELECTRICAL PROPERTIES			LIMITS
Dielectric withstanding voltage:	Windings	(1–4)	(5–7)	
At sea-level	Volts rms	2,500	2,500	- -
At reduced barometric pressure	Volts rms	1,340	1,340	
No load	With 105 v, 400 Hz across (1–2):			
	Current in (1–2): 0.16 amp			Max
	Power in (1–2): 5.1 watts			Max
	Voltage across (5–7): 6.46 v rms ct			±2%
Rated load	With 105/115/125 v, 380 to 1,000 Hz across (1–2–3–4):			
	Voltage across (5–7): 6.3 v rms ct, 20 amp rms			±2%
Electrostatic shielding	Voltage ratio: 5 to 1 at 20 kHz			Min
DC resistance	(1–4): 1.10 ohms			Max
	(5–7): 0.006 ohm			
Temperature rise	40°C with 125 v rms, 400 Hz across (1–2) at an ambient temperature of 90°C			Max

(E) Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B test of MIL-T-27 shall be applicable.

P.A EC Other Cust ER AF-85	International interest	TITLE TRANSFORMER, POWER STEP-DOWN, TYPE TF4SX01GA209	MILITARY STANDARD MS 16471
Procurement Specification MIL-T-27		SUPERSEDES:	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5950-0599-3

APPROVED 18 OCT 1956 REVISED (C) 18 MAR 1966 (D) 23 JUNE 81 (E) FOR CHANGES SEE PAGE 2

User activities: Army - Navy - Air Force -

Review activities: Army - Navy - Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:57Z
Check the source to verify that this is the current version before use.