
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF T ECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-28748

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense


Form Approved
OMB No 0704 0188

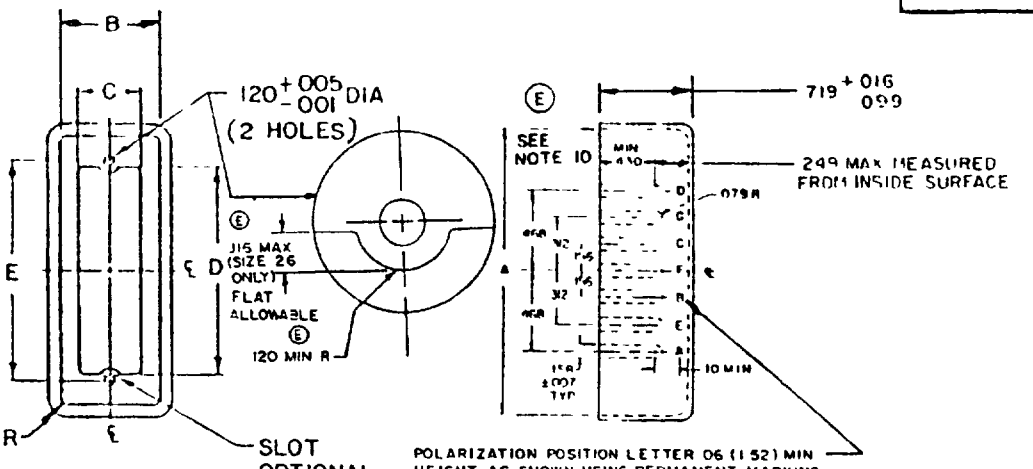

STYLE FOR 9, 14, 20 AND 26 CONTACT CONNECTORS (-1, -2, -9 & -10)


POLARIZATION POSITION LETTER OR (1.52) MIN HEIGHT AS SHOWN USING PERMANENT MARKING SLOT AND LETTER FOR APPLICABLE LOCATION ONLY ORIENTATION OPTIONAL SEE NOTE 8

TYPICAL SIDE VIEW FOR ALL RECEPTACLE SHELLS

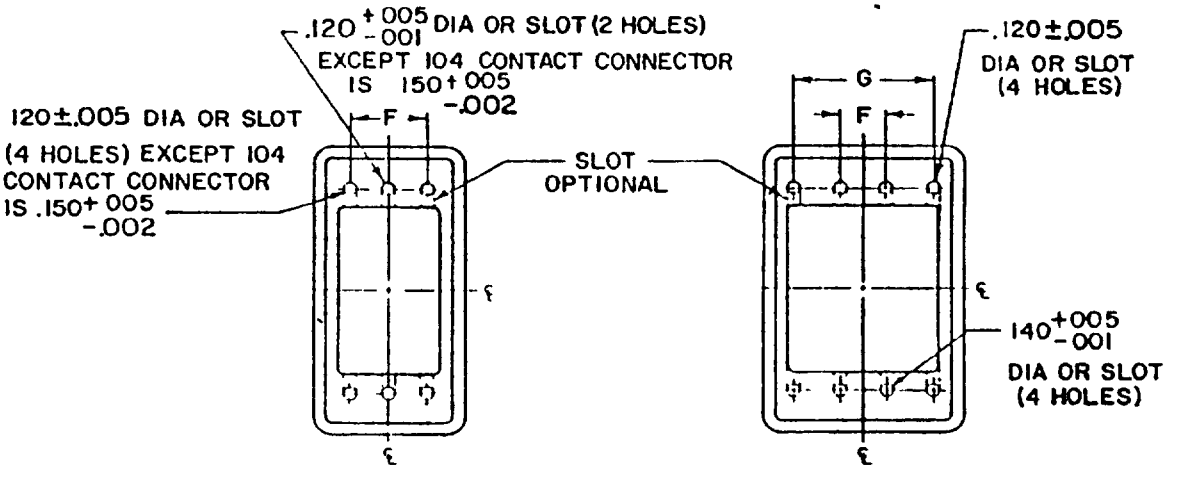

STYLE FOR 34, 42, 50, 66 AND 104 CONTACT CONNCETORS (-3, -4, -5, -6 & -8)

STYLE FOR 75 CONTACT CONNECTOR (-7)

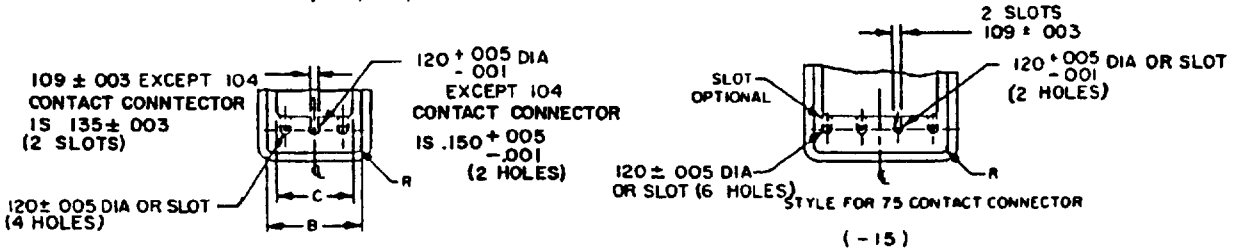

STYLE FOR 34,42 50,66 & 104 CONTACT CONNECTORS (-11, -12, -13, -14 & -16)

STYLE FOR 75 CONTACT CONNECTOR (-15)

DESIGN STANDARD FOR USE WITH MIL-C-28748 CONNECTORS.

(E) denotes changes

PREPARING ACTIVITY Navy - EC CUSTODIANS ARMY CR NAVY - AIR FORCE - 85 DLA REVIEW Army-AT, MI; Navy-AS, Air Force-11, 80; DLA-ES USER Army-AM, AR, ME, Navy-MC PROJECT NUMBER 5935-3772-05	MILITARY SPECIFICATION SHEET TITLE SHELL, ELECTRICAL CONNECTOR, RECEPTACLE, RECTANGULAR, POLARIZING	SPECIFICATION SHEET NUMBER MS18204 26 April 1990 SUPERSEDING MS18204 3 June 1976 AMSC N/A FSC 5935
DISTRIBUTION STATEMENT Approved for public release, distribution is unlimited		Page 1 of 2

DD Form 672, MAY 88 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-28748

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704 0188

TABLE I Shell dimensions.

MS part number	Connector size (number of contacts)	A min	B min	C min	D min	E ±.005	F ±.005	G ±.005	R
MS18204-1( )	14	1.388	.575	.440	.800	.938	---	---	.141
-2( )	20	1.702	.575	.440	1.097	1.250	---	---	.141
-3( )	34	2.138	.888	.745	1 400	1 688	.468	---	.141
-4( )	42	2.450	.888	.745	1.700	2 000	.468	---	.141
-5( )	50	2.856	1.015	.745	2.026	2.281	.468	---	.188 1/
-6( )	66	2.420	1.254	1.115	1 696	1.969	.500	---	.375
-7( )	75	2.855	1.370	1.104	2.026	2.281	.234	.766	.203
-8( )	104	2.900	1.680	1.476	2.073	2.375	.875	---	.422
-9( )	9	1.448	.512	.375	.864	1.000	---	---	.141
-10( )	26	1.763	.696	.565	1 182	1 312	---	---	.141
-11( )	34	2.138	.888	.745	1.400	1.688	.468	---	.141
-12( )	42	2.450	.888	.745	1.700	2 000	.468	---	.141
-13( )	50	2.856	1 015	.745	2.026	2 281	.468	---	.188 1/
-14( )	66	2.420	1.264	1.115	1.696	1.969	.500	---	.375
-15( )	75	2.855	1.370	1.104	2.026	2.281	.234	.766	.203
-16( )	104	2.900	1.680	1.476	2.073	2.375	.875	---	.422

1/ Tolerance +.020, -.016.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.188	4.78	.800	20.32	1.476	37.49
.002	0.05	.203	5.16	.864	21.94	1.680	42.67
.003	0.08	.234	5.94	.875	22.22	1.688	42.88
.005	0.13	.249	6.32	.888	22.56	1.696	43.08
.007	0.18	.312	7.92	.938	23.82	1.700	43.18
.016	0.41	.375	9.52	1.000	25.40	1.702	43.23
.020	0.51	.422	10.72	1.015	25.78	1.763	44.78
.06	1.52	.430	10.92	1.097	27.86	1.969	50.01
.099	2.51	.440	11.18	1.104	28.04	2.000	50.80
.10	2.54	.468	11.89	1.115	28.32	2.026	51.46
.109	2.77	.500	12.70	1.182	30.02	2.073	52.65
.116	2.94	.512	13.00	1.250	31.75	2.138	54.30
.120	3.05	.565	14.35	1.264	32.10	2.281	57.94
.135	3.43	.575	14.60	1.312	33.32	2.375	60.32
.140	3.56	.696	17.68	1.370	34.80	2.420	61.47
.141	3.58	.719	18.26	1.388	35.26	2.450	62.23
.150	3.81	.745	18.92	1.400	35.56	2.855	72.52
.156	3.96	.766	19.46	1.448	36.78	2.856	72.54
.158	4.01					2.900	73.66

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (0.41 mm).
3. Metric equivalents are given for general information only.
4. Material: Aluminum alloy in accordance with QQ-A-250/8, temper O, or QQ-A-250/1, temper H12, .040 (1.02 mm) thick.
5. Finish: Anodize in accordance with MIL-A-8625, type I or type II.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. The MS part number includes the polarization letter from figure. Omit letter if polarization is not required. Example: MS18204-1-( ).
9. MS18204-11, -12, -13, -14, -15, and -16 are not used with one piece jackscrew shields of MS24133.
10. (E) Each slot may vary ±.005 (0.13 mm) from the centerline.
11. (E) Design standard only: Parts described by this MS sheet will not be stocked by the Government.

PREPARING ACTIVITY Navy - EC
CUSTODIANS ARMY - CR NAVY
AIR FORCE - 85 DLA
REVIEW Army-AT,MI; Navy-AS; Air Force-11,80; DLA-ES
USER Army-AM,AR,ME; Navy-MC
PROJECT NUMBER 5935-3772-05

MILITARY SPECIFICATION SHEET
TITLE
SHELL, ELECTRICAL CONNECTOR, RECEPTACLE, RETANGULAR, POLARIZING

SPECIFICATION SHEET NUMBER
MS18204
SUPERSEDING
MS18204 3 June 1976
AMSC N/A FSC 5935

DISTRIBUTION STATEMENT
Approved for public release, distribution is unlimited

DD Form 672, MAY 88 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.