THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

PREPARING ACTIVITY: DLA-IS
CUSTODIANS: ARMY- AV NAVY- AS AIR FORCE- 11 DLA-
REVIEW: 82
USER CR, MI
PROJECT NUMBER: 5310-1981
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

MILITARY SPECIFICATION SHEET

TITLE: NUT, SELF-LOCKING, PLATE, ONE LUG, REDUCED RIVET SPACING, LOW HEIGHT, CRES, 125KSI FTU, 450°F AND 800°F

AMSC- N/A FSC 5310

SPECIFICATION SHEET NUMBER: 1 FEB 94 MS21072 REV G

SUPERSEDING: MS21072F 30 SEP87 (SEE NOTE 5.)


Page 1 of 2


Form Approved OMB No. 0704-0188

Ⓖ DENOTES CHANGE(S)

INCH-POUND

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS SPECIFIED HEREIN

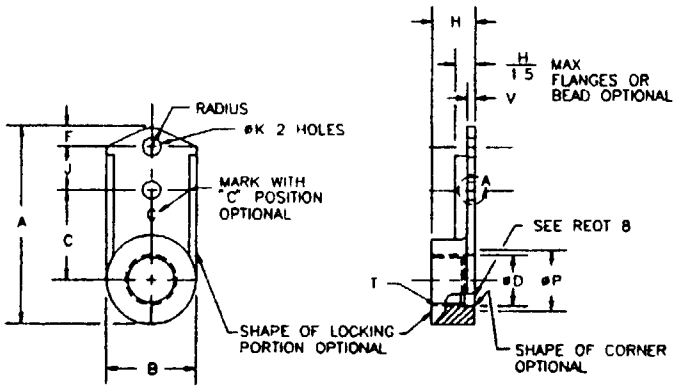






TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBERS 450°F PLAIN HOLES	450°F CTSK OR DIMPLED HOLES	450°F WELDING PROJECTION	800°F PLAIN HOLES	800°F CTSK OR DIMPLED HOLES	800°F WELDING PROTECTION	T THREAD SIZES	A MAX	B MAX	B MIN	C ± .005	øD MIN	F MIN	øG ± .010	H MAX 1/	J ± .002 2/	øK + .005 - .000 3/	øP MAX	V MAX	AXIAL STRENGTH LBS/INCH	WEIGHT LBS/100
L02	–	L02W	-02	–	-02W	086-56 UNJC-3B	507	164	140	125	–	071	4/	110	219	066	130	035	440	06
L03	–	L03W	-03	–	-03W	099-48 UNJC-3B	535	184	140	133	–	071	4/	125	219	066	143	035	550	09
L04	L04K	L04W	-04	-04K	-04W	112-40 UNJC-3B	667	260	140	203	–	089	200	143	219	098	166	040	750	12
L06	L06K	L06W	-06	-06K	-06W	138-32 UNJC-3B	684	265	195	218	–	089	200	171	219	098	206	047	1 130	15
L08	L08K	L08W	-08	-08K	-08W	164-32 UNJC-3B	718	297	235	234	168	100	200	250	219	098	248	047	1,720	23
L3	L3K	L3W	3	3K	-3W	190-32 UNJC-3B	745	328	298	250	194	100	200	250	219	098	274	047	2,480	27
L4	L4K	L4W	4	4K	-4W	250-28 UNJF-3B	822	414	380	281	254	100	200	281	219	098	344	055	4 580	46
L5	L5K	L5W	5	5K	-5W	3 215-24 UNJF-3B	1 026	505	475	359	317	125	230	328	269	130	417	065	7 390	85
L8	L6K	—	6	—	-6W	375-24 UNJF-3B	1 139	614	580	414	379	125	230	344	269	130	505	075	11 450	2 04

1/ MINIMUM "H" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION
2/ CENTER OF THE TAPPED HOLE SHALL NOT DEVIATE IN ANY DIRECTION FROM THE CENTER OF THE PLATE NUT AS DETERMINED BY THE RIVET HOLES BY MORE THAN .005
3/ DIMPLED RIVET HOLE TOLERANCE FOR "øK" IS + .015 - .000
4/ SPACE WILL NOT PERMIT COUNTERSINK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION

Form Approved
OMB No 0704-0188

REQUIREMENTS

1 MATERIAL CORROSION RESISTANT STEEL TYPE A286 (UNS S66286) IN ACCORDANCE WITH AMS5525 AMS5732 OR AMS5737

(C) 2 FINISH ONLY 800°F NUTS SILVER PLATE ALL THREADED SURFACES OF NUT ELEMENT IN ACCORDANCE WITH AMS 2410 THREADS SHALL SHOW COMPLETE COVERAGE SILVER PLATING ON ALL OTHER SURFACES OPTIONAL TARNISHING OR DISCOLORATION OF SILVER NOT CAUSE FOR REJECTION

3 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

4 HARDNESS 49HRC, MAX

5 THREADS THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879

6 SURFACE TEXTURE SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL NOT EXCEED 125 MICROINCHES IN ACCORDANCE WITH ANSI/ASME B46 1


7 LUBRICANT ONLY 450°F NUTS DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-N-25027

8 CONTERBORE/COUNTERSINK ON SIZE 164 AND LARGER THREAD RELIEF SHALL BE 062 MINIMUM, ON SIZE 0138 AND SMALLER COUNTERSINK TO "P" DIAMETER

9 PERFORMANCE SEE PROCUREMENT SPECIFICATION EXCEPT 450°F DRY FILM LUBRICATED NUTS LIMITED TO FIVE REUSE CYCLES

10 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS21072L4K



MS21072L4K INDICATES NUT SELF-LOCKING, PLATE ONE LUG, REDUCED RIVET SPACING, LOW HEIGHT, CRES 125 KSI FTu 450 DEGREES F, DRY FILM LUBRICATION 250-28 UNJF-3B COUNTERSUNK OR DIMPLED HOLES

NOTES

1 ALL DIMENSIONS ARE IN INCHES

2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

4 DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588 ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED

5 MS21072 SUPERSEDES NAS696

INTERCHANGEABILITY RELATIONSHIP

MS21072 NUTS CAN UNIVERSALLY REPLACE NAS696 NUTS OF LIKE MATERIAL THREAD SIZE LUBRICANT (DRY FILM OR NON-DRY FILM LUBRICANT) AND FASTENING METHOD (PLAIN RIVET HOLES DIMPLED OR COUNTERSUNK RIVET HOLES) BUT THESE NAS696 NUTS CANNOT UNIVERSALLY REPLACE MS21072 NUTS

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS696C02	MS21072-02
NAS696C02M	MS21072L02
NAS696C03	MS21072-03
NAS696C03M	MS21072L03
NAS696C04L	MS21072-04
NAS696C04LM	MS21072L04
NAS696C06L	MS21072-06
NAS696C06LM	MS21072L06
NAS696C08	MS21072-08
NAS696C08M	MS21072L08
NAS696C3	MS21072-3
NAS696C3M	MS21072L3
NAS696C4	MS21072-4
NAS696C4M	MS21072L4
NAS696C5	MS21072-5
NAS696C5M	MS21072L5
NAS696C6	MS21072-6
NAS696C6M	MS21072L6

PREPARING ACTIVITY DLA-IS
CUSTODIANS ARMY- AV NAVY- AS
AIR FORCE- 11 DLA-
REVIEW 82
USER CR, MI
PROJECT NUMBER 5310-1981

MILITARY SPECIFICATION SHEET

TITLE
NUT, SELF-LOCKING PLATE ONE LUG, REDUCED RIVET SPACING, LOW HEIGHT CRES, 125KSI FTu, 450°F AND 800°F

SPECIFICATION SHEET NUMBER
MS21072 1 FEB 94 REV G

SUPERSEDING
MS21072F 30 SEP87 (SEE NOTE 5)

AMSC- N/A FSC 5310

DISTRIBUTION STATEMENT
A Approved for public release distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:26Z
Check the source to verify that this is the current version before use.